



waag society

Nienke Boelen
900918-070-088
July 2015

Abstract

Keywords

Geo-visualization Heritage Drenthe Field names GIS

Table of Contents

Chapter 1. Introduction	5
1.1. Project goals	5
1.2. Target group	5
1.3. The objectives	5
Chapter 2. Background	6
2.1. Field names in Drenthe	6
2.1.1. Living heritage	6
2.2. Waag Society	6
2.2.1. Waag Society Lelystad Waag Society	6
2.3. Cultural heritage data & GIS	6
2.4. Geo data	7
2.4.1. Spatial dimension	7
2.4.2. Temporal dimension	7
2.4.3. Thematic dimension	7
2.5. Geo-visualization	7
2.5.1. Geo-personal visualization	7
Chapter 3. Method	9
3.1. Theoretical framework	9
3.2. Building the web-application	9
3.2.1. The idea	9
3.2.2. The data	12
3.2.3. Data processing the data	12
3.2.4. Back-end processes	13
3.2.5. Web design	15
3.3. Testing the web-application	15
Chapter 4. Results	16
4.1. Theoretical framework	16
4.1.1. The meaning of field names	16
4.1.2. Web based geo visualizations & user centered maps	16
4.1.3. User centered designs or Customer engagement	17
4.2. The application	17
4.3. Testing the web-application	21
4.3.1. Remarks on the questionnaire	22
Chapter 5. Discussion	23
5.1. Web-based geo-visualizations	23
Chapter 6. Conclusion	24
Chapter 7. References	25
Chapter 8. Appendix	26
8.1. Mood board	26
8.2. Categories field names form RCE	27
8.3. ANN analysis conducted	27
8.4. R script converting files to shapefile	28
8.5. R script detecting categories	28
8.6. Categories field names from RCE	28

The amount of geospatial data is increasing rapidly. The magnitude and complexity of large geospatial data sets are a challenge to transform from information into knowledge. Geo-visualization is one of the tools to turn these heterogeneous data volumes into knowledge for a broader public. Also in the field of cultural heritage geo-information systems is used more for conservation and safeguarding purposes. For cultural heritage the representation in the form of web-mapping is a suitable tool to make the data more open and promote heritage information. In this design oriented research an interactive web application is build to apply geo-visualization techniques to cultural heritage data sets. The case study is an area in Drenthe where field-names from the 18th century are collected. These field names tell us how the environment used to look, because they originate in the minds local inhabitants to navigate and communicate about their spatial orientation. The names often relate to landmarks and characteristics of the direct environment. Mostly, local altitude differences, vegetation and soil types. In the application the user is able to see the field names on a map and on a transect line, showing the relation of the field to its direct environment. Through information texts, the user can relate the names to the characteristics of the surroundings. The goal is to preserve the living heritage of field-names, give the inhabitants of Drenthe the possibility to explore names that cannot be found in the real surroundings and turn the raw data that is only available to a small group of people, into knowledge for a broader audience about their landscape. The geo-visualization techniques were useful for the representation of the field names. Though every visualization of data needs a individual approach.

Abbreviations

H&L	Heritage and Location Project
CH	Cultural Heritage
GIS	Geo Information System
ICH	Intangible Cultural Heritage
RCE	Rijksdienst voor Cultureel Erfgoed

Chapter 1. Introduction

The amount of geospatial data has increased rapidly. Geospatial data is created and used increasingly every day in smart phones, digital maps, satellite navigation systems, websites, services and Apps. Almost 60% of all data is geographically referenced. Next to that, the modern computer technologies provide better opportunities for institutions, organizations and citizens to create and use geospatial data. Already a wide range of domains use geo information systems (GIS) for management and decision-making purposes and the fields of application are still expanding (Cartwright, Miller, & Pettit, 2004; Hahmann & Burghardt, 2013; MacEachren & Kraak, 2004).

The management and use of data and geospatial reference are a challenge in information science. How to transform this data into information and subsequently into knowledge? Data is a product of research, creation, collection and discovery. It is raw material, often being, incomplete or incomplete. It is not yet valuable communication, for it is not a complete message. Often audiences are presented with data instead of information. (see figure) According to Nathan Shedroff, successful communications do not present data. Transforming data into information by organizing it into a meaningful form, presenting it in an appropriate way and communication context is the process to get the story to the audience. The use of the enormous amount of geo data to inform the general public is also still in development. Geo-visualization is one of the tools to turn large heterogeneous geo data volumes from information into knowledge. Geo-visualization integrates scientific visualization, cartography, image analysis, information visualization, data analysis and geographic information systems to provide methods and tools for visual exploration, analysis and presentation of geospatial data. (MacEachren & Kraak, 2004; Shedroff, 1999 ; Tensen, 2014)

The world is being used to produce new visualizations, moving beyond the statics of maps and other representations of geographic information. The World Wide Web has become an extremely efficient channel for transferring data, and also, has great visual capabilities. There is a need for creating user-centered geo designs to ensure that usable geo products are created and delivered. (Cartwright et al., 2004) This raises the interest for geo-visualization in publishing geo-referenced information on the web and getting the enormous amount of available data to the general public (Lin, Gong, & Wang, 1999; Tensen, 2014). Only a few methodologies specifically directed and web geo visualizations emerge which emphasized the scientific information visualization techniques as a way to handle these very large and complex data sets. New visual forms and practices emerge, but how and why do they differ from the more conventional cartographic forms?

In this research, web geo-visualization is explored through a case study in the field of cultural heritage [CH].

There is a big relevance of using geospatial data and geo information systems for the field of cultural heritage conservation purposes. Safeguarding and exploiting CH is higher on the agenda and requires the use of digital management systems. Before this is a huge task, with the growing computer science there are ways to support this. The main role of the computer scientist in this field is to develop applications that can support the data conversion and transformation to preserve and safeguard the amount of cultural heritage data on another level. More and more central and local authorities responsible for cultural heritage use GIS as one of the main infrastructure components when digitizing CH data. (Deal, 2014; Drod, 2010; Meyer, Grusenmeyer, Perrin, Durand, & Drap, 2007; Petrescu, 2007)

For cultural heritage data, the issue of the representation of the results of inventories in mapping systems and updating and maintaining the data, remains open. Web-mapping applications can be used to make open access-easy to use formats, for the assessment and promotion of heritage data. Web-mapping is a suitable tool for visualizing and updating geo heritage data. In general, much of the spatial data being created and shared is strongly visual in nature, including photographs, video, maps and art (Elwood, 2011; Martin, Reynard, Peillero Ondoz, & Ghirardi, 2011)

As stated by Deal:

I Visualizations have the potential to greatly improve search and discovery for online collections, transforming how users interact with digital collections. Furthermore, changing technology is making it easier than ever to incorporate visualizations into search interfaces and websites. The time is ripe for cultural heritage institutions to begin experimenting with data visualization in earnest.


In the cultural heritage field, the temporal dimension plays an important role to explore data. (Cerasulo, Cutugno, & Leon, 2012) Spatial-temporal data visualization assumes and improves the role in the data presentation to users. The three dimensional data form of geo data (spatial, temporal and descriptive) helps users understand and gain knowledge in the discovery process.

This research is part of an internship at Waag Society for the project of Heritage & Location. (see) This report describes the work and the results from the development of a web-application for the project Heritage & Location.

The application will be a geo-visualizations geo names around Drenthe [CH] data that will be a common research. The context is a database of field names that were used in the local climate around 1800 to refer to specific agricultural fields or areas in Drenthe, the Netherlands. The information about the landscape that is hidden in the names gives a lot of historic information. Yet, noticeable is that this data is only known to a few selected historians. (Spek, Elter, & Kosian, 2009) The data was supplied by the Rijksdienst voor Cultureel Erfgoed and based on the book "Van Jeruzalem tot Ezelskar, levende veldnamen van de Drentse Aa". More about the data will be described in chapter .

The research will be build up in 3 parts; first the possible visualization techniques will be explored through literature study. With the chosen techniques, the application will be build, for which certain design goals and requirements will be defined. In the end the application will shortly be evaluated.

Figure 1.
DIKW pyramid. From data to wisdom

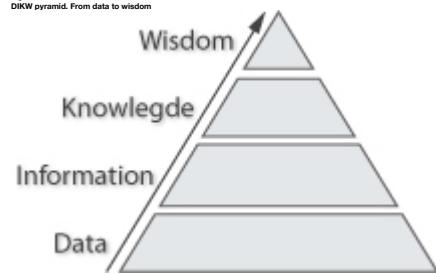

1.1. Design goals

1. The goal is to preserve the living heritage names of Drenthe, which are mostly stored in people's memory and so will disappear.

2. Give people the possibility to explore them, discover them. For names cannot be found in the real surroundings, only in people's memory and now given a place to exist.

3. Getting the stories out of the raw data and show people the surprising knowledge that stays hidden. Help people explore intangible cultural heritage and so the history of the Dutch landscape. Engage people in something interesting about the landscape.

We will do this by building an attractive web-application for the project Heritage & Location to show its potential of visualizing heritage data and preserving them. A big part of the web application will be a geo-visualization of the intangible cultural heritage data set of living field names from Drenthe. The interactivity of the web application, will give users the possibility to discover the names themselves in relation to the environment. The focus is on revealing hidden meaning of the raw data, to the general public.

1.2. Target group

The target group will be defined as the common citizen, living in Drenthe and show an interest in their direct environment and want to discover something about its history. It will not specifically be targeted at children or elderly but to a general public. The target group's language is Dutch.

1.3. The objectives

A. The target group must feel:

1. Attracted to use the application
2. Attracted to stay and play around with the application
3. Challenged to explore more

B. The target group must be able to:

1. Discover the meaning of the field names in relation to their environment
2. Discover interesting stories and surprising facts about the field-names
3. Understand the field-names and their value

C. The application must be:

1. Intuitive and simple to use, so it shows quick and surprising results on the actions of the target group
2. Technically working in an efficient and error-safe way. User friendly.

Chapter 2. Background

In this chapter, the field names are further explained and their role in the cultural heritage field. Therefore, also the field of cultural heritage is explained and its categories. Because this research was conducted in the scope of the Heritage and Location project at Waag Society, this will also be elaborated on. Also some background information on geo-data and the combination with heritage is given.

2.1. Field-names in Drenthe

A field-name is a toponym used for a small area of land or a certain surrounding. Mostly arable land, pasture lands, wastelands, uncultivated areas, hills, valleys, woodlands and swampy areas. The names are thought up by the local inhabitants for practical use in communication and spatial orientation. A field-name is often only existing in oral form and originates, develops or disappears while the environment changes. This makes field-names living heritage (see next section) and it exist only in people's memory. There for field-names fade away from daily lives and disappear with new generations. Written documentation of field names date from the 17th / 18th and 19th century. Some names live through because they were taken up into official cadastral documentations or other landscape documentations. Nowadays, a new interest arises for field-names as they can tell us how the landscape used to look in the 18th century. A collection of field-names was gathered by collecting popular memories, old cadastral documents, maps and other collections. This mental map is now made tangible, by documenting as much as possible and organizing them into a GIS system.

Field-names tells us how the landscape used to look, which soil types, vegetation types or animals occurred. They link to specific landmarks or environmental characteristics of the direct village surroundings. The origin and meaning of field-names are mainly influenced by the geography of its direct environment, like water bodies, streams, soil properties and altitude in relation to its surroundings. They can be used for landscape design and planning, knowledge for historical research and inspiration source for artist. (Spek et al., 2009; "Veldnamen - Encyclopedie Drenthe Online.")

2.1.1. Living heritage

The field-names in Drenthe are called living heritage, which is one of the 4 kinds of cultural heritage categories according to Volkscultuur institut:

1. The physical environment. Including monuments, archeology sites and cultural landscapes.
2. Paper heritage. Stored in archives and libraries in the form of paper documents, maps and books.
3. Object collections, owned and displayed by museums. Only focusing on objects.
4. Living heritage: habits, traditions, religions and cultural events that people experience. From: ("Volkscultuur,"

Categories 1,2 and 3 are tangible substance, while category 4 is intangible heritage. UNESCO introduced the concept of intangible heritage data in 2003, to safeguard the importance of intangible cultural heritage and distinct it from tangible heritage and natural heritage. ("UNESCO Culture Sector - Intangible Heritage - 2003 Convention.")

The Convention of UNESCO introduces five domains of ICH. The boundaries between those domains are extremely fluid:

1. Oral and intangible expressions including language as a vehicle of the ICH.
2. Performing arts (dance, music, theatre).
3. Social practices, rituals and festive events.
4. Knowledge and practices concerning nature and the universe.
5. Traditional craftsmanship, meaning the skills and knowledge involved rather than the craft product itself.

In the scope of the H&L project this research will focus on the connection of place and time in intangible cultural heritage. ICH can be shortly explained as all traditions and rituals of normal life, which gives people a sense of identity and continuity. ICH is transmitted from generation to generation and can be constantly recreated by communities due to interaction with their environment. ("UNESCO Culture Sector - Intangible Heritage - 2003 Convention.", Zeijden, 2011) Intangible heritage is strongly depended on the features of space and influenced by the space. Of course these traditions, habits, etc. have a place where they take place. Or they are about a place, have a spreading, an origin, a continuation, can cover multiple places, through time. (Karavia & Georgopoulos, 2013)

This applies also for the field-names in Drenthe, which is oral living heritage. Originated with a strong influence of the direct environment it exists in.

2.2. Waag Society

For this research takes place in the scope of the Heritage and Location[H&L] project at Waag Society, they both will be shortly explained.

Figure 2.
Waag Society




Waag Society is a institute for art, science and technology. They develop technical interventions for relevant social innovation. In 7 labs they conduct creative research in the form of projects, creative care lab, creative learning lab, future heritage lab, future internet lab, open design lab and open wet-lab. The Heritage & Location project (see next section) is part of the future internet lab [FIL]. The FIL focuses on the development of big and open data, making internet technology accessible and research the impact of the internet on society. ("Waag Society," n.d.)

2.2.1. Heritage and Location project Waag Society

The project H&L is owned by the Rijksdienst voor Cultureel Erfgoed (RCE), and at Waag Society a historical-geo-thesaurus and tools are developed. The H&L project aims to develop a uniform system to link CH collections to existing geometries, with the use of place indicators in the metadata of the CH data. One of the tools is a historical-geocoder, to make heritage data geo-located and so link it in time and space to other heritage data sets and enrich knowledge. It combines multiple geo data sets with a time component and can be used easily to locate heritage data with a place notification. Big heritage collections with a place indication, though no geo data, can be linked to geometries. The goal of the H&L project is to know every place, administrative boundary, building and address that ever existed in the Netherlands. Figure shows the overview of the whole H&L project. Now focusing on the historical geocoder and thesaurus. ("Ergeo," n.d.; "Ergeo & Locatia," n.d.)

Figure 3.
Scheme of Heritage and Location project. Products and Services.

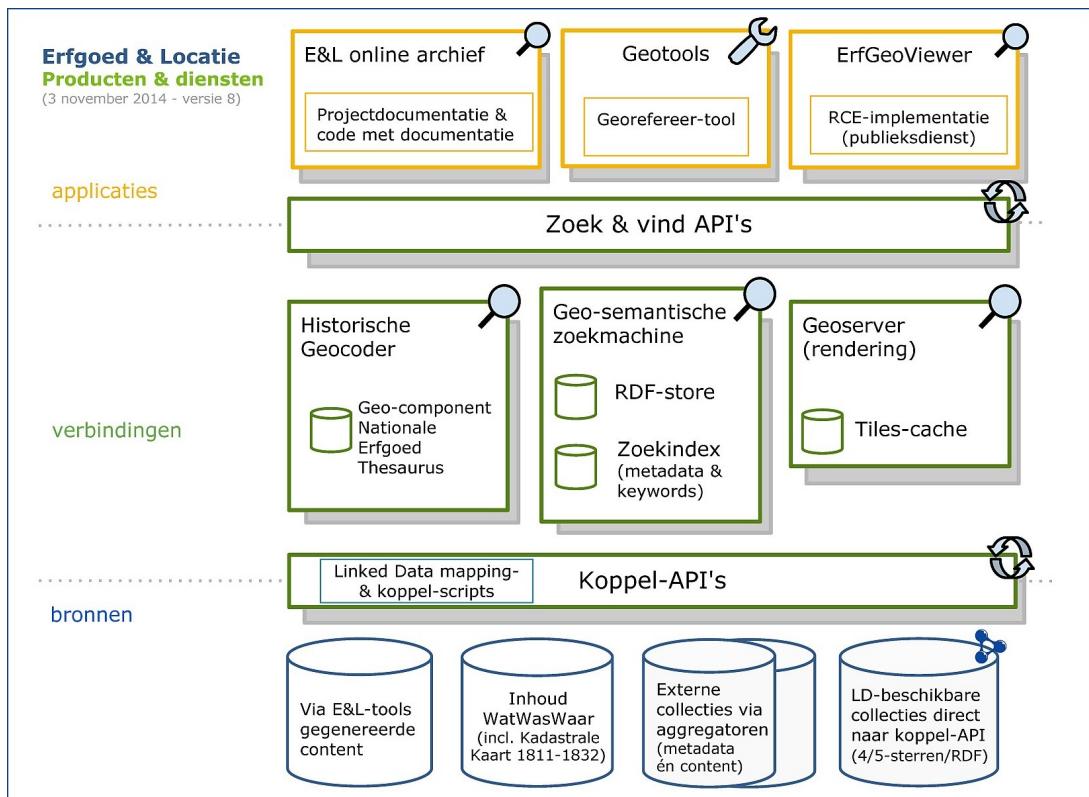

2.3. Cultural heritage data & GIS

There is a big relevance of using geospatial data and geo information systems for the field of cultural heritage conservation purposes. (Dro, 2010) Explained here are several reasons why a GIS system is beneficial for digitizing CH data. One, digitalizing CH data in a web GIS system can serve the goal to preserve the CH, by presenting the digital records in the form of focusing on its relation to place. Geographical information systems have proved their potential to present and exploit cultural heritage data. Second, such a system can be used for research aims. Implementing analysis on the spatial correlation of the CH data. The geographical relation and connection among various cultural heritages can be studied as well as the evolution through time and space and relationships between different datasets. So GIS can help to correlate and exploit heritage spatial relations and enrich the knowledge already existing. (Dro, 2010; Koenig & Geographer, 2013; Lai, Luo, & Zhang, 2012; Meyer et al., 2007) This is also the third and the main goal of the Heritage & Location (HAL) project, enriching current datasets, by linking it in space and time to other datasets, which do not contain exact location data but do contain a reference in time and place to the data described. By doing so, it is possible to improve the information access and improve the richness of the existing data of cultural heritage institutions. ("erfgoedelocatie.nl," n.d.) Assumption is that the place referred to in historical documents, probably refer to the identical real-world place if they are related in name.

Digitalizing heritage as linked data contains the following key aspects:

1. Identifiable, making the object unique and identifiable.
2. Make it accessible via the Internet.
3. Searchable, making it possible to index by search engines.
4. Re-usability. Linked data makes it easy to use the data. (DEN | DE BASIS vindbaarheid)

2.4. Geo data

Geospatial data is data with a location, a connection to a location and oriented by their geographical relationships. Geo data has a nature of threefold: spatial, temporal and descriptive. The spatial dimension can be used to interpret the spatial dimensions and relation of data entities, an absolute and enclosed space wherein the geographic phenomena exists. The temporal dimension can be used to interpret the change in the data through time. The thematic dimension is to interpret what the data is about, a property that can be measured and assigned. The data component only concerns the raw observational data, with location, time and attributes. (Mennis et al., 2000; Nöllenburg, 2007) These three characteristics will be explained in detail in the next sections.

2.4.1. Spatial dimension

Geo data is different from other data because it is inherently structured with a spatial dimension. An X and Y location and sometimes a Z dimension. This contains the where of a particular phenomenon. Spatial objects can be physical, real objects in the world, or non-physical phenomena, like administrative boundaries. Continuous fields cover large areas with no clear boundaries, like rainfall or temperature. A single object on the earth is discrete; they have sharp boundaries, like a house. But also the spatial structure tells a lot about the phenomena, is it random or regular clustered. The general assumption of spatial correlation tells that close things are more correlated than far apart things.

2.4.2. Temporal dimension

The time of happening of phenomena can be divided into 3 forms, it can happen/exist as a point in time, a period in time or on a certain interval in time. Also time can be classified into the four measurement classes, nominal ordinal discrete or continuous time model. Nominal would be: the 90ties, Christmas or the WWII. Ordinal contains relative order time statements like: before, after. Discrete is in years, seconds, minutes, etc.

Another differentiation is linear versus cyclic time ordering. Linear time is ordered along a path. Cyclic time follows a path of periodic turn phases. Like seasons, day and night. Serial periodic data is periodic time represented on a linear path.

2.4.3. Thematic dimension

The theme or attribute of a phenomena. The 'what' is happening in the world. This data is often stored in the attributes of the data, more than one attributes can exist. This data can be qualitative or quantitative, nominal ordinal discrete or continuous.

2.5. Geo-visualization

Geo-visualization is a combination of communication, scientific information visualization, geographic information systems and cartography. It comes after the collection of data, transformations and analysis. From the real world we go to data and all the modifications to the data. Eventually the data will be visualized, either a computer or on paper. The perception of people will interpret the data and turns the data into knowledge. In general, every map is a selective representation of reality and subjected to the interpretation of the human eyes. (Dibaise et al., 1992; MacEachren & Kraak, 2001)

2.5.1. Static geospatial visualization

Geo data has three basic symbols to represent the data, points, lines and polygons. Selecting the right graphic characteristic for data display is a challenging issue. Effective symbolization requires human creativity and judgment. The classic method for cartography is Berlin's theory. This provides a classified system with four levels of data measurement and a list of graphic symbols that can be assigned to the visual variables. Berlin's graphic variables are locations, size, density/size, texture, color, orientation and shape. See figure.

Figure 4.
Berlin's theory

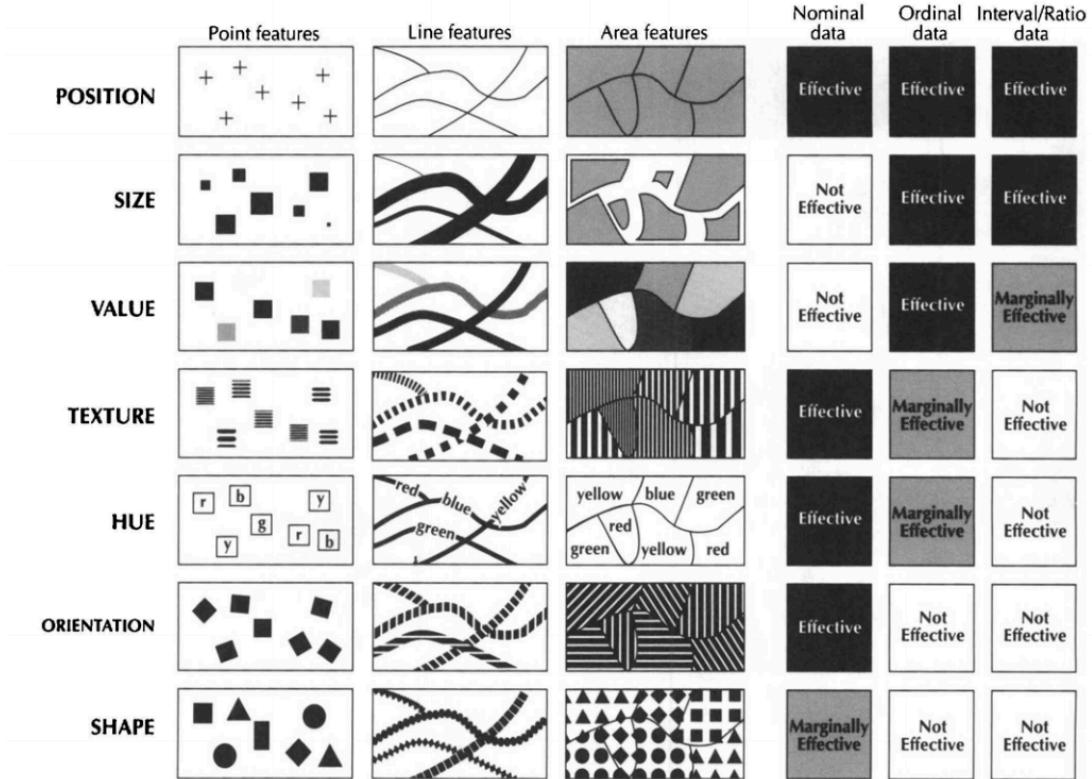


Figure 1. The visual variables and their effectiveness in signifying the three levels of measurement of data (after Bertin [1983]).

(Dibaise et al., 1992; Bertin, 2000)

After Bertin, other researchers have added to this method with more graphic variables. Morrison added more specifications on color, existing out of hue, saturation and value. MacEachren (1995) added the term clarity, build up from crispness, resolution and transparency. Calvano (1990) adds more dimensions on texture. Defining directionality, size and density of texture.

Deciding the right graphic variable to be assigned to a certain type of data, helps the viewer in defining the perceptual properties. For example, ordinal data needs the perception of being ordered, quantitative data of being proportional. While nominal data needs to be perceived as distinct categories. (Bertin, 2000; Calvano, 1990; Dibaise et al., 1992; MacEachren, 1995; Nöllenburg, 2007) ##Dynamic geo-visualizations Bertin's theory was designed in the context of static maps but is for a part the basis and seems applicable to the design of dynamic maps which require a set of dynamic graphic variables. A few forms of dynamic geo-visualization can be named, animation, display of time or spatial temporal visualization and interaction. The dynamic categories are divided into 2D and 3D animations. In this research we only work with 2D animations because of limited technology. Also in the theoretical frame work we will leave this out of consideration.

They state that the dynamic visual variables will only give the right results when combined with the traditional static visual variables. (Köbben & Yaman, 1996)

Animation

Animated maps leave interaction aside, and use time to add a visual dimension to the display. The scenes in an animation show the state of the data at one moment accordingly. There is hardly any interactive control. Dynamic animated variables are

- > Temporal duration, when something is displayed.
- > Duration, how long is something displayed.
- > Order of the temporal sequence.
- > Rate of change.
- > Frequency or speed.
- > Synchronization.

Animated maps contain dynamic variables. Scene duration, rate of change, scene order. (Köbben and Yaman; MacEachren; Ormeling, 1996)

Spatial - temporal

Spatial temporal visualization is the display of dynamic phenomena as a series of static maps. To analyze and understand patterns of temporal change of phenomena. The two categories are temporal animation and non-temporal animation. In temporal animation, display time and world time are directly related. While for non-temporal, no direct relation between display time and world time is present. Kraak & Komp give a slightly different categorization, but can be compared to the Köbben & Yaman. Kraak & Komp talk about time-series, successive build-up and changing representations. (Dibaise et al., 1992; Köbben & Yaman, 1996; Nöllenburg, 2007) See table .

Dibaise states that dynamic variables can be used to emphasize the location of a phenomenon, emphasize the attributes or visualize change in the spatial, temporal or thematic dimensions. (Dibaise et al., 1992)

Table 1. Categories of possible animations for dynamic phenomena.

		Kraak & Komp
Temporal	Direct relation between world time and display time	Time-series Aggregated time Database time
Non - Temporal	No direct relation between world time and display time	Successive build-up Changing representations

Information from (Köbben & Yaman, 1996; Kraak & Komp, 1996)

Dynamic visualization variables are identified by Dibaise et al. (1992), MacEachren (1994), Köbben and Yaman, and Blok (2000) and are gathered here and put into one overview. Based on Blok Blok provides a framework for animated representation of dynamic geo-spatial phenomena. (Blok, 2000) She provides a range of dynamic visualization variables to be used for monitoring purposes of spatial temporal relationships. Blok's framework more aims at the exploratory use of visualization while this research, aims at the display and communication part of the geo-spatial phenomena for explanatory use. Though, this author finds that Blok's dynamic visualization variables can be applied for both purposes. As Blok also states; the ultimate goal is to contribute to the development of representation methods and interaction tools, which are also found in the explanatory visualization forms.

Interaction


Interactivity is one of the key aspects of geo visualization. The full potential of interaction in geo visualization lies in linking multiple views of the same data on the screen. Term used is Guided discovery. Interactive visualization gives the control of the animation to the user, they engage in sorting, highlighting, filtering and transforming. The level of detail displayed and the speed can be determined, so information is less likely to be missed.

Two main interactive visualization techniques are introduced by Buja et al. form Nöllenburg (2007).

1. **Focusing individual views.** The user can modify the single display and what is seen. Choose the perspective, magnification level and level of detail. For example a set of navigation controls can be provided to zoom, pan and rotate. Layers can be selected to display or different attributes can be available to choose from.

2. **Linking multiple views.** Linking means simultaneous highlighting of data items in multiple views in possible different formats. This can be combined with brushing: selecting display objects by pointing on them or encircling them on the screen. This stimulates visual thinking because data can be displayed in different ways and be analyzed from different perspectives. The number, type and arrangements of the different views depend on the task, the user and the available space on the screen or specific interface. (Nöllenburg, 2007)

Figure 5.
Methodology overview

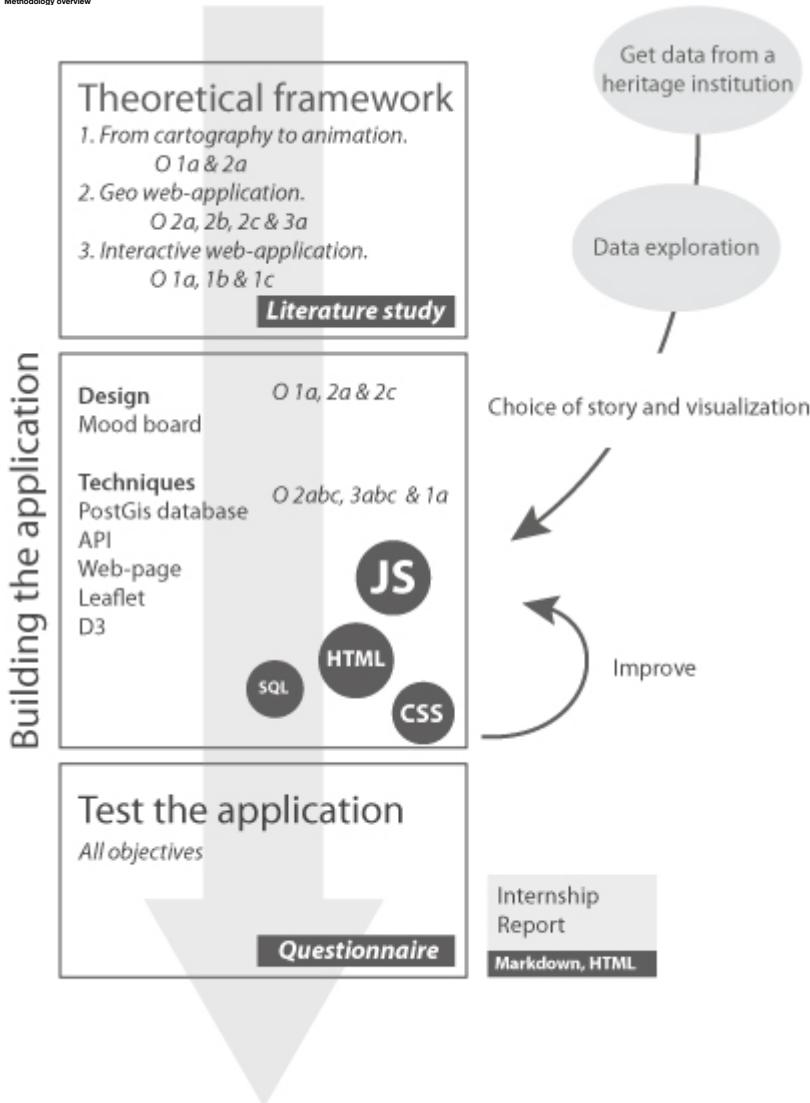

This research will be a designer-oriented research, trying to fulfil the general goals and objectives. By letting the objectives into account, the goals will be fulfilled. Therefore the objectives are given numbers and letters, to easily refer to them, where they are covered. See figure for the general goals and objectives, where the specific objectives are addressed. The whole process will be more iterative and chaotic than the overview shows. This means that many adjustments will be taken by the researcher and her preferences.

Once the general goal was established, making a web-based geo-visualization, the case study in the field of cultural heritage had to be defined. This, because the research is conducted in the project Hereditas, funded at the World Society. In the case several heritage institutions take part, and so came into contact with potential data providers. By explaining the general goal of this research, the data providers were asked to provide by Rijksdienst voor Cultureel Erfgoed. With the data, the subject of the research took more form.

The report will be build up in 3 parts, first geo-visualization and web-application techniques will be explained through the case study. Then the used techniques, the web-application will be build, for which certain design objectives will be defined. In the end the application will be tested according to the set objectives and found literature.

3.1.

Theoretical framework

Three things will be looked at in the literature research. First, a literature research is done into geo-visualization techniques and already available methods. Going from the conventional cartographic techniques to the modern techniques. Including animation and change. This to cover objective A1, to make the application attractive, and B3, understanding the geo-data. Second, literature about building geo-web applications and the available techniques will be consulted. To cover objectives, B 1-3 and C1. Adding knowledge and experience from preceding research. Last, will be looked at some frameworks explaining how to build an efficient, attractive and interactive web-application in general. Covering objectives from A.

This will all be summarized into the theoretical framework which can be found in the results chapter. The found literature will be used to make decisions while building the main application. Therefor the focus of the chapter will be on the field-name data set, and its characteristics and visual variables.

3.2. Building the web-application

After exploring the field-names dataset, a choice of story and way to visualize the data is made, which will be explained in section . This will immediately be implemented into building a web-based geo-visualization. The focus will be on building the web-application and finding the best way to visualize the data. While doing this, decisions and choices will be made on the developed framework. There will be several things that will be taken into account during this stage.

Section

- The idea and design

Section

- Techniques needed to make the web-application. (O C 1-2)
- Techniques for geo support. (O C)
- Visualizing of the geo data. (O B)

Section

- Designing the webpage. (O A1)
- Writing the information in text, that is needed in the web page. (O B 1-3)

Both the design and technical building will be done by the researcher.

3.2.1. The idea

Because the origin and meaning of field-names are mainly influenced by the geography of its direct environment, like water bodies, streams, soil properties and altitude in relation to its surroundings. In order to visualize this relation, as stated in objective B1, the geographical surrounding in relation to the name has to be shown. Because the field-names are already categorized by a previous study, easily this distinction can be made.


Several ideas came up to do this, as many characteristics are of influence. The main goal for the visualization can be stated as: > Visualize the meaning and origin of the field name by showing its relation with its direct environment.

The first ideas:

- Showing soil related field names on a soil map. This can be a current or old soil map.
- Showing height related field names on a height map.
- Showing water related field names in relation to water, swamps and soil types.
- Vegetation types, present on a field in the current situation vs what the field-name tells us about the historic vegetation.
- Showing names with relation to wind direction, in their position relative to the closest town or city.

Main idea

Eventually one of the ideas was chosen. Namely, showing the field names on a height map. By doing this, it includes also names related to water and swamps, for lower areas are more wet then higher areas. Also vegetation types, dependent on wet or dry situations, will be included for their is a relation. Figure shows some fields with names related to height. Though less clear than the examples above, some fields do indicate small increases or decreases in the relation to the area around. The Bult and the Hooge Akker are clearly on higher ground than the fields to the West. Where de zwarte kuil indicates that it is a lower field.

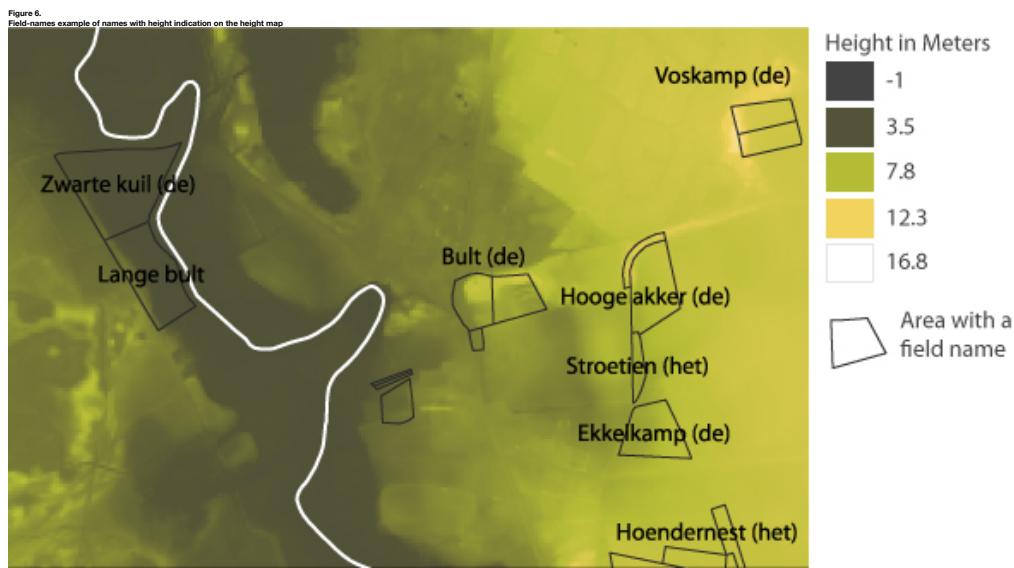

Though, field-names are only related to its direct environment, as far as the naked eye could see, for it is human invented. The relation of a field with a name can only be shown in relation to the direct environment, and not on a general overview map. For example, a name like 'Bultakker' (bump field) tells up that this field lies higher than its surrounding fields, not what the exact altitude it is. In order to include this in the visualization, showing the polygons on a map won't be sufficient. Chosen is to draw a transect of the height data and indicate the names of the fields on this.

// tekeningetjes

Interactivity will be added to the transect line, letting the user define the transect line themselves and explore the different objects located on and around the transect line.

For this is needed:

Webpage A map showing the area, where a line can be drawn to locate the position of the transect line. A area where the defined transect line will be drawn and can be explored. A explanation about how the application works. Other interactive features to navigate through the webpage.

Data Data about the height of the study area and all the field-names with its categories. Additional stories and explanation texts about the meaning and origin of the field-names. Additional pictures of the landscape characteristics.

Backend Linking the data with the webpage. See paragraphs .

Variations on Main idea

For also on this main idea some variations can be made, these will be shown here.

Soil properties as colors of the fields. Or pattern of the specific soil type. Like stones, clay, sand etc. Giving colors or patterns to the fields according to the soil property. Like a Stonefield or Redfield.

Pop-ups with explanations and texts. Linking field-names to textual explanation, adding pictures of the surroundings and landscape characteristics. Vegetation types, animal occurrence.


Adding pictures or symbols of vegetation types and animals on the transect line. As well as houses to indicate towns and cities. Water bodies as blue dips in the transect line. Give more explanation per category or field-name type. Include pictures of trees, shrubs, plants or animals with which the field name is connected.

Creating a small 3d landscape by adding multiple transect lines, stacked in front of each other.

Link stories provided to the line, so popups with provided stories from the book.

Mood board

For design ideas and color use a mood board was made. Pictures from the internet combined with fonts. Search terms were, living heritage, cultural heritage, transect, old transect map and more. One of the main inspirations was the following image.

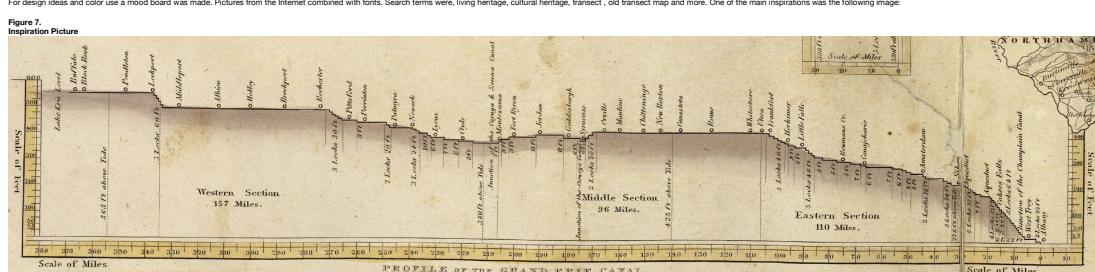

Source: https://commons.wikimedia.org/wiki/File:1832_Erie_Canal.jpg

Complete mood board; see appendix

3.2.2. The data

Field-names

From the 'Residentie voor Cultuur Erfgoed' of the Netherlands a dataset with living field-names in Drenthe was supplied. This data contains field geometries that have a field-name, a name or toponym given to the plot or area by the people living in the neighborhood from around 1830. These field-names were derived from studies by Naardins and Wieringa, together with het Drenthe Archief and het Meenters Instituut. Old toponyms on old maps, tell us a lot, but here they used another source, the memory of the local inhabitants, where generation after generation the field names keep on living. The polygons where drawn by hand or the names were assigned to plots from the cadastral maps from 1830.

These field-names contain a lot of information about how the landscape used to look. Because most field-names are based on their direct environment. The most important factors influencing the forming of field-names are : natural relief, natural water and the vegetation structure. (Spek et al., 2009) This information is highly important for nature conservation and heritage preservation. (Spek et al., 2009)


Further reference about the field names in Drenthe can be found in the book "Van Jerszalem tot Ezelakker, Levende veldnamenlijst van de Drentse Aa". (Spek et al., 2009)

The dataset contains in total 1747 polygons with a field-name. Projection Rd new. EPSG28992

This results in the following coverage of field names:


Table 2. Field-name Amounts per source

Figure 8.
All fields with a field name.

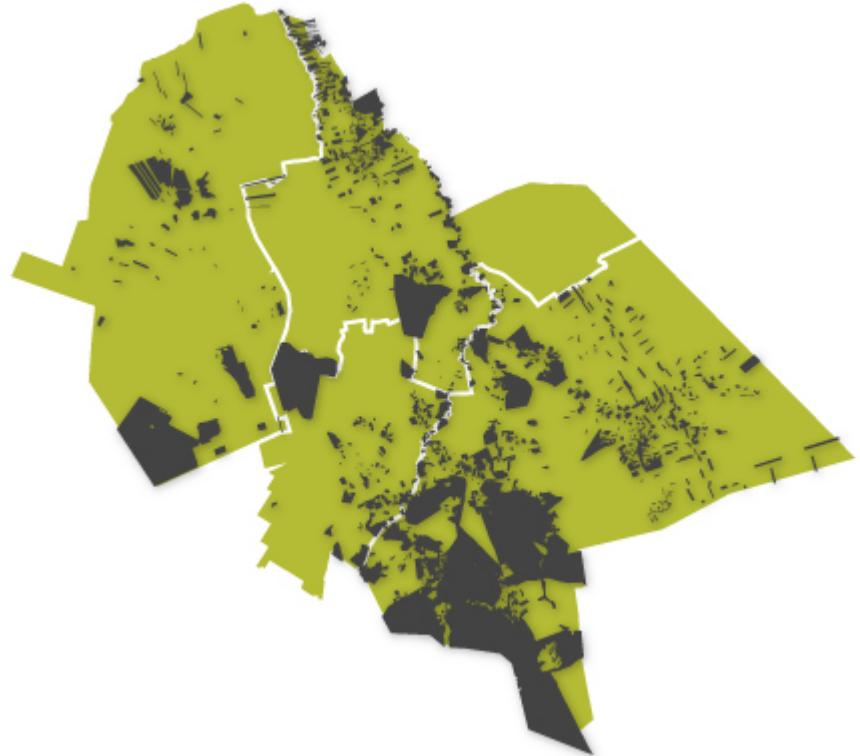

Amount	Source
459	cadastral topographic map from 1832
452	Landouw
276	Wier
18	Kadaster
515	Drents Archief
Based on this the total research location is determined, consisting of the municipality's Aa en Hunze, Assen, Noordenveld and Tynaarlo. All located in the watershed of the Drentse Aa.	

Figure 9.
Research area, location in the Netherlands and the municipalities

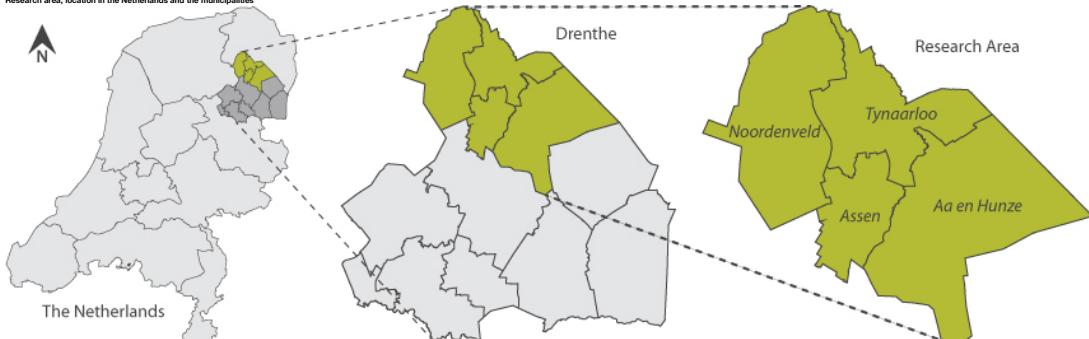

The field names are already categorized in a previous study by the RCE by §§§. The categories give a meaning to the name, of which environmental characteristic was of influence on the name creation. These categories are given in table . In the appendix a total overview of the categories and the names and alternatives can be found.

Table 3. Field-name categories

Code	Category	Count old	Count new
A	Altitude	116	1109
B	Water related names	33	399
C	River valleys and swamps	270	926
E	Forest	175	3146
F	Drift-sand fields	59	223
G	Wild animals	38	181
D	Miscellaneous	3	85
W	Wind direction	0	165
Total		770	6585

AHN

The AHN2 tiles covering the research area were downloaded from [nationaalgeoregister.nl](#) to show the relation of the field-names with the environment. The AHN has proved useful for historical research. Small differences in the landscape can be seen in the AHN2 and already historians and archeologists use it to discover old settlements that cant be discovered with the naked eye. (Actueel Hoogtebestand Nederland, n.d.)

The raster data has a resolution of 5 meters and a precision of systematic and stochastic error of max 5 cm the projection is RD new (EPSG28992). (Actueel Hoogtebestand Nederland, n.d.)

The maximum and minimum values of the total area are 29.5 and -1.9 meters respectively.

Figure 10.
AHN2 from the research area

See appendix for table with all the tiles used.

Kadaster parcels 1830

Data from the cadastre were also supplied by the RCE, showing the plots and parcels as they were in 1830. And can be used to refer the field-names to. The dataset is in projection RDnew(EPSG28992).

Water bodies

The water bodies are downloaded from the open data POKK-nl. The TopoNLactueel contains all topology of the Netherlands on a scale of 1:25.000. From this dataset only the water polygons are used and clipped to the research area. So the names of the water bodies can be included into the application. (TOP10NL | Publieke Dienstverlening Op de Kaart Laken, n.d.) EPSG28992

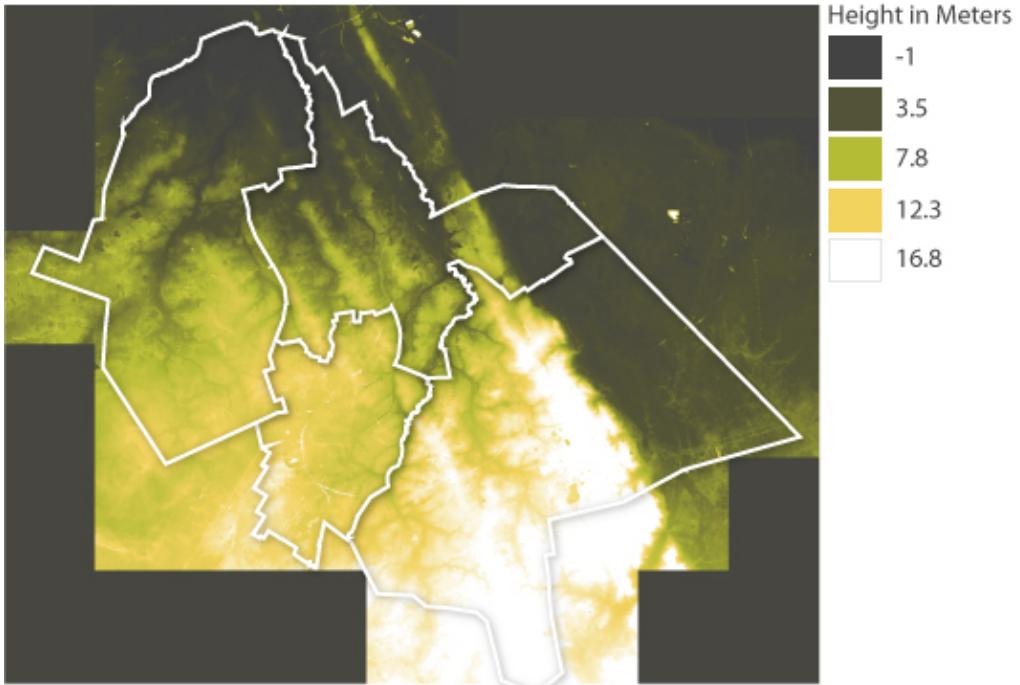


Table 4. Map sheets Top10NL downloaded

Top10NL_170 Top10NL_trW Top10NL_trO Top10NL_trW


3.2.3. Pre-processing the data

Field-names

All the data was delivered separate .DAT files and scattered over several folders and sources. All the possible datasets containing field-names were collected and displayed in one view. So this results in different sources saying something about the names. This also resulted in plots with multiple names, some differed slightly, some were totally different.

In order to work with the files in QGIS all the files needed to be converted to shape-files. This was done in R. See script appendix in QGIS, manually the attribute names needed were changed in one standardized name in order to merge all the data together.

Figure 11.
Flowchart field-name dataset processing

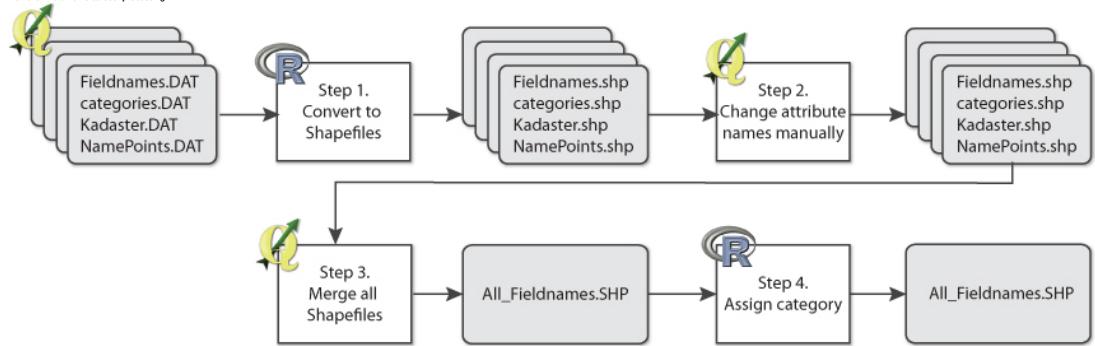

Code snippet 1. SQL adjustments

```
UPDATE valdnames3 SET name = name_1 WHERE name IS NULL;
UPDATE valdnames3 SET stoto_co_3 = code_3 WHERE stoto_co_3 IS NULL;
UPDATE valdnames3 SET stoto_co_1 = code_1 WHERE stoto_co_1 IS NULL;
DELETE FROM valdnames3 WHERE name IS NULL;
ALTER TABLE valdnames3 DROP COLUMN name_2 CASCADE;
ALTER TABLE valdnames3 DROP COLUMN code_2 CASCADE;
ALTER TABLE valdnames3 DROP COLUMN code_3 CASCADE;
ALTER TABLE valdnames3 RENAME COLUMN stoto_co_1 TO code_1;
ALTER TABLE valdnames3 RENAME COLUMN stoto_co_2 TO code_2;
ALTER TABLE valdnames3 RENAME COLUMN stoto_co_3 TO code_3;
```

Because this resulted into a lot of overlapping areas, instead, the field-names were all linked to the Kadaster dataset from 1830. So a single layer of polygons with multiple names is the result. This was done by spatially joining the datasets, or joining by the Kadaster ID's which most of the datasets contained. (The ID contained; municipality, sheet map number, parcel number).


Eventually, the field-names that had no category assigned had to be classified as well. The cadastre field-names and ... were not included in the previous research by the RCE, but were added here, to have more coverage and amount of field-names.

The classification was done in R. See appendix for the script. A field-name can consist out of multiple words with a different meaning and multiple categories and lemmings can be assigned to one field name. The classification provided by the RCE was used. This contained per category, different codes and alternative words that signifies the same.

The script runs through all the field-names and all the possible categories, to match which category was applicable.

While reading few of the names, new ideas for a category came up and added. The category wind direction W.

Figure 12.
Amount of field names with a specific category, before and after categorization in R

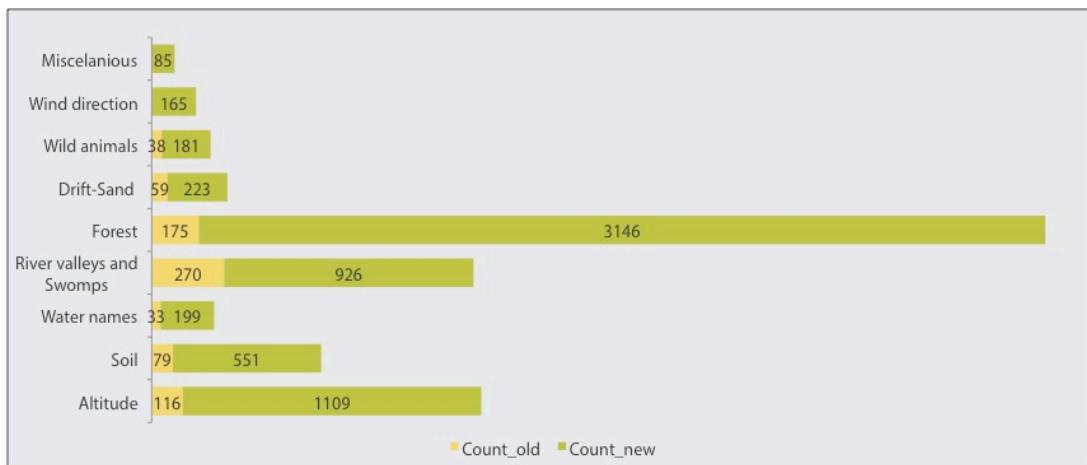


AHN

The AHN is measured with laser altimetry or LIDAR. Laser beams shot from an airplane and localized with GPS. It is measured over several time periods and merged in the end for a detailed measurement of the height. The average height and product delivered is corrected to ground level (mean sea level). So vegetation, buildings and other objects do not appear. (Actual height is measured in the Netherlands, n.d.) These filtered areas are given no-data values.

For use in the application the transect line looks best when not containing any gaps. Therefore, the no-data values are filled by the fill no-data tool of Qgis. This takes an average of around 100 pixels to calculate the average height of the missing pixels.

Figure 13.
Flowchart AHN2 raster processing

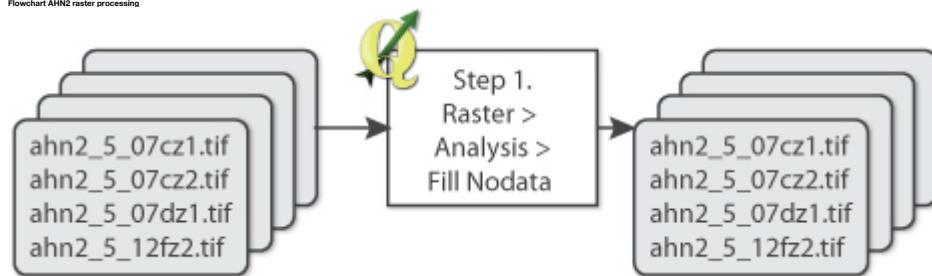

Cadastre parcels

No preprocessing needed other than explained in preprocessing field-names.

Water bodies

Only processing was clipped to the research area. No other preprocessing needed other than was used for the AHN.

3.2.4. Back-end processes

First both client side and server side are build on one computer as a single seat set-up, in order to develop and test the processes. Once the desired result is achieved, the possibility to move it to a server will be regarded.

Figure 14.
Back-end processes

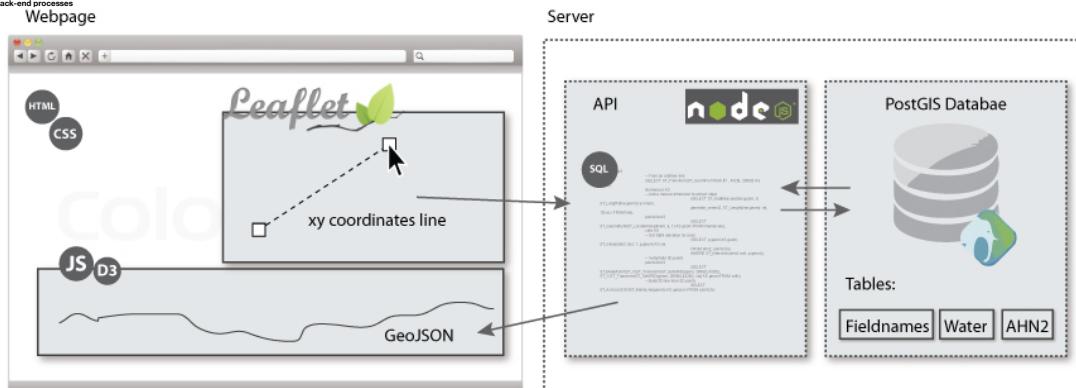



Figure shows the overall setup of the system. On the web page a line can be drawn by LeafletDraw on the Leaflet map. The coordinates of this line are edited to a line string format and parsed into a SQL query. This query is explained in paragraph . This query is asked to the API which requests the data from the PostGIS database. The response is a geoJSON array containing the heights on every 10 meters of the line. This data is parsed back to the script of the website and used to draw the transect line and all the other characteristics needed. The next paragraphs explain the database, the API, the SQL query and the website.

Setting up the database

Figure 15.
Loading data into the database

Hunter (2013). The PostGIS extension enables geographic objects like shape files and rasters.

The open source database PostgreSQL was installed with PostGIS extension to create the needed database. It is currently the most popular free and open source spatial database (Steiniger and

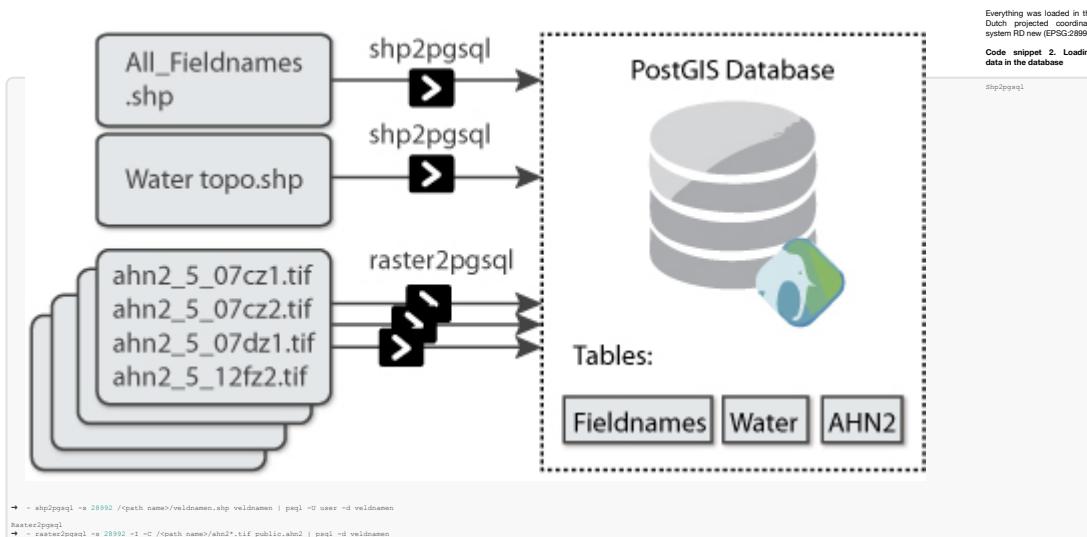

Setting up web-server or web API

A API or application programming interface, is needed to connect the web-application with the data in the PostGIS database. For this purpose Brian's node-postgres is used. Done with Node-Postgres for PostgreSQL client for node.js with pure JavaScript bindings. The API itself is a chunk of software code written

It supports parameterizes queries for PostgreSQL.

So the functions are made to get from coordinates to a SQL query asking the height data from the AHN raster. <https://github.com/brianc/node-postgres> <https://nodejs.org/about/>

Code snippet 3. Request & Response for transect line

```

app.get('/transect', function (req, res) {
  var query = 'SELECT ST_Transform(ST_GeomFromText($1, 4326), 28992) AS geom';
  if (err) {
    res.status(500).send(err);
  } else {
    res.send(result.rows.map(function(row) {
      row.geometry = JSON.parse(row.geometry);
      return row;
    }));
  }
})
  
```

API SQL queries

After a line is drawn on the Leaflet map with Leaflet Draw, the coordinates of the line are inserted into the request (\$1) as a LINESTRING format. The line is in WGS84 (EPSG4326) and needs to be converted to RDNew (EPSG28992) in order to extract the location with the other data at the right location.

Code snippet 4. The line

```

WITH line AS
  (SELECT ST_GeomFromText('LINESTRING($1)', 4326))
  (SELECT ST_Transform(ST_GeomFromText($1, 4326), 28992) AS geom),
  
```

The line is then cut into parts of 10 meter and points are generated with its percentage location along the line.

Code snippet 5. Point and percentage at every 10 m along the line

```

linemeasure AS
  (SELECT ST_AddPointMeasure(line.geom, 0, ST_Length(line.geom)) AS lineme,
  point AS
  (SELECT ST_MakePoint(ST_X(ST_StartPoint(lineme)), ST_Y(ST_StartPoint(lineme)), 10) AS i
  FROM line)
  points2d AS
  (SELECT ST_GeometryN(ST_LocateAlong(lineme, i), 1) AS geom, (i*100/ST_Length(lineme)) AS percentage
  FROM linemeasures),
  
```

This array of points is intersected with the AHN table to ext rat the height value for every point.

Code snippet 6. Get height per point

```

points AS
  (SELECT geom AS geom, ST_Value(ahn.rast, 1, p.geom) AS heights, percentage
  FROM ahn, points2d p
  WHERE ST_Intersects(ahn.rast, p.geom)),
  
```

Also the points are intersected with the field names table to see if a points falls into a field, which name and category code it belongs to.

Code snippet 7. Get field name for intersecting points

```

fields AS
  (SELECT name AS naam, code_1 AS category1, code_2 AS category2, ST_Intersection(p.geom, veldnamen2.geom) AS geom
  FROM veldnamen2, points2d p
  WHERE ST_Intersects(veldnamen2.geom, p.geom)),
  
```

Then the points are intersected with the water topology table to see if a points falls into a water body, and which name and category code it belongs to.

Code snippet 8. Get field name for intersecting points

```

--Get Water intersects
waters AS
  (SELECT wasser AS watersname, typewater AS typewater, identific AS waterid, ST_Intersection(p.geom, water.geom) AS geom
  FROM water, points2d p
  WHERE ST_Intersects(water.geom, p.geom)),
  
```

In the end all points that fall into a field or water body are joined to the total amount of points to contain the whole range of points.

Code snippet 9. Join all outcomes

```

points AS
  (SELECT * FROM AHN LEFT OUTER JOIN fields ON (AHN.geom = fields.geom)),
  points1 AS
  (SELECT * FROM points LEFT OUTER JOIN waters ON (points.geom = waters.geom))
  
```

This is all send back as one complete GeoJSON response.

Code snippet 10. final GeoJSON response

```

-- Make points!
SELECT ST_AsGeoJSON(ST_MakePoint(ST_X(ST_Transform(ST_SetSRID(geom, 28992), 4326)), ST_Y(ST_Transform(ST_SetSRID(geom, 28992), 4326)), heights))
AS points, naam, heights, percentage , category1, category2, watersname, typewater, waterid
FROM points
  
```

Eventually the response of the request will be a GeoJSON. An example of the GeoJSON array is shown in .

Code snippet 11. Example GeoJSON response

Everything was loaded in the Dutch projected coordinate system RD new (EPSG28992)
Code snippet 2. Loading data in the database
Shp2pgsql

```

[ {
    "id": 1,
    "geometry": {
        "type": "Point",
        "coordinates": [
            5.000000000000001,
            53.05184931708253,
            8.05700016021729
        ]
    },
    "name": "Surpol (deel)",
    "height": 8.05700016021729,
    "percentage": 1.0,
    "category": "water",
    "category2": null,
    "category3": null,
    "typewater": null,
    "watername": null
},
{...},
{...},
{...},
{
    "id": 2,
    "geometry": {
        "type": "Point",
        "coordinates": [
            6.023549000000001,
            51.855490584524,
            4.843998626709
        ]
    },
    "name": "Coyse Staat",
    "height": 4.843998626709,
    "percentage": 55.58112392359005,
    "category": "water",
    "category2": null,
    "category3": null,
    "typewater": null,
    "watername": null
},
{...},
{...}
]

```

3.2.5. Web design

Will be an inductive process. Mostly based on the researchers' preferences. The language in the product will be Dutch, for the data covers a part of the Netherlands and the target group is dutch. Internet mapping applications, is software that enables a developer to deliver and view geo-data and maps in a standard internet protocols and run in a normal browser.

Licenses

Only use of free and open source software is used.

Map5

Technology

HTML, CSS to build the webpage and the interactivity with JavaScript.

Packages needed for building the geo-application will be leaflet and d3.js. And possible leaflet plugins like, Leaflet Draw and Leaflet MiniMap. Leaflet is a JavaScript library for the creation of interactive maps by the founders of OpenStreetMap. Interesting for developers is probably the focus on desktop and mobile web browsers, and its use of HTML5. (Steiniger and Hunter 2013)

Technological advancements, such as browsers that support scripting languages natively, and standards, such as Cascading Style Sheets (CSS), Asynchronous JavaScript and HTML 5.

Leaflet

Code snippet 12. Leaflet map initializing

```

var basemaps = [
    "1830": L.tileLayer("http://a.map5.nl/map/gast/tiles/tmk_1850/ERSGR00913/{z}/{x}/{y}.png"),
    "2011": L.tileLayer("http://a.map5.nl/map/guestmap/crp/{z}/{x}/{y}.png"),
    "Google": L.tileLayer("http://a.map5.nl/map/gast/tiles/raster/crop00913/{z}/{x}/{y}.jpeg")
];
var map = new L.map("map", {
    zoomControl: false,
    minZoom: 12,
    layers: basemaps._1830
});
map.setView([53.079529, 6.614894], 14);
map.setZoom([52.861743, 6.458972],
[53.202277, 6.936033]);

```

D3, data driven documents.

Code snippet 13. D3 request coordinates and drawing transect path

```

d3.json("transect?linestrings") + coordinates, function(json) {
    var line = d3.select("div#line");
    line.selectAll("path").remove();
    .data(json.linestrings)
    .enter()
    .append("path")
    .attr("class", "transect")
    .attr("stroke", function(d){return d.color})
    .attr("stroke-width", 2)
    .attr("fill", "none");
});

```

3.3. Testing the web-application

Third, a small test will be held to see if the product complies with the set goals and objectives. During the whole process, iteratively the web visualization was adjusted and tested again until the project ends.

The final test will be conducted with a small questionnaire. About 20 people will be asked to open the web-application and look at it, use it and play around with it. Afterwards, 8 statements will be given and asked to rate them to the level of agreeing or not. Ranks between a number of 1 and 5, from totally disagreeing till, totally agreeing. Because the objectives were used in defining the statements, it tests if the application lives up to the objectives set for the user.

Because there is not a official testing group available, the participants will be colleagues of the Waag Society, the heritage institutions of the Heritage and Location project and possible, classmates and/or family and friends. This to have a broad general public.

Table shows the statements asked and their relation to the objectives. The complete questionnaire can be found in appendix.

Table 5. Questions and Objectives

Number	Objective	Statement
1	1 A	I think the application is visually appealing.
2	1 B and 1 C	I feel tempted to use the tools and functions in the application multiple times.
3	1 C	I feel tempted to use this application multiple times (in the future)
4	2 A and 2 C	The meaning and origin of the field-names became clear to me.
5	2 B	The shown information is surprising and interesting.
6	2 C	By using this application I can understand more about the importance of safe-guarding the field-names as cultural heritage.
7	3 A	The application is simple to use.
8	3 B	Everything was working as I expected.

4.1. Theoretical framework

First, a literature research is done into geo visualization techniques and already available methods which are applicable to the field-names. Describing the field-name data in the kind of data it is and the visual variables which can be linked to them. This to cover objective 1a, to make the application attractive, and 2c, understanding.

Second, literature about building geo-web applications and the available techniques will be consulted. To cover objectives, 2a, 2b, 2c and 3 to add knowledge and experience from preceding research to the techniques which will be used here.

Last, will be looked at some frameworks explaining how to build an efficient, attractive and interactive web-application in general. Focussing on a user centered design. Covering objectives, 1a, 1b and 1c.

4.1.1. Visualization of field-names



Geographical visualization can be used for 2 purposes; data exploration and information display. (Cartwright et al., 2004) By interpreting graphic representations new knowledge can be created and this can be distributed by visual communication. The one is exploratory, while visual communication is explanatory. (Dibaise, MacEachren, Krygier, & Reaven, 1992)

Showing the field-names in an interactive application is explanatory visual communication. The goal of the field-names is explanatory, while the interactivity makes the data exploratory. (MacEachren, 2002) In the Map use Cube of MacEachren (2002), the field-name application can be placed in the top corner. The application is about sharing information to a general and broad public. While making it interactive and so explanatory.

In figure the geo processing chain is combined with the series of visualization transformations. Showing that the process of visualization as exploration and communication will focus on the visual communication. To turn raw data sets into understandable knowledge on the explanatory level with a user-centered design. For the field-names the data collection and preparation was done. In this study only specific data transformations were required and no little data analysis was done. The main focus is on the communication for creating knowledge.

Figure 17.
Geo processing chain and visualization series

Figure 16.
Map use cube from MacEachren and Kraak

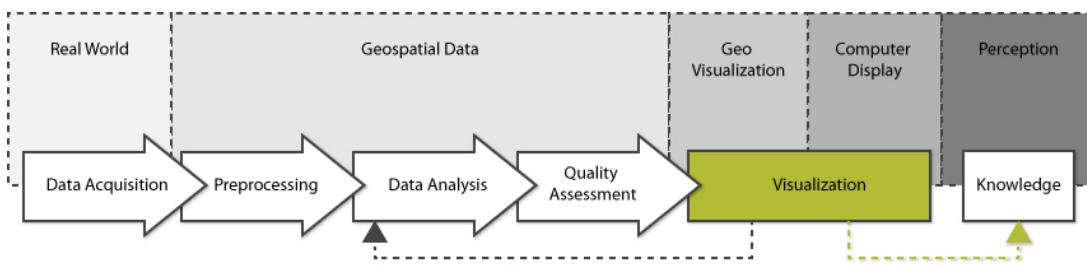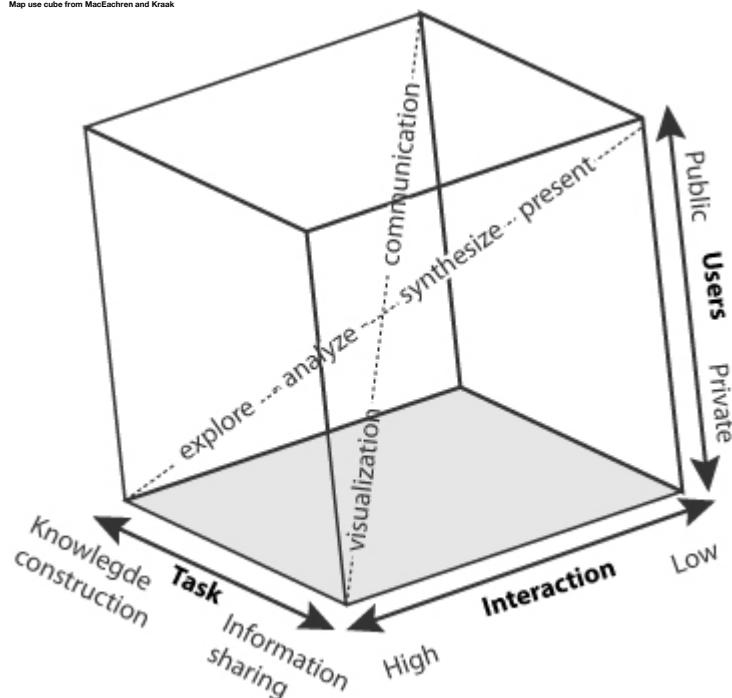

The field-name data sets are static data, but will be displayed dynamically and interactive. It will let the user explore, and re-discover the information themselves, called guided discovery. (Näslund, 2007) The user is no longer depended on what the cartographer puts on the map. (Ogao & Kraak, 2002) With electronic maps, the user can navigate and explore the spatial data themselves with the given functionality. In a dynamic interactive visualization, the user needs pends between data presentation and exploration. (Ogao & Kraak, 2002) Knopp(1985) defined four visualization operation tasks to be considered; identify, locate, compare and associate. Identify is describing an object, locate indicates the search for a object whose identity was already known. Associate and compare is the ability to relate between two different objects.

Table 6. Visualization operators from Ogao & Kraak

Table 1
The four main generic visualization operators

Visualization operator	Visualization sub-operator	Example of definitive characteristics of results
Identify	Spatial identification	Length, area, irregularity, minimum, maximum, range, distance, pattern of distribution
	Temporal identification	Extent: longest, shortest; sequence: first, last; category: nominal, ordinal, interval/ratio; movement: continuous, cyclical, intermittent
	Thematic identification	Name, symbols (legend)
Locate	Spatial location	(x, y), (φ , λ), grid locations (rows, columns), near, within, between, above, below, neighborhood of
	Temporal location	Event/valid time t , observed interval ($t_1 - t_2$) before, after, together, next
Associate/compare	Spatial association/spatial comparison	Topological relations, spatial collocation, covariance, correlation
	Temporal association/temporal comparison	Temporal collocation, time between objects, orientation (before, after), adjacency (just before, just after), causality (correlation)

- Geo browser – the map. Spatial dimension. Let users navigate.
- Time bar temporal dimension
- Filter bar – selecting a thematic filter. Thematic dimension.

The field names are historic but do not contain a change in time. Therefore the time bar had no relevance in the application. The static display of the field-names will be on the map as simple polygons, to indicate their position and show the user the spatial dimension, the location and sizes of the fields. There will be a set of navigation controls available to the user. Also multiple background layers, from which the user can choose. The information will be shown in a transect map. So the same information is shown in multiple views and from different perspectives. (linking) The brushing technique is used to highlight the hight on the line and the position on the map of that specific point so the user can link between the two presentations.

4.1.2. Web based geo visualizations & user centered maps

For making the map, Web Map software was needed to create a map in the browser. Some possible Web Map Frameworks that could be used and are widely known are OpenLayers, MapFish and Leaflet.(Steiniger & Hunter, 2013) They will be elaborated on to specify why the application makes use of Leaflet.

OpenLayers is a library for WMS (bild layers) and WFS (vector layers). It implements a JavaScript API for visualization of spatial data in the web browser. Without a server-side component. (Steiniger & Hunter, 2013) (<http://openlayers.org>)

MapFish, is an open source web mapping framework for building rich web-mapping applications. MapFish provides specific tools for creating web services that allows querying and editing geographic objects. (Steiniger & Hunter, 2013) (<http://mapfish.org>)

Leaflet is a web-map service WMS that returns geo-referenced rasterized maps or tiles. In this context a map is considered a two-dimensional visualization of features in the common formats jpeg or tiff. Leaflet is open-source JavaScript library for interactive maps. (<http://leafletjs.org>)


Leaflet currently competes with OpenLayers only with respect to the display of map tiles, because OpenLayers offers much more functionality when it comes to interactive and vector-based map-ping tools. Also MapFish provides much more capabilities. For this was not needed for this application, the choice was made for using Leaflet, being light and simple.

Leaflet also has the applicability to install plugins. For letting the user change the background map, the MiniMap plugin was used.

For building the transect line, d3 is used. A graphic drawing package. The transect line is therefore not a geographic representation but more information display. The geo-data is retained in the underlying data.

4.1.3. User centered designs or Customer engagement

To engage the target group into the application, the hook model is followed. This models explains how a user can become addicted to a online product. First there is a trigger, to make the user want to use the application. This could be either an external (e-mail, advertisement) or internal trigger. When using the product, the user can makes actions for which they have to be rewarded. If a user invest in the system they will likely stay and keep using the system, for they already put time and effort in that particular system. With multiple rewards and investments the user will go through the process again, for they get internal triggers to perform more actions.

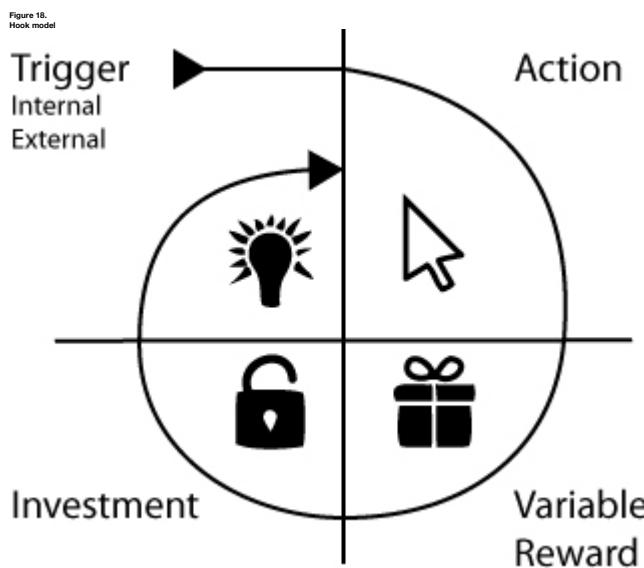

In the field-names application the external trigger would be given by heritage institutions or environmental institutions. Informing the citizens about what interesting information there is to find about the Drentse surroundings. This could be in newsletter, pamphlets, online on their websites or even on social media. After the user has found something interesting, they can click on the button to draw a line on the map of the users personal interest. After this the transect line is drawn and a lot of interesting information is displayed for the user to explore. This is called the reward. So in order to make the user come back to the application again, the application needs to be interesting and contain interesting and surprising information. For the long term a investment in the field-name application could be the adding of own field-names. So people that know some old field-names or have current names for particular areas of their neighborhood can draw them and save them to the system. Contributing to the conservation of the living heritage of field-names.

4.2. The web application

The web application can be found on: www.hierokomt.niene Some screenshots of how it looks. The first figure is the welcome screen. Where information about the field-names is given and the explanation of the how the application works. If the user is ready they can press the button, to go to the map and start the application.

Figure 19.
Welcome screen

Veldnamen in Drenthe



Ontdek het landschap en de verborgen namen!

Klik hier om naar de kaart te gaan!

Wat zijn veldnamen?

De tijd ligt niet eens zover achter ons dat veldnamen een vanzelfsprekend onderdeel vormden van de leefomgeving van veel dorpsbewoners. Het platteland was als het ware gestoffeerd met een rijk geschaard kleed van veldnamen. Of het nu een akker betrof, een stuk groenland of opvallende plek, alles had een eigen naam. We spreken dan ook van een namenlandschap dat naast het geografische en het landbouwkundige landschap een plek op de kaart heeft veroverd.. Veldnamen lichten een tipje van de sluier op die over het dagelijks bestaan in vroegere tijden hangt. Ze reiken ons informatie aan over de inrichting van deels nog woest en ledig landschap. Zo zijn ze ons behulpzaam bij het ontcijferen van de geheimtaal die een dorpslandschap van soms eeuwen terug in zich draagt.

Veldnamen zijn te vergelijken met onze huidige straatnamen. Ze hadden in het agrarische werkdorp een praktisch nut in de communicatie en in de ruimtelijke oriëntatie. Samen vormden ze de basis voor een mentale kaart van het dorpslandschap. De veldnamen riepen daarin als ijkpunten allerlei associaties, betekenissen en voorstellingen op. Waar ze uit het dagelijkse gebruik verdwenen, zijn in veel gevallen de verhalen erover nog springlevend.

In de twintigste eeuw, vooral in de tweede helft ervan, zijn het Nederlandse landschap en het gebruik ervan fundamenteel veranderd. Grootchalige ruilverkavelingen, intensive landbouw, de urbanisatie van het platteland en natuurontwikkeling hebben de oude cultuurlandschappen weggevaagd, en deze ontwikkeling gaat nog dag in dag uit door.

Aandacht voor de oude toponiemen, de veldnamen waarmee we een oud en zelfs prehistorisch landschap kunnen ontdekken. Er zijn topografische kaarten die we bij het speurwerk kunnen

Hoe werkt de applicatie?

Met deze knop kan je een lijn beginnen te tekenen op de kaart



Eindig de lijn door nog eens op het laatste punt te klikken

Heb even geduld...



Nu wordt jouw hoogte doorsnede van het landschap getekend! Ontdek de namen van de velden, er zijn verhalen, dieren en betekenissen te vinden



Klik hier om naar de kaart te gaan!


The next figure shows how the screen looks when entering the application. A example line is already given to show the user what is possible.

Figure 20.
Map status in beginning



The next figure shows the drop-down panel with multiple background layers. If the user moves the mouse over the drop-down menu this will appear. Then they can click on the preferred layer. The image after that shows the information panel that will appear when the mouse moves over one of the fields.

Figure 21.
Map functionalities with mouseover.

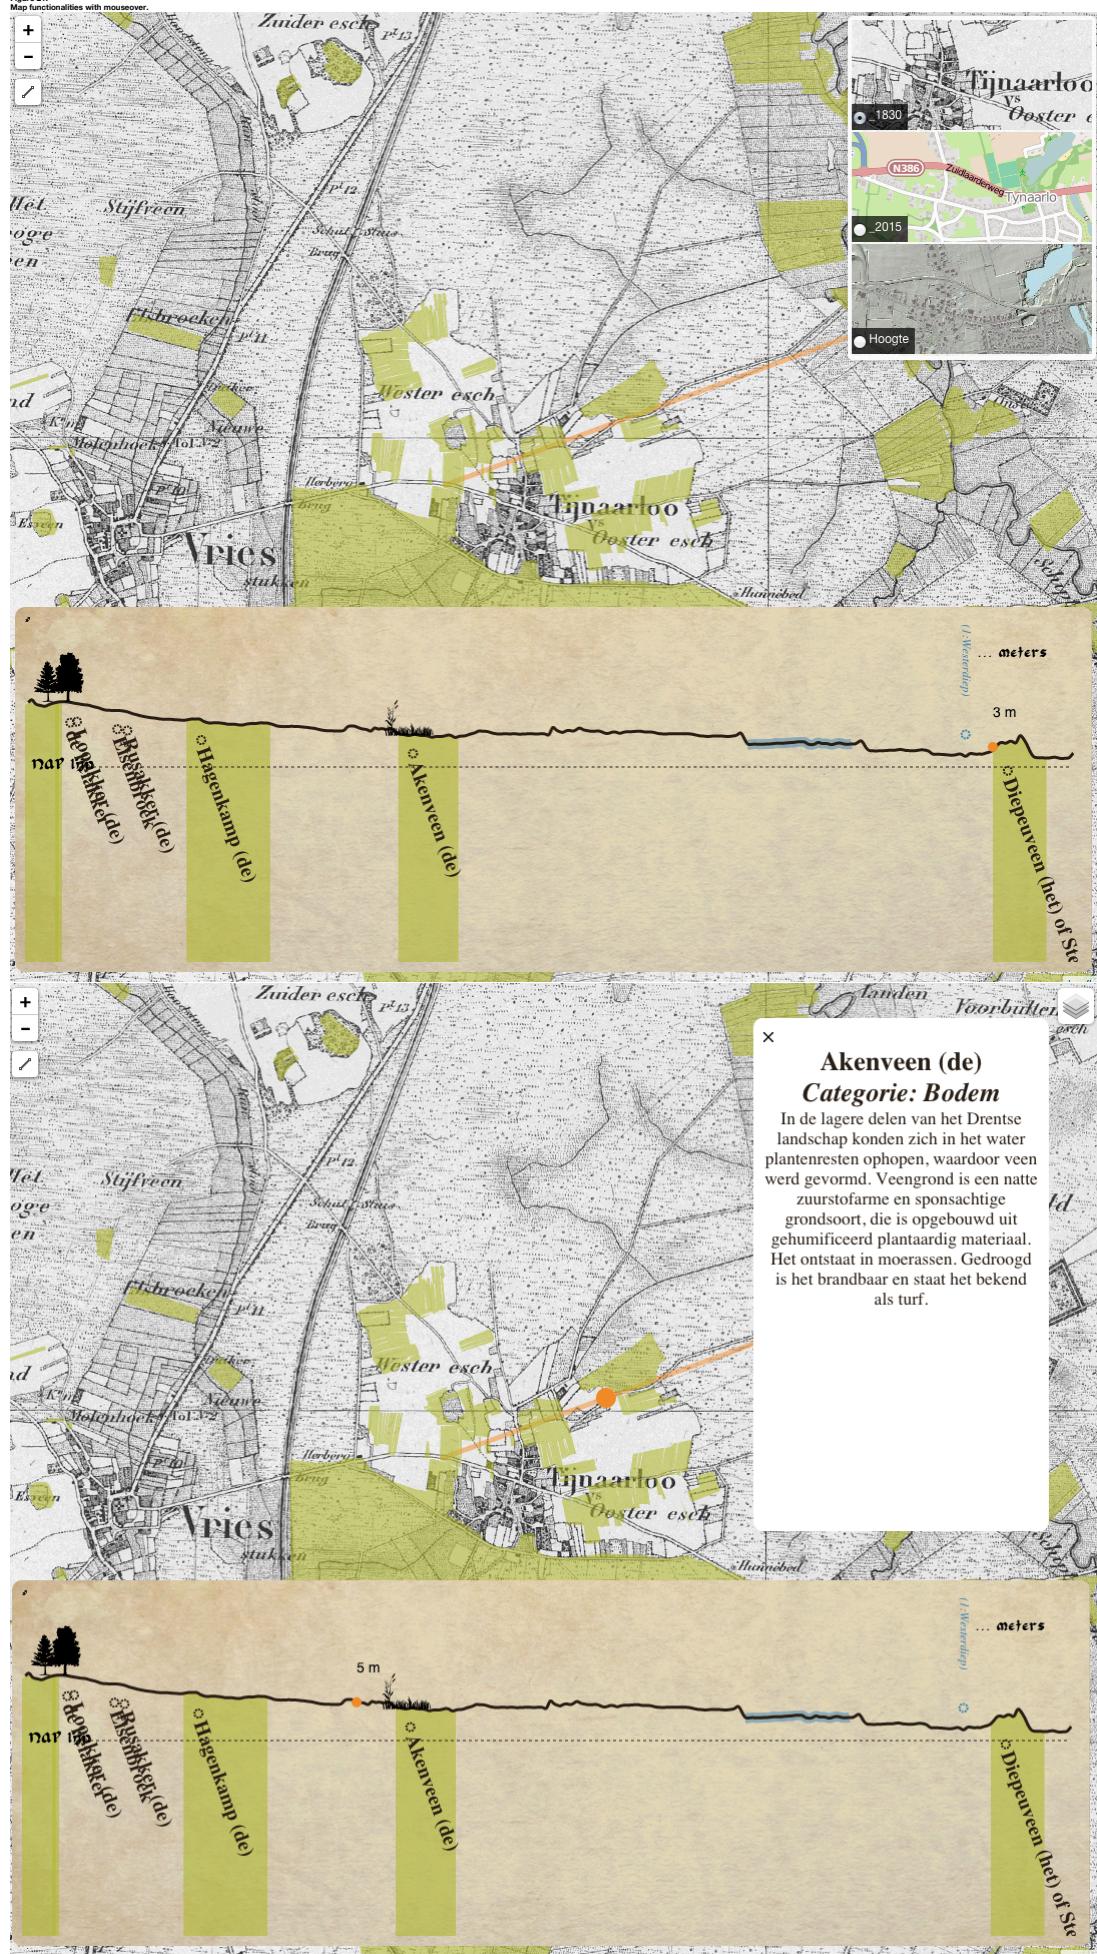

The user can click on the line button to start drawing a line.

Figure 22.
Map drawing a line function


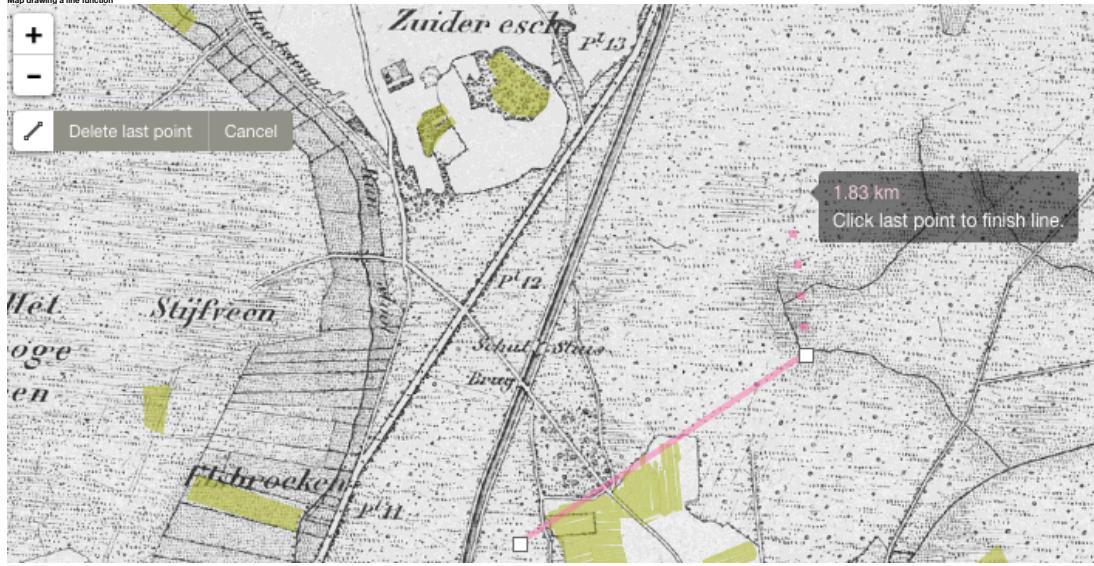



Figure 23.
Example interesting spot

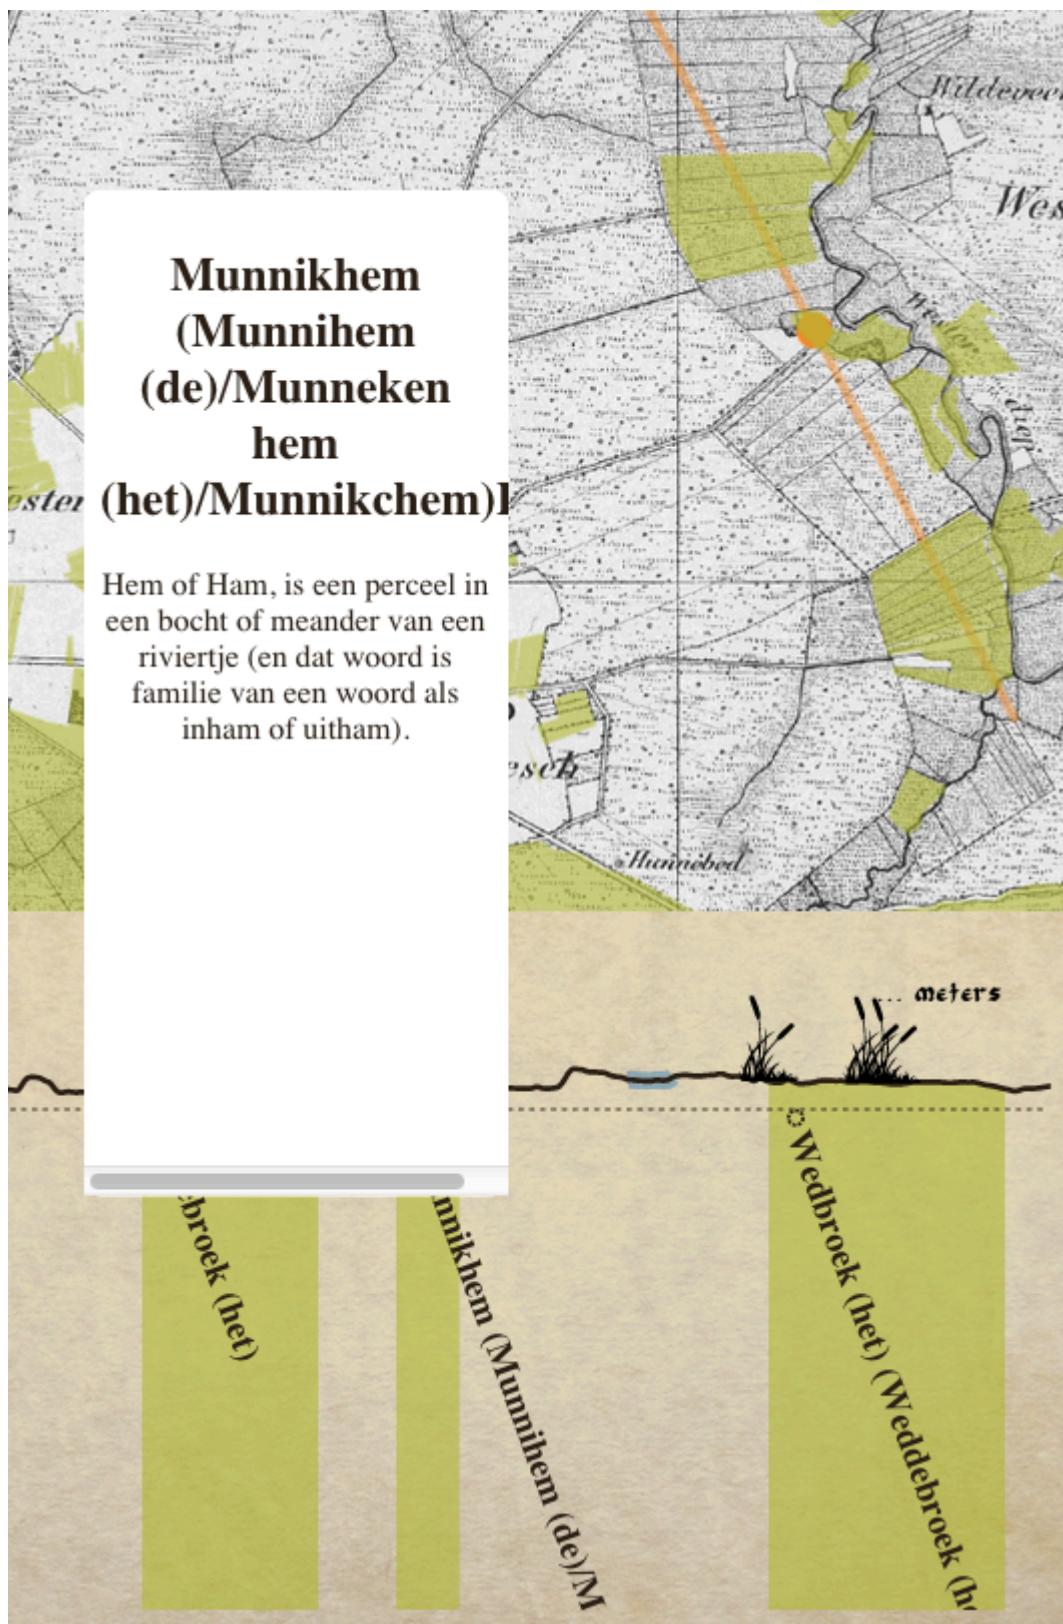

4.3. Testing the web-application

Outcome questionnaire \$5 people were asked to use the application and fill in the small questionnaire. The graph below shows the outcome of each question. With 5 being positive and 1 being negative. Question 2 about if people were triggered to perform multiple actions was answered the most positive. Also question 5 if the user found the information surprising and interesting scored high. Meaning that the application was perceived interesting and the user lingered around to discover more. Question 8 got the lowest score, the functionality did not work as the user would expect.

Figure 24.
Results questionnaire

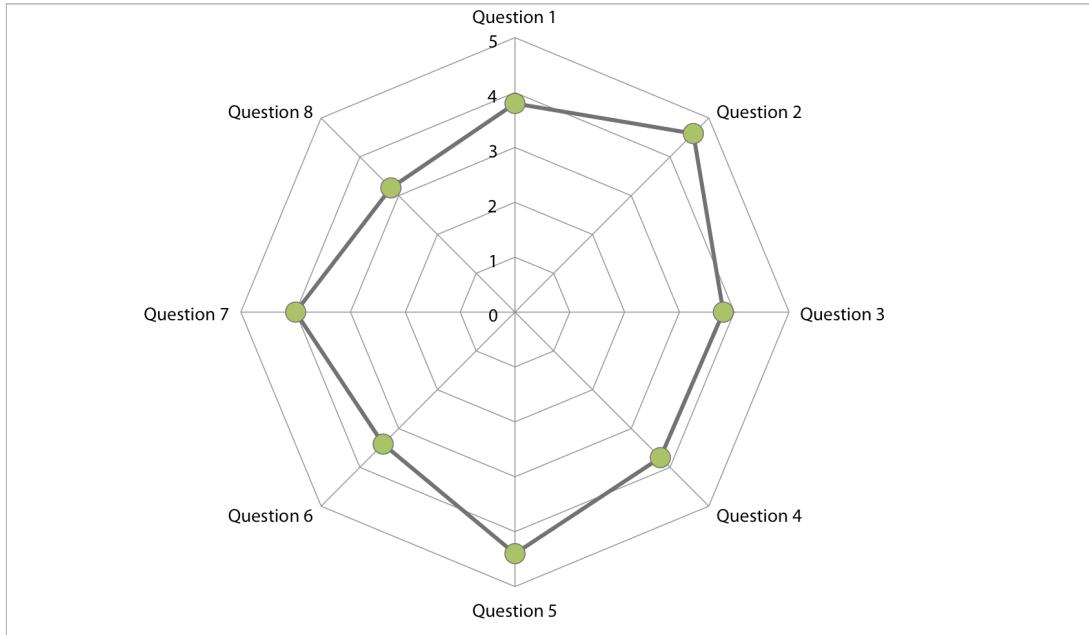

4.3.1. Remarks on the questionnaire

- "works logical, though information is missing"
- "make a pop-up disappear when the mouse moves away"
- "I take a total look of the page"
- "Finish line, not working..."
- "The elevation grid does not follow the x of mouse instead of following just X"
- "not always the same sometimes conflicts with the layer selector"
- "cursor on the map synchronizes with the moving circle on the line"
- "also point selection, not only line"
- "Use the zoom function on the image"
- "I would like to know more about the different map layers"
- "drawing button for the line is hard to find"
- "When you put the line"
- "You would expect the information about the field to pop up when the moving circle is on the field, instead of the mouse."

General

Firs, the short time span of the project, resulted in a product that is not finished. The iterative process had to be followed several times in order to come to a user centered design. Though, after the first concept of the application, the time was not found to conduct a good testing round and adjust the application to this. The advise and comments received in the end, were very useful but were not implemented any more. This is a pity, for the application could be further improved with the new ideas. One of the new ideas, was splitting up the screen in 3 parts. Firs a screen with information, then scroll through to the next screen, where the user can draw a line. If the line is loaded, a new screen is show with the transect line and the information behind it. If the user wants to go back to either the explanation, or drawing a new line, they can simply scroll up and start over again. This form of websites is called a carousel and starts to become more popular.

In general, the conducting researcher did all steps of the process herself, and a lack for specific skills and knowledge was there. Recommended would be to outsource certain parts of the development of an application to professionals with specific aimed skills.

The data

The data was provided by the RCE, because this all came in a unknown file structure with no explanation behind the columns. The table structure and quality of the data were not clear. After the extraction of the data, the first step was to clean it. Also the extraction of the data from the excel sheet was done in a harsh and crude way. Simply a string of words was taken and the length of categories, for example short words like val and gal could not appear in names which didn't refer to this particular relief structure. Also the code of the scripts, starts at the beginning of the file and runs on the order of categories through the possible categories, resulting in more use of names in the category altitude and forests, then the last category wind direction and miscellaneous. The order of the table and so the order of running the script can be seen in appendix. Also no human cognition came to pass for the process. Which makes the classification crude. The professional knowledge about the data was with the RCE, therefore the focus was more on the visualization and not improving the information in the data. A lack of professional knowledge about the field-names was kept at a low level.

Also the AHN processing was quite crude. The no value pixels were crudely run through a default tool of Qgis to fill up. Other possibilities were using another version of the AHN or calculating the water bodies differently. On the other hand for the goal of the data, the data could be seen as too detailed. Using pixels of 0.5 m resolution is not really needed for the visualization. The same for the water bodies, these do not need to be that exact.

Height is the recent height, is this still the same as in 1830?? A lot has changed since.

The water topologies used are from 2015. Therefore they do not show correlation with the field names. Some lakes disappeared and new ones appeared. The default background map is a map from 1830, showing a good reference for the field-names. But on the transect line, water bodies show up that cannot be seen on this base layer. When switching to the base layer from the current map, the water bodies do correlate but the field-names are not referenced.

The web application

The technology to build the web application was a restricting factor in the implementation of some ideas. For example, displaying the total length of the line, was a hard technical trick and therefore not finished or worked out. Also the panel with the extra base-layers was supposed to show all the time. But the plugins for the minimap did not support this and there was no time to work around it. On the positive side, the d3 package provided good and simple ways to work with the graphical display of the transect line. It is an easy tool and draws simple svg formats in the browser with the possibility to animate it easily. It is also possible to be creative, providing the basic needs for a map and displaying the geoJSON of the field-names on it. The drawing plugin was also easily edited so only the possibility for drawing a line was enabled. Changing the text from English to Dutch was more hard and therefore also not implemented in the short time span.

The database and API do slow down the process. Because the AHN data is really detailed and every 10 meters a point is asked to intersect, the process goes really slow. This could be looked into to improve. Next to that, the user doesn't see a waiting sign yet. For the experience of the user they need to know that something is happening after their action. Now it looks like nothing goes on.

Design Gets the old feeling intended as the mood-board. Old font was tried but made the names hard to read. So changed back to an easier to read font.

Geo-visualization

Geo-visualization has proved a good method for displaying the field-names and show their relation to the environment. The different base maps show the difference between 1830 and now. The transect line, shows the relation between height, vegetation types on certain heights and the distance to rivers in accordance to the field-names. The theoretical framework did bring in some nice techniques that are found back in the application. Like the brushing and linking techniques. However when it comes to color, patterns, symbol or size selection it was more done in a subjective manner then looking at the theory. It is hard to follow a strict theoretical framework and every visualization and story to be told is an individual case, and so, needs to be designed and created individual.

Geo-visualization is so broad and there are so many ways in which a dataset can be described that it is not possible to set up a framework in steps to follow. For the field-names there are probably a variety of forms to present them. From simply displaying the names on a map, to animated dynamic maps.

No temporal dimension added, more specific stories needed behind the field-names. Scale is needed Not the best way to visualize the correlation which the field-names have to their surrounding.

Testing the application

The test with the questionnaire was conducted very quickly and not thoroughly. The statements posed may be too positively asked. 5 levels might be giving the people an opportunity of choosing 3 which is no saying. The participants are influenced by that they like heritage and understand the project in the bigger picture, participants are biased. Not enough participants.

The test did provide useful comments and showed clearly where the user got stuck at or not. It brought in new ideas but there was no time to implement them and test them again.

5.1. Website recommendations

Because there are sufficient recommendations to be done to improve the web application, they are listed here below. Some are extra ideas, that didn't receive the time to be implemented. Others are recommendations done by the test group.

- + Add more symbols and information behind it.
- + Make the application suitable for multiple browsers.
- + Let the user invest, possible idea: Draw a field name and add a field name.
- + Implement a zoom function, this will make it more interesting.
- + Add waiting sign while database query is running.
- + Make the extra map layers visible always.
- + Restructure the web page into sections. Giving the information and maps more space on the screen and is for the user more easy to navigate between the different aspects of the application.
- + Longer transect line and the AHN dataset for a more beautiful and clear display on the transect line.
- + Find water body data from 1830 instead of 2015.
- + Make the process more quick by decreasing the level of detail in the data.


Chapter 6. Conclusion

Every geo-visualization needs to be looked at individually and specific for that type. A type of story must be selected to tell.

Chapter 7. References

- Actueel Hoogtebestand Nederland. (n.d.). AHN - Actueel Hoogtebestand Nederland - homepage [overzichtspagina]. Retrieved July 13, 2015, from <http://www.ahn.nl/index.html>
- Bertin, J. (2000). Matrix theory of graphics. *Information Design Journal*, 10(1), 5–19.
- Blok, C. (2000). Monitoring Change: Characteristics of Dynamic Geo-spatial Phenomena for Visual Exploration. *Spatial Cognition II*, 1 (2000), 16–30. http://doi.org/10.1007/3-540-45460-8_2
- Carwright, W., Miller, S., & Pettit, C. (2004). Geographical visualization: Past, present and future development. *Journal of Spatial Science*, 49(1), 25–36. <http://doi.org/10.1080/14498596.2004.9635003>
- Cerasuolo, F., Cutugno, F., & Leonardi, V. A. (2012). Visualization with a New Visual Metaphor for Hierarchical and Stratified Temporal Domain. In S. D. Martino, A. Peron, & T. Tezuka (Eds.), *Web and Wireless Geographical Information Systems* (pp. 57–71). Springer Berlin Heidelberg. Retrieved from http://link.springer.com/chapter/10.1007/978-3-642-29247-7_6
- Deal, L. (2014). Visualizing Digital Collections. *Technical Services Quarterly*, (April), 30–30. <http://doi.org/10.1080/07317131.2015.972971>
- DEN_Home. (n.d.). Retrieved May 6, 2015, from <http://www.den.nl>
- Dibaise, D., MacEachren, A., Kryger, J., & Reeves, C. (1992). Animation and the Role of Map Design in Scientific Visualization. *Cartography and Geographic Information Systems*, 19(4), 201–8. <http://doi.org/10.1559/152304092783721295>
- Droj, G. (2010). Cultural Heritage Conservation by GIS, A–B.
- Elwood, S. (2011). Geographic Information Science: Visualization, visual methods, and the geoweb. *Progress in Human Geography*, 35(3), 401–408. <http://doi.org/10.1177/0309132510374250>
- erfgeo. (n.d.). Retrieved July 22, 2015, from <http://erfgeodenlocatie.nl>
- Hahmann, S., & Burghardt, D. (2013). How much information is geographically referenced? Networks and cognition. *International Journal of Geographical Information Science*, 27(6), 1171–1189. <http://doi.org/10.1080/13658816.2012.743664>
- Karavia, D., & Georgopoulos, A. (2013). Placing Intangible Cultural Heritage. *Researchgate Net*, 675–678. <http://doi.org/10.1109/DigitalHeritage.2013.6743815>
- Köbben, B., & Yaman, M. (1996). Evaluating Dynamic Visual Variables. In Proceedings of the Seminar on Teaching Animated Cartography. Madrid, Spain: International Cartographic Association. Retrieved from <http://cartography.geo.uu.nl/ica/Madrid/ormeeting.html>
- Kraak, M.-J., & Klomp, A. (1998). A Classification of Cartographic Animations: Towards a Tool for the Design of Dynamic Maps in a GIS Environment. In Proceedings of the Seminar on Teaching Animated Cartography. Madrid, Spain: International Cartographic Association. Retrieved from <http://cartography.geo.uu.nl/ica/Madrid/ormeeting.html>
- Lai, J., Luo, J., & Zhang, M. (2012). Design and Realization of the Intangible Cultural Heritage Information Management System Based on Web Map Service. *Springer-Verlag Berlin Heidelberg 2012*, 605–612.
- Lin, H., Gong, J., & Wang, F. (1999). Web-based three-dimensional geo-referenced visualization. *Computers and Geosciences*, 25(10), 1177–1185. [http://doi.org/10.1016/S0098-3004\(99\)00076-X](http://doi.org/10.1016/S0098-3004(99)00076-X)
- MacEachren, A. M., & Kraak, M.-J. (2001). Research Challenges in Geovisualization. *Cartography and Geographic Information Science*, 28(1), 3–12. <http://doi.org/10.1559/152304001782173970>
- Martin, S., Reynard, E., Pelletier, Ondicou, R., & Ghirardi, L. (2014). Multi-scale Web Mapping for Geohistory Visualisation and Promotion. *Geohistory*, 6(2), 141–148. <http://doi.org/10.1007/s12371-014-0102-3>
- Mensis, J. I., Peugnet, D. J., & Qian, L. (2009). A conceptual framework for incorporating cognitive principles into geographical database representation. *International Journal of Geographical Information Science*, 14(6), 501–520. <http://doi.org/10.1080/136588100415710>
- Meyer, E., Grusenmeyer, P., Perrin, J. P., Durand, A., & Drap, P. (2007). A web information system for the management and the dissemination of Cultural Heritage data. *Journal of Cultural Heritage*, 8(4), 396–411. <http://doi.org/10.1016/j.culher.2007.07.003>
- Nöllenburg, M. (2007). Geographic Visualization. In A. Kerren, A. Ebert, & J. Meyer (Eds.), *Human-Centered Visualization Environments* (pp. 257–294). Springer Berlin Heidelberg. Retrieved from http://link.springer.com/chapter/10.1007/978-3-540-71949-6_8
- Ogao, P. J., & Kraak, M.-J. (2002). Defining visualization operations for temporal cartographic design. *International Journal of Applied Earth Observation and Geoinformation*, 4(1), 23–31. [http://doi.org/10.1016/S0930-2434\(02\)00005-3](http://doi.org/10.1016/S0930-2434(02)00005-3)
- Ormeling, F. (1998). Teaching Animated Cartography. In Proceedings of the Seminar on Teaching Animated Cartography. Madrid, Spain: International Cartographic Association. Retrieved from <http://cartography.geo.uu.nl/ica/Madrid/ormeeting.html>
- Petrescu, F. (2007). The Use of Gis Technology in Cultural Heritage. *October*, (October), 1–6.
- Shedroff, N. (1999). Information interaction design: A unified field theory of design. *Information Design*, 267–292.
- Spek, T., Elerie, H., & Kostan, M. (2009). Van Jezuïeten tot Ezelskar: Levende vademecumtales van de Drentse Aa. *Matrijs*.
- Steiniger, S., & Hunter, A. J. S. (2013). The 2012 free and open source GIS software map – A guide to facilitate research, development, and adoption. *Computers, Environment and Urban Systems*, 39, 136–150. <http://doi.org/10.1016/j.compenvurbsys.2012.10.003>
- Tensen, T. (2014). Master Thesis Geo-data animations in television journalism, 1–87.
- TOP10NL Publieke Dienstverlening *Op de Kaart Lokaal*. (n.d.). Retrieved July 13, 2015, from <https://www.pdok.nl/nl/producten/pdok-downloads/basis-registratie-topografie/topni-topni-actueel/top10nl>
- UNESCO Culture Sector - Intangible Heritage - 2003 Convention. (n.d.). Retrieved May 6, 2015, from <http://www.unesco.org/culture/ich/index.php?lg=en&pgr=00002>
- Veldnamen - Encyclopedie Drenthe Online. (n.d.). Retrieved July 22, 2015, from <http://www.encyclopediedrenthe.nl/Veldnamen>
- volkscultuur. (n.d.). Retrieved May 6, 2015, from <http://www.volkscultuur.nl>
- Waag Society. (n.d.). Retrieved July 23, 2015, from <https://www.waag.org/nl/organisatie>
- Zeijden, A. V. D. (2011). Immaterieel erfgoed en musea, (35), 4–6.

8.1. Mood board

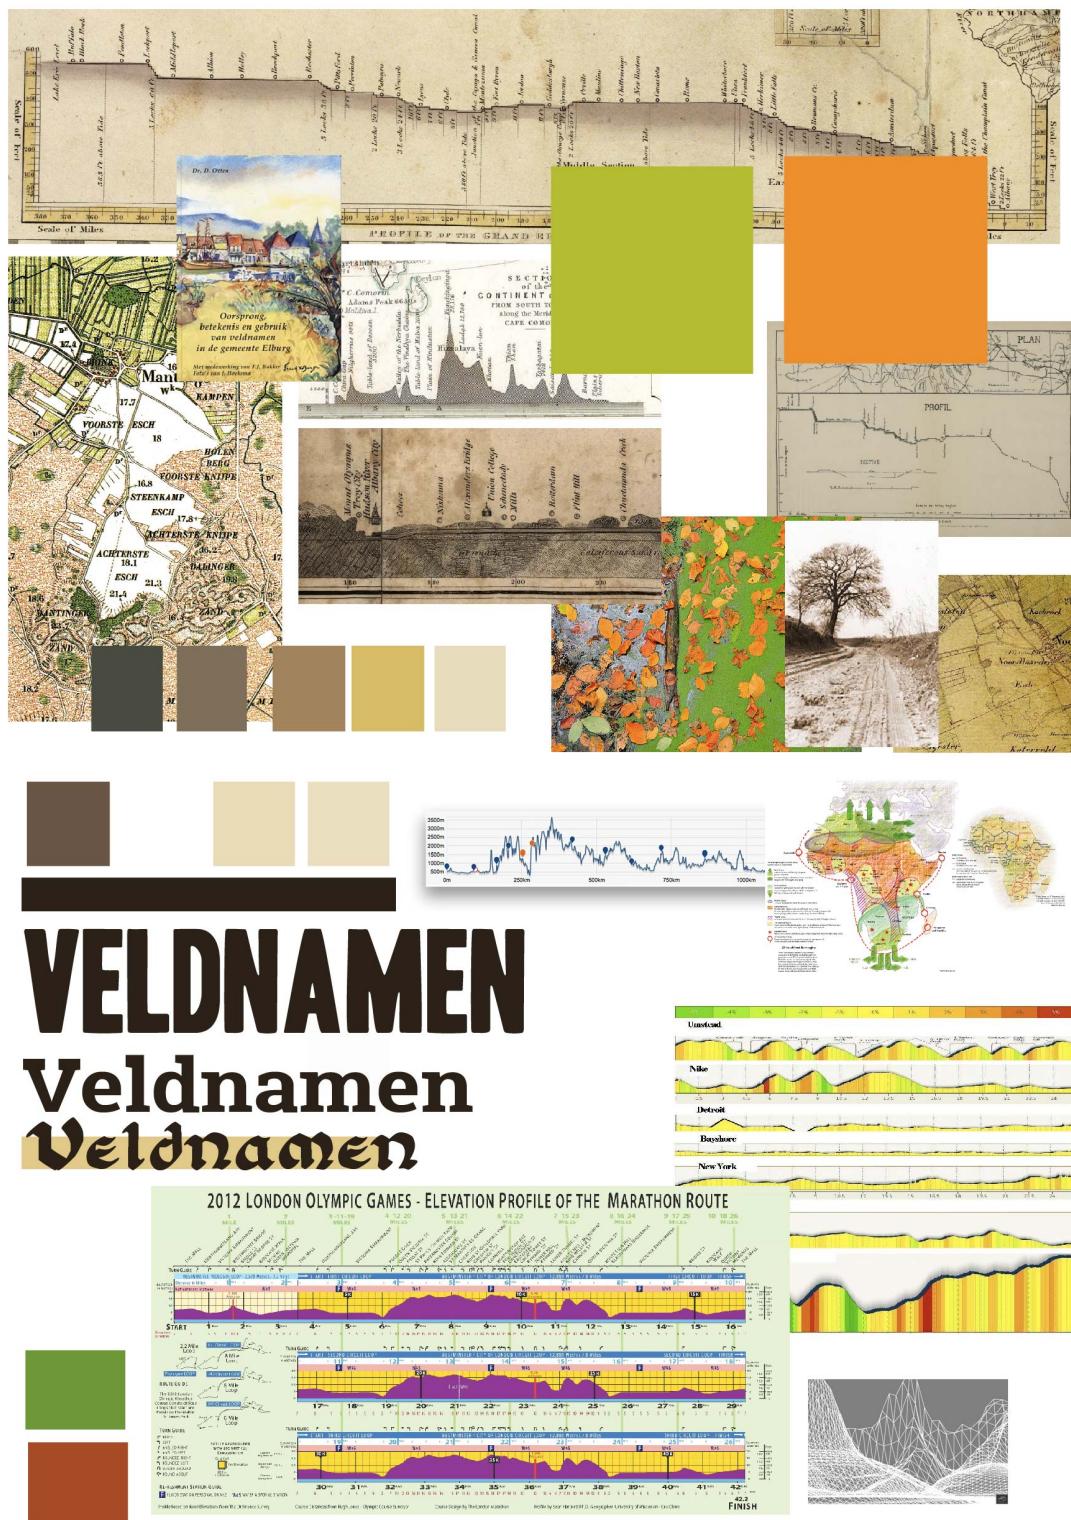

8.2. Categories field-names form RCE

Lemming Code	Category	Category Code	Lemming	Name Alternatives	Count first Code	Count second Code
A1	Relief	A	berg	bergen/bergelberg	210	38
A10	Relief	A	beest		13	247
A11	Relief	A	hoed		1	11
A12	Relief	A	duik	dunckinne	39	22
A13	Relief	A	dal	daal(dal)	39	175
A14	Relief	A	kull	koel	18	4
A15	Relief	A	waerd	weerd	2	6
A16	Relief	A	kwab	kweb(k)wet(k)wabbe	4	10
A17	Relief	A	gat		11	6
A18	Relief	A	put		1	1
A19	Relief	A	haag	laagen(l)sag(e)leig(e)loge	1	44
A2	Relief	A	buult	bullen(buult)buulten	48	15
A20	Relief	A	val		499	53
A21	Relief	A	gat		1	1
A22	Relief	A	disk	vlek(k)vlekken		2
A23	Relief	A	hol		15	120
A24	Relief	A	glis	glij(g)leip(g)heid	2	16
A3	Relief	A	hoog	hog(h)oogte(h)eupt	71	41
A4	Relief	A	hoorn	Horn(h)orne(h)eurn	64	17
A5	Relief	A	hell	helle	53	52
A6	Relief	A	hud	hulle	7	1
A7	Relief	A	pol		2	39
A8	Relief	A	hoop		2	1
A9	Relief	A	nor	norre	31	1
B1	Bodem	B	zand	sand	80	36
B10	Bodem	B	gras	grassel(grauw)		1
B11	Bodem	B	steen		1	5
B12	Bodem	B	bruin	bruin		1
B2	Bodem	B	teem		3	2
B3	Bodem	B	veen		279	175
B4	Bodem	B	klei		15	122
B5	Bodem	B	zand	zand(z)eton	29	39
B6	Bodem	B	kei	kei(k)asi	2	1
B7	Bodem	B	zwart		10	11
B8	Bodem	B	wit		46	44
B9	Bodem	B	rood	rode	27	32
C1	Watermen	C	meer	meren	88	28
C10	Watermen	C	oever	waal	1	1
C11	Watermen	C	zee			3
C12	Watermen	C	vals	vluch		1
C13	Watermen	C	weier	weier(w)eiert	1	4
C14	Watermen	C	veentje	veentje		3
C2	Watermen	C	oever		19	16
C3	Watermen	C	dobbe		14	8
C4	Watermen	C	streeg		33	6
C5	Watermen	C	diep		15	24
C6	Watermen	C	beek	beek	18	14
C7	Watermen	C	water		4	1
C8	Watermen	C	oever		5	10
C9	Watermen	C	leek			1
D1	Beekdijk Moeras	D	brook	broeken(broekje)	416	221
D10	Beekdijk Moeras	D	gaagel			1
D11	Beekdijk Moeras	D	moor	moer(m)oerde		1
D12	Beekdijk Moeras	D	goor	gor		33
D13	Beekdijk Moeras	D	zaak			3
D14	Beekdijk Moeras	D	nus	reech	3	6
D15	Beekdijk Moeras	D	geel	gele	5	28
D16	Beekdijk Moeras	D	slob	slob		1
D17	Beekdijk Moeras	D	eis		1	6
D18	Beekdijk Moeras	D	schol	schol(schol)schel	6	15
D19	Beekdijk Moeras	D	zak			1
D20	Beekdijk Moeras	D	maast	maadm(a)madig	350	246
D3	Beekdijk Moeras	D	mars		18	24
D4	Beekdijk Moeras	D	veelder	veer(vier)veer(veer)	25	15
D5	Beekdijk Moeras	D	stroet	strootstroce	13	5
D6	Beekdijk Moeras	D	merk	merk	29	19
D7	Beekdijk Moeras	D	horst	horst	23	7
D8	Beekdijk Moeras	D	ped		1	5
D9	Beekdijk Moeras	D	riet	riet(r)aatstreet	8	8
E1	Bossen	E	loo		1572	63
E10	Bossen	E	haag	hagen(h)eg(h)eg		44
E11	Bossen	E	zak	zak(z)ak		20
E12	Bossen	E	bulst	bulst		14
E13	Bossen	E	den	denne	118	582
E14	Bossen	E	eschlaach		59	61
E15	Bossen	E	wilg	ween(w)eene(w)ed(w)eel(w)arfl(w)arwe(w)erfl(w)ewer	7	7
E16	Bossen	E	eik	esk(e)kk(e)ek	1	37
E17	Bossen	E	roos	roos		1
E18	Bossen	E	struik	struik		1
E19	Bossen	E	bramen	brummel		10
E2	Bossen	E	hees	heez(h)eze	75	20
E20	Bossen	E	meidoorn	hagedorn		2
E21	Bossen	E	doorn		775	47
E22	Bossen	E	oude	kreuz(k)renzen(k)ros(k)ritzen		1
E23	Bossen	E	euwtebosse(b)lauwtebosse(b)	blie(b)ch		5
E24	Bossen	E	bessen			1
E25	Bossen	E	roos	rosen(rozen)		1
E26	Bossen	E	stok	stock	61	40
E3	Bossen	E	stobbe	stob	251	136
E4	Bossen	E	hout		48	29
E6	Bossen	E	holt		120	12
E7	Bossen	E	laar		9	8
E8	Bossen	E	wold	woold	2	20
E9	Bossen	E	struwe		19	37
F1	Veldgrond stuifsand	F	endt	velt	162	112
F10	Veldgrond stuifsand	F	listterbos	kweekboekom		1
F2	Veldgrond stuifsand	F	heide	heide(heet)heit	23	8
F3	Veldgrond stuifsand	F	haar	hare	33	20
F4	Veldgrond stuifsand	F	zuring		2	2
F5	Veldgrond stuifsand	F	woset		4	5
F6	Veldgrond stuifsand	F	weid	wilden(w)ildernis	1	4
F7	Veldgrond stuifsand	F	ruijg	roege	4	5
F8	Veldgrond stuifsand	F	brem	braam(broom)brem(b)ram	1	1
F9	Veldgrond stuifsand	F	wind		2	8
G1	Wilde dieren	G	fazant(patrijs)	hunder(h)oen(er)hoender	29	15
G2	Wilde dieren	G	kranaag		12	1
G11	Wilde dieren	G	krampogel	kras(k)raan(k)raan(k)crane		1
G12	Wilde dieren	G	reiger			1
G13	Wilde dieren	G	mus			1
G14	Wilde dieren	G	raaf	raven	14	
G15	Wilde dieren	G	duif	duverduiven(d)elfdoveven	2	
G16	Wilde dieren	G	reus			1
G17	Wilde dieren	G	cocoavaar	cocoavaar(h)elver(cocoavaar)elber(schollbos)lubert	1	
G18	Wilde dieren	G	krast		2	
G19	Wilde dieren	G	spreuw	spree		1
G2	Wilde dieren	G	haan	hane	13	20
G20	Wilde dieren	G	oud	hund	2	1
G21	Wilde dieren	G	kat		4	1
G22	Wilde dieren	G	bever			1
G23	Wilde dieren	G	vos		5	4
G24	Wilde dieren	G	wolf	wolven	10	10
G25	Wilde dieren	G	haas	hazen	11	11
G26	Wilde dieren	G	oel		5	5
G27	Wilde dieren	G	eter		1	2
G28	Wilde dieren	G	das		1	1
G29	Wilde dieren	G	adder	edder	7	32
G3	Wilde dieren	G	uil	oel	4	9
G30	Wilde dieren	G	mug		1	1
G31	Wilde dieren	G	rat		2	1
G32	Wilde dieren	G	bij	immoniv(m)yen(y)em	24	4
G33	Wilde dieren	G	bloodzuiger	egellege(d)		1
G34	Wilde dieren	G	aal	aten	3	
G35	Wilde dieren	G	visch		6	6
G4	Wilde dieren	G	skater	asker(rik)ster		1
G5	Wilde dieren	G	haren	haren(h)aren(k)arvet	5	6
G6	Wilde dieren	G	ecord	ert	9	3
G7	Wilde dieren	G	gans	ganzen(gaans)(gaansen)goes(gaansen)ges	2	3
G8	Wilde dieren	G	snip			1
G9	Wilde dieren	G	leeuw(er)k			1
G10	Overig	O	sassen			1
G11	Overig	O	riet	wet	32	38
G12	Overig	O	dansel			1
G13	Overig	O	walg			2
G14	Overig	O	alk	halk		1
G15	Overig	O	harteer			1
G16	Overig	O	duur			1
G17	Overig	O	halmer			1
G18	Overig	O	staart		3	5
G19	Overig	O	vlas		4	
G20	Overig	O	bod		21	20
G21	Overig	O	wool	violen		1
G22	Overig	O	asdad	dessel(d)iesel		8
G23	Overig	O	bloom			1
G24	Overig	O	ronsel		18	
G25	Overig	O	mos		3	3
G26	Overig	O	klaver		2	22
G27	Overig	O	groen			3
G28	Wind	W	west	ooster	121	33
W1	Wind	W	noord	noorder	25	18
W2	Wind	W	west	weester	8	20
W3	Wind	W	zuid	zuidere	11	44

8.3. AHN tiles downloaded:

ahn2_5_07cz1.tif ahn2_5_12en1.tif ahn2_5_07cz2.tif ahn2_5_12en2.tif ahn2_5_07dz1.tif ahn2_5_12e1.tif ahn2_5_07dz2.tif ahn2_5_12e2.tif ahn2_5_11fz1.tif ahn2_5_12fn1.tif ahn2_5_12an2.tif ahn2_5_12fn1.tif ahn2_5_12an1.tif ahn2_5_12fz1.tif ahn2_5_12az1.tif ahn2_5_12ft2.tif ahn2_5_12az2.tif ahn2_5_12en1.tif ahn2_5_12bn1.tif ahn2_5_12gn1.tif ahn2_5_12bn2.tif ahn2_5_12gn2.tif ahn2_5_12bn3.tif ahn2_5_12gn3.tif ahn2_5_12bn4.tif ahn2_5_12gn4.tif ahn2_5_12bn5.tif ahn2_5_12gn5.tif ahn2_5_12bn6.tif ahn2_5_12gn6.tif ahn2_5_12bn7.tif ahn2_5_12gn7.tif ahn2_5_12cn2.tif ahn2_5_12cn3.tif ahn2_5_12cn4.tif ahn2_5_12cn5.tif ahn2_5_12cn6.tif ahn2_5_12cn7.tif ahn2_5_12cn8.tif ahn2_5_12cn9.tif ahn2_5_12cn10.tif ahn2_5_12cn11.tif ahn2_5_12cn12.tif ahn2_5_17en2.tif ahn2_5_12en1.tif ahn2_5_12en2.tif ahn2_5_12en3.tif ahn2_5_12en4.tif ahn2_5_12en5.tif ahn2_5_12en6.tif ahn2_5_12en7.tif ahn2_5_17en1.tif ahn2_5_17en2.tif

8.4. R script converting files to shapefile.

```
filenames <- list.files()
filenames <- list.files(filenames , pattern = "*.TIF" , full.names = T)

## x = list of folder files # cat = category folder
exportToShape <- function(x, cat)
{
  for (i in 1:length(x))
  {
    name <- x[i]
    nr <- strsplit(name, "\\")[[1]][1]
    layer <- substr(nr[[1]][1], 1, nchar(nr[[1]][1])-4 )
    lemming <- substr(nr[[1]][2], 4, nchar(nr[[1]][2])-4)
    file <- paste0(cat, lemming)
    file$category <- lemming
    writeGD(obj = file, dan = "shape_vlak", layer = layer, driver = "ESRI Shapefile", overwrite_layer = T)
  }
}
exportToShape(filenames, "overig")
```

8.5. R script detecting categories

```
library(rgeos)
library(raster)
library(rgdal)
library(dplyr)
library(zoo)
require(RPostgreSQL)
require(rgdal)

setwd("C:\Users\wasag\Documents\MDI_Stapje\9_veldnamen\10_VeldnamenOrgineel")

# csv alle categorieën en Lemmings
categorie <- read.csv(file = "Categorie_Alle.csv", header = T, sep=",")

# shapefile alle velden + naam
velden <- readOGR(dsn = "C:\Users\wasag\Documents\veldnamen.shp", layer = "veldnamen", stringsAsFactors = F)

# write shapefile back
writeOGR(db = velden, dan = "veldnamen_cat.shp", layer = "veldnamen_cat", driver = "ESRI Shapefile")

# modifying shapefile
velden@data$CODE_1 <- velden@data$CODE_1
## correctie
velden$CODE_1[velden$CODE_1 == "+007" <- "+007"
velden$CODE_1[velden$CODE_1 == "+024" <- "+04"
velden$CODE_1[velden$CODE_1 == "+031" <- "+21"
velden$CODE_1[velden$CODE_1 == "+040" <- "+22"
velden$CODE_1[velden$CODE_1 == "+045" <- "+05"
velden$CODE_1[velden$CODE_1 == "+047" <- "+07"
velden$CODE_1[velden$CODE_1 == "+051" <- "+01"
velden$CODE_1[velden$CODE_1 == "+053" <- "+03"
velden$CODE_1[velden$CODE_1 == "+057" <- "+08"
velden$CODE_1[velden$CODE_1 == "+062" <- "+02"
velden$CODE_1[velden$CODE_1 == "+067" <- "+06"
velden$CODE_1[velden$CODE_1 == "+071" <- "+07"
velden$CODE_1[velden$CODE_1 == "+075" <- "+05"

## categorieën toewegen
i <- 0
for (i in 1:length(velden@NAME))
{
  naam <- velden@NAME[i]
  for (j in 1:length(categorie$categorie))
  {
    if(categorie$categorie[j] == naam) 
    {
      teken <- paste(categorie$categorie[j],"|",categorie$manalternatieve[j] , sep = "")
      gids <- gregz(teken, naam, ignore.case=T)
      if(gids) {
        if(is.na(velden$CODE_1[i])) {
          velden$CODE_1[i] <- teken
        } else if(is.na(velden$CODE_1[i])) {
          velden$CODE_1[i] <- teken
        } else if(velden$CODE_1[i] <- teken) {
          velden$CODE_1[i] <- teken
        }
      }
      print(paste0(naam, teken, CODE_1[gids]))
    }
  }
}
```

8.6. Questionnaire for testing the application

Alt text