


A wrong write can coexist with a readable correct value

(a) Correct digit read before a wrong sum write

Separate predictor reads internal activity.
Original names; training uses other programs.

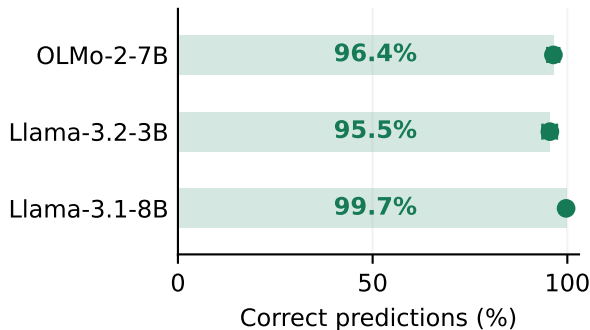


95% intervals. Added writes = misleading-name rate minus ordinary-name rate.

Readable information does not show that the model uses it.

(b) Does showing the operation help?

Fresh programs; names screened before testing.

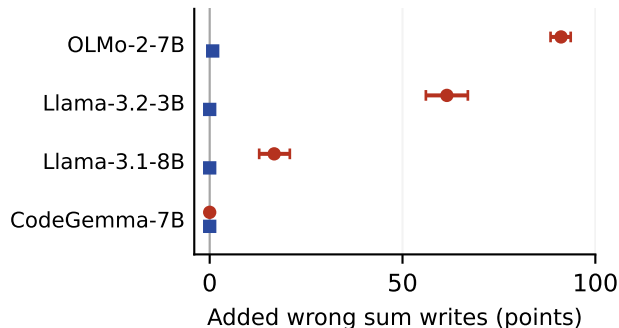

Examples: values only

Examples: operation + value