


A wrong write can coexist with a readable correct value

(a) Correct digit read before a wrong sum write

Separate predictor reads internal activity.
Original names; training uses other programs.

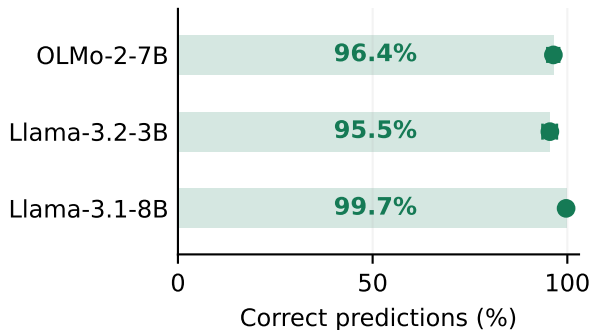


95% intervals. Added writes = misleading-name rate minus ordinary-name rate.

Readable information does not show that the model uses it.

(b) Include the code expression in examples

Fresh programs; names screened before testing.

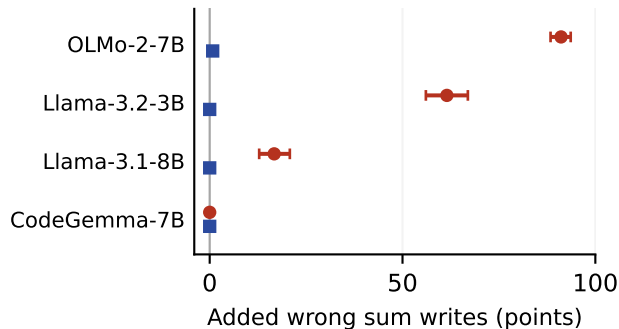

Examples: $v = 2$

Examples: $v = \text{len}(xs) = 2$