Recoverability alone does not identify native program semantics

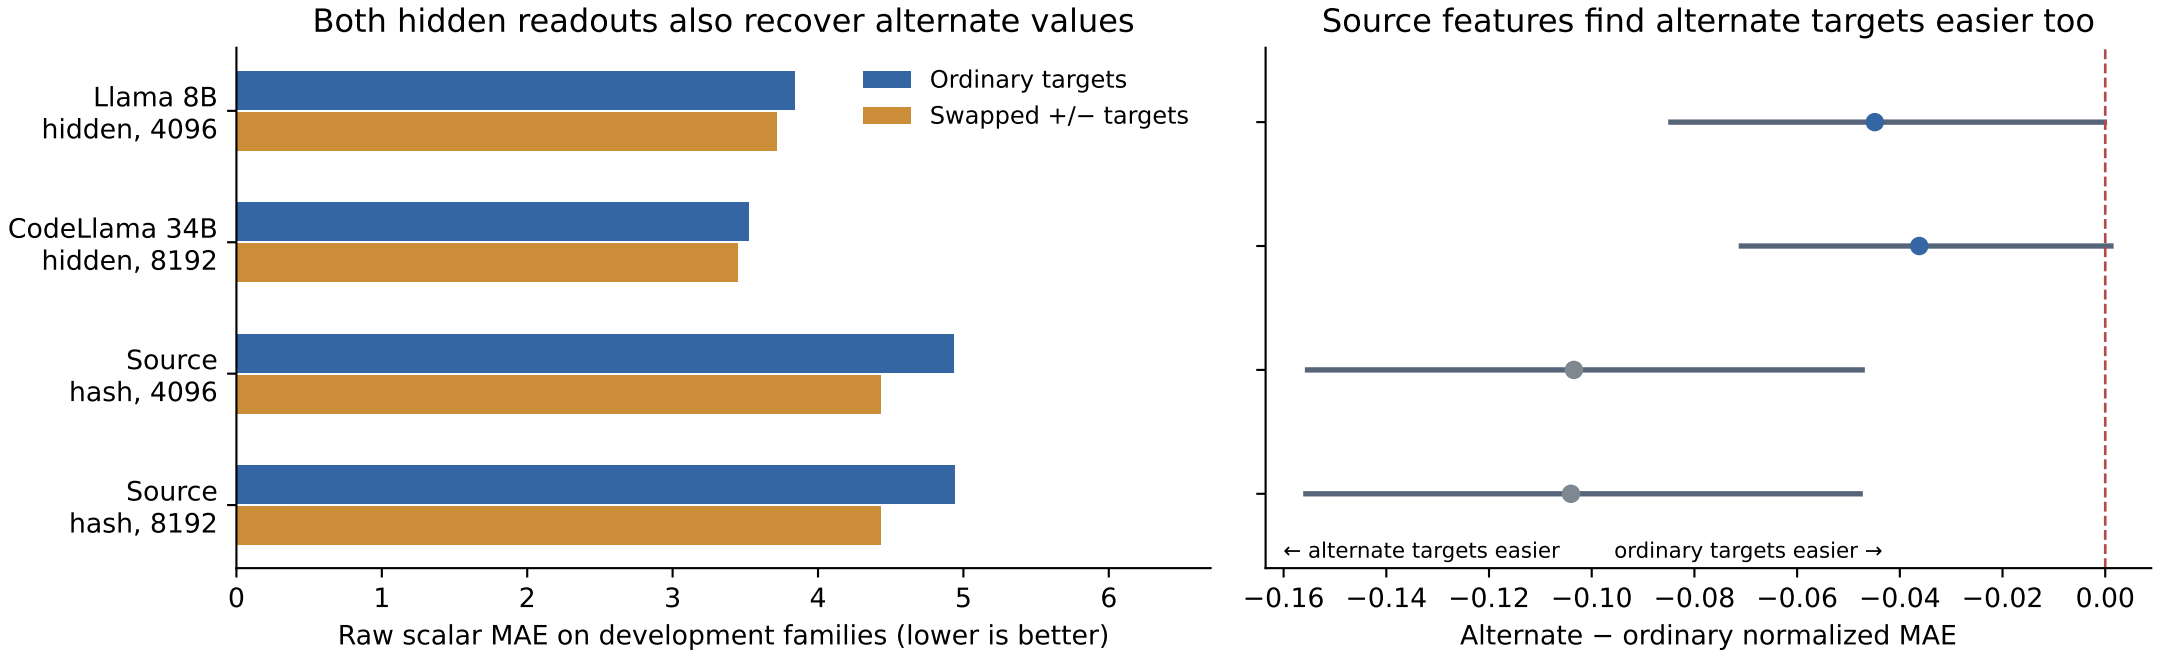

Same archived inputs and states; three TRAIN-selected fitting seeds. Right: 95% paired structural-family bootstrap intervals.
Adaptive DEV; non-simultaneous intervals. Target distributions/scales differ. Parity is invariant under swapping + and −.