


Predictors pass the accuracy check in Llama-3.2-3B, but fail in OLMo-2-1B

Separate predictor reads internal activity → predicts the variable's correct digit.

Train and test on different ordinary-name problems, using calculations generated by the model.

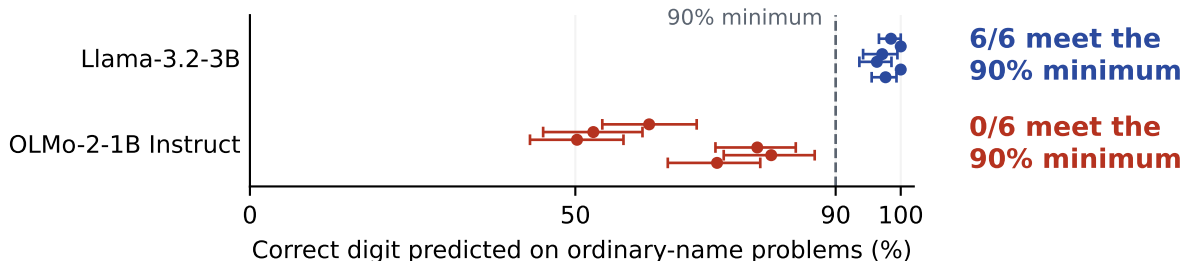

Six points per model: 2 variables × 3 example sets; 95% intervals. Failed checks limit error-case interpretation.