



Chrome DevTools Integration Project
Barry B. Benson Pet Game
Kevin Gomez
Comp 484

Run Message Logging

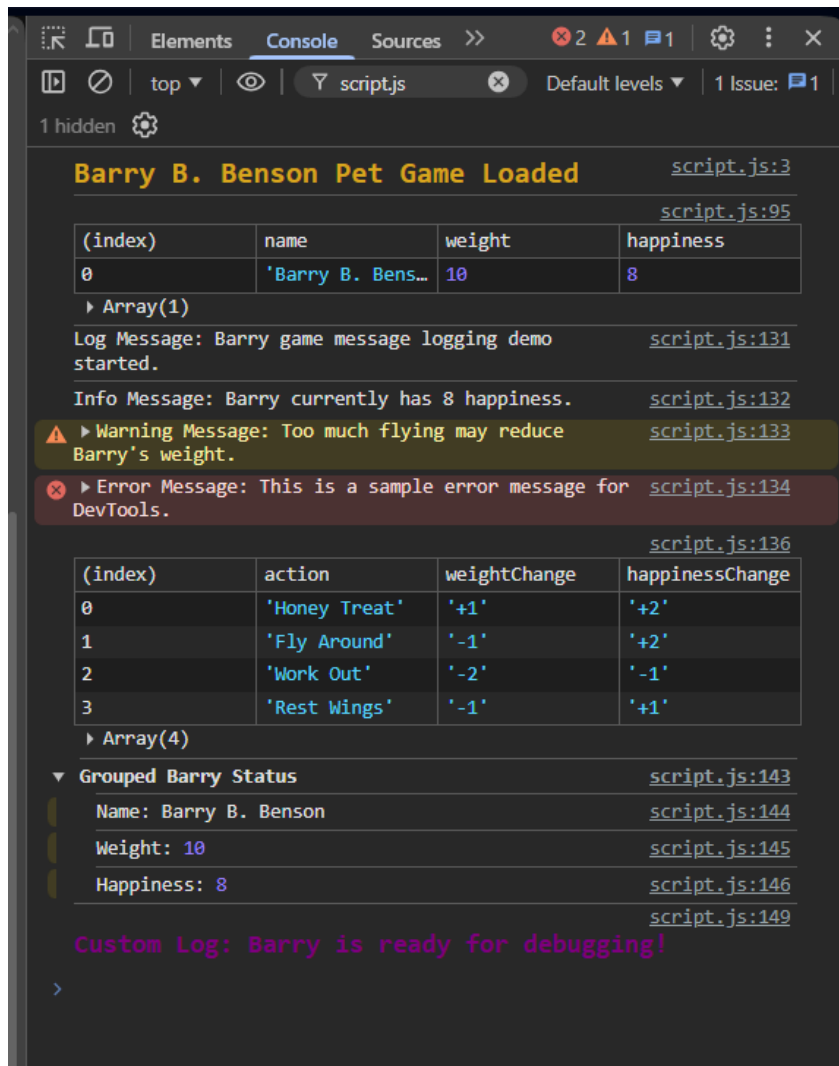


I filtered console messages by source using "script.js". This allowed me to view only the logs generated by my application while hiding browser and extension messages.

Filter by text

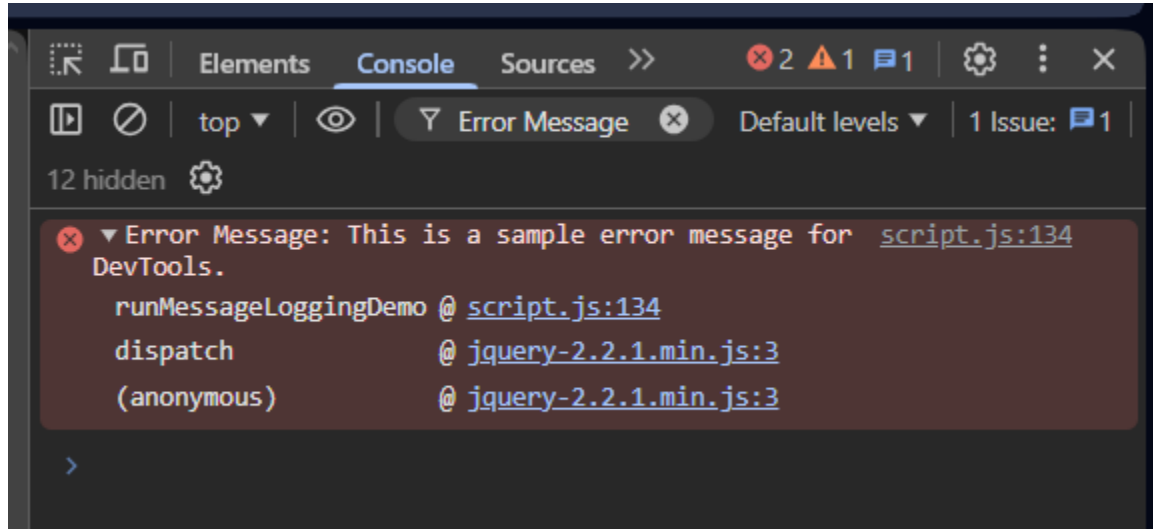


I filtered console messages by text using “Error Message”. This allowed DevTools to display only error-related logs generated by my application.

Filter by regular expression

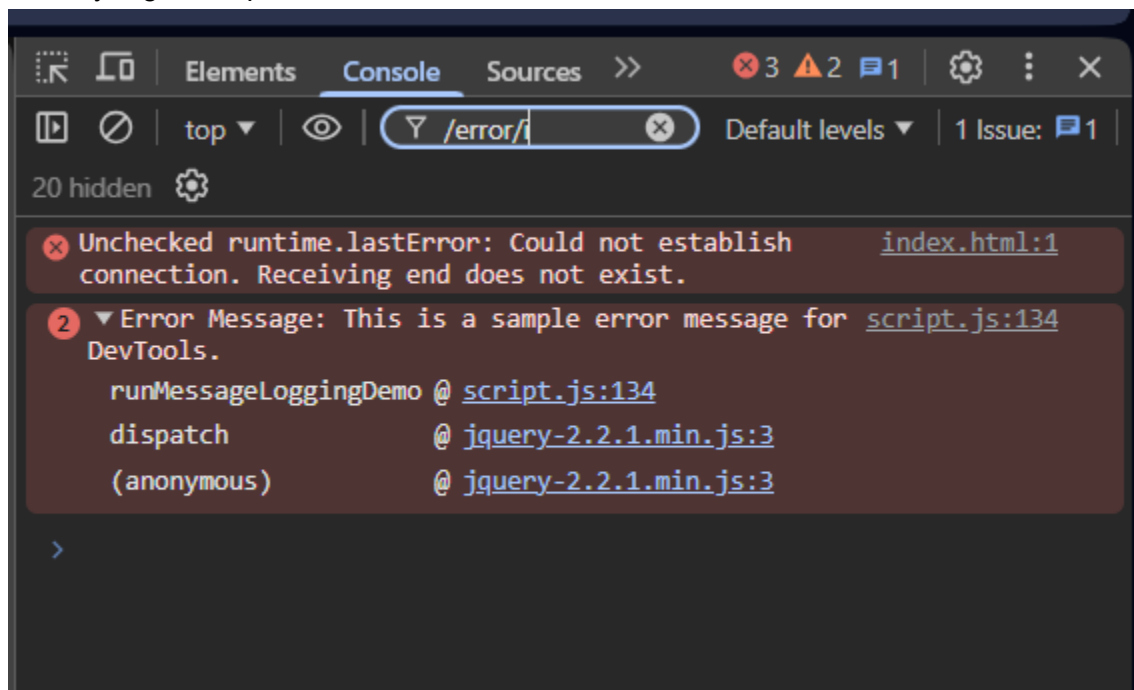


I filtered console messages using the regular expression “/error/i”. This allowed DevTools to match and display all error-related messages regardless of case sensitivity.

Filter by log level

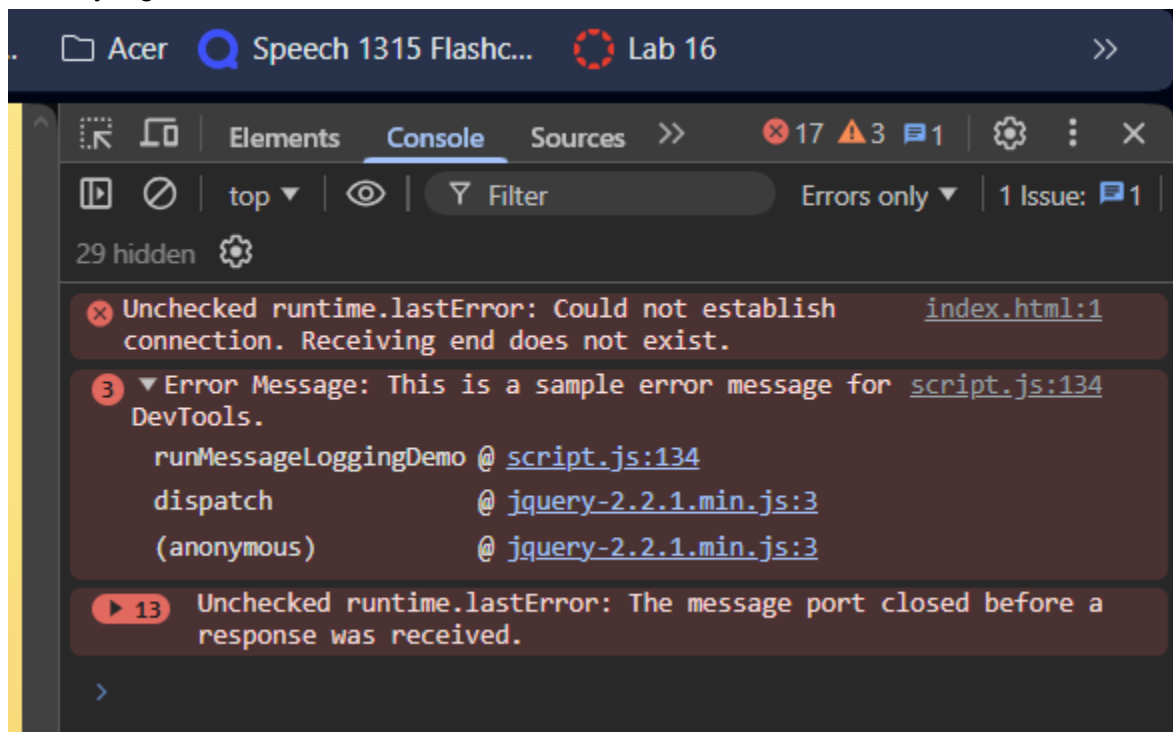

I filtered console messages by log level by selecting only “Errors” from the Default levels dropdown. This allowed DevTools to display only error messages and hide all other log types.

404 network error

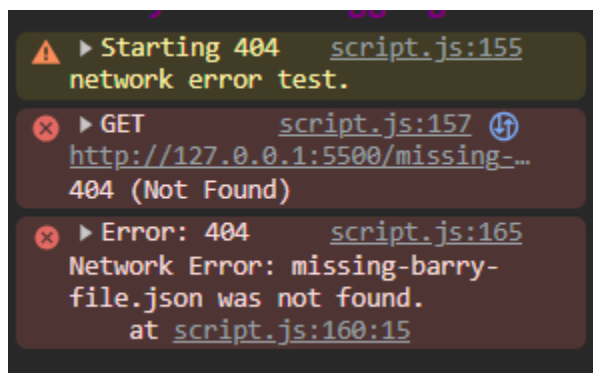

Cause type error

```
▶ Starting script.js:172
  TypeError test.

✖ ▶ Uncaught script.js:176
  TypeError: Cannot read
  properties of null (reading
  'name')
    at
    HTMLButtonElement.causeTypeErro
    r (script.js:176:28)
    at
    HTMLButtonElement.dispatch (
    jquery-2.2.1.min.js:3:7516)
    at HTMLButtonElement.
    <anonymous> (
    jquery-2.2.1.min.js:3:5597)
```

Cause Violation

```
▶ Starting script.js:182
  violation/performance warning
  test.

Violation demo script.js:190
finished after blocking the
main thread.
```

Apply fix

```
▼ Bug Reproduction script.js:196
  Current script.js:203
  weight: 10
  Honey amount: script.js:204
  5
  ✖ ▶ Bug script.js:205
    reproduced: weight became a
    string calculation: 105
```

Pause with break point

The screenshot shows the Chrome DevTools interface with the following components:

- Sources Panel:** Displays the file structure on the left, including `top`, `127.0.0.1:5500`, `images`, `index.html`, `script.js`, `style.css`, `code.jquery.com`, and `localhost`. The `script.js` file is open, showing a breakpoint at line 236, column 3. The code includes various jQuery methods like `console.log`, `console.info`, `assert`, `clear`, `context`, `count`, `countReset`, `createTask`, `debug`, `dir`, `dirxml`, `error`, `group`, `groupCollapsed`, and `groupEnd`.
- Console Panel:** Shows a list of console methods: `assert`, `clear`, `context`, `count`, `countReset`, `createTask`, `debug`, `dir`, `dirxml`, `error`, `group`, `groupCollapsed`, and `groupEnd`.
- Breakpoints Panel:** Shows the current breakpoint at line 236, column 3, with the label `pauseWithBreakpoint` and the file `script.js:236`.
- Scope Panel:** Shows the current scope and variables. The `Local` scope contains `this: button.debug-button`, `debugScore: undefined`, `startingHappiness: 8`, and `startingWeight: 10`. The `Global` scope is also visible.