WEEK 29 3/24 ASSIGNMENT

WEEK 29 02/24 ASSIGNMENT

Here is the link to the GITHUB submission for my group Brotherhood of Steel:

https://discord.com/channels/1282569658851004487/1311914013965291520/1455752641660325888

The response email from Theo on my groups passing Armageddon is called Armageddon_pass.png and is in the s3 bucket.

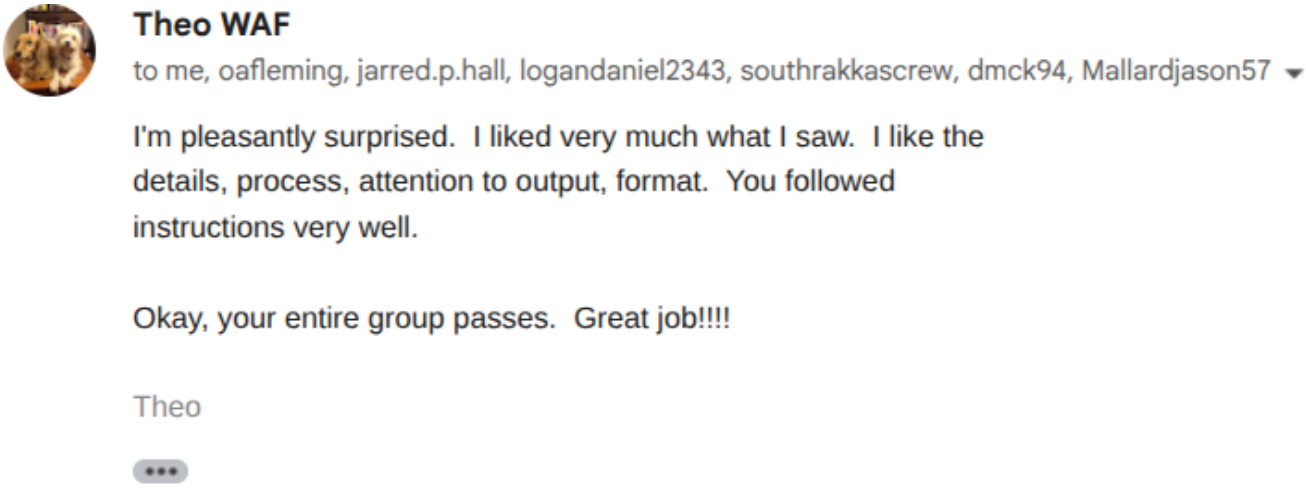

Theo WAF

to me, oafleming, jarred.p.hall, logandaniel2343, southrakkascrew, dmck94, Mallardjason57

I'm pleasantly surprised. I liked very much what I saw. I like the details, process, attention to output, format. You followed instructions very well.

Okay, your entire group passes. Great job!!!!

Theo

Here is the code from my jenkins file:

```
pipeline {
  agent any

  environment {
    AWS_DEFAULT_REGION = 'us-east-1'
    TF_IN_AUTOMATION   = 'true'
    TF_VERSION = '1.9.8'   // or latest stable, e.g., '1.10.0'
  }

  stages {
    stage('Checkout') {
      steps {
        git branch: 'main', url: 'https://github.com/Nightwolf197676/new-jenkins-s3-test'
      }
    }
    stage('Terraform Format') {
      steps {
        sh '''
          terraform fmt -check -diff
```

```
            '''
        }
    }
    stage('Terraform Init') {
  steps {
    withCredentials([[
        $class: 'AmazonWebServicesCredentialsBinding',
        credentialsId: 'bf6a2105-8276-483c-b42f-f697caa59979',
        accessKeyVariable: 'AWS_ACCESS_KEY_ID',
        secretKeyVariable: 'AWS_SECRET_ACCESS_KEY'
    ]]) {
        sh '''
            terraform init \
              -backend-config="bucket=jenkins-891377135193" \
              -backend-config="key=jenkins/new-jenkins-s3-test.tfstate" \
              -backend-config="region=us-east-1" \
              -backend-config="encrypt=true"
        '''
    }
  }
}


    stage('Terraform Apply') {
        steps {
            withCredentials([[
                $class: 'AmazonWebServicesCredentialsBinding',
                credentialsId: 'bf6a2105-8276-483c-b42f-f697caa59979'
            ]]) {
                sh '''
                    terraform plan -out=tfplan
                    terraform apply -auto-approve tfplan
                '''
            }
        }
    }


    stage('Optional Destroy') {
        steps {
            script {
                def destroyChoice = input(
                    message: 'Do you want to run terraform destroy?',
                    ok: 'Submit',
                    parameters: [
                        choice(
                            name: 'DESTROY',
                            choices: ['no', 'yes'],
                            description: 'Select yes to destroy resources'
                        )
                    ]
                )
```

```
                if (destroyChoice == 'yes') {
                    withCredentials([[
                        $class: 'AmazonWebServicesCredentialsBinding',
                        credentialsId: 'bf6a2105-8276-483c-b42f-f697caa59979'
                    ]]) {
                        sh 'terraform destroy -auto-approve'
                    }
                } else {
                    echo "Skipping destroy"
                }
            }
        }
    }
  }
}
```

Here is my terraform code for my s3 bucket:

```
terraform {
  required_providers {
    aws = {
      source  = "hashicorp/aws"
      version = "~> 5.0"
    }
  }

  backend "s3" {
    bucket  = "jenkins-891377135193"
    key     = "jenkins/new-jenkins-s3-test.tfstate"
    region  = "us-east-1"
    encrypt = true
  }
}

provider "aws" {
  region = "us-east-1"
}

resource "aws_s3_object" "armageddon_pass_png" {
  bucket       = "jenkins-891377135193"
  key          = "Armageddon_Pass.png"
  source       = "./Armageddon_Pass.png"
  etag         = filemd5("./Armageddon_Pass.png")
```

```
  content_type = "image/png"
}
```

Results from Jenkins:

Console

Download View as plain text

```
Started by GitHub push by Nightwolf197676
Obtained Jenkinsfile from git https://github.com/Nightwolf197676/new-jenkins-s3-test
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in /var/lib/jenkins/workspace/againandagain
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Declarative: Checkout SCM)
[Pipeline] checkout
Selected Git installation does not exist. Using Default
The recommended git tool is: NONE
No credentials specified
 > git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/againandagain/.git # timeout=10
Fetching changes from the remote Git repository
 > git config remote.origin.url https://github.com/Nightwolf197676/new-jenkins-s3-test # timeout=10
Fetching upstream changes from https://github.com/Nightwolf197676/new-jenkins-s3-test
 > git --version # timeout=10
 > git --version # 'git version 2.50.1'
 > git fetch --tags --force --progress -- https://github.com/Nightwolf197676/new-jenkins-s3-test +refs/heads/
*:refs/remotes/origin/* # timeout=10
 > git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision 858d3862ec82f0d0650c5834a3c47fc4e3f9afc3 (refs/remotes/origin/main)
 > git config core.sparsecheckout # timeout=10
 > git checkout -f 858d3862ec82f0d0650c5834a3c47fc4e3f9afc3 # timeout=10
Commit message: "test webhook"
 > git rev-list --no-walk 0508dd77aaf83a55d63b11ba1aab19cc5ad4712c # timeout=10
[Pipeline] }
[Pipeline] // stage
[Pipeline] withEnv
[Pipeline] {
[Pipeline] withEnv
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Checkout)
[Pipeline] git
Selected Git installation does not exist. Using Default
The recommended git tool is: NONE
No credentials specified
 > git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/againandagain/.git # timeout=10
```

```
Fetching changes from the remote Git repository
 > git config remote.origin.url https://github.com/Nightwolf197676/new-jenkins-s3-test # timeout=10
Fetching upstream changes from https://github.com/Nightwolf197676/new-jenkins-s3-test
 > git --version # timeout=10
 > git --version # 'git version 2.50.1'
 > git fetch --tags --force --progress -- https://github.com/Nightwolf197676/new-jenkins-s3-test +refs/heads/
*:refs/remotes/origin/* # timeout=10
 > git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision 858d3862ec82f0d0650c5834a3c47fc4e3f9afc3 (refs/remotes/origin/main)
 > git config core.sparsecheckout # timeout=10
 > git checkout -f 858d3862ec82f0d0650c5834a3c47fc4e3f9afc3 # timeout=10
 > git branch -a -v --no-abbrev # timeout=10
 > git branch -D main # timeout=10
 > git checkout -b main 858d3862ec82f0d0650c5834a3c47fc4e3f9afc3 # timeout=10
Commit message: "test webhook"
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Terraform Format)
[Pipeline] sh
+ terraform fmt -check -diff
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Terraform Init)
[Pipeline] withCredentials
Masking supported pattern matches of $AWS_ACCESS_KEY_ID or $AWS_SECRET_ACCESS_KEY
[Pipeline] {
[Pipeline] sh
+ terraform init -backend-config=bucket=jenkins-891377135193 -backend-config=key=jenkins/new-jenkins-
s3-test.tfstate -backend-config=region=us-east-1 -backend-config=encrypt=true
[0m[1mInitializing the backend...[0m
[0m[1mInitializing provider plugins...[0m
- Reusing previous version of hashicorp/aws from the dependency lock file
- Using previously-installed hashicorp/aws v5.100.0

[0m[1m[32mTerraform has been successfully initialized![0m[32m[0m
[Pipeline] }
[Pipeline] // withCredentials
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Terraform Apply)
[Pipeline] withCredentials
Masking supported pattern matches of $AWS_ACCESS_KEY_ID or $AWS_SECRET_ACCESS_KEY
[Pipeline] {
[Pipeline] sh
+ terraform plan -out=tfplan

[0m[1m[32mNo changes.[0m[1m Your infrastructure matches the configuration.[0m
```

```
[0mTerraform has compared your real infrastructure against your configuration
and found no differences, so no changes are needed.
+ terraform apply -auto-approve tfplan
[0m[1m[32m
Apply complete! Resources: 0 added, 0 changed, 0 destroyed.
[0m
[Pipeline] }
[Pipeline] // withCredentials
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Optional Destroy)
[Pipeline] script
[Pipeline] {
[Pipeline] input
Input requested
Approved by Larry Harris
[Pipeline] withCredentials
Masking supported pattern matches of $AWS_ACCESS_KEY_ID or $AWS_SECRET_ACCESS_KEY
[Pipeline] {
[Pipeline] sh
+ terraform destroy -auto-approve


[0m[1m[32mNo changes.[0m[1m No objects need to be destroyed.[0m

[0mEither you have not created any objects yet or the existing objects were
already deleted outside of Terraform.
[0m[1m[32m
Destroy complete! Resources: 0 destroyed.
[0m
[Pipeline] }
[Pipeline] // withCredentials
[Pipeline] }
[Pipeline] // script
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

Webhook · http://32.192 × | Change VS Code GitHub F × | image.png (PNG Image, 806 × | Instances | EC2 | us-east-1 × | Console - #16 - Jenkins × | Webhook · http://32.192 ×

github.com/Nightwolf197676/class_7_3-24_assignment/settings/hooks/602605738?tab=deliveries

General

Access
- Collaborators
- Moderation options

Code and automation
- Branches
- Tags
- Rules
- Actions
- Models (Preview)
- Webhooks
- Copilot
- Environments
- Codespaces
- Pages

Security
- Advanced Security
- Deploy keys
- Secrets and variables

Integrations
- GitHub Apps
- Email notifications

Webhooks / Manage webhook

Settings | Recent Deliveries

5a043f00-282e-11f1-9cd8-e2ec24ec536e push 2026-03-25 05:38:17

Request | Response 200 | Redeliver | Completed in 0.01 seconds.

Headers

```
Request URL: http://32.192.80.54:8080/github-webhook/
Request method: POST
Accept: */*
Content-Type: application/json
User-Agent: GitHub-Hookshot/ea963ee
X-Github-Delivery: 5a043f00-282e-11f1-9cd8-e2ec24ec536e
X-Github-Event: push
X-Github-Hook-Id: 602605738
X-Github-Hook-Installation-Target-Id: 1191447212
X-Github-Hook-Installation-Target-Type: repository
```

Payload


```
{
  "ref": "refs/heads/main",
  "before": "8da321f457da6366f6b25193bbc23ae71c203016",
  "after": "7a85be9b4564fc986ec3ccb095f5af741b8f25fa",
  "repository": {
    "id": 1191447212,
    "node_id": "R_kgDORwQKrA",
    "name": "class_7_3-24_assignment",
    "full_name": "Nightwolf197676/class_7_3-24_assignment",
    "private": false,
    "owner": {
      "name": "Nightwolf197676",
      "email": "32481510+Nightwolf197676@users.noreply.github.com",
      "login": "Nightwolf197676",
      "id": 32481510,
      "node_id": "MDQ6VXNlcjMyNDgxNTEw",
      "avatar_url": "https://avatars.githubusercontent.com/u/32481510?v=4",
      "gravatar_id": "",
      "url": "https://api.github.com/users/Nightwolf197676",
      "html_url": "https://github.com/Nightwolf197676",
      "followers_url": "https://api.github.com/users/Nightwolf197676/followers",
```


Webhook · http://32.192 × | Change VS Code GitHub F × | image.png (PNG Image, 806 × | Instances | EC2 | us-east-1 × | Console - #16 - Jenkins × | Webhook · http://32.192 ×

Not Secure http://32.192.80.54:8080/job/againandagain/16/console

Jenkins / againandagain / #16

- Status
- Changes
- Console Output
- Edit Build Information
- Polling Log
- Timings
- Git Build Data
- Git Build Data
- Pipeline Overview
- Thread Dump
- Pause/resume
- Replay
- Pipeline Steps
- Workspaces
- Previous Build

Console

Download | Copy | View as plain text

```
Started by GitHub push by Nightwolf197676
Obtained Jenkinsfile from git https://github.com/Nightwolf197676/class_7_3-24_assignment
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in /var/lib/jenkins/workspace/againandagain@2
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Declarative: Checkout SCM)
[Pipeline] checkout
Selected Git installation does not exist. Using Default
The recommended git tool is: NONE
No credentials specified
Cloning the remote Git repository
Cloning repository https://github.com/Nightwolf197676/class_7_3-24_assignment
 > git init /var/lib/jenkins/workspace/againandagain@2 # timeout=10
Fetching upstream changes from https://github.com/Nightwolf197676/class_7_3-24_assignment
 > git --version # timeout=10
 > git --version # 'git version 2.50.1'
 > git fetch --tags --force --progress -- https://github.com/Nightwolf197676/class_7_3-24_assignment +refs/heads/*:refs/remotes/origin/* # timeout=10
 > git config remote.origin.url https://github.com/Nightwolf197676/class_7_3-24_assignment # timeout=10
 > git config --add remote.origin.fetch +refs/heads/*:refs/remotes/origin/* # timeout=10
Avoid second fetch
 > git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision 7a85be9b4564fc986ec3ccb095f5af741b8f25fa (refs/remotes/origin/main)
 > git config core.sparsecheckout # timeout=10
 > git checkout -f 7a85be9b4564fc986ec3ccb095f5af741b8f25fa # timeout=10
Commit message: "readme update"
 > git rev-list --no-walk 8da321f457da6366f6b25193bbc23ae71c203016 # timeout=10
[Pipeline] }
[Pipeline] // stage
[Pipeline] withEnv
[Pipeline] {
[Pipeline] withEnv
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Checkout)
[Pipeline] git
```

Webhook · http://32.192 × | Change VS Code GitHub F × | image.png (PNG Image, 806 × | Instances | EC2 | us-east-1 × | Console - #16 - Jenkins × | Webhook · http://32.192 ×

Not Secure http://32.192.80.54:8080/job/againandagain/16/console

Jenkins / againandagain / #16

- Status
- Changes
- Console Output
- Edit Build Information
- Polling Log
- Timings
- Git Build Data
- Git Build Data
- Pipeline Overview
- Thread Dump
- Pause/resume
- Replay
- Pipeline Steps
- Workspaces
- Previous Build

Console

Download | Copy | View as plain text

```
Started by GitHub push by Nightwolf197676
Obtained Jenkinsfile from git https://github.com/Nightwolf197676/class_7_3-24_assignment
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in /var/lib/jenkins/workspace/againandagain@2
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Declarative: Checkout SCM)
[Pipeline] checkout
Selected Git installation does not exist. Using Default
The recommended git tool is: NONE
No credentials specified
Cloning the remote Git repository
Cloning repository https://github.com/Nightwolf197676/class_7_3-24_assignment
 > git init /var/lib/jenkins/workspace/againandagain@2 # timeout=10
Fetching upstream changes from https://github.com/Nightwolf197676/class_7_3-24_assignment
 > git --version # timeout=10
 > git --version # 'git version 2.50.1'
 > git fetch --tags --force --progress -- https://github.com/Nightwolf197676/class_7_3-24_assignment +refs/heads/*:refs/remotes/origin/* # timeout=10
 > git config remote.origin.url https://github.com/Nightwolf197676/class_7_3-24_assignment # timeout=10
 > git config --add remote.origin.fetch +refs/heads/*:refs/remotes/origin/* # timeout=10
Avoid second fetch
 > git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision 7a85be9b4564fc986ec3ccb095f5af741b8f25fa (refs/remotes/origin/main)
 > git config core.sparsecheckout # timeout=10
 > git checkout -f 7a85be9b4564fc986ec3ccb095f5af741b8f25fa # timeout=10
Commit message: "readme update"
 > git rev-list --no-walk 8da321f457da6366f6b25193bbc23ae71c203016 # timeout=10
[Pipeline] }
[Pipeline] // stage
[Pipeline] withEnv
[Pipeline] {
[Pipeline] withEnv
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Checkout)
[Pipeline] git
```