WEEK 29 3/24 ASSIGNMENT

WEEK 29 02/24 ASSIGNMENT

Here is the link to the GITHUB submission for my group Brotherhood of Steel:

https://discord.com/channels/1282569658851004487/1311914013965291520/1455752641660325888

The response email from Theo on my groups passing Armageddon is called Armageddon_pass.png and is in the s3 bucket.

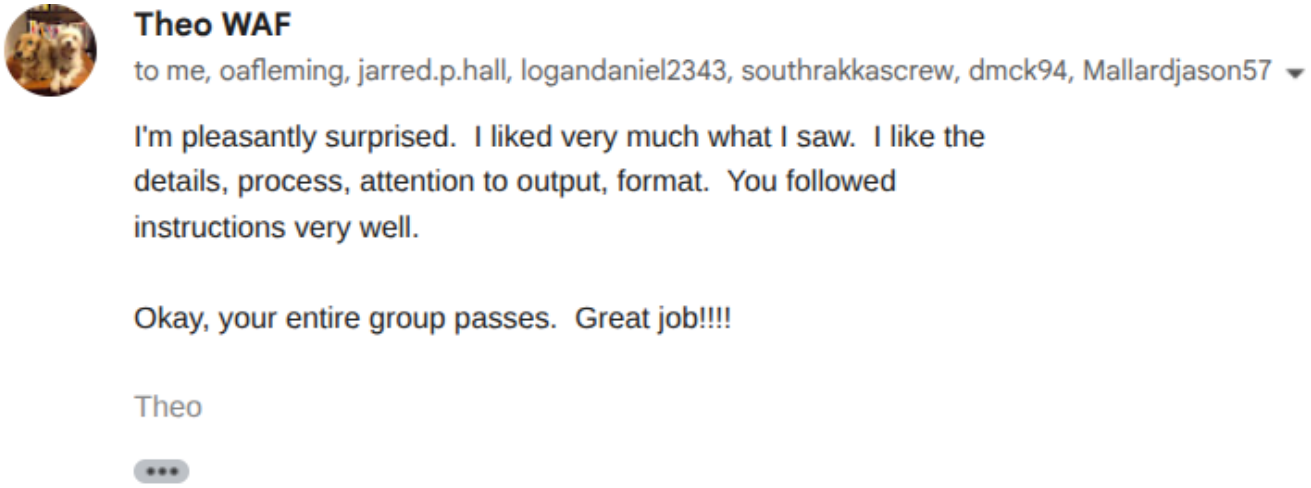

Theo WAF

to me, oafleming, jarred.p.hall, logandaniel2343, southrakkascrew, dmck94, Mallardjason57

I'm pleasantly surprised. I liked very much what I saw. I like the details, process, attention to output, format. You followed instructions very well.

Okay, your entire group passes. Great job!!!!

Theo

Here is the code from my jenkins file:

```
pipeline {
  agent any

  environment {
    AWS_DEFAULT_REGION = 'us-east-1'
    TF_IN_AUTOMATION   = 'true'
    TF_VERSION = '1.9.8'   // or latest stable, e.g., '1.10.0'
  }

  stages {
    stage('Checkout') {
      steps {
        git branch: 'main', url: 'https://github.com/Nightwolf197676/new-jenkins-s3-test'
      }
    }
    stage('Terraform Format') {
      steps {
        sh '''
          terraform fmt -check -diff
```

```
            '''
        }
    }
    stage('Terraform Init') {
  steps {
    withCredentials([[
        $class: 'AmazonWebServicesCredentialsBinding',
        credentialsId: 'bf6a2105-8276-483c-b42f-f697caa59979',
        accessKeyVariable: 'AWS_ACCESS_KEY_ID',
        secretKeyVariable: 'AWS_SECRET_ACCESS_KEY'
    ]]) {
        sh '''
            terraform init \
              -backend-config="bucket=jenkins-891377135193" \
              -backend-config="key=jenkins/new-jenkins-s3-test.tfstate" \
              -backend-config="region=us-east-1" \
              -backend-config="encrypt=true"
        '''
    }
  }
}


    stage('Terraform Apply') {
        steps {
            withCredentials([[
                $class: 'AmazonWebServicesCredentialsBinding',
                credentialsId: 'bf6a2105-8276-483c-b42f-f697caa59979'
            ]]) {
                sh '''
                    terraform plan -out=tfplan
                    terraform apply -auto-approve tfplan
                '''
            }
        }
    }


    stage('Optional Destroy') {
        steps {
            script {
                def destroyChoice = input(
                    message: 'Do you want to run terraform destroy?',
                    ok: 'Submit',
                    parameters: [
                        choice(
                            name: 'DESTROY',
                            choices: ['no', 'yes'],
                            description: 'Select yes to destroy resources'
                        )
                    ]
                )
```

```
                if (destroyChoice == 'yes') {
                    withCredentials([[
                        $class: 'AmazonWebServicesCredentialsBinding',
                        credentialsId: 'bf6a2105-8276-483c-b42f-f697caa59979'
                    ]]) {
                        sh 'terraform destroy -auto-approve'
                    }
                } else {
                    echo "Skipping destroy"
                }
            }
        }
    }
  }
}
```

Here is my terraform code for my s3 bucket:

```
terraform {
  required_providers {
    aws = {
      source  = "hashicorp/aws"
      version = "~> 5.0"
    }
  }

  backend "s3" {
    bucket  = "jenkins-891377135193"
    key     = "jenkins/new-jenkins-s3-test.tfstate"
    region  = "us-east-1"
    encrypt = true
  }
}

provider "aws" {
  region = "us-east-1"
}

resource "aws_s3_object" "armageddon_pass_png" {
  bucket       = "jenkins-891377135193"
  key          = "Armageddon_Pass.png"
  source       = "./Armageddon_Pass.png"
  etag         = filemd5("./Armageddon_Pass.png")
```

```
  content_type = "image/png"
}
```

Results from Jenkins:

Console

Download View as plain text

```
Started by GitHub push by Nightwolf197676
Obtained Jenkinsfile from git https://github.com/Nightwolf197676/new-jenkins-s3-test
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in /var/lib/jenkins/workspace/againandagain
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Declarative: Checkout SCM)
[Pipeline] checkout
Selected Git installation does not exist. Using Default
The recommended git tool is: NONE
No credentials specified
 > git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/againandagain/.git # timeout=10
Fetching changes from the remote Git repository
 > git config remote.origin.url https://github.com/Nightwolf197676/new-jenkins-s3-test # timeout=10
Fetching upstream changes from https://github.com/Nightwolf197676/new-jenkins-s3-test
 > git --version # timeout=10
 > git --version # 'git version 2.50.1'
 > git fetch --tags --force --progress -- https://github.com/Nightwolf197676/new-jenkins-s3-test +refs/heads/
*:refs/remotes/origin/* # timeout=10
 > git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision 858d3862ec82f0d0650c5834a3c47fc4e3f9afc3 (refs/remotes/origin/main)
 > git config core.sparsecheckout # timeout=10
 > git checkout -f 858d3862ec82f0d0650c5834a3c47fc4e3f9afc3 # timeout=10
Commit message: "test webhook"
 > git rev-list --no-walk 0508dd77aaf83a55d63b11ba1aab19cc5ad4712c # timeout=10
[Pipeline] }
[Pipeline] // stage
[Pipeline] withEnv
[Pipeline] {
[Pipeline] withEnv
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Checkout)
[Pipeline] git
Selected Git installation does not exist. Using Default
The recommended git tool is: NONE
No credentials specified
 > git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/againandagain/.git # timeout=10
```

```
Fetching changes from the remote Git repository
 > git config remote.origin.url https://github.com/Nightwolf197676/new-jenkins-s3-test # timeout=10
Fetching upstream changes from https://github.com/Nightwolf197676/new-jenkins-s3-test
 > git --version # timeout=10
 > git --version # 'git version 2.50.1'
 > git fetch --tags --force --progress -- https://github.com/Nightwolf197676/new-jenkins-s3-test +refs/heads/
*:refs/remotes/origin/* # timeout=10
 > git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision 858d3862ec82f0d0650c5834a3c47fc4e3f9afc3 (refs/remotes/origin/main)
 > git config core.sparsecheckout # timeout=10
 > git checkout -f 858d3862ec82f0d0650c5834a3c47fc4e3f9afc3 # timeout=10
 > git branch -a -v --no-abbrev # timeout=10
 > git branch -D main # timeout=10
 > git checkout -b main 858d3862ec82f0d0650c5834a3c47fc4e3f9afc3 # timeout=10
Commit message: "test webhook"
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Terraform Format)
[Pipeline] sh
+ terraform fmt -check -diff
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Terraform Init)
[Pipeline] withCredentials
Masking supported pattern matches of $AWS_ACCESS_KEY_ID or $AWS_SECRET_ACCESS_KEY
[Pipeline] {
[Pipeline] sh
+ terraform init -backend-config=bucket=jenkins-891377135193 -backend-config=key=jenkins/new-jenkins-
s3-test.tfstate -backend-config=region=us-east-1 -backend-config=encrypt=true
[0m[1mInitializing the backend...[0m
[0m[1mInitializing provider plugins...[0m
- Reusing previous version of hashicorp/aws from the dependency lock file
- Using previously-installed hashicorp/aws v5.100.0

[0m[1m[32mTerraform has been successfully initialized![0m[32m[0m
[Pipeline] }
[Pipeline] // withCredentials
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Terraform Apply)
[Pipeline] withCredentials
Masking supported pattern matches of $AWS_ACCESS_KEY_ID or $AWS_SECRET_ACCESS_KEY
[Pipeline] {
[Pipeline] sh
+ terraform plan -out=tfplan

[0m[1m[32mNo changes.[0m[1m Your infrastructure matches the configuration.[0m
```

```
[0mTerraform has compared your real infrastructure against your configuration
and found no differences, so no changes are needed.
+ terraform apply -auto-approve tfplan
[0m[1m[32m
Apply complete! Resources: 0 added, 0 changed, 0 destroyed.
[0m
[Pipeline] }
[Pipeline] // withCredentials
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Optional Destroy)
[Pipeline] script
[Pipeline] {
[Pipeline] input
Input requested
Approved by Larry Harris
[Pipeline] withCredentials
Masking supported pattern matches of $AWS_ACCESS_KEY_ID or $AWS_SECRET_ACCESS_KEY
[Pipeline] {
[Pipeline] sh
+ terraform destroy -auto-approve


[0m[1m[32mNo changes.[0m[1m No objects need to be destroyed.[0m

[0mEither you have not created any objects yet or the existing objects were
already deleted outside of Terraform.
[0m[1m[32m
Destroy complete! Resources: 0 destroyed.
[0m
[Pipeline] }
[Pipeline] // withCredentials
[Pipeline] }
[Pipeline] // script
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

Jenkins on AWS EC2 S | (1) Facebook | Armageddon_Pass.pn | EC2 Instance Connect | Class 7 Doc - Google D | Console - #11 - Jenkin | what is content type f | Webhook · http://32.1

github.com/Nightwolf197676/new-jenkins-s3-test/settings/hooks/602332080?tab=deliveries

General

Access

Collaborators

Moderation options

Code and automation

Branches

Tags

Rules

Actions

Models Preview

Webhooks

Copilot

Environments

Codespaces

Pages

Security

Advanced Security

Deploy keys

Secrets and variables

Integrations

GitHub Apps

Email notifications

Webhooks / Manage webhook

Settings | Recent Deliveries

41b0f78c-27ec-11f1-8958-f8498ca8d752 push 2026-03-24 21:45:10

Request | Response 200 | Redeliver | Completed in 0.43 seconds.

Headers

```
Request URL: http://32.192.80.54:8080/github-webhook/
Request method: POST
Accept: */*
Content-Type: application/json
User-Agent: GitHub-Hookshot/ea963ee
X-Github-Delivery: 41b0f78c-27ec-11f1-8958-f8498ca8d752
X-Github-Event: push
X-Github-Hook-Id: 602332080
X-Github-Hook-Installation-Target-Id: 1186225588
X-Github-Hook-Installation-Target-Type: repository
```

Payload


```
{
  "ref": "refs/heads/main",
  "before": "f12475a35e49b2913244a7fbd674cb0ac06f607d",
  "after": "858d3862ec82f0d0650c5834a3c47fc4e3f9afc3",
  "repository": {
    "id": 1186225588,
    "node_id": "R_kgDORrRdtA",
    "name": "new-jenkins-s3-test",
    "full_name": "Nightwolf197676/new-jenkins-s3-test",
    "private": false,
    "owner": {
      "name": "Nightwolf197676",
      "email": "32481510+Nightwolf197676@users.noreply.github.com",
      "login": "Nightwolf197676",
      "id": 32481510,
      "node_id": "MDQ6VXNlcjMyNDgxNTEw",
      "avatar_url": "https://avatars.githubusercontent.com/u/32481510?v=4",
      "gravatar_id": "",
      "url": "https://api.github.com/users/Nightwolf197676",
      "html_url": "https://github.com/Nightwolf197676",
      "followers_url": "https://api.github.com/users/Nightwolf197676/followers",
```


Jenkins on AWS EC2 S | (1) Facebook | Armageddon_Pass.pn | EC2 Instance Connect | Class 7 Doc - Google D | Console - #11 - Jenkin | what is content type f | Webhook · http://32.1

Not Secure http://32.192.80.54:8080/job/againandagain/11/console

Jenkins / againandagain / #11

Status

Changes

Console Output

Edit Build Information

Polling Log

Timings

Git Build Data

Pipeline Overview

Thread Dump

Pause/resume

Replay

Pipeline Steps

Workspaces

Previous Build

Console

Download | Copy | View as plain text

```
Started by GitHub push by Nightwolf197676
Obtained Jenkinsfile from git https://github.com/Nightwolf197676/new-jenkins-s3-test
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in /var/lib/jenkins/workspace/againandagain
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Declarative: Checkout SCM)
[Pipeline] checkout
Selected Git installation does not exist. Using Default
The recommended git tool is: NONE
No credentials specified
 > git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/againandagain/.git # timeout=10
Fetching changes from the remote Git repository
 > git config remote.origin.url https://github.com/Nightwolf197676/new-jenkins-s3-test # timeout=10
Fetching upstream changes from https://github.com/Nightwolf197676/new-jenkins-s3-test
 > git --version # timeout=10
 > git --version # 'git version 2.50.1'
 > git fetch --tags --force --progress -- https://github.com/Nightwolf197676/new-jenkins-s3-test +refs/heads/*:refs/remotes/origin/* # timeout=10
 > git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision 858d3862ec82f0d0650c5834a3c47fc4e3f9afc3 (refs/remotes/origin/main)
 > git config core.sparsecheckout # timeout=10
 > git checkout -f 858d3862ec82f0d0650c5834a3c47fc4e3f9afc3 # timeout=10
Commit message: "test webhook"
 > git rev-list --no-walk 0508dd77aaf83a55d63b11ba1aab19cc5ad4712c # timeout=10
[Pipeline] }
[Pipeline] // stage
[Pipeline] withEnv
[Pipeline] {
[Pipeline] withEnv
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Checkout)
[Pipeline] git
Selected Git installation does not exist. Using Default
The recommended git tool is: NONE
No credentials specified
```