

Assignment-14.5

P. Niharika

2303A51694

Batch-24

Task 1 – Image Gallery Website

Create an image gallery web page.

Requirements:

- Display images in a grid layout.
- Use AI to:
 - o Optimize layout using CSS Grid.
 - o Add hover zoom or overlay effects.
 - o Ensure mobile responsiveness.

```
webpage.html > > webpage.html > > html > > div.gallery > > div.gallery-item > > img
1  <!-- create an image gallery web page and display images in grid layout. Optimize layout using CSS Grid and Add hover zoom or overlay effects.Ensure mobile responsiveness.-->
2  <!DOCTYPE html>
3  <html lang="en">
4  <head>
5      <meta charset="UTF-8">
6      <meta name="viewport" content="width=device-width, initial-scale=1.0">
7      <title>Image Gallery</title>
8      <style>
9          body {
10             font-family: Arial, sans-serif;
11             margin: 0;
12             padding: 0;
13             background-color: #f0f0f0;
14         }
15         .gallery {
16             display: grid;
17             grid-template-columns: repeat(auto-fit, minmax(200px, 1fr));
18             gap: 15px;
19             padding: 20px;
20         }
21         .gallery-item {
22             position: relative;
23             overflow: hidden;
24         }
25         .gallery-item img {
26             width: 100%;
27             height: auto;
28             transition: transform 0.3s ease;
29         }
30         .gallery-item:hover img {
31             transform: scale(1.1);
32         }
33         .overlay {
34             position: absolute;
35             top: 0;
36             left: 0;
37             width: 100%;
38             height: 100%;
39             background-color: rgba(0, 0, 0, 0.5);
40             color: white;
41             display: flex;
42             align-items: center;
43             justify-content: center;
44             opacity: 0;
45             transition: opacity 0.3s ease;
46         }
```

```

44         opacity: 0;
45         transition: opacity 0.3s ease;
46     }
47     .gallery-item:hover .overlay {
48         opacity: 1;
49     }
50 
```

```

51 </style>
52 </head>
53 <body>
54 <div class="gallery">
55     <div class="gallery-item">
56         
57         <div class="overlay">Image 1 Description</div>
58     </div>
59     <div class="gallery-item">
60         
61         <div class="overlay">Image 2 Description</div>
62     </div>
63     <div class="gallery-item">
64         
65         <div class="overlay">Image 3 Description</div>
66     </div>
67     <!-- Add more gallery items as needed -->
68 </div>
69 </html>
70

```



Task 2 – Profile Card Generator

Create a profile card web page.

Requirements:

- Display user image, name, role, and social media links.
- Use AI to:
 - o Suggest modern UI colors and fonts.
 - o Design the card using Flexbox.
 - o Add hover animation and shadow effects

```


webpage.html > ○ webpage.html > @html > @head > @style > 📄 profile-image
1 1. Create a profile card web page. Display user image, name, role, and social media links. Suggest modern UI colors and fonts. and Design the card using Flexbox. and Add hover animation and shadow e
2 <DOCTYPE html>
3 <html lang="en">
4 <head>
5   <meta charset="UTF-8">
6   <meta name="viewport" content="width=device-width, initial-scale=1.0">
7   <title> This attribute defines the name of a piece of document-level metadata. It should not be set if one of the attributes itemprop, http-equiv or charset is also set.
8   <style> This metadata name is associated with the value contained by the content attribute. The possible values for the name attribute are:
9     <body>
10       • application-name which defines the name of the application running in the web page.
11       Note:
12         • Browsers may use this to identify the application. It is different from the <title> element, which usually contain the application name, but may also contain information like the
13           document name or a status.
14         • Simple web pages shouldn't define an application name.
15       • author which defines the name of the document's author.
16       • description which contains a short and accurate summary of the content of the page. Several browsers, like Firefox and Opera, use this as the default description of bookmarked pages.
17       • generator which contains the identifier of the software that generated the page.
18       • keywords which contains words relevant to the page's content separated by commas.
19       • referrer which controls the Referrer HTTP header attached to requests sent from the document.
20     </body>
21   </head>
22   <body>
23     width: 300px;
24     text-align: center;
25     padding: 20px;
26     transition: transform 0.3s, box-shadow 0.3s;
27   </body>
28   .profile-card:hover {
29     transform: translateY(-10px);
30     box-shadow: 0 8px 16px 0 rgba(0, 0, 0, 0.2);
31   }
32   .profile-image {
33     width: 100px;
34     height: 100px;
35     border-radius: 50%;
36     object-fit: cover;
37     margin-bottom: 15px;
38   }
39   .profile-name {
40     font-size: 1.5em;
41     color: #333333;
42     margin-bottom: 5px;
43   }
44   .profile-role {
45     font-size: 1em;
46     color: #444444;
47     margin-bottom: 15px;
48   }
49   .social-links a {
50     text-decoration: none;
51     color: #555555;
52     margin: 0 10px;
53     font-size: 1.2em;
54   }
55   .social-links a:hover {
56     color: #007366;
57   }
58 </style>
59 </head>
60 <body>
61   <div class="profile-card">
62     
63     <div class="profile-name">John Doe</div>
64     <div class="profile-role">Software Engineer</div>
65     <div class="social-links">
66       <a href="https://twitter.com/johndoe" target="_blank">Twitter</a>
67       <a href="https://linkedin.com/in/johndoe" target="_blank">LinkedIn</a>
68       <a href="https://github.com/johndoe" target="_blank">GitHub</a>
69     </div>
70   </div>
71 </body>
72 </html>

```

```

31 .profile-image {
32   border-radius: 50%;
33   object-fit: cover;
34   margin-bottom: 15px;
35 }
36 .profile-name {
37   font-size: 1.5em;
38   color: #333333;
39   margin-bottom: 5px;
40 }
41 .profile-role {
42   font-size: 1em;
43   color: #444444;
44   margin-bottom: 15px;
45 }
46 .social-links a {
47   text-decoration: none;
48   color: #555555;
49   margin: 0 10px;
50   font-size: 1.2em;
51 }
52 .social-links a:hover {
53   color: #007366;
54 }
55 </style>
56 </head>
57 <body>
58   <div class="profile-card">
59     
60     <div class="profile-name">John Doe</div>
61     <div class="profile-role">Software Engineer</div>
62     <div class="social-links">
63       <a href="https://twitter.com/johndoe" target="_blank">Twitter</a>
64       <a href="https://linkedin.com/in/johndoe" target="_blank">LinkedIn</a>
65       <a href="https://github.com/johndoe" target="_blank">GitHub</a>
66     </div>
67   </div>
68 </body>
69 </html>

```

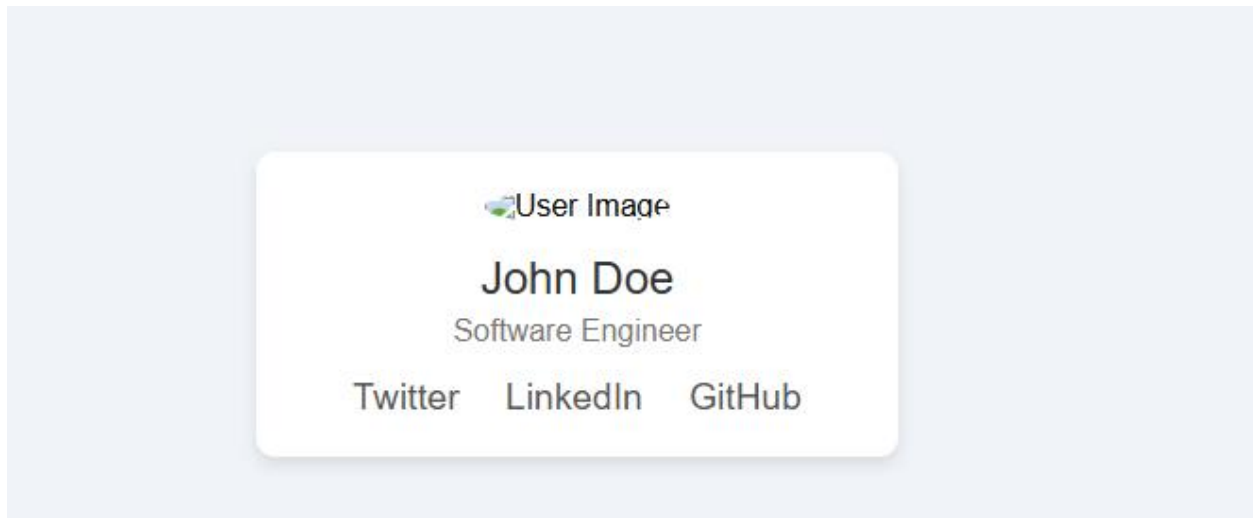

Task 3 -Develop a dynamic shopping cart system.

Requirements:

- Add, remove, and update product quantities.
- Display real-time total price.
- Use AI to:
 - o Manage cart state using JavaScript objects.
 - o Persist cart data in localStorage.

```

webpage.html > < webpage.html > < html > < body > < div#products > < div.product
1 <!--Develop a dynamic shopping cart system.Add, remove, and update product quantities.Display real-time total price.
2 and Manage cart state using JavaScript objects.Persist cart data in localStorage.-->
3 <!DOCTYPE html>
4 <html lang="en">
5 <head>
6 <meta charset="UTF-8">
7 <meta name="viewport" content="width=device-width, initial-scale=1.0">
8 <title>Dynamic Shopping Cart</title>
9 <style>
10     body {
11         font-family: Arial, sans-serif;
12         margin: 20px;
13     }
14     .product {
15         border: 1px solid #ccc;
16         padding: 10px;
17         margin-bottom: 10px;
18     }
19     .cart {
20         margin-top: 20px;
21     }
22     .cart-item {
23         border-bottom: 1px solid #ccc;
24         padding: 10px 0;
25     }
26     .total {
27         font-weight: bold;
28         margin-top: 10px;
29     }
30 </style>
31 </head>
32 <body>
33 <h1>Dynamic Shopping Cart</h1>
34 <div id="products">
35     <div class="product" data-id="1" data-price="10">
36         <h2>Product 1</h2>
37         <p>Price: $10</p>
38         <button onclick="addToCart(1, 10)">Add to Cart</button>

```

```

37         <p>Price: $10</p>
38         <button onclick="addToCart(1, 10)">Add to Cart</button>
39     </div>
40     <div class="product" data-id="2" data-price="20">
41         <h2>Product 2</h2>
42         <p>Price: $20</p>
43         <button onclick="addToCart(2, 20)">Add to Cart</button>
44     </div>
45     <div class="product" data-id="3" data-price="30">
46         <h2>Product 3</h2>
47         <p>Price: $30</p>
48         <button onclick="addToCart(3, 30)">Add to Cart</button>
49     </div>
50 </div>
51
52 <div class="cart">
53     <h2>Your Cart</h2>
54     <div id="cart-items"></div>
55     <div class="total">Total: $<span id="total-price">0</span></div>
56 </div>
57
58 <script src="cart.js"></script>
59 </html>

```

Dynamic Shopping Cart

Product 1

Price: \$10

Add to Cart

Product 2

Price: \$20

Add to Cart

Product 3

Price: \$30

Add to Cart

Your Cart

Total: \$0

Task 4 – Role-Based Access Control Application

Create a role-based web application.

Requirements:

- Admin, Editor, User roles.
- Conditional UI rendering.
- Use AI to:
 - o Design access control logic.
 - o Maintain secure state transitions.
 - o Create scalable UI components.

```

webpage.html > <? webpage.html > <? html
1 <!-- Create a role-based web application. Admin, Editor, User roles.Conditional UI rendering.
2 and Design access control logic.Maintain secure state transitions.Create scalable UI components.-->
3 <!DOCTYPE html>
4 <html lang="en">
5 <head>
6   <meta charset="UTF-8">
7   <meta name="viewport" content="width=device-width, initial-scale=1.0">
8   <title>Role-Based Web Application</title>
9   <style>
10  body {
11    font-family: Arial, sans-serif;
12    margin: 20px;
13  }
14  .admin, .editor, .user {
15    display: none;
16  }
17  .admin {
18    background-color: #f8d7da;
19    padding: 10px;
20    margin-bottom: 10px;
21  }
22  .editor {
23    background-color: #d1ecf1;
24    padding: 10px;
25    margin-bottom: 10px;
26  }
27  .user {
28    background-color: #d4edda;
29    padding: 10px;
30    margin-bottom: 10px;
31  }
32 </style>
33 </head>
34 <body>

```

```

35 <h1>Welcome to the Role-Based Web Application</h1>
36 <div id="adminSection" class="admin">
37   <h2>Admin Section</h2>
38   <p>Only admins can see this section.</p>
39 </div>
40 <div id="editorSection" class="editor">
41   <h2>Editor Section</h2>
42   <p>Only editors can see this section.</p>
43 </div>
44 <div id="userSection" class="user">
45   <h2>User Section</h2>
46   <p>Only users can see this section.</p>
47 </div>
48
49 <script>
50   // Simulate user role (this would typically come from authentication logic)
51   const userRole = 'editor'; // Change this to 'admin', 'editor', or 'user'
52
53   // Function to render UI based on user role
54   function renderUI(role) {
55     if (role === 'admin') {
56       document.getElementById('adminSection').style.display = 'block';
57     } else if (role === 'editor') {
58       document.getElementById('editorSection').style.display = 'block';
59     } else if (role === 'user') {
60       document.getElementById('userSection').style.display = 'block';
61     }
62   }
63
64   // Render the UI based on the user's role
65   renderUI(userRole);
66 </script>
67 </html>

```

Welcome to the Role-Based Web Application

Editor Section

Only editors can see this section.

Task 5 – Multi-Language Website

Design a multilingual website.

Requirements:

- Switch languages dynamically.
- Persist language preference.
- Use AI to:
 - o Structure translation files.
 - o Handle RTL/LTR layouts.
 - o Improve accessibility.

```
webpage.html > webpage.html > html
1  <!-- Design a multilingual website.Switch languages dynamically.Persist language preference. and
2  Structure translation files. Handle RTL/LTR layouts. Improve accessibility.-->
3  <!DOCTYPE html>
4  <html lang="en">
5  <head>
6      <meta charset="UTF-8">
7      <meta name="viewport" content="width=device-width, initial-scale=1.0">
8      <title>Multilingual Website</title>
9      <link rel="stylesheet" href="styles.css">
10 </head><body>
11 <header>
12     <nav>
13         <ul>
14             <li><a href="#" data-lang="en">English</a></li>
15             <li><a href="#" data-lang="es">Español</a></li>
16             <li><a href="#" data-lang="ar">العربية</a></li>
17         </ul>
18     </nav>
19 </header>
20 <main>
21     <h1 data-translate="welcome">Welcome to our multilingual website!</h1>
22     <p data-translate="description">This website supports multiple languages. You can switch languages dynamically and your preference will be saved.
23 </main>
24 <script src="script.js"></script>
25
26 </html>
```


- [English](#)
- [Español](#)
- [العربية](#)

Welcome to our multilingual website!

This website supports multiple languages. You can switch languages dynamically and your preference will be saved.

Task 6 – Online Examination System

Create an online exam interface.

Requirements:

- Timer, questions, and submission.
- Prevent multiple submissions.
- Use AI to:
 - o Manage exam state.
 - o Improve exam UX.
 - o Ensure accessibility.

```

webpage.html > webpage.html > ...
1  <!-- Create an online exam interface, timer, questions, and submission. Prevent multiple submissions.
2  and Manage exam state. Improve exam UX. Ensure accessibility-->
3  <!DOCTYPE html>
4  <html lang="en">
5  <head>
6      <meta charset="UTF-8">
7      <meta name="viewport" content="width=device-width, initial-scale=1.0">
8      <title>Online Exam Interface</title>
9      <style>
10         body {
11             font-family: Arial, sans-serif;
12             margin: 20px;
13         }
14         .timer {
15             font-size: 24px;
16             color: rgb(64, 0, 255);
17             margin-bottom: 20px;
18         }
19         .question {
20             margin-bottom: 15px;
21         }
22         .options {
23             list-style-type: none;
24             padding: 0;
25         }
26         .options li {
27             margin-bottom: 10px;
28         }
29         .submit-btn {
30             padding: 10px 20px;
31             font-size: 16px;
32         }
33     </style>

```

```

33     </style>
34 </head>
35 <body>
36     <div class="timer" id="timer">Time Remaining: 30:00</div>
37
38     <div class="question" id="question1">
39         <p>1. What is the capital of France?</p>
40         <ul class="options">
41             <li><input type="radio" name="q1" value="a"> A) Berlin</li>
42             <li><input type="radio" name="q1" value="b"> B) Madrid</li>
43             <li><input type="radio" name="q1" value="c"> C) Paris</li>
44             <li><input type="radio" name="q1" value="d"> D) Rome</li>
45         </ul>
46     </div>
47     <button class="submit-btn" onclick="submitExam()">Submit Exam</button>
48 </body>
49 </html>
50 <script>
51     let timeRemaining = 30 * 60; // 30 minutes in seconds
52     const timerElement = document.getElementById('timer');
53     const submitButton = document.querySelector('.submit-btn');
54     let examSubmitted = false;
55
56     function updateTimer() {
57         if (timeRemaining > 0) {
58             timeRemaining--;
59             const minutes = Math.floor(timeRemaining / 60);
60             const seconds = timeRemaining % 60;
61             timerElement.textContent = `Time Remaining: ${minutes}:${seconds < 10 ? '0' : ''}${seconds}`;
62         } else {
63             submitExam();
64         }
65     }
66
67     function submitExam() {
68         if (examSubmitted) {
69             alert("You have already submitted the exam.");
70             return;
71         }
72         examSubmitted = true;
73         clearInterval(timerInterval);
74         alert("Exam submitted successfully!");
75         // Here you can add code to handle the submission, e.g., send data to the server
76     }
77
78     const timerInterval = setInterval(updateTimer, 1000);
79 </script>
80
81

```

← → 🔍 📄 File C:/Users/HP/Documents/AI-Lab/webpage.html/webpage.html

Time Remaining: 29:54

1. What is the capital of France?

- ☒ A) Berlin
☐ B) Madrid
☐ C) Paris
☐ D) Rome

Submit Exam

This page says

Exam submitted successfully!

OK