

Cucumber Report

25 Apr, 2021 9:12:36 AM

Start : Apr 25, 9:12:18.710 AM

End : Apr 25, 9:12:34.777 AM

Duration : 16.067 s

Features

Scenarios

Steps

PASSED - 0

FAILED - 2

SKIPPED - 0

PASSED - 0




FAILED - 2

SKIPPED - 0

PASSED - 2


FAILED - 2

SKIPPED - 2

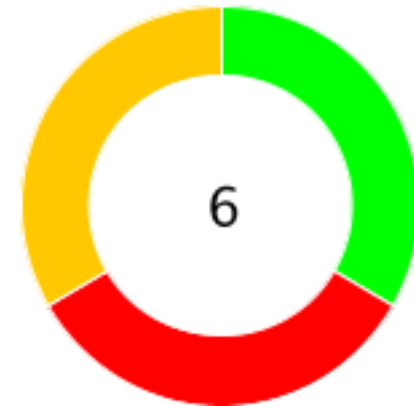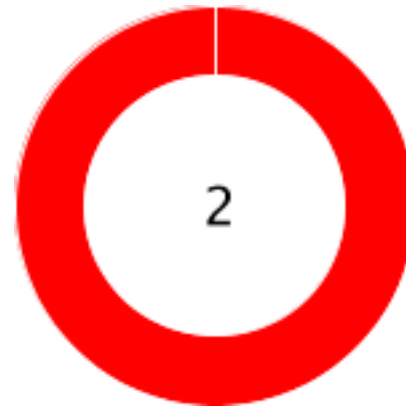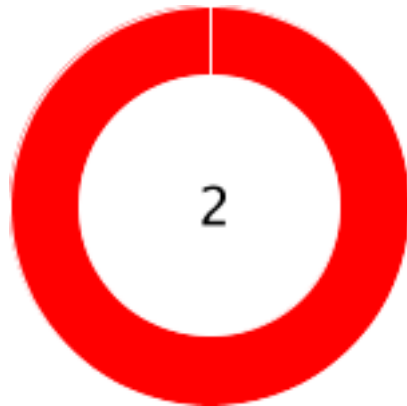



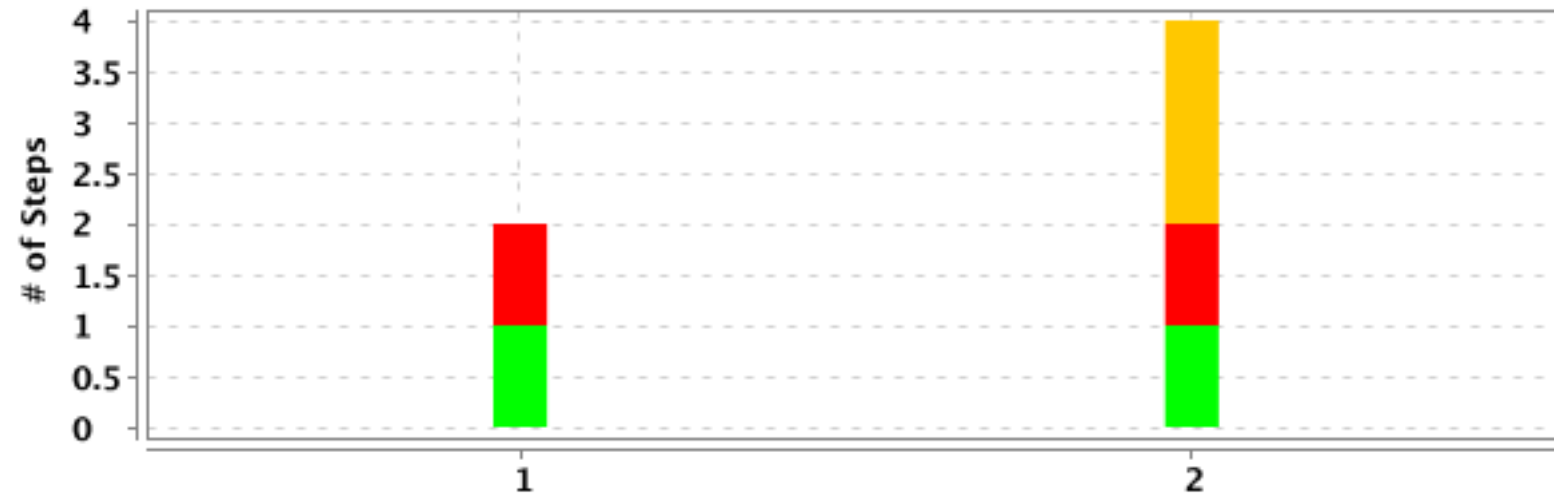

#	Feature Name	T	P	F	S	Duration
1	Applications login	1	0	1	0	16.054 s
2	Application login	1	0	1	0	16.040 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Applications login</u>	<u>Browser up states</u>	2	1	1	0	16.043 s
2	<u>Application login</u>	<u>Browser up state</u>	4	1	1	2	16.039 s

(F)- Applications login

FAILED	DURATION - 16.054 s	Scenarios		Steps	
/ 9:12:18.710 AM // 9:12:34.764 AM /		Total - 1		Total - 2	
		Pass - 0		Pass - 1	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	



(S)- Browser up states

<div>FAILED</div> <div>DURATION - 16.043 s</div>		<div></div>	<div>Steps</div> <div>Total - 2</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 0</div>	<div></div>
<div>/ 9:12:18.721 AM // 9:12:34.764 AM /</div>				
<div>Applications login</div>				
<div>@datatablenew</div>				



#	Step / Hook Details	Status	Duration
1	Given the browser is opened	PASSED	5.912 s
2	When values are entered in the browser	FAILED	10.083 s
	<p>org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"name","selector":"q1"} (Session info: chrome=90.0.4430.85) (Driver info: chromedriver=2.44.609545 (c2f88692e98ce7233d2df7c724465ecacfe74df5),platform=Mac OS X 10.15.7 x86_64) (WARNING: The server did not provide any stacktrace information) Command duration or timeout: 0 milliseconds For documentation on this error, please visit: https://www.seleniumhq.org/exceptions/no_such_element.html Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'Nikhils-MacBook-Air.local', ip: '2406:7400:54:3143:e420:c372:8d59:61c8%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '10.15.7', java.version: '1.8.0_211' Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities {acceptInsecureCerts: false, acceptSslCerts: false, applicationCacheEnabled: false, browserConnectionEnabled: false, browserName: chrome, chrome: {chromedriverVersion: 2.44.609545 (c2f88692e98ce7..., userDataDir: /var/folders/sk/k1xy6wyn153...}, cssSelectorsEnabled: true, databaseEnabled: false, goog:chromeOptions: {debuggerAddress: localhost:54108}, handlesAlerts: true, hasTouchScreen: false, javascriptEnabled: true, locationContextEnabled: true, mobileEmulationEnabled: false, nativeEvents: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: MAC, platformName: MAC, rotatable: false, setWindowRect: true, takesHeapSnapshot: true, takesScreenshot: true, unexpectedAlertBehaviour: ignore, unhandledPromptBehavior: ignore, version: 90.0.4430.85, webStorageEnabled: true} Session ID: e8e242c082ccf76ee203a82a43d05e69 *** Element info: {Using=name, value=q1}</p> <p>at sun.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)</p> <p>at sun.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62)</p> <p>at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)</p> <p>at java.lang.reflect.Constructor.newInstance(Constructor.java:423)</p> <p>at org.openqa.selenium.remote.ErrorHandler.createThrowable(ErrorHandler.java:214)</p>		

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.ErrorHandler.throwIfResponseFailed(ErrorHandler.java:166) at org.openqa.selenium.remote.http.JsonHttpStatusCode.reconstructValue(JsonHttpStatusCode.java:40) at org.openqa.selenium.remote.http.AbstractHttpStatusCode.decode(AbstractHttpStatusCode.java:80) at org.openqa.selenium.remote.http.AbstractHttpStatusCode.decode(AbstractHttpStatusCode.java:44) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:323) at org.openqa.selenium.remote.RemoteWebDriver.findElementByName(RemoteWebDriver.java:404) at org.openqa.selenium.By\$ByName.findElement(By.java:284) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:315) at parallel.StepDefinition.values_are_entered_in_the_browser(StepDefinition.java:35) at ?.values are entered in the browser(file:///Users/nikhilkanojia/seleniumProject/UDEMY_CUCUMBER2_RERUN/src/test/resources/parallel/ account.feature:14) * Not displayable characters are replaced by '?'. </pre>		

(F)- Application login

FAILED	DURATION - 16.040 s	Scenarios		Steps	
/ 9:12:18.737 AM // 9:12:34.777 AM /		Total - 1	1	Total - 4	4
		Pass - 0		Pass - 1	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 2	

(S)- Browser up state

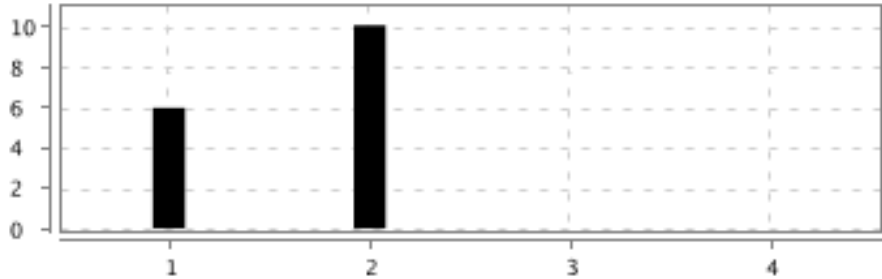FAILED	DURATION - 16.039 s				
/ 9:12:18.738 AM // 9:12:34.777 AM /					
Application login					
@datatablenew					
		Steps			
		Total - 4	4		
		Pass - 1			
		Fail - 1			
		Skip - 2			

#	Step / Hook Details	Status	Duration
1	Given the browser is opened	PASSED	5.973 s
2	When values are entered in the browser	FAILED	10.042 s

#	Step / Hook Details	Status	Duration									
	<div>org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"name","selector":"q1"} (Session info: chrome=90.0.4430.85) (Driver info: chromedriver=2.44.609545 (c2f88692e98ce7233d2df7c724465ecacfe74df5),platform=Mac OS X 10.15.7 x86_64) (WARNING: The server did not provide any stacktrace information) Command duration or timeout: 0 milliseconds For documentation on this error, please visit: https://www.seleniumhq.org/exceptions/no_such_element.html Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'Nikhils-MacBook-Air.local', ip: '2406:7400:54:3143:e420:c372:8d59:61c8%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '10.15.7', java.version: '1.8.0_211' Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities {acceptInsecureCerts: false, acceptSslCerts: false, applicationCacheEnabled: false, browserConnectionEnabled: false, browserName: chrome, chrome: {chromedriverVersion: 2.44.609545 (c2f88692e98ce7..., userDataDir: /var/folders/sk/k1xy6wyn153...}, cssSelectorsEnabled: true, databaseEnabled: false, goog:chromeOptions: {debuggerAddress: localhost:54105}, handlesAlerts: true, hasTouchScreen: false, javascriptEnabled: true, locationContextEnabled: true, mobileEmulationEnabled: false, nativeEvents: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: MAC, platformName: MAC, rotatable: false, setWindowRect: true, takesHeapSnapshot: true, takesScreenshot: true, unexpectedAlertBehaviour: ignore, unhandledPromptBehavior: ignore, version: 90.0.4430.85, webStorageEnabled: true} Session ID: 25caad5e1686fd0f282ef1030c2d90e1 *** Element info: {Using=name, value=q1}</div> <div>at sun.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)</div> <div>at sun.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62)</div> <div>at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)</div> <div>at java.lang.reflect.Constructor.newInstance(Constructor.java:423)</div> <div>at org.openqa.selenium.remote.ErrorHandler.createThrowable(ErrorHandler.java:214)</div> <div>at org.openqa.selenium.remote.ErrorHandler.throwIfResponseFailed(ErrorHandler.java:166)</div> <div>at org.openqa.selenium.remote.http.JsonHttpResponseCodec.reconstructValue(JsonHttpResponseCodec.java:40)</div> <div>at org.openqa.selenium.remote.http.AbstractHttpResponseCodec.decode(AbstractHttpResponseCodec.java:80)</div> <div>at org.openqa.selenium.remote.http.AbstractHttpResponseCodec.decode(AbstractHttpResponseCodec.java:44)</div> <div>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158)</div> <div>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83)</div> <div>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)</div> <div>at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:323)</div> <div>at org.openqa.selenium.remote.RemoteWebDriver.findElementByName(RemoteWebDriver.java:404)</div> <div>at org.openqa.selenium.By\$ByName.findElement(By.java:284)</div> <div>at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:315)</div> <div>at parallel.StepDefinition.values_are_entered_in_the_browser(StepDefinition.java:35)</div> <div>at ?.values are entered in the browser(file:///Users/nikhilkanojia/seleniumProject/UDEMY_CUCUMBER2_RERUN/src/test/resources/parallel/Login.feature:18)</div> <div>* Not displayable characters are replaced by '?'.</div>											
3	Then search button is clicked	SKIPPED	0.001 s									
4	And the datatable is fetched as maps	SKIPPED	0.008 s									
	<table><tr><td>name</td><td>age</td><td>sex</td></tr><tr><td>nikhil</td><td>34</td><td>M</td></tr><tr><td>kalyani</td><td>29</td><td>F</td></tr></table>	name	age	sex	nikhil	34	M	kalyani	29	F		
name	age	sex										
nikhil	34	M										
kalyani	29	F										