



Global Academy of Technology

(An Autonomous Institute under VTU, Belagavi)

Rajarajeshwarinagar, (off Mysore Road),

Ideal Homes Township

Bangalore-560098, Karnataka, India. www.gat.ac.in

Phone : +91-91082-75635, +91-92431-90105, +91-80-28603158



Department of Computer Science and Engineering

(Accredited by NBA 2019-2022)

and

Department of Information Science and Engineering

(Accredited by NBA 2019-2022)

LABORATORY MANUAL

Mobile Application Development

18CSMP68

Version 1.0

Editorial Committee

Faculty Members, Department of CSE

Faculty Members, Department of ISE

Approved by

H.O.D, Department of CSE

&

H.O.D, Department of ISE

Document Log

Name of the document	Mobile Application Development Laboratory
Syllabus Scheme	2018-2019
Current version number and date	V1 / 25.03.2021
Subject code	18CSMP68
Editorial Committee	Mobile Application Development Lab Faculty Members
Approved by	HOD, Dept. of CSE HOD, Dept. of ISE
Lab faculty	Dr. Kavitha K S, Dr. Kumaraswamy S, Mrs. Vanishree M L, Mrs. Shruthi K R
Computer Programmer	Mr. Parashivamurthy C

About Global Academy of Technology

Established in 2001, Global Academy of Technology, an Autonomous Institute under VTU, one of the most sought-after Engineering and Management institution in Bengaluru accredited with **NAAC A grade**, under the auspices of National Education Foundation has a clear vision of providing uncompromising quality Technical and Management Education. The geographical location of the institute and lush green surrounding provides an apt environment for higher learning. GAT offers the most modern infrastructure for the students supported by passionate and highly experienced and trained faculty. Creativity is our buzz word, and “**Growing Ahead of Time**” is our motto.

About CSE and ISE Departments

The Department of Computer Science and Engineering and Information Science and Engineering established in the year 2001, offers UG, PG and Ph.D programmes. **Both the Departments' UG programme are accredited by NBA.**

The ever-expanding role of IT in Education, Entertainment, Business Enterprises, Industry, Science, and Public & Private Sectors has influenced personal lives to a great extent.

This has compelled the need to remain on the cutting edge of the technology to provide quick and easy access to information.

The aim is to equip CSE and ISE graduates with knowledge, skills and attitude needed for a successful career, shaping the future, by refuelling creativity, innovation, and lifelong learning for a changing world. Students would be able to relate the knowledge and skills acquired to the work environment. The friendly and supportive environment in the department encourages our students and staff to develop innovative ideas for implementation, conducting seminars/ workshops/ FDPs, Poster Presentations, and various other activities. The Teaching methods blend both the traditional modes and modern styles covering case studies, group discussions, project-based learning, participative workshops and seminars leading to clear conceptual understanding.

Vision of the Institute

Become a premier institution imparting quality education in engineering and management to meet the changing needs of society

Mission of the Institute

- Create environment conducive for continuous learning through quality teaching and learning processes supported by modern infrastructure
- Promote Research and Innovation through collaboration with industries
- Inculcate ethical values and environmental consciousness through holistic education programs

Program Outcomes (POs)

Engineering Graduates will be able to:

1. **Engineering knowledge:** Apply the knowledge of mathematics, science, engineering fundamentals, and an engineering specialization to the solution of complex engineering problems.
2. **Problem analysis:** Identify, formulate, review research literature, and analyze complex engineering problems reaching substantiated conclusions using first principles of mathematics, natural sciences, and engineering sciences.
3. **Design/development of solutions:** Design solutions for complex engineering problems and design system components or processes that meet the specified needs with appropriate consideration for the public health and safety, and the cultural, societal, and environmental considerations.
4. **Conduct investigations of complex problems:** Use research-based knowledge and research methods including design of experiments, analysis and interpretation of data, and synthesis of the information to provide valid conclusions.
5. **Modern tool usage:** Create, select, and apply appropriate techniques, resources, and modern engineering and IT tools including prediction and modeling to complex engineering activities with an understanding of the limitations.
6. **The engineer and society:** Apply reasoning informed by the contextual knowledge to assess societal, health, safety, legal and cultural issues and the consequent responsibilities relevant to the professional engineering practice.
7. **Environment and sustainability:** Understand the impact of the professional engineering solutions in societal and environmental contexts, and demonstrate the knowledge of, and need for sustainable development.
8. **Ethics:** Apply ethical principles and commit to professional ethics and responsibilities and norms of the engineering practice.
9. **Individual and team work:** Function effectively as an individual, and as a member or leader in diverse teams, and in multidisciplinary settings.
10. **Communication:** Communicate effectively on complex engineering activities with the engineering community and with society at large, such as, being able to comprehend and write effective reports and design documentation, make effective presentations, and give and receive clear instructions.
11. **Project management and finance:** Demonstrate knowledge and understanding of the engineering and management principles and apply these to one's own work, as a member and leader in a team, to manage projects and in multidisciplinary environments.
12. **Life-long learning:** Recognize the need for, and have the preparation and ability to engage in independent and life-long learning in the broadest context of technological change.

Course Details

Course Name: **Mobile Application Development**

Course Code: **18CSMP68**

Course prerequisite: Core Java

Course Objectives

Upon completion of this course, students are expected to:

1. Learn and acquire the art of Android Programming.
2. Configure Android studio to run the applications.
3. Understand and implement Android's User interface functions.
4. Create, modify and query on SQLite database.
5. Inspect different methods of sharing data using services.

SYLLABUS

MOBILE APPLICATION DEVELOPMENT

Subject Code: 18CSMP68

IA Marks: 40

No. of Practical Hrs. / Week: 0:0:2

Exam Marks: 60

Total No. of Practical Hrs: 3 Hours/Week

Exam Hours: 03

No. of Credits: 02

Descriptions (if any):

1. The installation procedure of the Android Studio/Java software must be demonstrated and carried out in groups.
2. Students should use the latest version of Android Studio/Java/ Kotlin to execute these programs. Diagrams given are for representational purposes only, students are expected to improvise on them.
3. Part B programs should be developed as an application and are to be demonstrated as a mini project in a group by adding extra features or the students can also develop their application and demonstrate it as a mini-project. (Projects/programs are not limited to the list given in Part B).

PART A


Program 1

Create an application to design a Visiting Card. The Visiting card should have a company logo at the top right corner. The company name should be displayed in Capital letters, aligned to the center. Information like the name of the employee, job title, phone number, address, email, fax and the website address is to be displayed. Insert a horizontal line between the job title and the phone number.



Program 2

Develop an Android application using controls like Button, TextView, EditText for designing a Calculator having basic functionality like Addition, Subtraction, Multiplication, and Division.

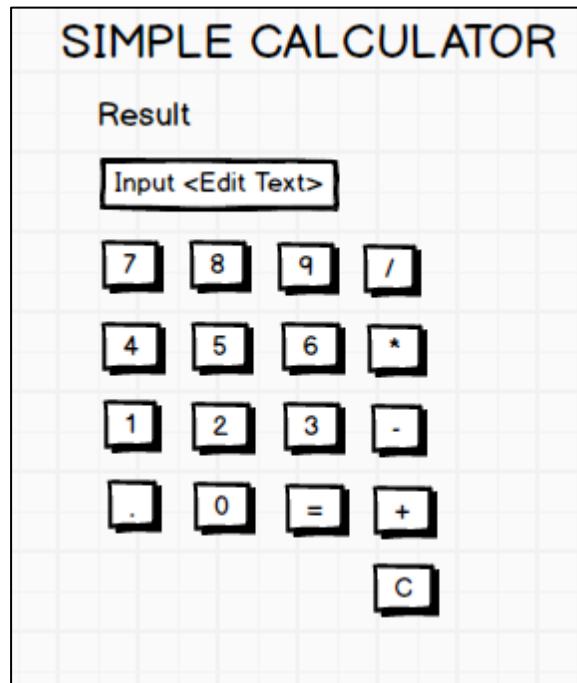

Program 3


Create a SIGN UP activity with Username and Password. Validation of password should happen based on the following rules:

- Password should contain uppercase and lowercase letters.
- Password should contain letters and numbers.
- Password should contain special characters.
- Minimum length of the password (the default value is 8).


On successful **SIGN UP** proceed to the next Login activity. Here the user should **SIGN IN** using the Username and Password created during signup activity. If the Username and Password are matched then navigate to the next activity which displays a message saying “Successful Login” or else display a toast message saying “Login Failed”. The user is given only two attempts and after that display a toast message saying “Failed Login Attempts” and disable the **SIGN IN** button. Use Bundle to transfer information from one activity to another.

Program 4

Develop an application to set an image as wallpaper. On click of a button, the wallpaper image should start to change randomly every 30 seconds.

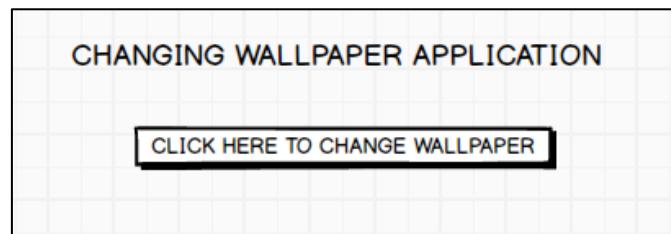**Program 5**

Write a program to create an activity with two buttons START and STOP. On Pressing of the START button, the activity must start the counter by displaying the numbers from One and the counter must keep on counting until the STOP button is pressed. Display the counter value in a TextView control.

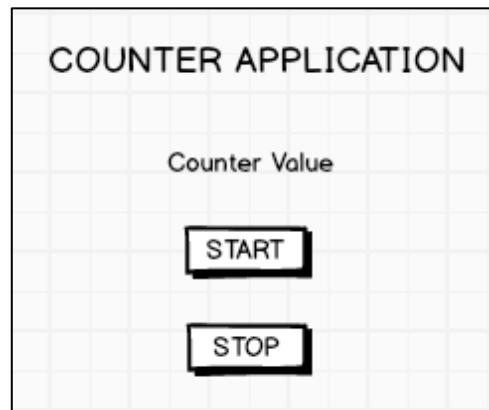
**Program 6**

Create two files of XML and JSON type with values for City_Name, Latitude, Longitude, Temperature, and Humidity. Develop an application to create an activity with two buttons to parse the XML and JSON files which when clicked should display the data in their respective layouts side by side.


PARSING XML AND JSON DATA		PARSING XML AND JSON DATA	
<input type="button" value="Parse XML Data"/> <input type="button" value="Parse JSON Data"/>		XML DATA City_Name: Mysore Latitude: 12.295 Longitude: 76.639 Temperature: 22 Humidity: 90%	
		JSON Data City_Name: Mysore Latitude: 12.295 Longitude: 76.639 Temperature: 22 Humidity: 90%	

Program 7


Develop a simple application with one Edit Text so that the user can write some text in it. Create a button called “Convert Text to Speech” that converts the user input text into voice.

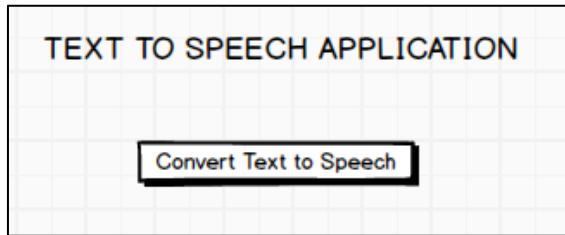**Program 8**

Create an activity like a phone dialer with CALL and SAVE buttons. On pressing the CALL button, it must call the phone number and on pressing the SAVE button it must save the number to the phone contacts.

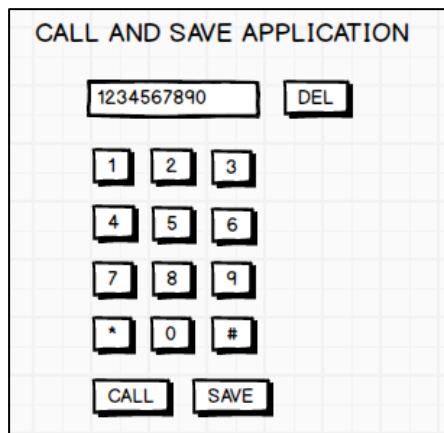
**PART B****Program 1**

Write a program to enter Medicine Name, Date and Time of the Day as input from the user and store it in the SQLite database. Input for Time of the Day should be either Morning or Afternoon or Evening or Night. Trigger an alarm based on the Date and Time of the Day and display the Medicine Name.

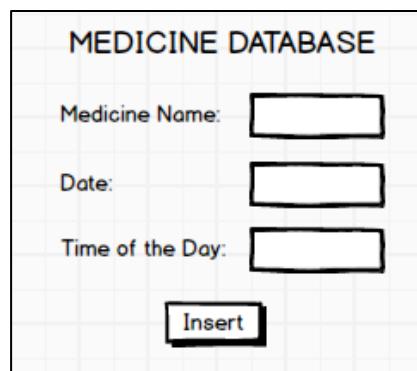


Program 2

Develop a content provider application with an activity called “Meeting Schedule” which takes Date, Time and Meeting Agenda as input from the user and store this information into the SQLite database. Create another application with an activity called “Meeting Info” having DatePicker control, which on the selection of a date should display the Meeting Agenda information for that particular date, else it should display a toast message saying “No Meeting on this Date”.

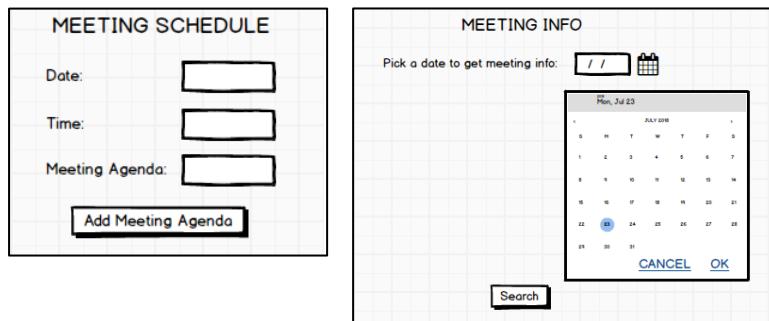


Program 3

Create an application to receive an incoming SMS which is notified to the user. On clicking this SMS notification, the message content and the number should be displayed on the screen. Use appropriate emulator control to send the SMS message to your application.

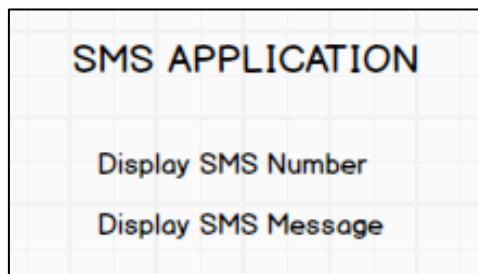


Program 4

Write a program to create an activity having a Text box, and also Save, Open and Create buttons. The user has to write some text in the Text box. On pressing the Create button the text should be saved as a text file in MkSDcard. On subsequent changes to the text, the Save button should be pressed to store the latest content to the same file. On pressing the Open button, it should display the contents from the previously stored files in the Text box. If the user tries to save the contents in the Textbox to a file without creating it, then a toast message has to be displayed saying “FirstCreate a File”.

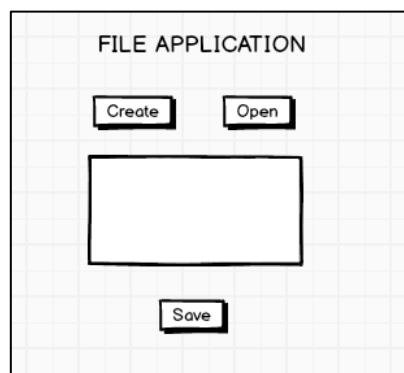


Program 5


Create an application to demonstrate a basic media player that allows the user to Forward, Backward, Play and Pause an audio. Also, make use of the indicator in the seek bar to move the audio forward or backward as required.

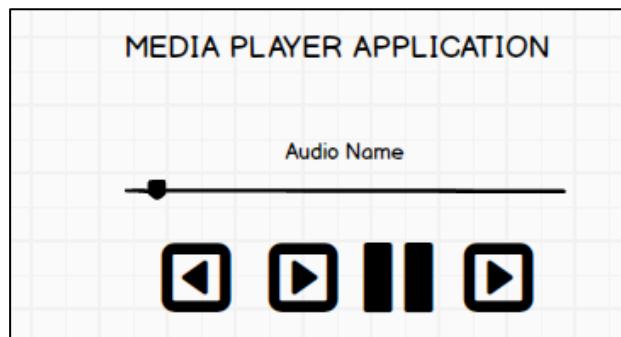**Program 6**

Develop an application to demonstrate the use of Asynchronous tasks in android. The asynchronous task should implement the functionality of a simple moving banner. On pressing the **Start Task** button, the banner message should scroll from right to left. On pressing the **Stop Task** button, the banner message should stop. Let the banner message be “Demonstration of Asynchronous Task”.

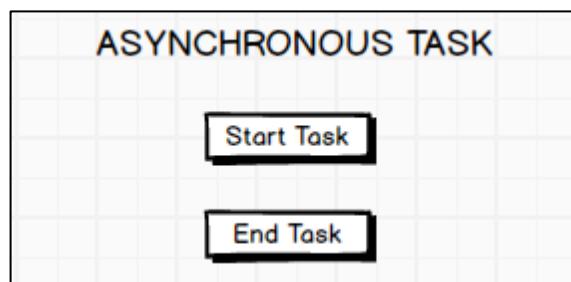**Program 7**

Develop an application that makes use of the clipboard framework for copying and pasting of the text. The activity consists of two EditText controls and two Buttons to trigger the copy and paste functionality.

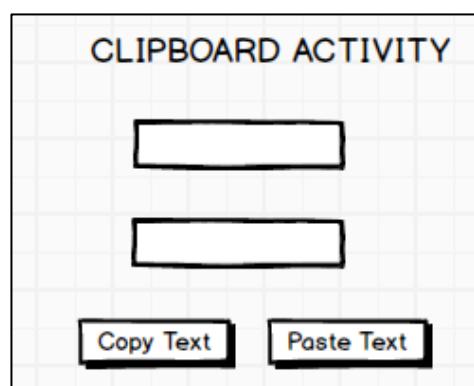

Program 8

Create an AIDL service that calculates Car Loan EMI. The formula to calculate EMI is

$$E = P * (r(1+r)^n) / ((1+r)^n - 1)$$

where


E = The EMI payable on the car loan amount

P = The Car loan Principal Amount

r = The interest rate value computed on a monthly basis

n = The loan tenure in the form of months

The down payment amount has to be deducted from the principal amount paid towards buying the Car. Develop an application that makes use of this AIDL service to calculate the EMI. This application should have four EditText to read the Principal Amount, Down Payment, Interest Rate, Loan Term (in months) and a button named as “Calculate Monthly EMI”. On click of this button, the result should be shown in a TextView. Also, calculate the EMI by varying the Loan Term and Interest Rate values.

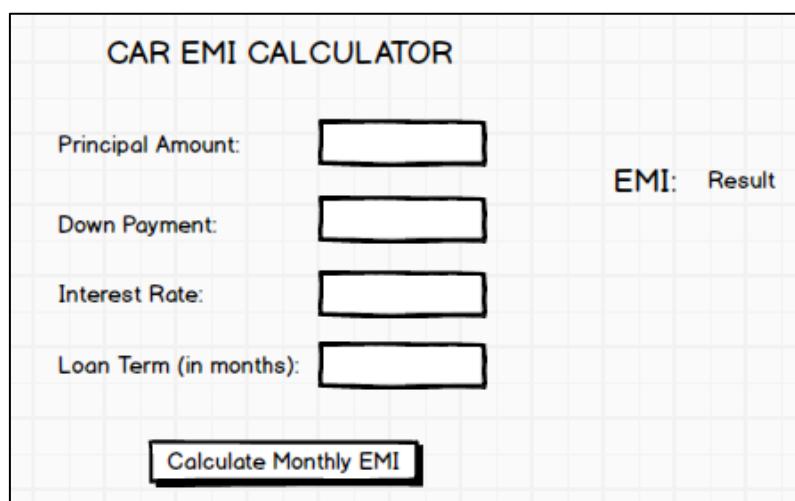

Course Outcomes

After successful completion of the Course, the participants will be able to

18CSMP68.1	Create, test and debug Android application by setting up Android development environment.
18CSMP68.2	Implement adaptive, responsive user interfaces that work across a wide range of devices.
18CSMP68.3	Demonstrate methods in storing, sharing and retrieving data in Android applications.
18CSMP68.4	Infer the role of permissions and security for Android applications.

CO-PO Mapping

CO No.	PO1	PO2	PO3	PO4	PO5	PO6	PO7	PO8	PO9	PO10	PO11	PO12
18CSMP68.1	3	2	2	-	2	1	-	-	1	1	-	1
18CSMP68.2	3	2	2	-	2	1	-	-	1	1	-	1
18CSMP68.3	3	2	2	-	2	1	-	-	1	1	-	1
18CSMP68.4	3	2	2	-	-	-	-	2	1	1	-	1

Procedure to Conduct Practical Examination

Experiment distribution

- For laboratories having only one part: Students are allowed to pick one experiment from the lot with equal opportunity.
- For laboratories having PART A and PART B: Students are allowed to pick one experiment from PART A and one experiment from PART B, with equal opportunity.

Change of experiment is allowed only once and marks allotted for procedure to be made zero of the changed part only.

Marks Distribution (Course to change in accordance with university regulations)

- For laboratories having only one part –
Procedure + Execution + Viva-Voce: $15+70+15= 100$ Marks
- For laboratories having PART A and PART B
 - i) Part A – Procedure + Execution + Viva = $6 + 28 + 6 = 40$ Marks
 - ii) Part B – Procedure + Execution + Viva = $9 + 42 + 9 = 60$ Marks

1. Android Studio Tutorials



1.1 Install Android Studio and Packages:


Download Android Version 4.0.2 from the below link

<https://redirector.gvt1.com/edgedl/android/studio/install/4.0.2.0/android-studio-ide-193.6821437-windows.exe>

1.2 Configure Android SDK packages:


Go to Tools → SDK Manager

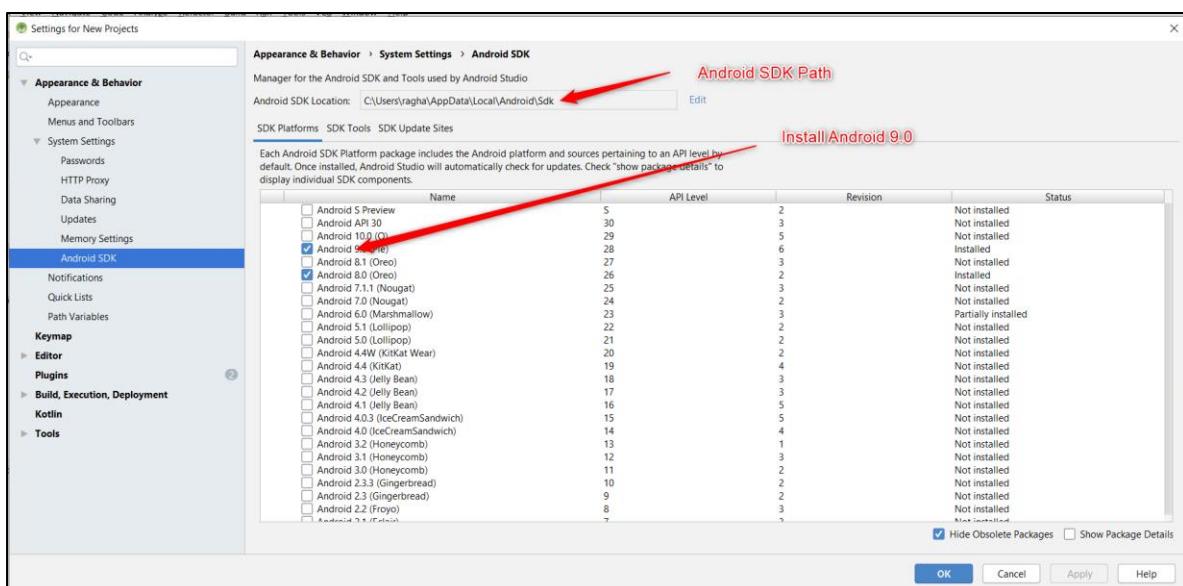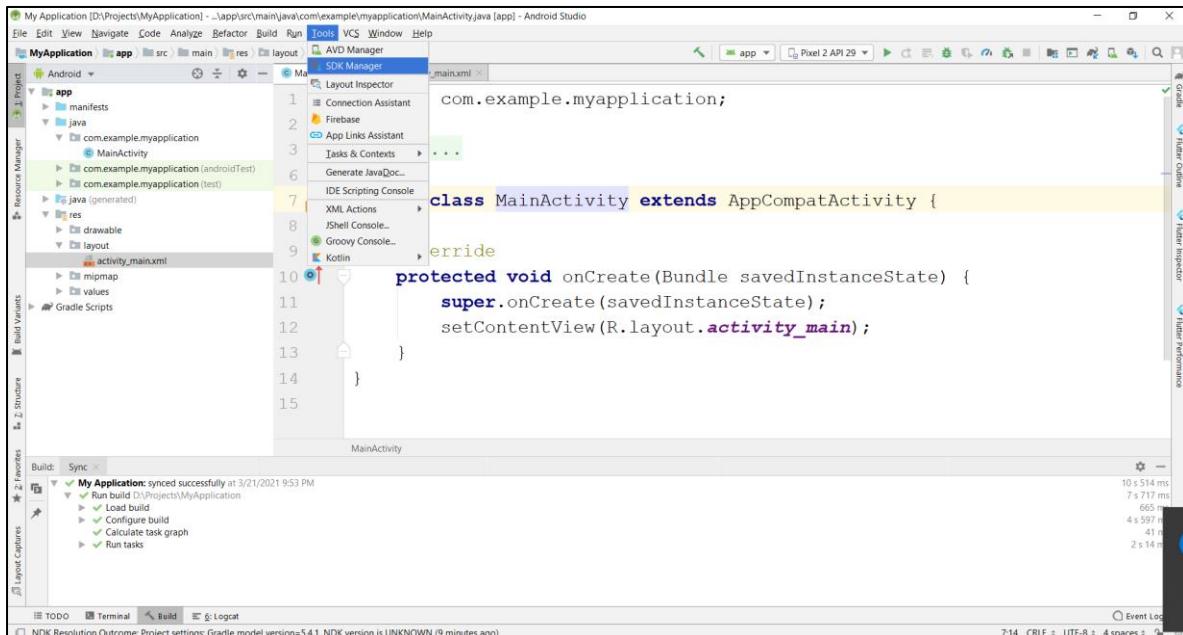


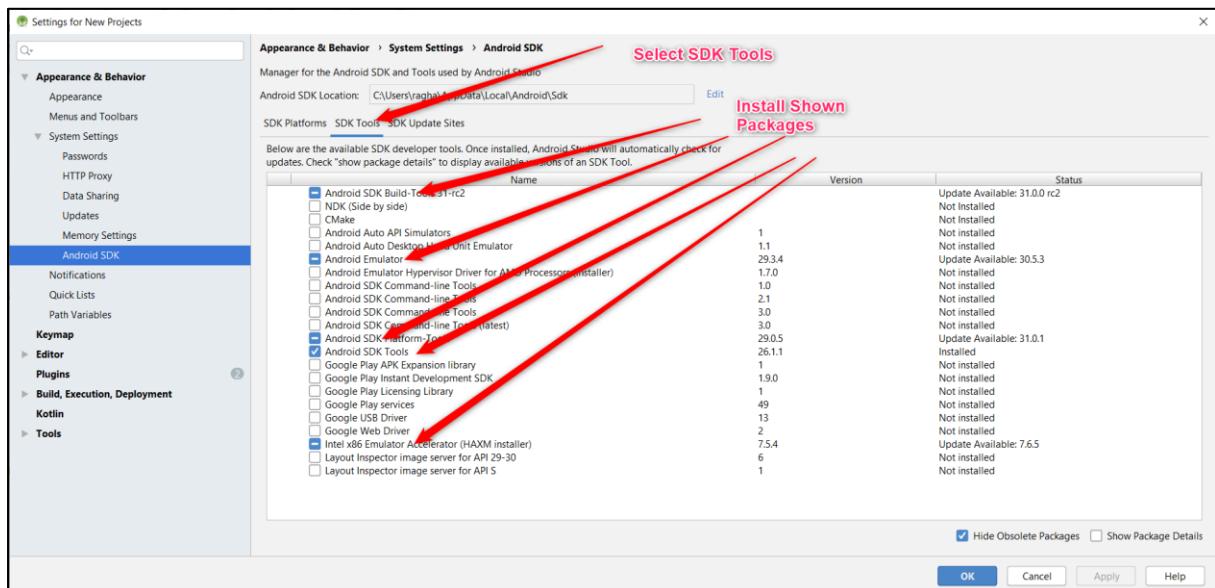


1.3 Creating Emulator

Go to Tools → Select AVD Manager

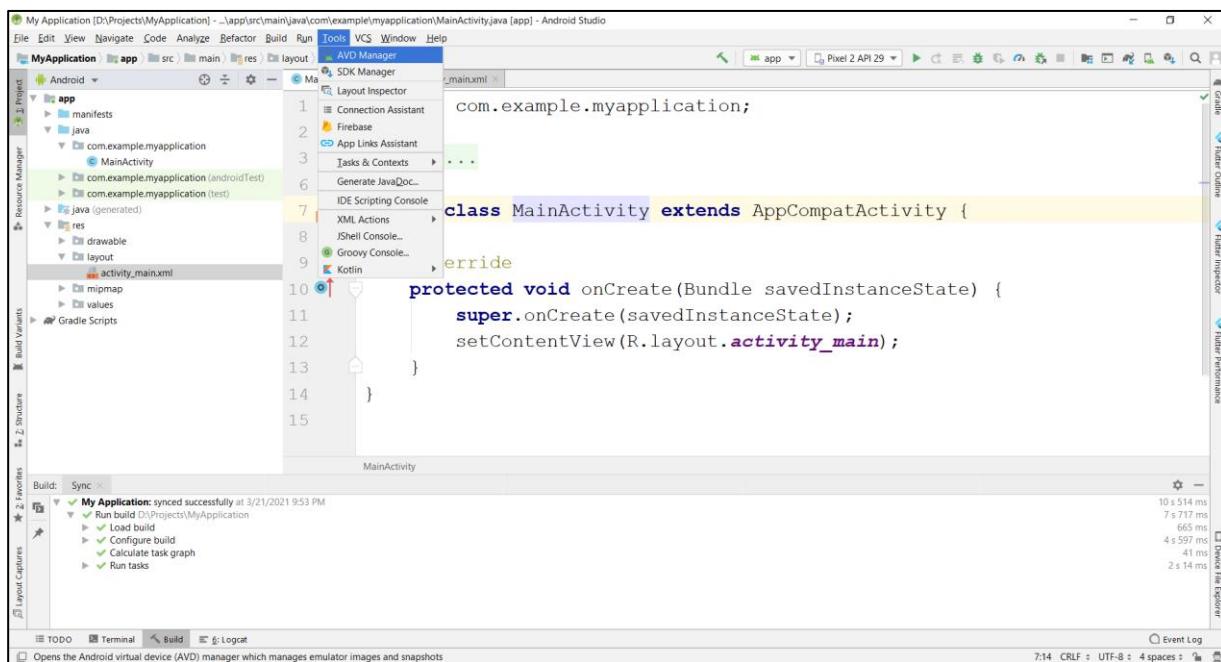


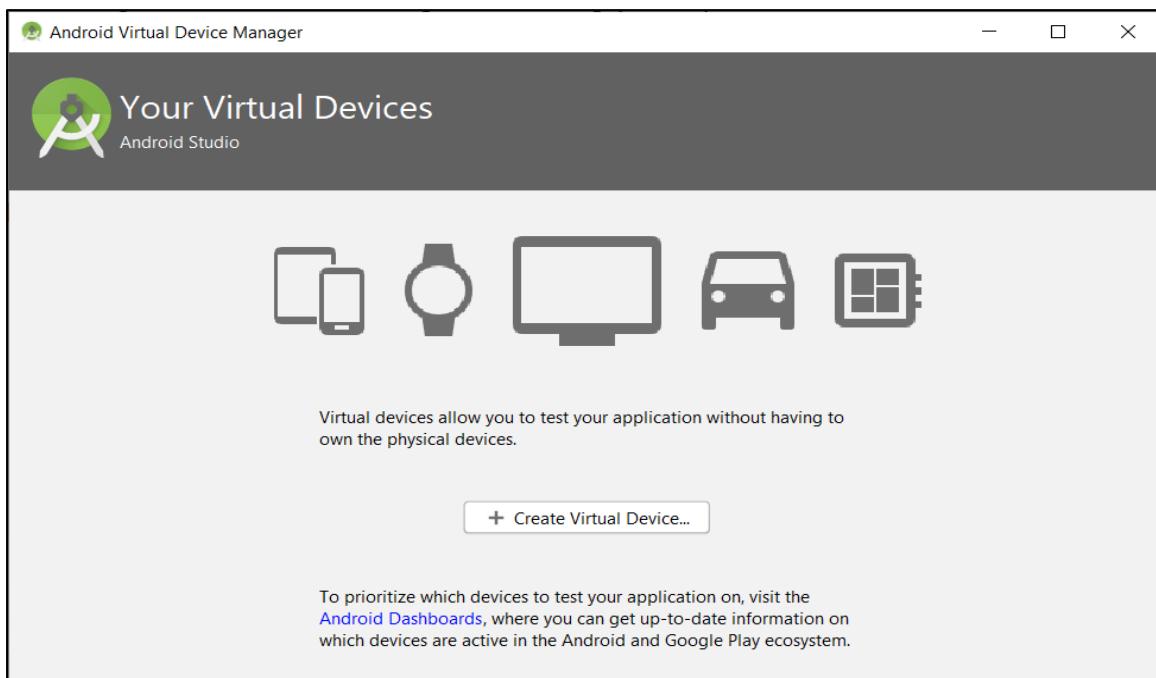


Select Create Virtual Device → Select Phone → Pixel 2 → Press Next

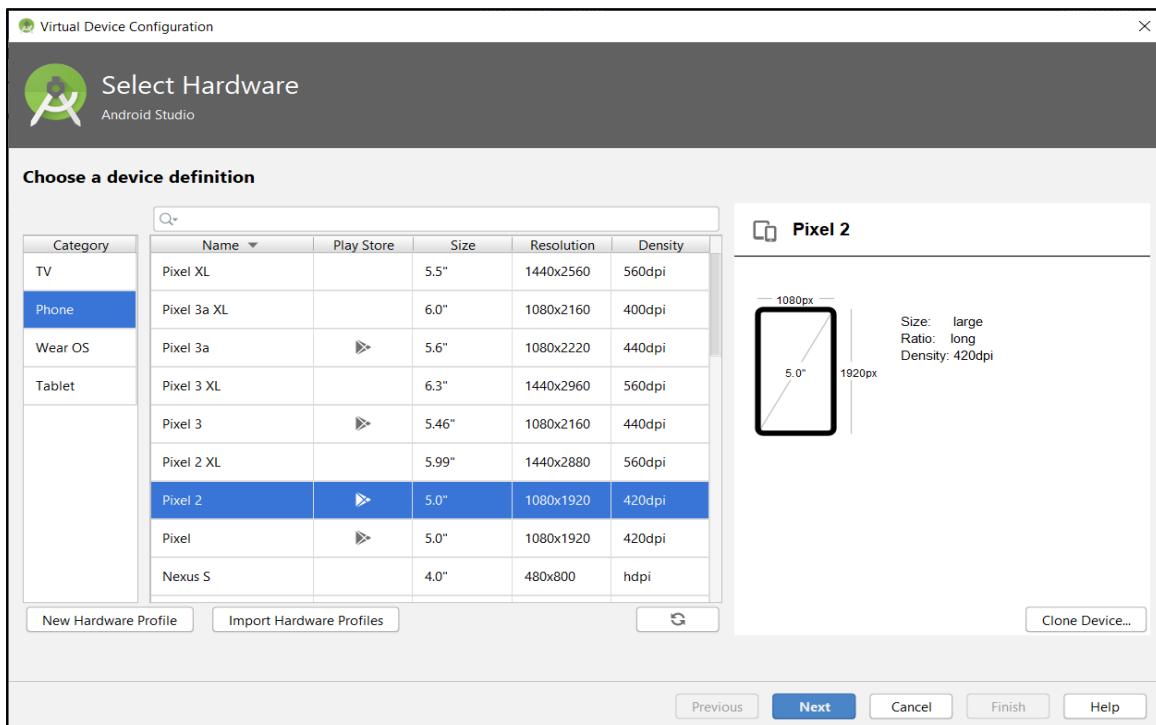



Select Android Q, if not already downloaded press download, After download completes Select Q and Press Next Button.

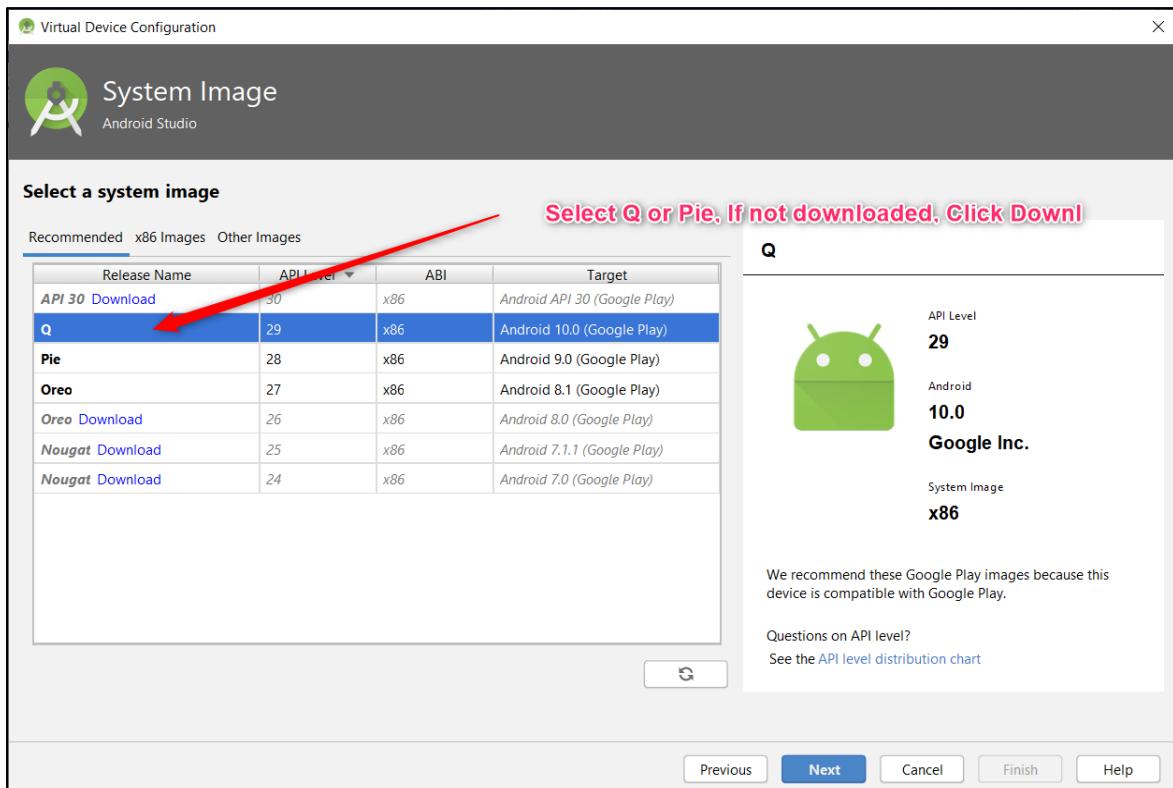

Enter AVD Name and Press Finish.

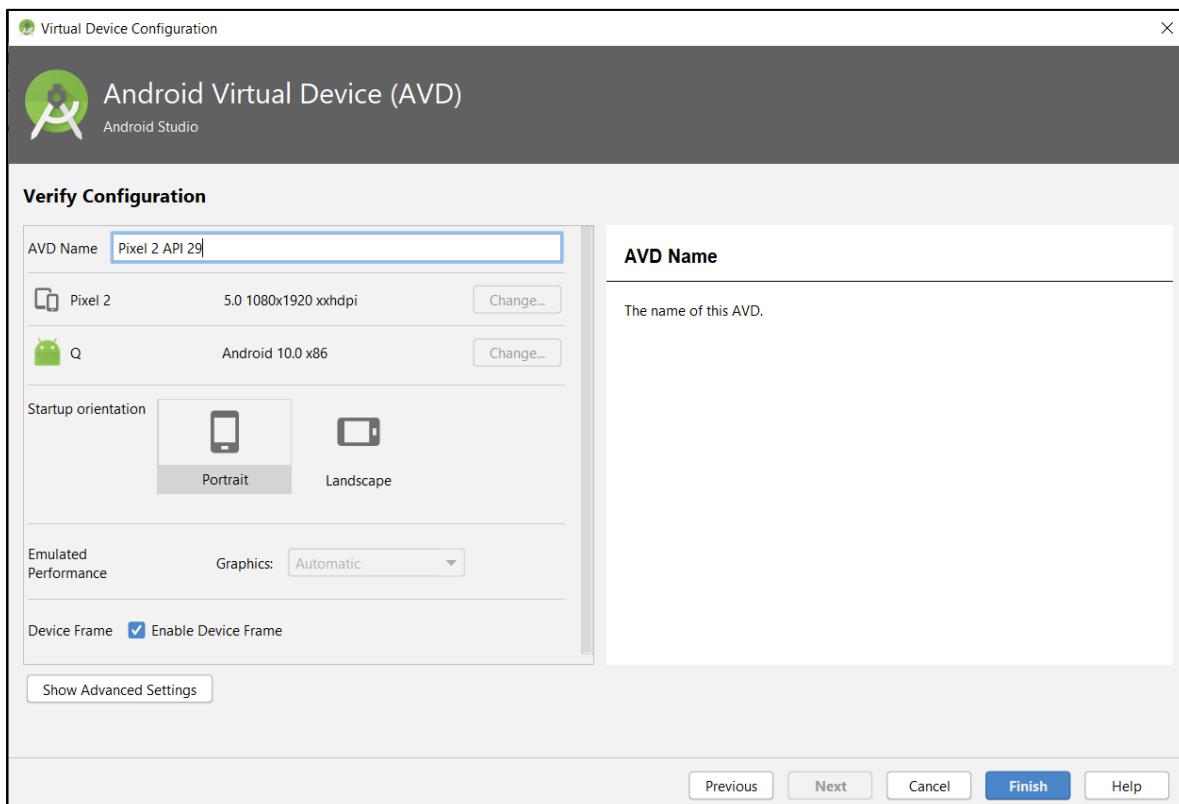


Press Play Button to Start Emulator

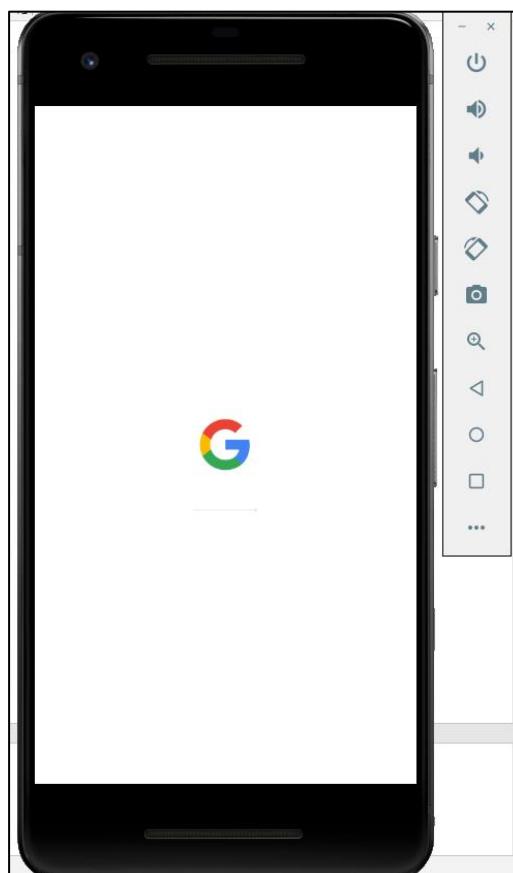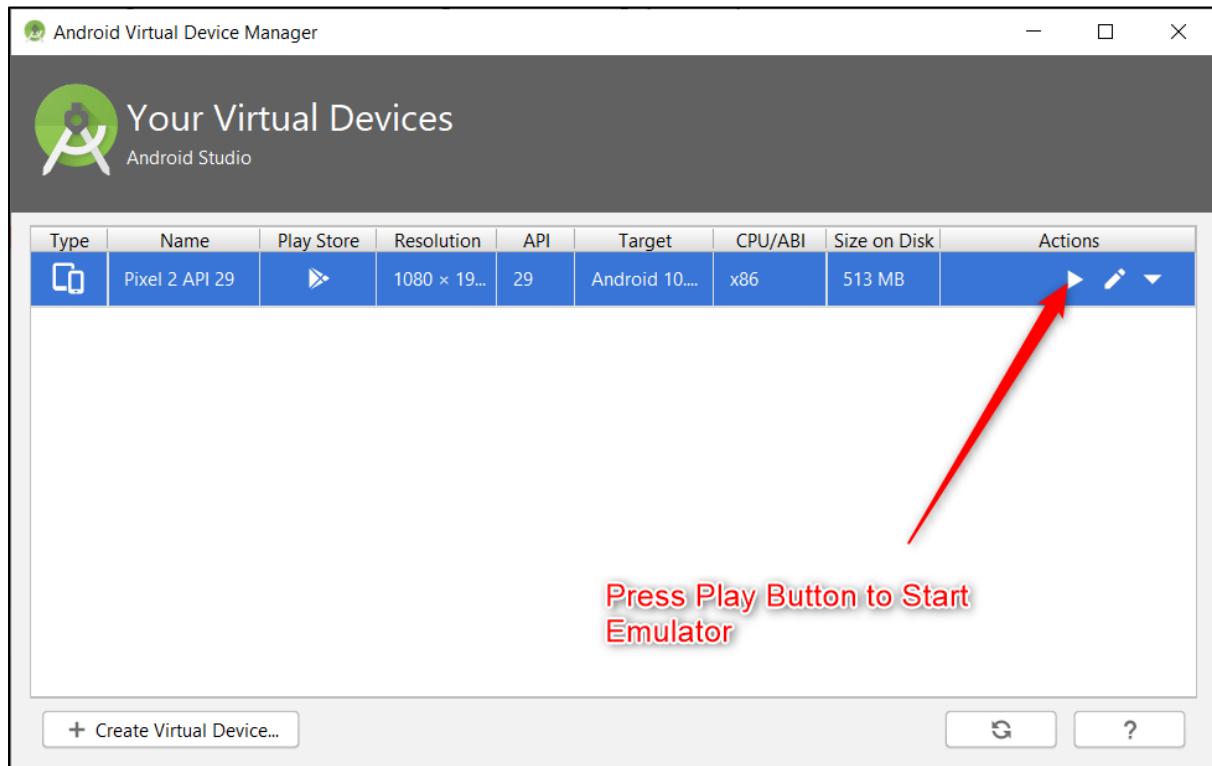


1.4 Creating a New Project in Android

While creating a New Project for First Time, make sure Android Studio is connected to internet, It downloads the required packages from internet.

Go to File → New → New Project

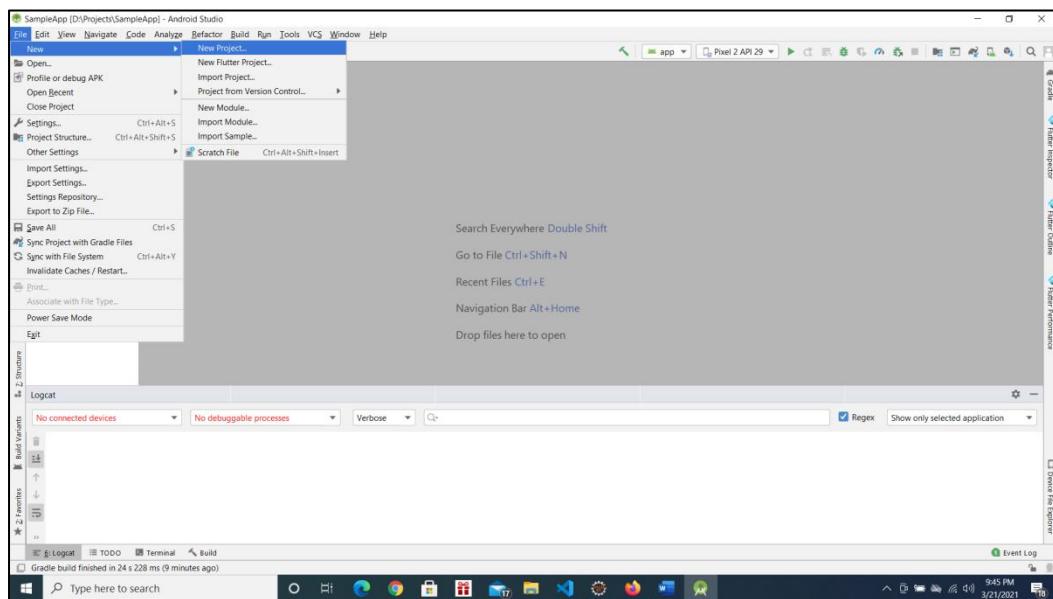

Choose Phone and Tablet → Empty Activity → Press Next

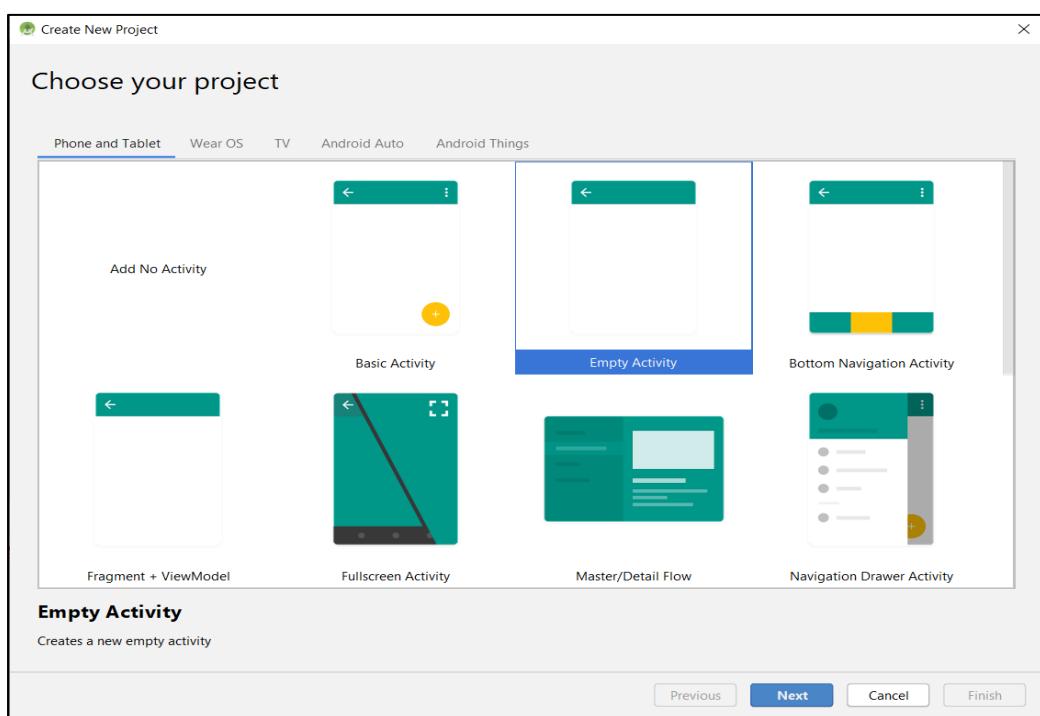

In Configure your Project Screen, Enter below details and Press Finish Button.
Enter Name of the Application → This will be application name this will be visible with Home Screen Icon.


Package Name → Enter package name atleast two identifier (Eg: com.example). Best Practice is 3 or more identifier (Eg: com.example.firstapp).

Save Location → Location where to save the Project

Language → Choose Java

Minimum API Level → Android 5.0

Select Checkbox Use androidx.artifacts folder as below screenshot.

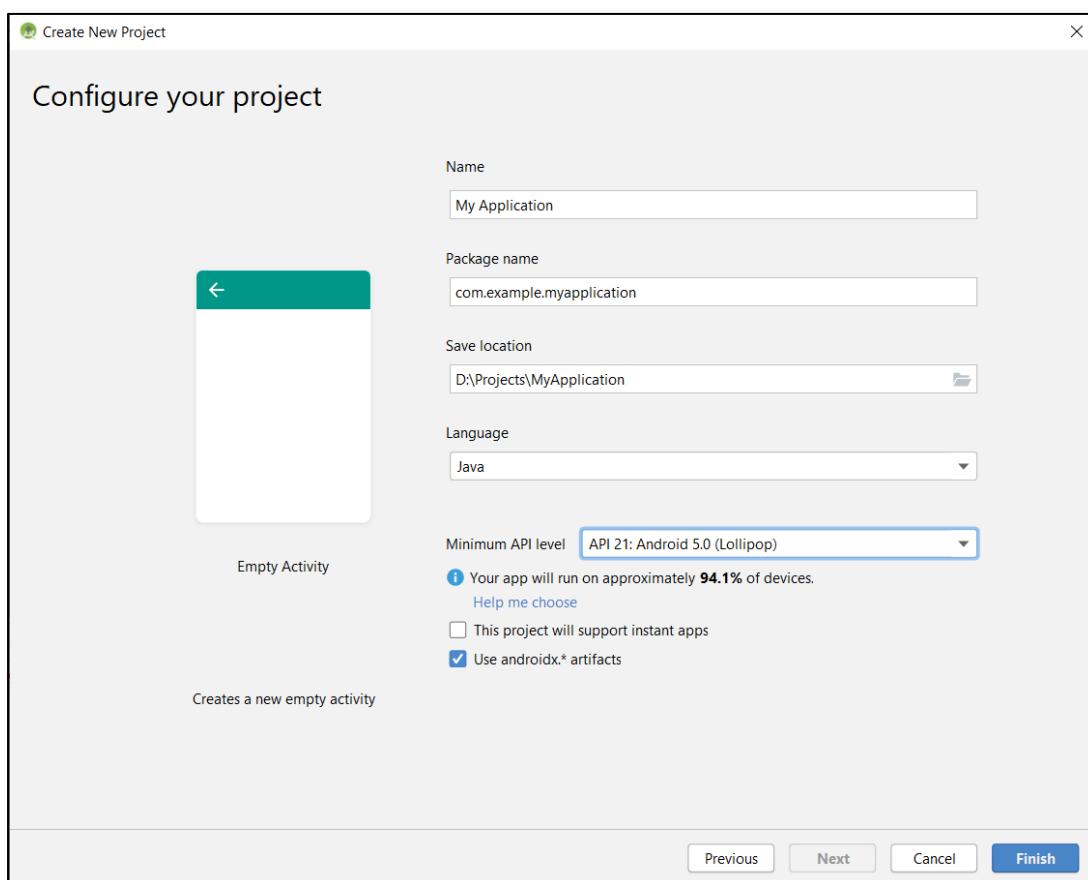

1.5 Android Project Structure:

The screenshot shows the Android Studio interface with the following details:


- Project View:** The left sidebar shows the project structure under "My Application". The "Android" section is expanded, showing "Project", "Packages", "Project Files", "Production", "Tests", "Project Source Files", "Project Non-Source Files", and "Problems". Below "Android" is "res" which contains "drawable", "values", and "res (generated)".
- Code Editor:** The main area displays the Java code for `MainActivity.java`. The code defines a class `MainActivity` that extends `AppCompatActivity`. It overrides the `onCreate` method to call `super.onCreate` and set the content view to `R.layout.activity_main`.
- Build Output:** The bottom-left pane shows the build log, indicating a successful build completed at 3/21/2021 10:23 PM.
- Event Log:** The bottom-right pane shows the event log, indicating the emulator process finished with exit code 0.

Select Project Explorer and Select Android from Project View

The screenshot shows the Android Studio interface with the following changes:

- Project Explorer Tab:** The "Project" tab is highlighted in the top navigation bar.
- Project View:** The "Android" section in the Project View is highlighted with a red arrow. A red box also highlights the text "Select Android From Project View" in the code editor area.
- Code Editor:** The Java code for `MainActivity.java` remains the same as in the previous screenshot.
- Build Output:** The bottom-left pane shows the build log, indicating a successful build completed at 3/21/2021 10:23 PM.
- Event Log:** The bottom-right pane shows the event log, indicating the emulator process finished with exit code 0.

Basic View:

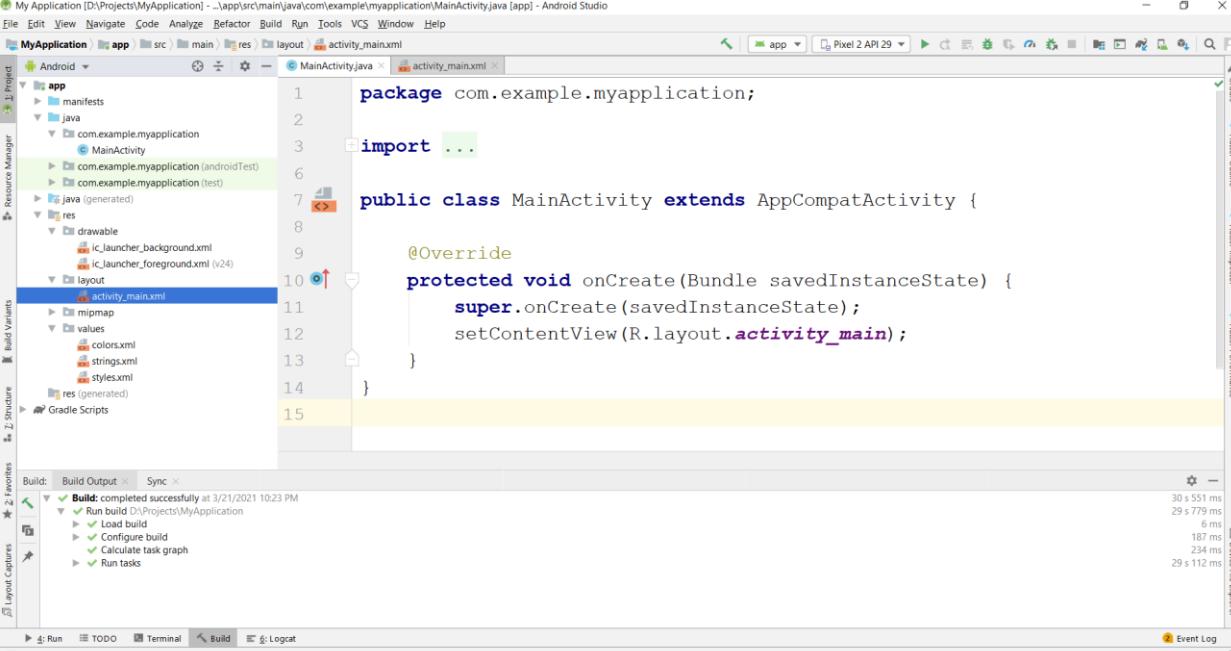

```

package com.example.myapplication;


import ...

public class MainActivity extends AppCompatActivity {



    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
    }
}

```

2. Importing an Existing Project in Android Studio
 3. Creating an Activity in Android
- Right Click on Package → New → Activity → Empty Activity

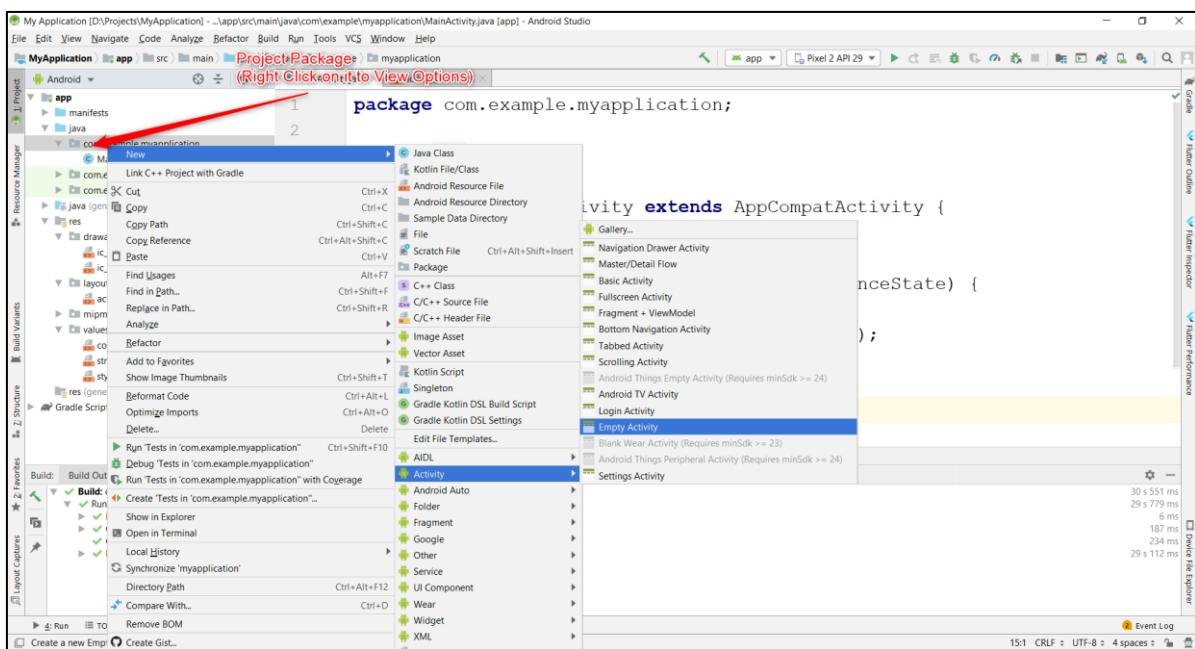


Enter Activity Name and Press Finish

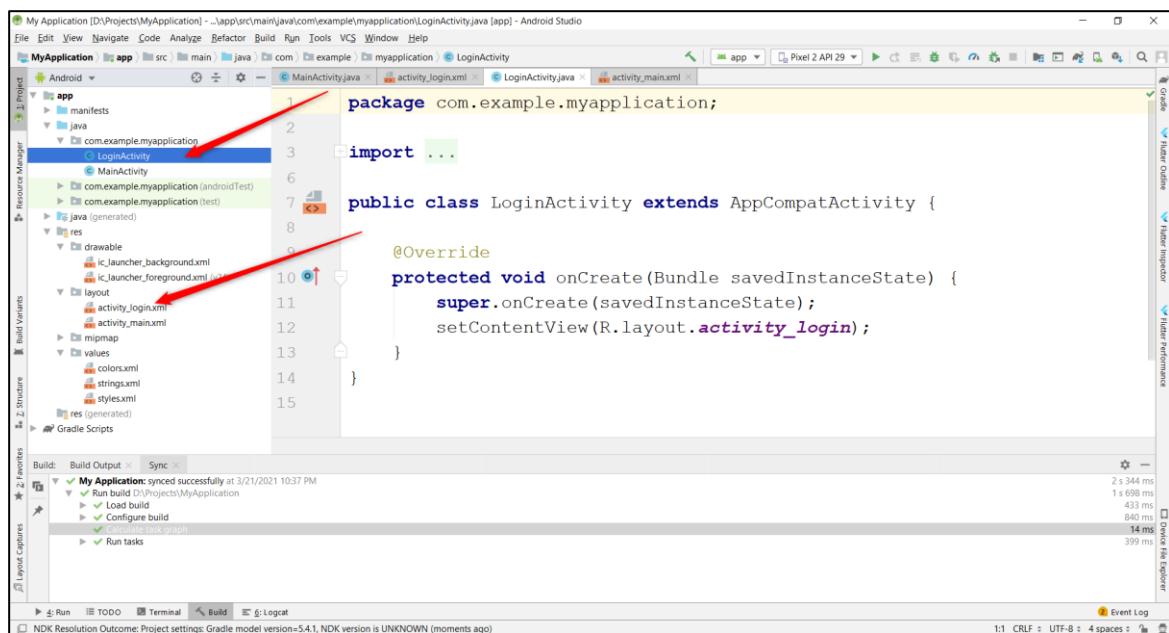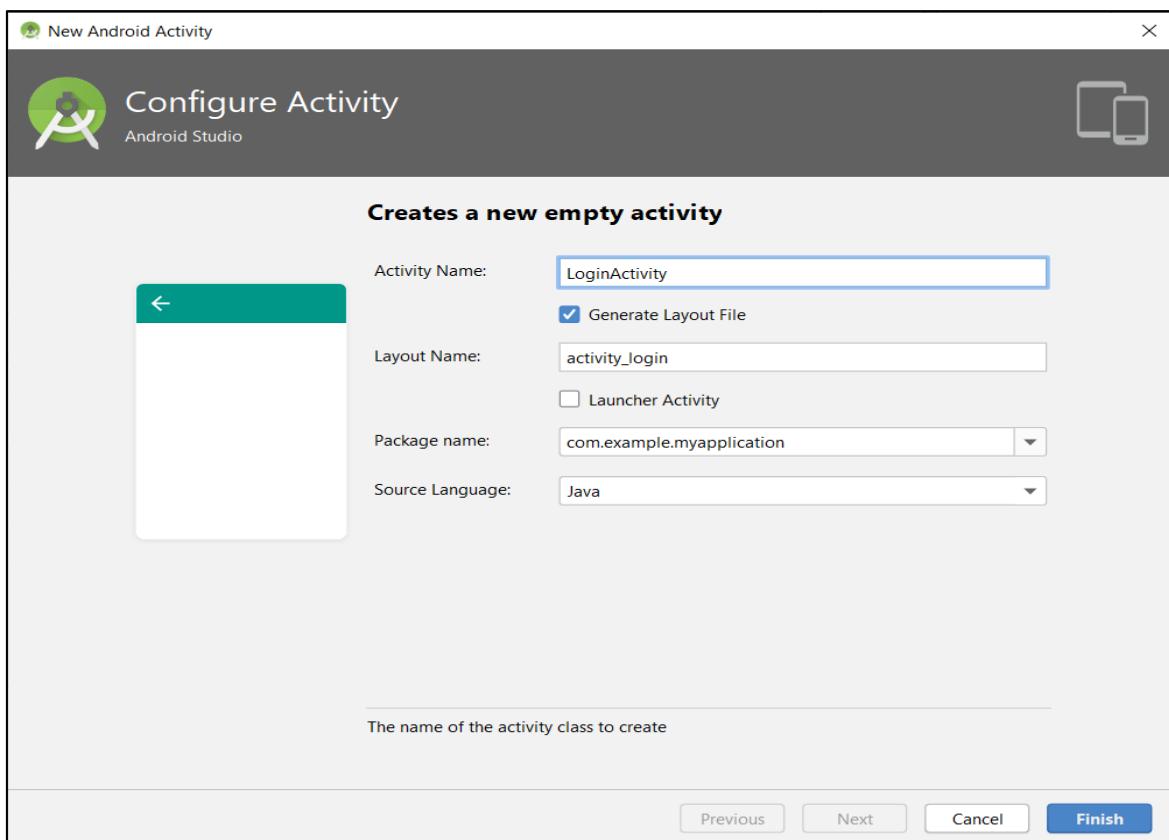


1.6 Creating a Layout in Android

Right Click on Layout Folder → New → XML → Layout XML File

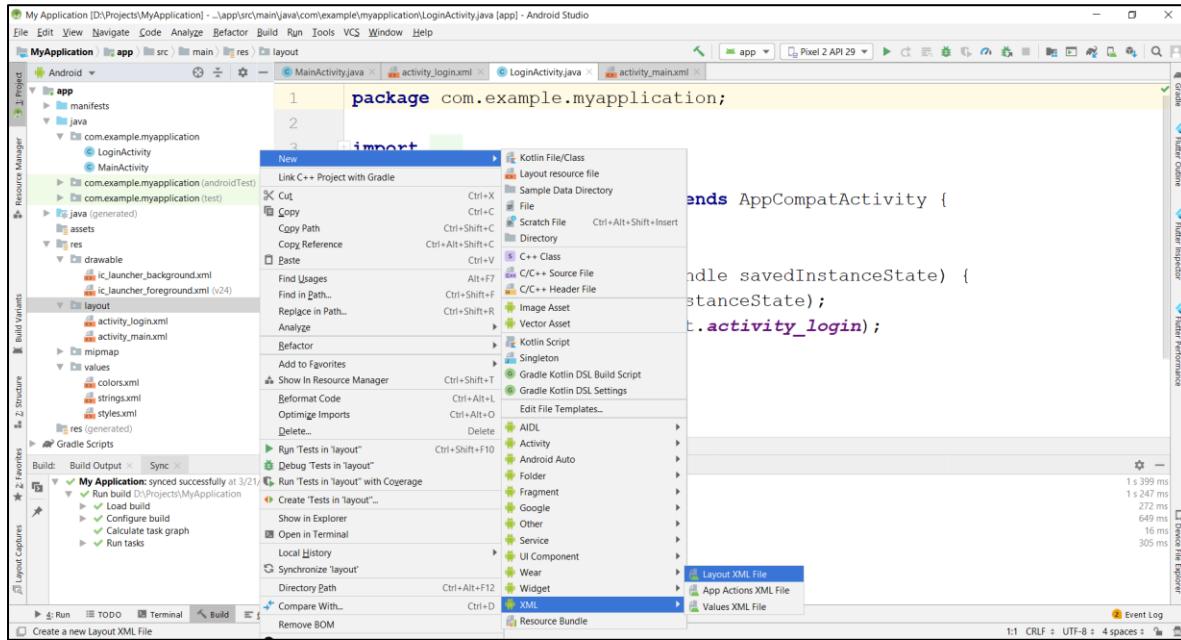



Enter xml file name and press Finish

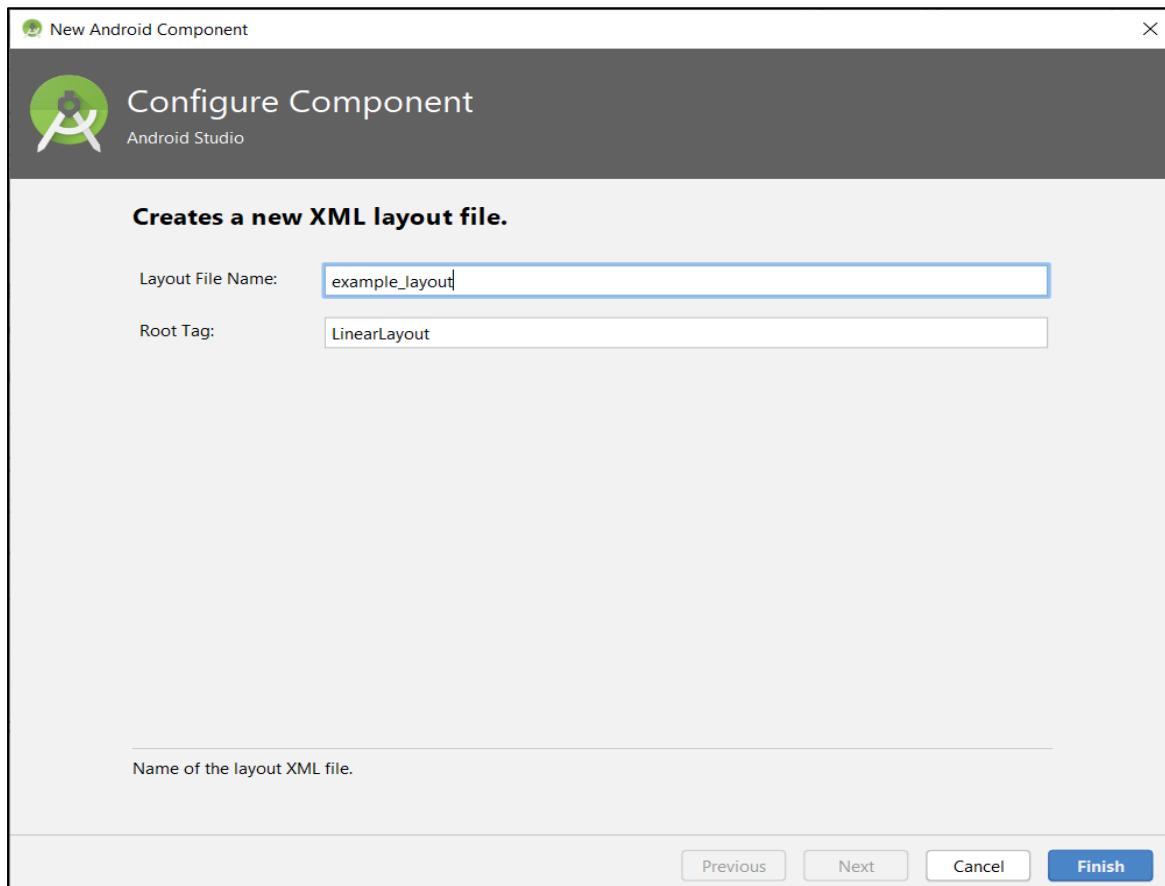

1.7 Creating Assets Folder in Android


Right Click on app folder → New → Folder → Assets Folder → Press Finish Button

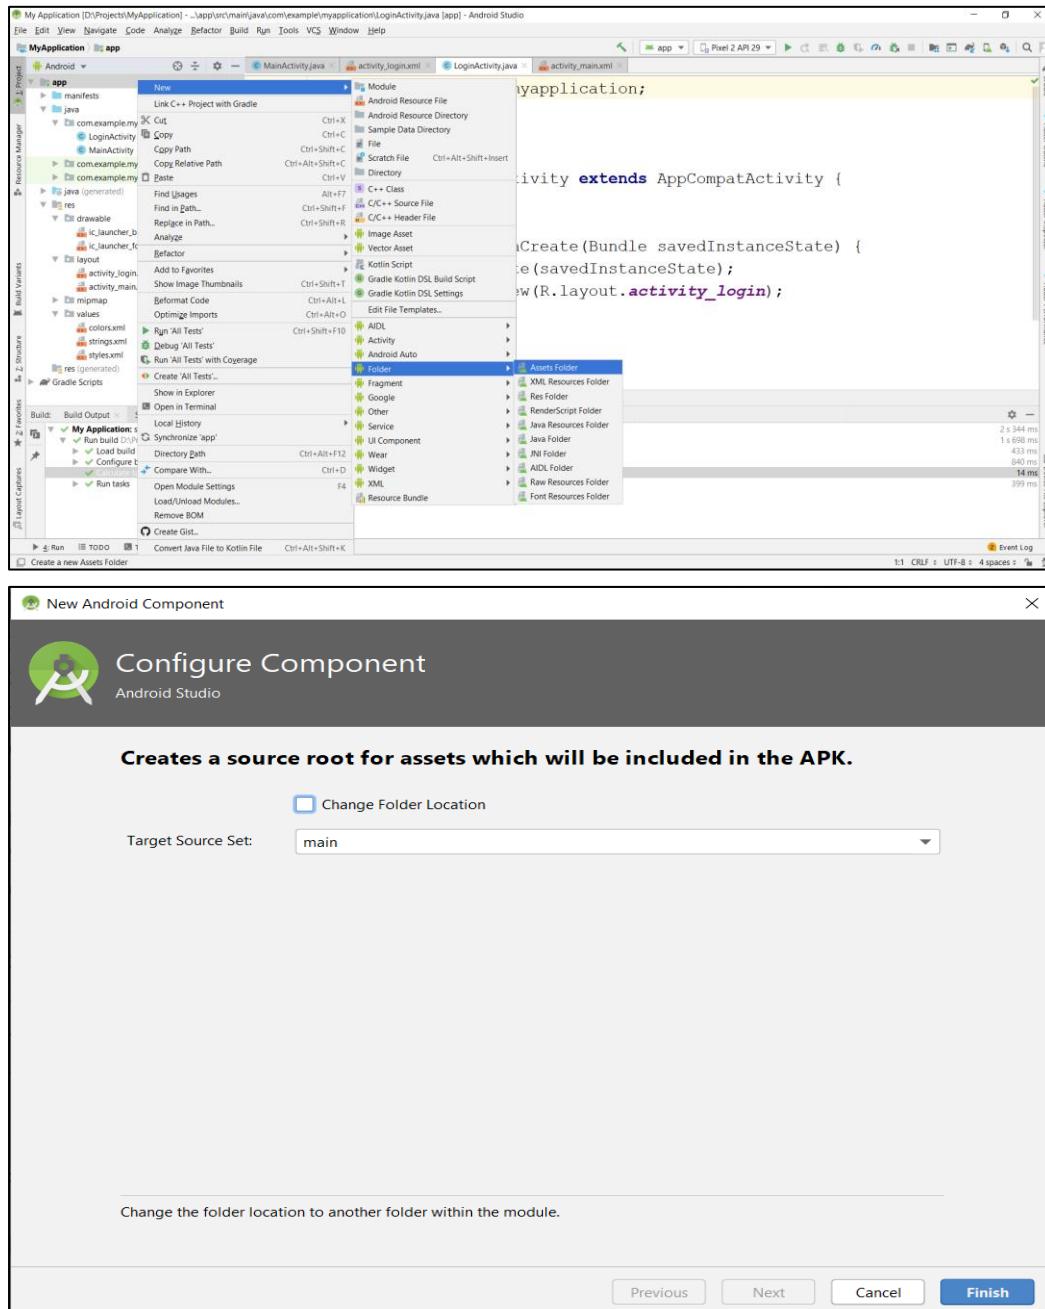

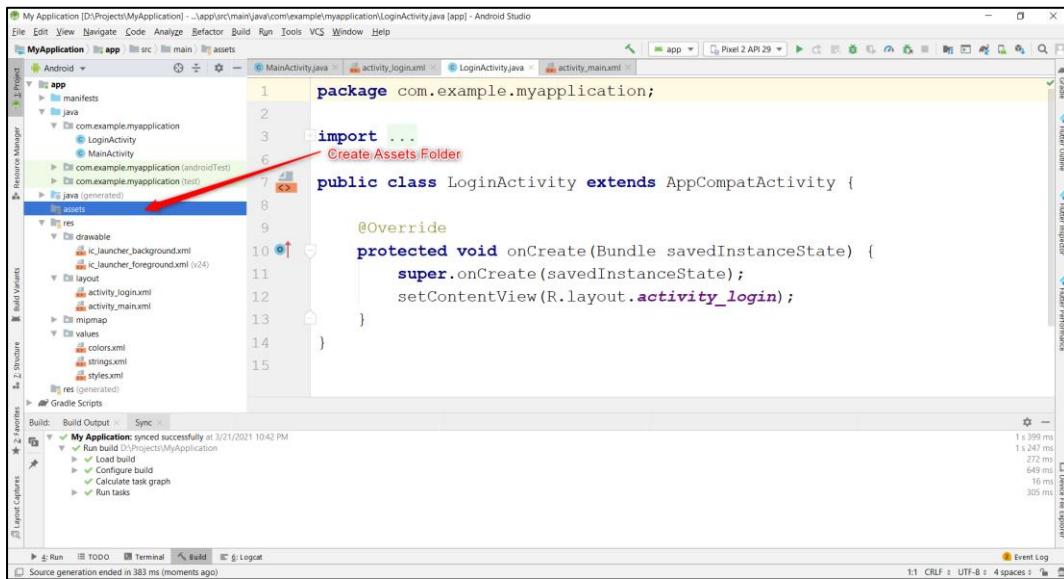


1.8 Creating File in assets Folder:

Right Click on assets folder → New → File

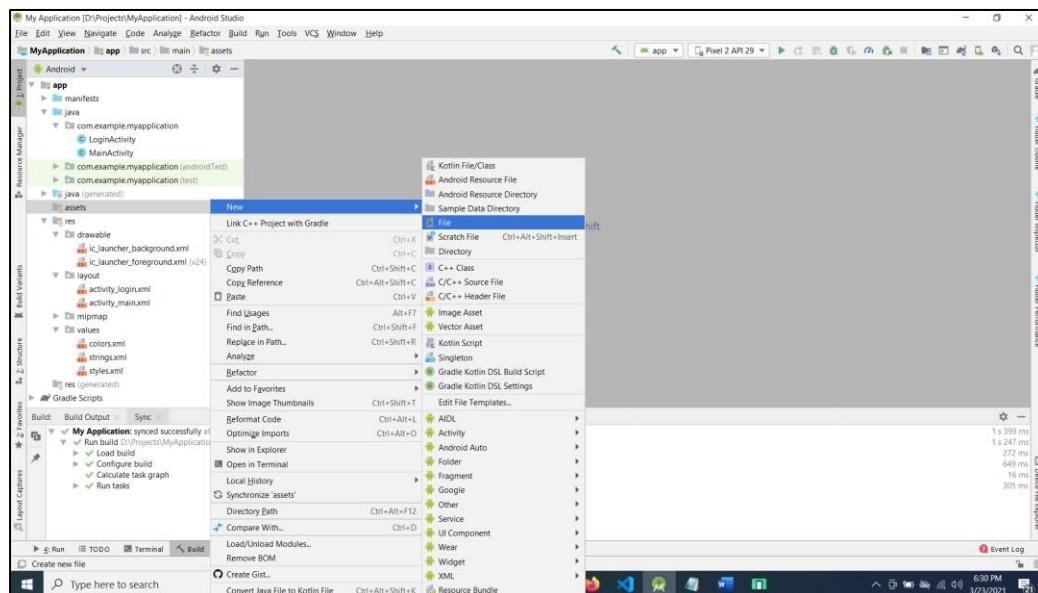


Enter filename with extension (Eg: abc.xml)

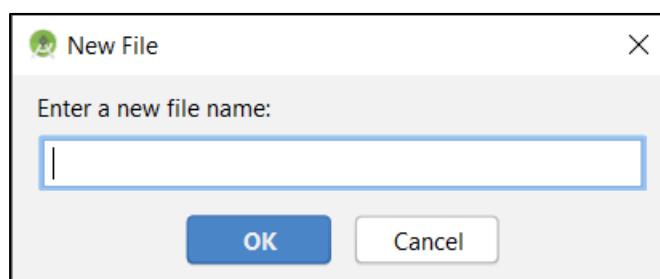

Programs PART A

Program 1

Create an application to design a Visiting Card. The Visiting card should have a company logo at the top right corner. The company name should be displayed in Capital letters, aligned to the center. Information like the name of the employee, job title, phone number, address, email, fax and the website address is to be displayed. Insert a horizontal line between the job title and the phone number.

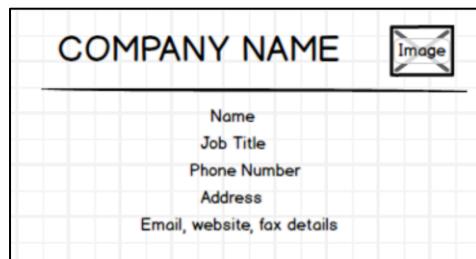

1. Create a New Android Project with Empty Activity.
2. Open activity_main.xml file from res → layout folder, check/add Linear Layout as the root view.
3. Create layout using nested Relative Layout and TextView.
4. Use View background property to draw the line
5. Add Image to drawable folder and reference the image in the layout using @drawable/<image_name>
6. Use android:layout_gravity/android:gravity properties to center the components.

Design



activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"

    android:orientation="vertical"
    android:paddingLeft="20dp"
    android:paddingTop="25dp"
    android:paddingRight="20dp"
    tools:context=".MainActivity">

    <RelativeLayout
        android:layout_width="match_parent"
        android:layout_height="59dp">

        <TextView
            android:id="@+id/textView"
            android:layout_width="wrap_content"
            android:layout_height="44dp"
            android:layout_alignParentStart="true"
            android:layout_alignParentBottom="true"
            android:layout_marginStart="31dp"
            android:layout_marginLeft="20dp"
            android:layout_marginBottom="10dp"
            android:gravity="center"
            android:text="GLOBAL TECHNOLOGY LTD"
            android:textColor="#E61717"
            android:textSize="20sp" />

        <ImageView
            android:id="@+id/imageView4"
            android:layout_width="48dp"
            android:layout_height="match_parent"
            android:layout_alignParentBottom="true"
            android:layout_marginLeft="11dp"
            android:layout_marginBottom="0dp"
            android:layout_toRightOf="@+id/textView"
            app:srcCompat="@drawable/gat_logo" />

    </RelativeLayout>

    <View
        android:layout_width="match_parent"
        android:layout_height="2dp"
        android:background="#000000"
    />

    <TextView
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="Amith"
        android:textSize="16dp"
```


```
        android:layout_marginBottom="10dp"
        android:layout_marginTop="10dp"
        android:textColor="#000000"
        android:gravity="center"
    />

    <TextView
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="software developer"
        android:textSize="16dp"
        android:layout_marginBottom="10dp"
        android:layout_marginTop="10dp"
        android:textColor="#000000"
        android:gravity="center"
    />
    <View
        android:layout_width="match_parent"
        android:layout_height="2dp"
        android:background="#000000"
    />
    <TextView
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="+91-91082-75635"
        android:textSize="16dp"
        android:layout_marginBottom="10dp"
        android:layout_marginTop="10dp"
        android:textColor="#000000"
        android:gravity="center"
    />

    <TextView
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="Bangalore"
        android:textSize="16dp"
        android:layout_marginBottom="10dp"
        android:layout_marginTop="10dp"
        android:textColor="#000000"
        android:gravity="center"
    />


    <TextView
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="Email:info@gat.ac.in, Website:https://gat.ac.in/, Fax:+91-80-28603158"
        android:textSize="16dp"
        android:layout_marginBottom="10dp"
        android:layout_marginTop="10dp"
        android:textColor="#000000"
        android:gravity="center"
    />
</LinearLayout>
```

Sample Output

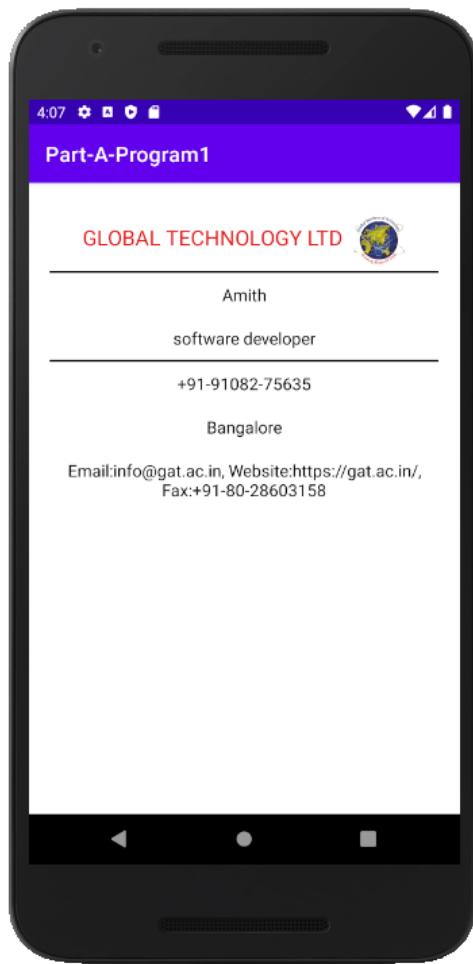


Program 2

Develop an Android application using controls like Button, TextView, EditText for designing a Calculator having basic functionality like Addition, Subtraction, Multiplication, and Division.

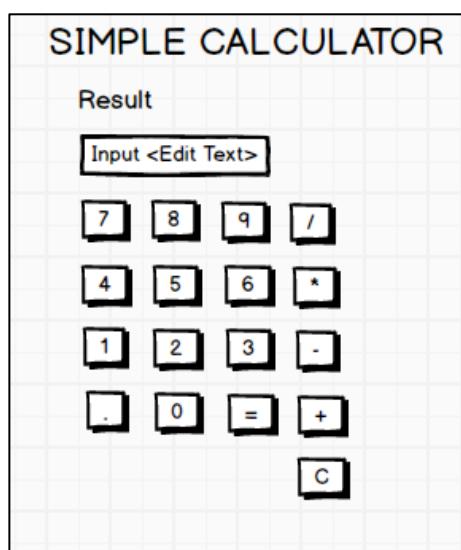

1. Create a New Android Project with Empty Activity.
2. Open activity_main.xml file from res → layout folder, check/add Constraint Layout as the root view.
3. Create Layout using Drag and Drop framework.
4. Open MainActivity.java file, Override onCreate() method and bring activity_main.xml file on screen using setContentView() and bring the view references using findViewById() method.
5. Add Listeners to Button Click Event:
6. Create a class which implements OnClickListener interface.
7. Override onClick() method of OnClickListener Interface.
8. Register the button for click event by calling setOnClickListener() method of View class and pass the object of the class that implemented OnClickListener Interface.
9. Create a logic to Add/Subtract/Multiply/Divide to perform arithmetic operation on 2 operands (Eg: 10+20), If more than 2 operands or wrong input, display invalid input messages.

Design

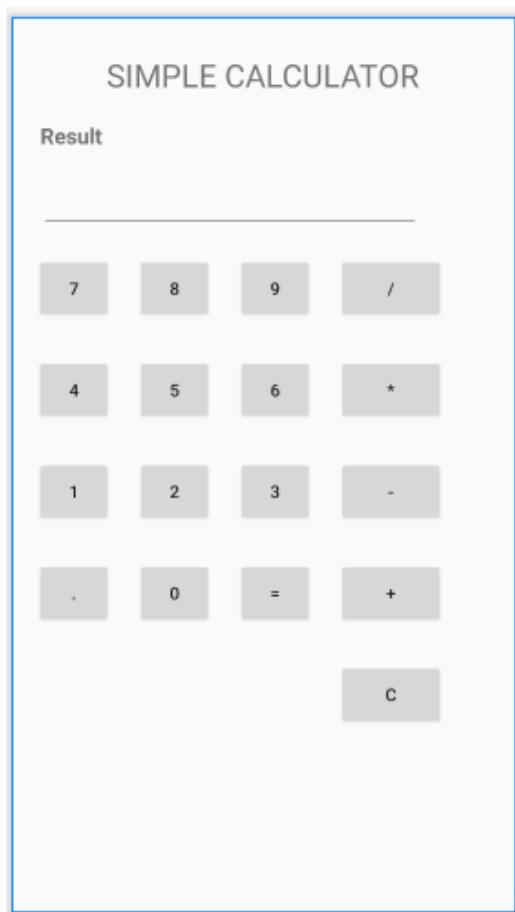

activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MainActivity">

    <Button
        android:id="@+id/button_clear"
        android:layout_width="87dp"
        android:layout_height="53dp"
        android:layout_marginTop="30dp"
        android:text="C"
        app:layout_constraintStart_toStartOf="@+id/button_add"
        app:layout_constraintTop_toBottomOf="@+id/button_add" />

    <Button
        android:id="@+id/button_sub"
        android:layout_width="87dp"
        android:layout_height="53dp"
        android:layout_marginStart="20dp"
        android:layout_marginTop="30dp"
        android:text="-"
        app:layout_constraintStart_toEndOf="@+id/button_three"
        app:layout_constraintTop_toBottomOf="@+id/button_mul" />

    <Button
        android:id="@+id/button_add"
        android:layout_width="87dp"
        android:layout_height="53dp"
        android:layout_marginStart="20dp"
        android:layout_marginTop="30dp"
        android:text="+"
        app:layout_constraintStart_toEndOf="@+id/button_equal"
        app:layout_constraintTop_toBottomOf="@+id/button_sub" />

    <Button
        android:id="@+id/button_mul"
        android:layout_width="87dp"
        android:layout_height="53dp"
        android:layout_marginStart="20dp"
        android:layout_marginTop="30dp"
        android:text "*"
        app:layout_constraintStart_toEndOf="@+id/button_six"
        app:layout_constraintTop_toBottomOf="@+id/button_div" />
```

```
<Button  
    android:id="@+id/button_equal"  
    android:layout_width="62dp"  
    android:layout_height="53dp"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="30dp"  
    android:text="="  
    app:layout_constraintStart_toEndOf="@+id/button_zero"  
    app:layout_constraintTop_toBottomOf="@+id/button_three" />  
  
<Button  
    android:id="@+id/button_zero"  
    android:layout_width="62dp"  
    android:layout_height="53dp"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="30dp"  
    android:text="0"  
    app:layout_constraintStart_toEndOf="@+id/button_dot"  
    app:layout_constraintTop_toBottomOf="@+id/button_two" />  
  
<Button  
    android:id="@+id/button_dot"  
    android:layout_width="62dp"  
    android:layout_height="53dp"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="30dp"  
    android:text=". "  
    app:layout_constraintStart_toStartOf="parent"  
    app:layout_constraintTop_toBottomOf="@+id/button_one" />  
  
<Button  
    android:id="@+id/button_three"  
    android:layout_width="62dp"  
    android:layout_height="53dp"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="30dp"  
    android:text="3"  
    app:layout_constraintStart_toEndOf="@+id/button_two"  
    app:layout_constraintTop_toBottomOf="@+id/button_six" />  
  
<Button  
    android:id="@+id/button_two"  
    android:layout_width="62dp"  
    android:layout_height="53dp"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="30dp"  
    android:text="2"  
    app:layout_constraintStart_toEndOf="@+id/button_one"  
    app:layout_constraintTop_toBottomOf="@+id/button_five" />
```

```
<Button  
    android:id="@+id/button_one"  
    android:layout_width="62dp"  
    android:layout_height="53dp"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="30dp"  
    android:text="1"  
    app:layout_constraintStart_toStartOf="parent"  
    app:layout_constraintTop_toBottomOf="@+id/button_four" />  
  
<Button  
    android:id="@+id/button_six"  
    android:layout_width="62dp"  
    android:layout_height="53dp"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="30dp"  
    android:text="6"  
    app:layout_constraintStart_toEndOf="@+id/button_five"  
    app:layout_constraintTop_toBottomOf="@+id/button_nine" />  
  
<Button  
    android:id="@+id/button_seven"  
    android:layout_width="62dp"  
    android:layout_height="53dp"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="20dp"  
    android:text="7"  
    app:layout_constraintStart_toStartOf="parent"  
    app:layout_constraintTop_toBottomOf="@+id/txt_result" />  
  
<Button  
    android:id="@+id/button_eight"  
    android:layout_width="62dp"  
    android:layout_height="53dp"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="20dp"  
    android:text="8"  
    app:layout_constraintStart_toEndOf="@+id/button_seven"  
    app:layout_constraintTop_toBottomOf="@+id/txt_result" />  
  
<Button  
    android:id="@+id/button_nine"  
    android:layout_width="62dp"  
    android:layout_height="53dp"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="20dp"  
    android:text="9"  
    app:layout_constraintStart_toEndOf="@+id/button_eight"  
    app:layout_constraintTop_toBottomOf="@+id/txt_result" />
```

```
<Button  
    android:id="@+id/button_four"  
    android:layout_width="62dp"  
    android:layout_height="53dp"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="30dp"  
    android:text="4"  
    app:layout_constraintStart_toStartOf="parent"  
    app:layout_constraintTop_toBottomOf="@+id/button_seven" />  
  
<TextView  
    android:id="@+id/textView"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:layout_marginTop="30dp"  
    android:text="SIMPLE CALCULATOR"  
    android:textSize="26dp"  
    app:layout_constraintEnd_toEndOf="parent"  
    app:layout_constraintStart_toStartOf="parent"  
    app:layout_constraintTop_toTopOf="parent" />  
  
<TextView  
    android:id="@+id/textView2"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="20dp"  
    android:text="Result"  
    android:textSize="18dp"  
    android:textStyle="bold"  
    app:layout_constraintEnd_toStartOf="@+id/textView"  
    app:layout_constraintStart_toStartOf="parent"  
    app:layout_constraintTop_toBottomOf="@+id/textView" />  
  
<EditText  
    android:id="@+id/txt_result"  
    android:layout_width="310dp"  
    android:layout_height="46dp"  
    android:layout_marginTop="20dp"  
    android:ems="10"  
    android:inputType="textPersonName"  
    app:layout_constraintStart_toStartOf="@+id/textView2"  
    app:layout_constraintTop_toBottomOf="@+id/textView2" />  
  
<Button  
    android:id="@+id/button_div"  
    android:layout_width="87dp"  
    android:layout_height="53dp"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="20dp"
```

```
        android:text="/"  
        app:layout_constraintStart_toEndOf="@+id/button_nine"  
        app:layout_constraintTop_toBottomOf="@+id/txt_result" />  
  
<Button  
    android:id="@+id/button_five"  
    android:layout_width="62dp"  
    android:layout_height="53dp"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="30dp"  
    android:text="5"  
    app:layout_constraintStart_toEndOf="@+id/button_four"  
    app:layout_constraintTop_toBottomOf="@+id/button_eight" />  
</androidx.constraintlayout.widget.ConstraintLayout>
```

MainActivity.java

```
package com.example.partaprogram2;  
  
import androidx.appcompat.app.AppCompatActivity;  
import android.os.Bundle;  
import android.view.View;  
import android.widget.Button;  
import android.widget.EditText;  
import android.widget.Toast;  
  
import java.util.regex.Pattern;  
  
public class MainActivity extends AppCompatActivity implements View.OnClickListener {  
    Button btnOne, btnTwo, btnThree, btnFour, btnFive, btnSix;  
    Button btnSeven, btnEight, btnNine, btnZero;  
    Button btnAdd,btnSub,btnMul,btnDiv;  
    Button btnClear,btnEqual,btnDot;  
  
    EditText txtResult;  
  
    @Override  
    protected void onCreate(Bundle savedInstanceState) {  
        super.onCreate(savedInstanceState);  
        setContentView(R.layout.activity_main);  
  
        btnOne=(Button)findViewById(R.id.button_one);  
        btnOne.setOnClickListener(this);  
  
        btnTwo=(Button)findViewById(R.id.button_two);  
        btnTwo.setOnClickListener(this);  
  
        btnThree=(Button)findViewById(R.id.button_three);  
        btnThree.setOnClickListener(this);
```

```
btnFour=(Button)findViewById(R.id.button_four);
btnFour.setOnClickListener(this);

btnFive=(Button)findViewById(R.id.button_five);
btnFive.setOnClickListener(this);

btnSix=(Button)findViewById(R.id.button_six);
btnSix.setOnClickListener(this);

btnSeven=(Button)findViewById(R.id.button_seven);
btnSeven.setOnClickListener(this);

btnEight=(Button)findViewById(R.id.button_eight);
btnEight.setOnClickListener(this);

btnNine=(Button)findViewById(R.id.button_nine);
btnNine.setOnClickListener(this);

btnZero=(Button)findViewById(R.id.button_zero);
btnZero.setOnClickListener(this);

btnAdd=(Button)findViewById(R.id.button_add);
btnAdd.setOnClickListener(this);

btnSub=(Button)findViewById(R.id.button_sub);
btnSub.setOnClickListener(this);

btnMul=(Button)findViewById(R.id.button_mul);
btnMul.setOnClickListener(this);

btnDiv=(Button)findViewById(R.id.button_div);
btnDiv.setOnClickListener(this);

btnClear=(Button)findViewById(R.id.button_clear);
btnClear.setOnClickListener(this);

btnEqual=(Button)findViewById(R.id.button_equal);
btnEqual.setOnClickListener(this);

btnDot=(Button)findViewById(R.id.button_dot);
btnDot.setOnClickListener(this);

txtResult=(EditText)findViewById(R.id.txt_result);
txtResult.setText("");
}
```

```
public void onClick(View v)
{
    if(v.equals(btnOne))
        txtResult.append("1");
    if(v.equals(btnTwo))
        txtResult.append("2");
    if(v.equals(btnThree))
        txtResult.append("3");
    if(v.equals(btnFour))
        txtResult.append("4");
    if(v.equals(btnFive))
        txtResult.append("5");
    if(v.equals(btnSix))
        txtResult.append("6");
    if(v.equals(btnSeven))
        txtResult.append("7");
    if(v.equals(btnEight))
        txtResult.append("8");
    if(v.equals(btnNine))
        txtResult.append("9");
    if(v.equals(btnZero))
        txtResult.append("0");
    if(v.equals(btnDot))
        txtResult.append(".");
    if(v.equals(btnClear))
        txtResult.setText("");
}

if(v.equals(btnEqual))
{
    try {

        String data = txtResult.getText().toString();
        if (data.contains("/")) {
            String[] operands = data.split("/");
            if(operands.length==2) {
                double operand1 = Double.parseDouble(operands[0]);
                double operand2 = Double.parseDouble(operands[1]);
                double result = operand1 / operand2;
                txtResult.setText(String.valueOf(result));
            }
        }
        else
        {
            Toast.makeText(getApplicationContext(),"Invalid Input",
            Toast.LENGTH_LONG).show();
        }

    }
    else if (data.contains("*")) {
        String[] operands = data.split(Pattern.quote("*"));
        if(operands.length==2) {
            double operand1 = Double.parseDouble(operands[0]);
            double operand2 = Double.parseDouble(operands[1]);
        }
    }
}
```

```
double result = operand1 * operand2;
txtResult.setText(String.valueOf(result));
}
else
{
Toast.makeText(getApplicationContext(),"Invalid Input",
Toast.LENGTH_LONG).show();
}

}
else if (data.contains("+")) {
String[] operands = data.split(Pattern.quote("+"));
if(operands.length==2) {
double operand1 = Double.parseDouble(operands[0]);
double operand2 = Double.parseDouble(operands[1]);
double result = operand1 + operand2;
txtResult.setText(String.valueOf(result));
}
else
{
Toast.makeText(getApplicationContext(),"Invalid Input",
Toast.LENGTH_LONG).show();
}
}


else if (data.contains("-")) {
String[] operands = data.split("-");
if(operands.length==2) {
double operand1 = Double.parseDouble(operands[0]);
double operand2 = Double.parseDouble(operands[1]);
double result = operand1 - operand2;
txtResult.setText(String.valueOf(result));
}
else
{
Toast.makeText(getApplicationContext(),"Invalid Input",
Toast.LENGTH_LONG).show();
}
}

}

catch(Exception e) {
Toast.makeText(getApplicationContext(),"Invalid Input",
Toast.LENGTH_LONG).show();
}
}
```

```
if(v.equals(btnAdd))
txtResult.append("+");
if(v.equals(btnSub))
txtResult.append("-");
if(v.equals(btnMul))
txtResult.append("*");
if(v.equals(btnDiv))
txtResult.append("/");
}
}
```

Sample Output

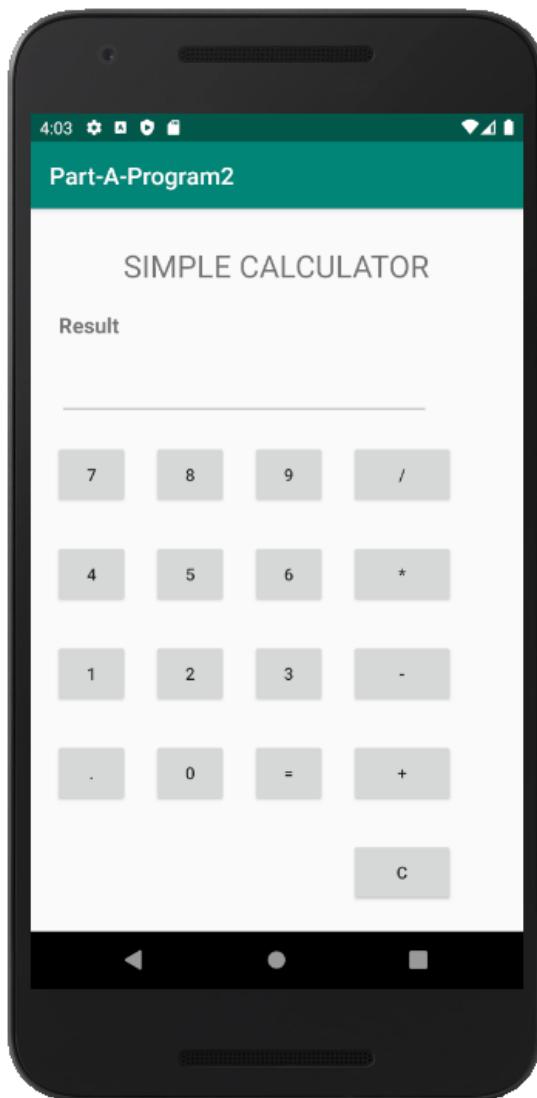


Program 3

Create a SIGN Up activity with Username and Password. Validation of password should happen based on the following rules:


- Password should contain uppercase and lowercase letters.
- Password should contain letters and numbers.
- Password should contain special characters.
- Minimum length of the password (the default value is 8).

On successful **SIGN UP** proceed to the next Login activity. Here the user should **SIGN IN** using the Username and Password created during signup activity. If the Username and Password are matched then navigate to the next activity which displays a message saying “Successful Login” or else display a toast message saying “Login Failed”. The user is given only two attempts and after that display a toast message saying “Failed Login Attempts” and disable the SIGN IN button. Use Bundle to transfer information from one activity to another.

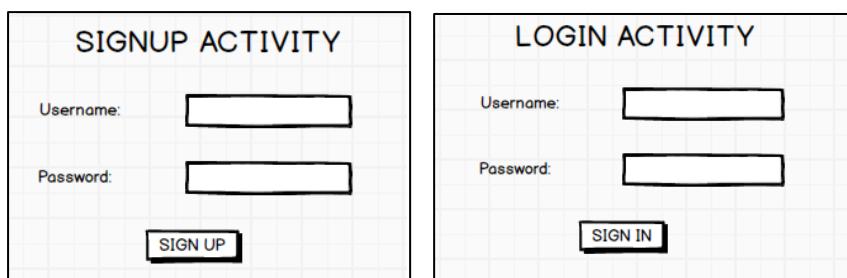

1. Create a New Android Project with Empty Activity.
2. Open activity_main.xml file from res → layout folder, check/add Constraint Layout as the root view.
3. Create Signup Layout using Drag and Drop framework design the layout.
4. Create One more Empty Activity LoginActivity using Android Studio Create Activity Flow (Refer Android Studio Tutorial)
5. Open activity_login.xml file from res → layout folder, check/add Constraint Layout as the root view.
6. Create Login Layout using Drag and Drop framework.
7. Add Listeners to Button Click Event:
 - Create a class which implements OnClickListener interface.
 - Override onClick() method of OnClickListener Interface.
 - Register the button for click event by calling setOnClickListener() method of View class and pass the object of the class that implemented OnClickListener Interface.
8. Use Regular Expression "`^(?=.*[A-Z])(?=.*[a-z])(?=.*\d)(?=.*[@$!])[A-Za-z\d@$!]{8,}$`" to validate the password.

Design

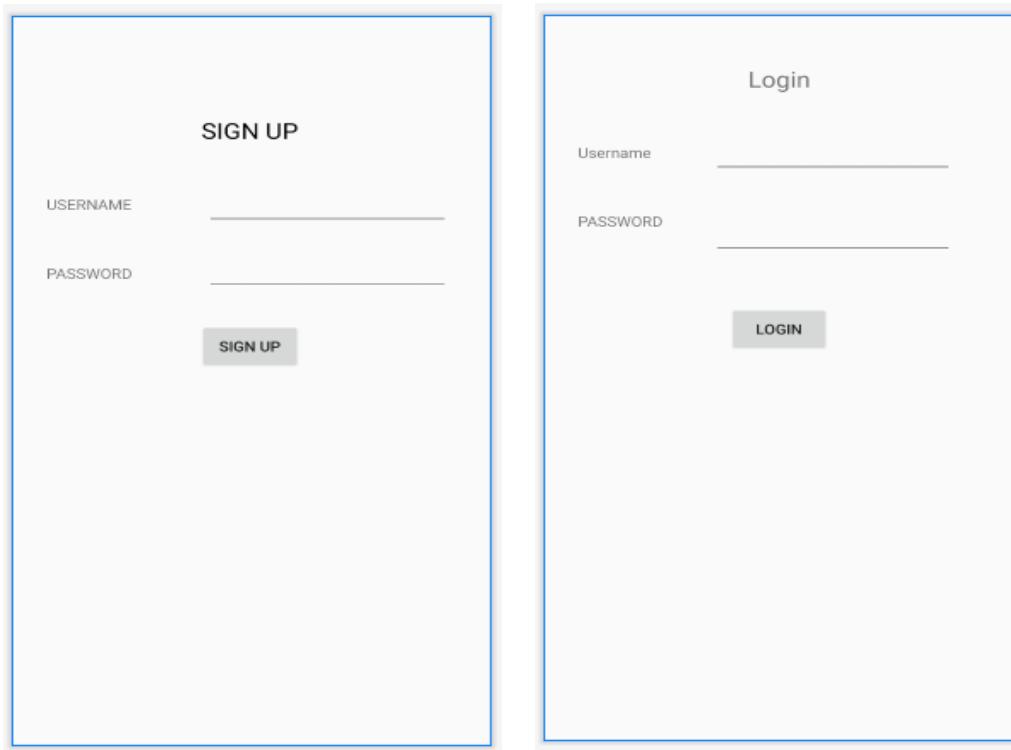

Activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MainActivity">

    <TextView
        android:id="@+id/textView2"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="100dp"
        android:text="SIGN UP"
        android:textColor="@android:color/background_dark"
        android:textSize="22dp"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toTopOf="parent" />

    <TextView
        android:id="@+id/textView3"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
```

```
        android:layout_marginStart="30dp"
        android:layout_marginTop="50dp"
        android:text="USERNAME"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/textView2" />

    <TextView
        android:id="@+id/textView4"
        android:layout_width="82dp"
        android:layout_height="34dp"
        android:layout_marginTop="50dp"
        android:text="PASSWORD"
        app:layout_constraintStart_toStartOf="@+id/textView3"
        app:layout_constraintTop_toBottomOf="@+id/textView3" />

    <EditText
        android:id="@+id/txt_username"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginStart="40dp"
        android:layout_marginEnd="10dp"
        android:ems="10"
        android:inputType="textPersonName"
        app:layout_constraintBottom_toBottomOf="@+id/textView3"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toEndOf="@+id/textView3"
        app:layout_constraintTop_toTopOf="@+id/textView3" />

    <EditText
        android:id="@+id/txt_password"
        android:layout_width="0dp"
        android:layout_height="40dp"
        android:layout_marginTop="26dp"
        android:ems="10"
        android:inputType="textPassword"
        app:layout_constraintEnd_toEndOf="@+id/txt_username"
        app:layout_constraintStart_toStartOf="@+id/txt_username"
        app:layout_constraintTop_toBottomOf="@+id/txt_username" />

    <Button
        android:id="@+id/btn_signup"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="30dp"
        android:text="Sign Up"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/txt_password" />
</androidx.constraintlayout.widget.ConstraintLayout>
```

Activity_login.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".LoginActivity">

    <TextView
        android:id="@+id/textView7"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="50dp"
        android:text="Login"
        android:textSize="22dp"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toTopOf="parent" />

    <TextView
        android:id="@+id/textView9"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginStart="30dp"
        android:layout_marginTop="50dp"
        android:text="Username"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/textView7" />

    <EditText
        android:id="@+id/txt_login_username"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginStart="20dp"
        android:layout_marginEnd="20dp"
        android:ems="10"
        android:inputType="textPersonName"
        app:layout_constraintBottom_toBottomOf="@+id/textView9"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toEndOf="@+id/textView9"
        app:layout_constraintTop_toTopOf="@+id/textView9" />

    <TextView
        android:id="@+id/textView10"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginStart="30dp"
        android:layout_marginTop="50dp"
```

```

    android:text="PASSWORD"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toBottomOf="@+id/textView9" />

    <EditText
        android:id="@+id/txt_login_password"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:ems="10"
        android:inputType="textPassword"
        app:layout_constraintEnd_toEndOf="@+id/txt_login_username"
        app:layout_constraintStart_toStartOf="@+id/txt_login_username"
        app:layout_constraintTop_toTopOf="@+id/textView10" />

    <Button
        android:id="@+id	btn_login_signin"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="50dp"
        android:text="Login"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/txt_login_password" />
</androidx.constraintlayout.widget.ConstraintLayout>

```

MainActivity.java

```

package com.example.parta.program3;

import androidx.appcompat.app.AppCompatActivity;

import android.content.Intent;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;

import java.util.regex.Matcher;
import java.util.regex.Pattern;

public class MainActivity extends AppCompatActivity implements View.OnClickListener {

    EditText txtUsername;
    EditText txtPassword;

    Button btnSignup;

    String regularExpression="^(?=.*[A-Z])(?=.*[a-z])(?=.*\\d)(?=.*[$!])[A-Za-z\\d$!]{8,}$";

```

```
@Override
protected void onCreate(Bundle savedInstanceState) {
super.onCreate(savedInstanceState);
setContentView(R.layout.activity_main);
txtUsername=(EditText)findViewById(R.id.txt_username);
txtPassword=(EditText)findViewById(R.id.txt_password);

btnSignup=(Button)findViewById(R.id.btn_signup);
btnSignup.setOnClickListener(this);

}

public void onClick(View v)
{
    String username=txtUsername.getText().toString();
    String password=txtPassword.getText().toString();

    if(validatePassword(password)) {
        Bundle bundle = new Bundle();
        bundle.putString("user", username);
        bundle.putString("Lab@2018", password);

        Intent it = new Intent(this, LoginActivity.class);
        it.putExtra("data", bundle);

        startActivity(it);
    }
else
{
    Toast.makeText(getApplicationContext(), "Invalid Password",
    Toast.LENGTH_LONG).show();
}
}

public boolean validatePassword(String password)
{
    Pattern pattern= Pattern.compile(regularExpression);
    Matcher matcher=pattern.matcher(password);
return matcher.matches();

}
```

LoginActivity.java

```
package com.example.parta.program3;

import androidx.appcompat.app.AppCompatActivity;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;

public class LoginActivity extends AppCompatActivity implements View.OnClickListener {

    EditText txtLoginUsername;
    EditText txtLoginPassword;
    Button btnLogin;

    String user, pass;

    int count=0;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_login);

        txtLoginUsername=(EditText)
        findViewById(R.id.txt_login_username);
        txtLoginPassword=(EditText)
        findViewById(R.id.txt_login_password);

        btnLogin=(Button)findViewById(R.id.btn_login_signin);
        btnLogin.setOnClickListener(this);

        Bundle bundle=getIntent().getBundleExtra("data");
        user=bundle.getString("user");
        pass=bundle.getString("Lab@2018");


    }

    public void onClick(View v)
    {
        String user1=txtLoginUsername.getText().toString();
        String pass1=txtLoginPassword.getText().toString();

        if(user.equals(user1)&&pass.equals(pass1))
        {
            Toast.makeText(this,"Login Successful"
            ,Toast.LENGTH_LONG).show();
        }
        else
    }
}
```


```
{  
    count++;  
    if(count==3)  
    {  
        btnLogin.setEnabled(false);  
        Toast.makeText(this,  
        "Failed Login Attempts"  
,Toast.LENGTH_LONG).show();  
    }  
    else  
    {  
        Toast.makeText(this,"Login Failed "+count  
,Toast.LENGTH_LONG).show();  
    }  
}  
}  
}
```

Sample Output

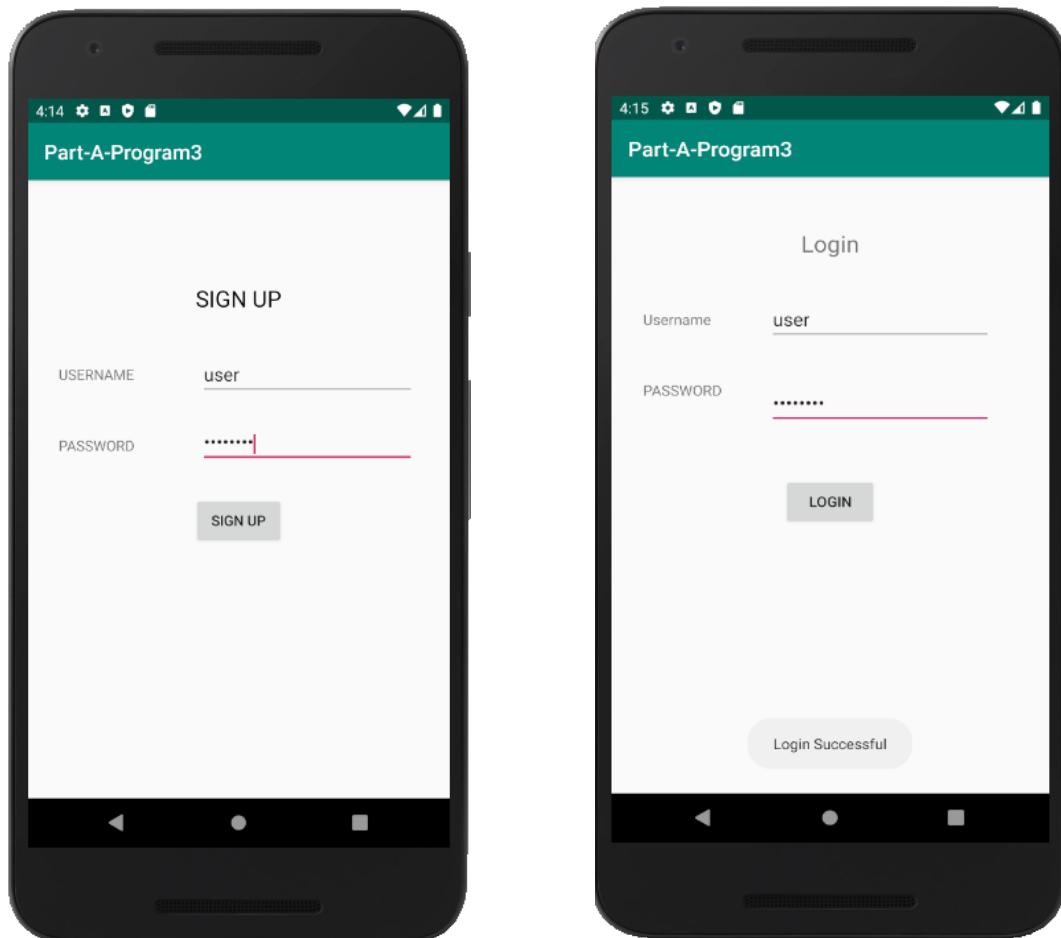

Program 4

Develop an application to set an image as wallpaper. On click of a button, the wallpaper image should start to change randomly every 30 seconds.

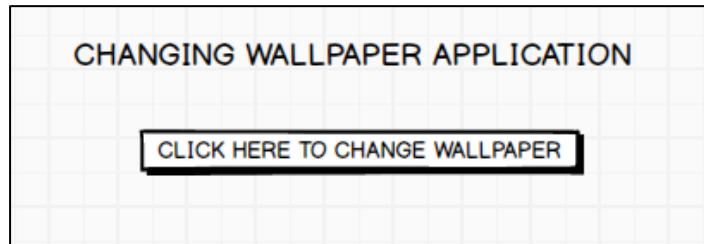

1. Create a New Android Project with Empty Activity.
2. Open activity_main.xml file from res→ layout folder, check/add LinearLayout as the root view.
3. Create the layout
4. Add 3 or More images to drawable folder (res→drawable)
5. Declare uses permission android.permission.SET_WALLPAPER in the AndroidManifest.xml file
6. Schedule Timer task to change the wallpaper on every 30 seconds interval.
7. Initialize and use WallpaperManager.setBitmap() method to change the wallpaper.

activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    android:gravity="center"
    tools:context=".MainActivity">

    <Button
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="Click here to Change Wallpaper"
        android:id="@+id/btn_start_change_wallpaper"/>

</LinearLayout>
```

MainActivity.java

```
package com.example.program4;

import androidx.appcompat.app.AppCompatActivity;

import android.app.WallpaperManager;
import android.graphics.BitmapFactory;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;

import java.util.Timer;
import java.util.TimerTask;

public class MainActivity extends AppCompatActivity implements View.OnClickListener{

    Button btnChangeWallpaper;
    boolean running;
    int[] imagesArray=new int[]{
        R.drawable.img1,
        R.drawable.img2,
        R.drawable.img3,
        R.drawable.img4,
        R.drawable.img5,
        R.drawable.img6,
        R.drawable.img7,
        R.drawable.img8,
        R.drawable.img9,
        R.drawable.img10,
        R.drawable.img11,
        R.drawable.img12
    };

    int i=0;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        btnChangeWallpaper=(Button)
        findViewById(R.id.btn_start_change_wallpaper);
        btnChangeWallpaper.setOnClickListener(this);

    }
}
```

```
public void onClick(View v)
{
    if(!running)
    {
        new Timer().schedule (new MyTimer(),0,3000);
        running=true;
    }
}

class MyTimer extends TimerTask
{
    public void run()
    {
        try
        {
            WallpaperManager wallpaperManager=
            WallpaperManager.getInstance(getApplicationContext());

            if(i==12)
                i=1;

            if(i==11)
                i=2;

            if(i==10)
                i=3;

            if(i==9)
                i=4;

            if(i==8)
                i=5;

            if(i==7)
                i=6;

            if(i==6)
                i=7;

            if(i==5)
                i=8;

            if(i==4)
                i=9;

            if(i==3)
                i=10;
        }
    }
}
```

```
wallpaperManager.setBitmap (BitmapFactory.decodeResource(getResources()
                ,imagesArray[i]));
i++;
}
catch(Exception e)
{
}

}
}

}
```

AndriodManifest.xml

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
package="com.example.program4">


<uses-permission android:name="android.permission.SET_WALLPAPER"/>

<application
    android:allowBackup="true"
    android:icon="@mipmap/ic_launcher"
    android:label="@string/app_name"
    android:roundIcon="@mipmap/ic_launcher_round"
    android:supportsRtl="true"
    android:theme="@style/AppTheme">
    <activity android:name=".MainActivity">
        <intent-filter>
            <action android:name="android.intent.action.MAIN" />

            <category android:name="android.intent.category.LAUNCHER" />
        </intent-filter>
    </activity>
</application>


</manifest>
```

Sample Output

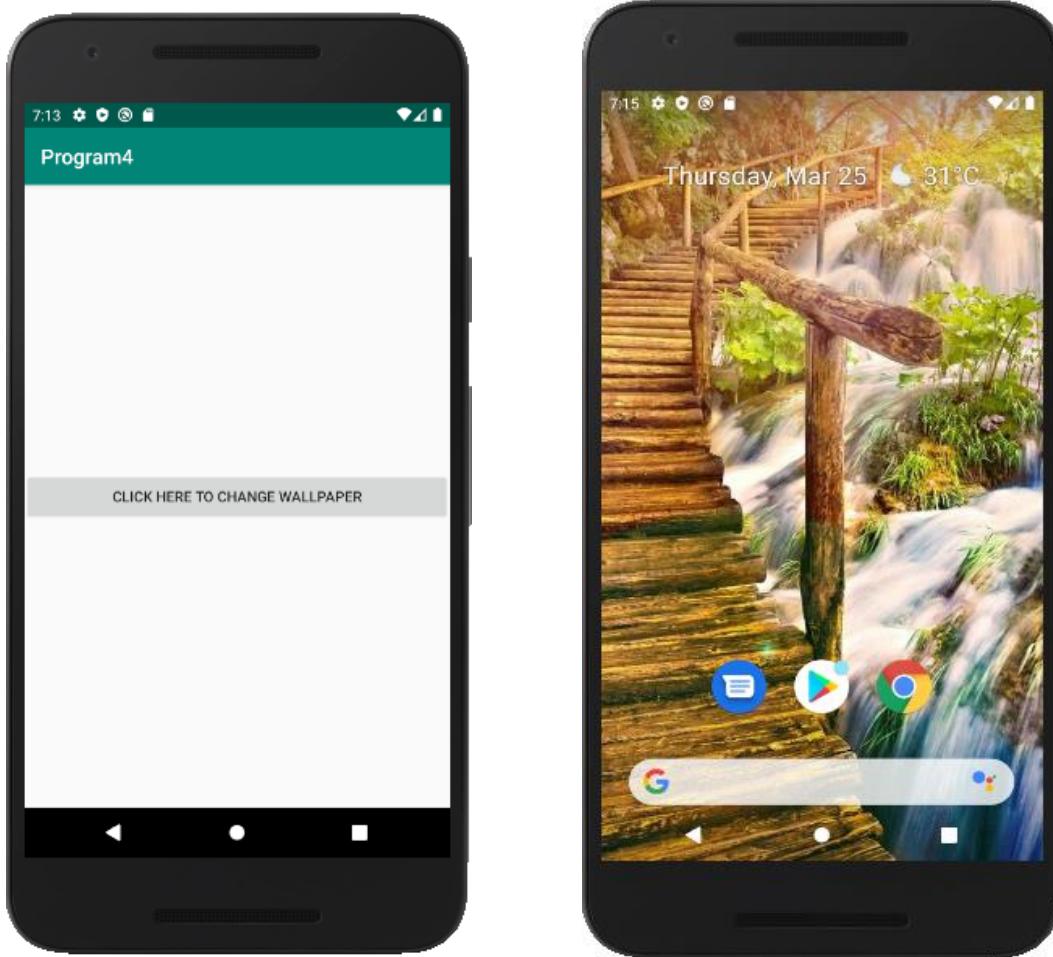


Program 5

Write a program to create an activity with two buttons START and STOP. On Pressing of the START button, the activity must start the counter by displaying the numbers from One and the counter must keep on counting until the STOP button is pressed. Display the counter value in a TextViewcontrol.

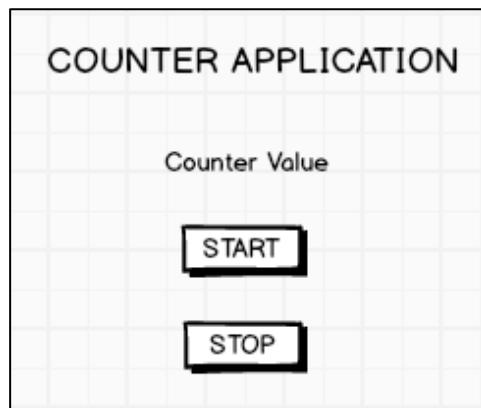

1. Create a New Android Project with Empty Activity.
2. Open activity_main.xml file from res → layout folder, check/add ConstraintLayout as the root view.
3. Create the layout design using Drag and Drop framework.
4. Add Listeners to Button Click Event:
 - Create a class which implements OnClickListener interface.
 - Override onClick() method of OnClickListener Interface.
 - Register the button for click event by calling setOnClickListener() method of View class and pass the object of the class that implemented OnClickListener Interface.
5. Create a Thread to start the counter logic.
6. Steps to Create a Thread
 - Create a class that extends Thread Class.
 - Override run method of Thread Class.
 - Use start() method of thread class to start the thread.
7. Create Handler class to receive message from child thread, Handler executes in Main Thread.
8. Steps to Create Handler
 - Create Object of type Handler.
 - OverridhandleMessage() of handler class.
9. Pass the counter value to be displayed to the handler.
10. Update the UI to display the counter value received from thread.

Design

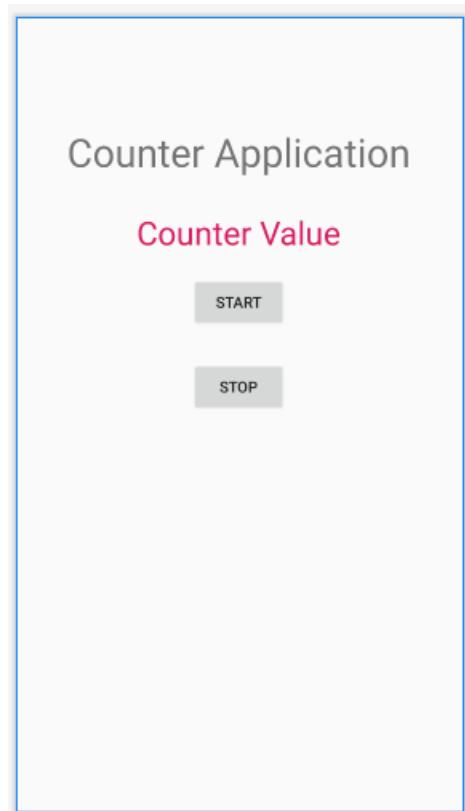

activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:id="@+id/lbl_counter"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MainActivity" >

    <TextView
        android:id="@+id/textView"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="100dp"
        android:text="Counter Application"
        android:textSize="36sp"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toTopOf="parent" />

    <TextView
        android:id="@+id/lbl_text"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="30dp"
        android:text="Counter Value"
        android:textColor="@color/colorAccent"
        android:textSize="30sp"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/textView" />

    <Button
        android:id="@+id/btn_start"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="20dp"
        android:text="Start"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/lbl_text" />

    <Button
        android:id="@+id/btn_stop"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="30dp"
        android:text="Stop"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/btn_start" />
</androidx.constraintlayout.widget.ConstraintLayout>
```

MainActivity.java

```
package com.example.program5;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;
import android.os.Handler;
import android.os.Message;
import android.view.View;
import android.widget.Button;
import android.widget.TextView;

import org.w3c.dom.Text;

public class MainActivity extends AppCompatActivity implements View.OnClickListener {

    TextView lblCounter;
    Button btnStart,btnStop;

    int counter=0;
    boolean running=false;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        lblCounter=(TextView)findViewById(R.id.lbl_text);
        btnStart=(Button)findViewById(R.id.btn_start);
        btnStop=(Button)findViewById(R.id.btn_stop);
        btnStop.setOnClickListener(this);
        btnStart.setOnClickListener(this);
    }


    public void onClick(View v)
    {
        if(v.equals(btnStart))
        {
            counter=0;
            running=true;
            new MyCounter().start();
        }
        else if(v.equals(btnStop))
        {
            running=false;
        }
    }

    Handler handler=new Handler()
    {
        public void handleMessage(Message m)
        {
            lblCounter.setText(String.valueOf(m.what));
        }
    };
}
```

```
class MyCounter extends Thread
{
    public void run()
    {
        while(running)
        {
            counter++;
            handler.sendMessage(counter);


            try {
                Thread.sleep(1000);
            }
            catch(Exception e) { }
        }
    }
}
```

Sample Output

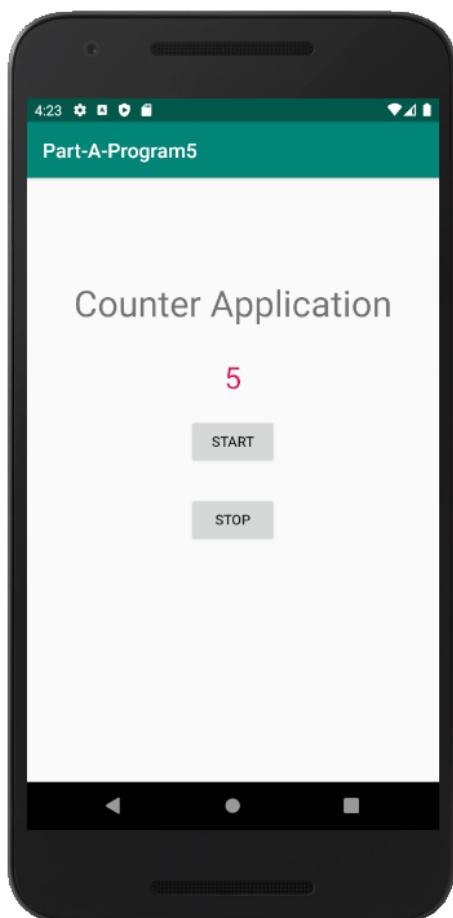

Program 6

Create two files of XML and JSON type with values for City_Name, Latitude, Longitude, Temperature, and Humidity. Develop an application to create an activity with two buttons to parse the XML and JSON files which when clicked should display the data in their respective layouts side by side.

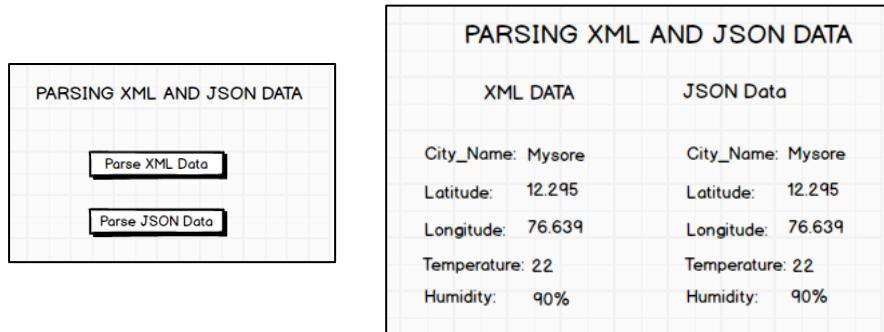

1. Create a New Android Project with Empty Activity.
2. Open activity_main.xml file from res → layout folder, check/add ConstraintLayout as the root view.
3. Create the layout design using Drag and Drop framework.
4. Add Listeners to Button Click Event:
 - Create a class which implements OnClickListener interface.
 - Override onClick() method of OnClickListener Interface.
 - Register the button for click event by calling setOnClickListener() method of View class and pass the object of the class that implemented OnClickListener Interface.
5. Create assets folder (Refer Section Android Studio Tutorial)
6. Create **input.xml** file inside assets folder and paste the below Xml Data


```


<?xml version="1.0" ?>
<records>
<employee>

<city_name>Mysore</city_name>
<Latitude>12.295</Latitude>
<Longitude>76.639</Longitude>
<Temperature>22</Temperature>
<Humidity>90%</Humidity>
</employee>
</records>
```
7. Create **input.json** file inside assets folder and paste the below Json Data


```

{
  "employee": {
    "city_name": "Mysore",
    "Latitude": "12.295",
    "Longitude": "76.639",
    "Temperature": 22,
    "Humidity": "90%"
  }
}
```
8. Read the XML and Json Data in the files and display on screen

Design

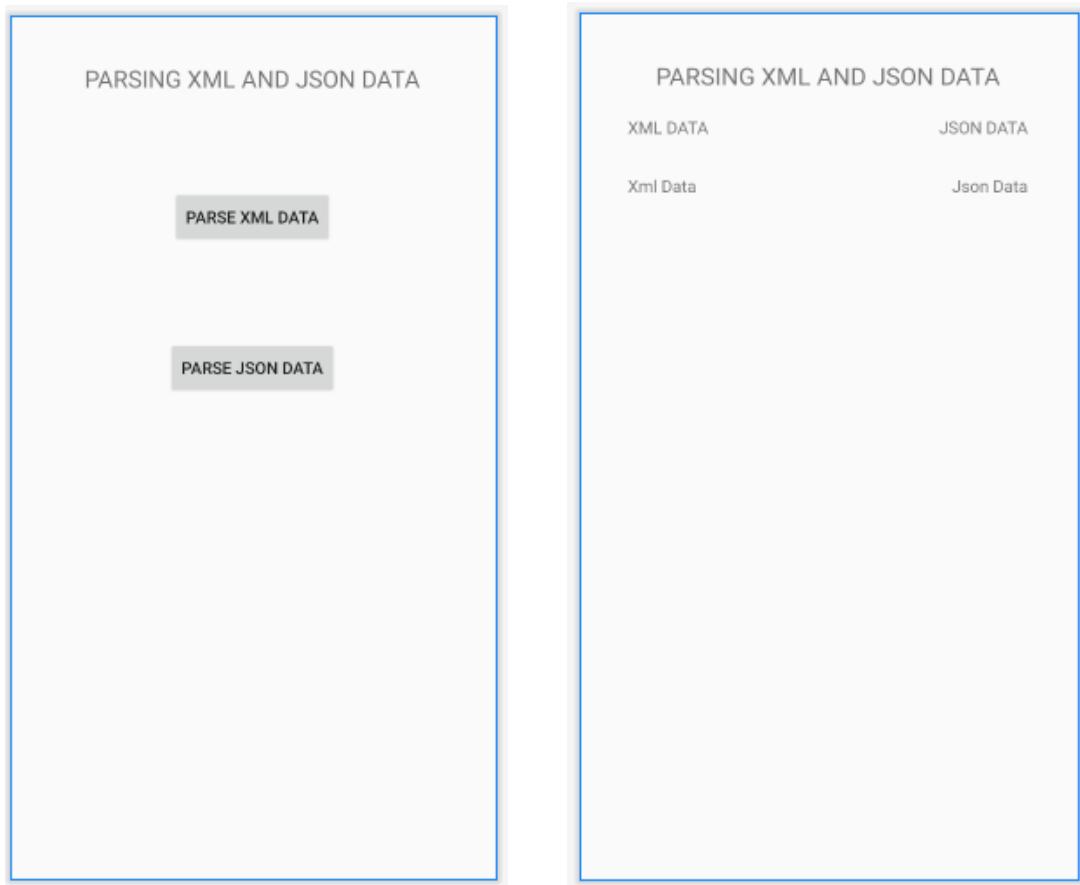

activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MainActivity">

    <Button
        android:id="@+id/btn_parsexml"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="80dp"
        android:text="Parse XML Data"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/textView4" />
```

```
<Button  
    android:id="@+id	btn_parsejson"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:layout_marginTop="80dp"  
    android:text="Parse Json Data"  
    app:layout_constraintEnd_toEndOf="parent"  
    app:layout_constraintStart_toStartOf="parent"  
    app:layout_constraintTop_toBottomOf="@+id/button_parsexml" />  
  
<TextView  
    android:id="@+id/textView4"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:layout_marginTop="40dp"  
    android:text="PARSING XML AND JSON DATA"  
    android:textSize="20dp"  
    app:layout_constraintEnd_toEndOf="parent"  
    app:layout_constraintStart_toStartOf="parent"  
    app:layout_constraintTop_toTopOf="parent" />  
</androidx.constraintlayout.widget.ConstraintLayout>
```

activity_view.xml

```
<?xml version="1.0" encoding="utf-8"?>  
<androidx.constraintlayout.widget.ConstraintLayout xmlns:android="http://schemas.android.com/apk/res/android"  
    xmlns:app="http://schemas.android.com/apk/res-auto"  
    xmlns:tools="http://schemas.android.com/tools"  
    android:layout_width="match_parent"  
    android:layout_height="match_parent"  
    tools:context=".ViewActivity">  
  
<TextView  
    android:id="@+id/lbl_xml_data"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:layout_marginTop="30dp"  
    android:text="Xml Data"  
    app:layout_constraintStart_toStartOf="@+id/textView2"  
    app:layout_constraintTop_toBottomOf="@+id/textView2" />  
  
<TextView  
    android:id="@+id/textView"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:layout_marginTop="40dp"  
    android:text="PARSING XML AND JSON DATA"  
    android:textSize="20dp"  
    app:layout_constraintEnd_toEndOf="parent"  
    app:layout_constraintStart_toStartOf="parent"  
    app:layout_constraintTop_toTopOf="parent" />
```

```

<TextView
    android:id="@+id/textView2"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginStart="40dp"
    android:layout_marginTop="20dp"
    android:text="XML DATA"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toBottomOf="@+id/textView" />

<TextView
    android:id="@+id/textView3"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginTop="20dp"
    android:layout_marginEnd="40dp"
    android:text="JSON DATA"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintTop_toBottomOf="@+id/textView" />

<TextView
    android:id="@+id/lbl_json_data"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginTop="30dp"
    android:text="Json Data"
    app:layout_constraintEnd_toEndOf="@+id/textView3"
    app:layout_constraintTop_toBottomOf="@+id/textView3" />
</androidx.constraintlayout.widget.ConstraintLayout>

```

MainActivity.java

```

package com.example.parta_program6;

import androidx.appcompat.app.AppCompatActivity;

import android.content.Intent;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;

public class MainActivity extends AppCompatActivity implements View.OnClickListener {

    Button btnParseXml,btnParseJson;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        btnParseXml=(Button)findViewById(R.id.btn_parsexml);
        btnParseJson=(Button)findViewById(R.id.btn_parsejson);
        btnParseJson.setOnClickListener(this);
        btnParseXml.setOnClickListener(this);
    }
}

```

```

@Override
public void onClick(View v) {

if(v.equals(btnParseJson))
{
    Intent it=new Intent(this,ViewActivity.class);
    it.putExtra("mode",1);
    startActivity(it);

}
else if(v.equals(btnParseXml))
{
    Intent it=new Intent(this,ViewActivity.class);
    it.putExtra("mode",2);
    startActivity(it);
}
}
}
}

```

ViewActivity.java

```

package com.example.parta_program6;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;
import android.widget.TextView;

import org.json.JSONObject;
import org.w3c.dom.Document;
import org.w3c.dom.Element;
import org.w3c.dom.Node;
import org.w3c.dom.NodeList;

import java.io.InputStream;

import javax.xml.parsers.DocumentBuilder;
import javax.xml.parsers.DocumentBuilderFactory;

public class ViewActivity extends AppCompatActivity {

TextView lblXmlData,lblJsonData;

int mode=0;
@Override
protected void onCreate(Bundle savedInstanceState) {
super.onCreate(savedInstanceState);
setContentView(R.layout.activity_view);
lblXmlData=(TextView)findViewById(R.id.lbl_xml_data);
lblJsonData=(TextView)findViewById(R.id.lbl_json_data);
mode=getIntent().getIntExtra("mode",0);
}
}
}
}

```

```
if(mode==1)
parseJson();

else
parseXmlDocument();

}

public String parseXmlDocument()
{
try {

InputStream is = getAssets().open("input.xml");

DocumentBuilderFactorydbFactory = DocumentBuilderFactory.newInstance();
DocumentBuilderdBuilder = dbFactory.newDocumentBuilder();
Document doc = dBuilder.parse(is);

Element element=doc.getDocumentElement();
element.normalize();

NodeListnList = doc.getElementsByTagName("employee");

for (int i=0; i<nList.getLength(); i++) {

Node node = nList.item(i);
if (node.getNodeType() == Node.ELEMENT_NODE) {
Element element2 = (Element) node;
lblXmlData.setText("City Name : " + getValue("city_name", element2)+"\n");
lblXmlData.append("Latitude : " + getValue("Latitude", element2)+"\n");
lblXmlData.append("Longitude : " + getValue("Longitude", element2)+"\n");
lblXmlData.append("Temperature : " + getValue("Temperature", element2)+"\n");
lblXmlData.append("Humidity : " + getValue("Humidity", element2)+"\n");

}
}
}
catch (Exception e) {e.printStackTrace();}
return null;
}


private static String getValue(String tag, Element element) {
NodeListnodeList = element.getElementsByTagName(tag).item(0).getChildNodes();
Node node = nodeList.item(0);
return node.getNodeValue();
}

public void parseJson()
{
try {
InputStreaminputStream=getAssets().open("input.json");
byte[] data=new byte[inputStream.available()];
InputStream.read(data);
```

```
String readData=new String(data);
JSONObject jsonObject=new JSONObject(readData);
JSONObject jsonObject=jsonObject.getJSONObject("employee");
lblJsonData.setText("City Name:"+jsonObject.getString("city_name")+"\n");
lblJsonData.append("Latitude:"+jsonObject.getString("Latitude")+"\n");
lblJsonData.append("Longitude"+jsonObject.getString("Longitude")+"\n");
lblJsonData.append("Temperature:"+jsonObject.getInt("Temperature")+"\n");
lblJsonData.append("Humidity"+jsonObject.getString("Humidity")+"\n");


}
catch (Exception e) {e.printStackTrace();}
}
```

Sample Output

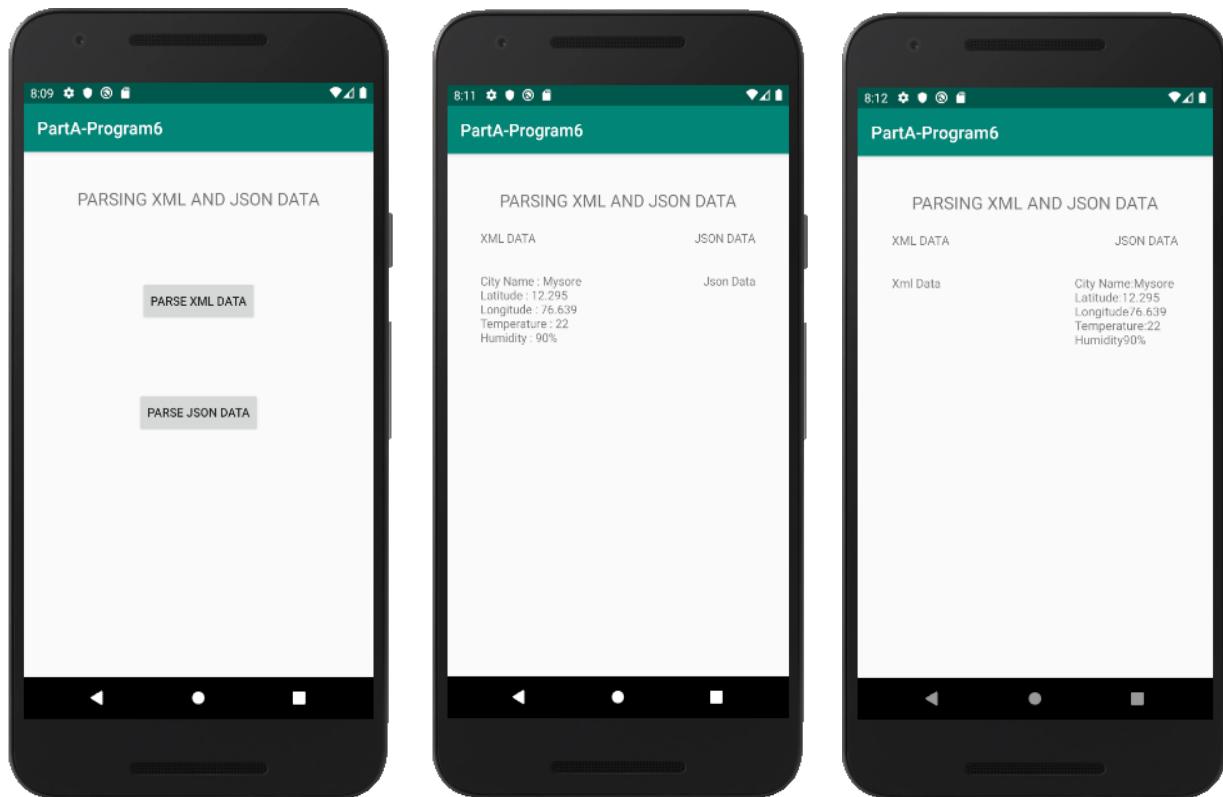


Program 7

Develop a simple application with one EditText so that the user can write some text in it. Create a button called “Convert Text to Speech” that converts the user input text into voice.

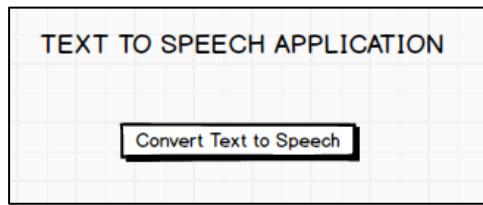

1. Create a New Android Project with Empty Activity.
2. Open activity_main.xml file from res → layout folder, check/add ConstraintLayout as the root view.
3. Create the layout design using Drag and Drop framework.
4. Add Listeners to Button Click Event:
 - Create a class which implements OnClick Listener interface.
 - Override onClick() method of OnClick Listener Interface.
 - Register the button for click event by calling setOn Click Listener() method of View class and pass the object of the class that implemented OnClick Listener Interface.
5. Initialize TextToSpeech Engine and the Language to Speak using setLanguage() method
6. Use Speak() method to speak the text passed to it.

Design

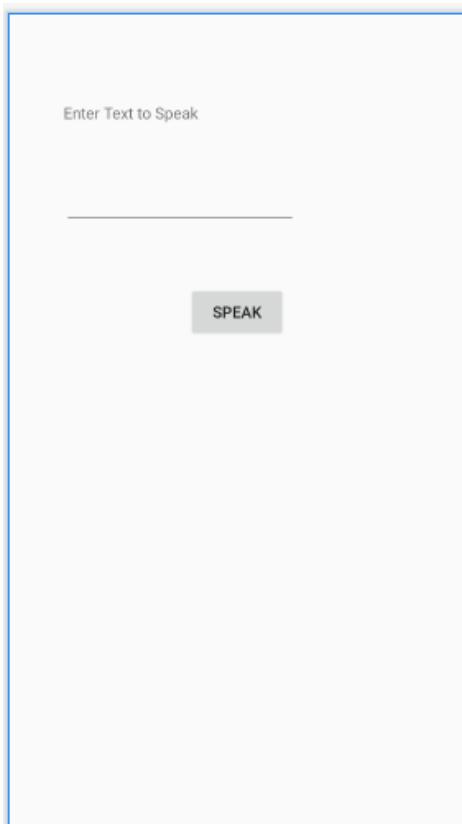

activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:id="@+id/txt_texttospeak"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MainActivity">

    <TextView
        android:id="@+id/textView"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginStart="50dp"
        android:layout_marginTop="80dp"
        android:text="Enter Text to Speak"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toTopOf="parent" />

    <EditText
        android:id="@+id/editText"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="48dp"
        android:ems="10"
        android:inputType="textPersonName"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintHorizontal_bias="0.0"
        app:layout_constraintStart_toStartOf="@+id/textView"
        app:layout_constraintTop_toBottomOf="@+id/textView" />

    <Button
        android:id="@+id/btn_speak"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="52dp"
        android:text="Speak"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/editText" />
</androidx.constraintlayout.widget.ConstraintLayout>
```

MainActivity.java

```
package com.example.parta.parta_program7;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;
import android.speech.tts.TextToSpeech;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;

import java.util.Locale;


public class MainActivity extends AppCompatActivity implements View.OnClickListener {

EditText txtSpeak;
Button btnSpeak;
TextToSpeech textToSpeech;

@Override
protected void onCreate(Bundle savedInstanceState) {
super.onCreate(savedInstanceState);
setContentView(R.layout.activity_main);
txtSpeak=(EditText)findViewById(R.id.editText);
btnSpeak=(Button)findViewById(R.id.btn_speak);
btnSpeak.setOnClickListener(this);
textToSpeech=new TextToSpeech(getApplicationContext(),
new TextToSpeech.OnInitListener() {
@Override
public void onInit(int status) {
if(status!=TextToSpeech.ERROR)
{
Toast.makeText(getApplicationContext(),"Success", Toast.LENGTH_LONG).show();
}
}
});
textToSpeech.setLanguage(Locale.UK);
}


public void onClick(View v)
{
String text=txtSpeak.getText().toString();
textToSpeech.speak(text,TextToSpeech.QUEUE_FLUSH,null);
}
}
```

Sample Output

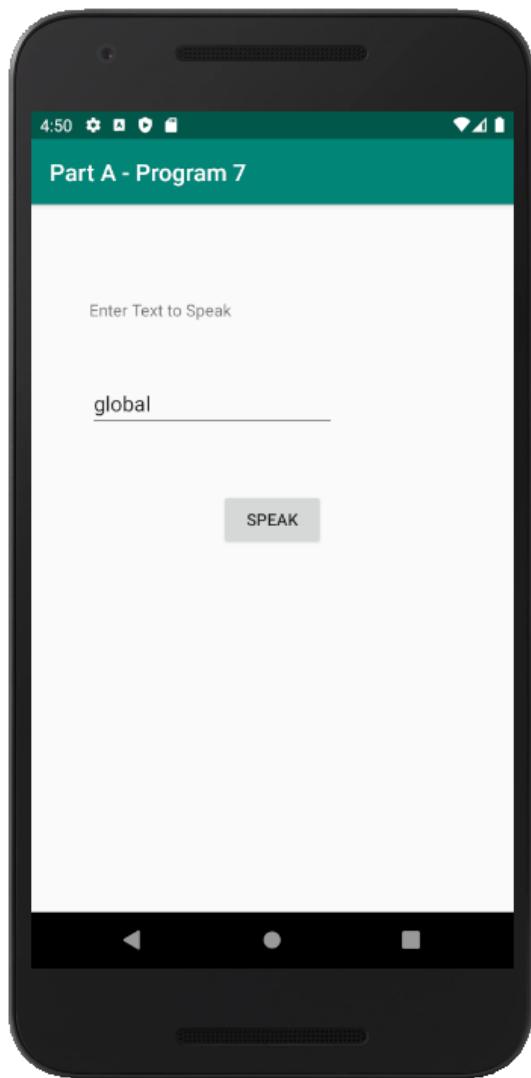


Program 8

Create an activity like a phone dialer with CALL and SAVE buttons. On pressing the CALL button, it must call the phone number and on pressing the SAVE button it must save the number to the phone contacts.

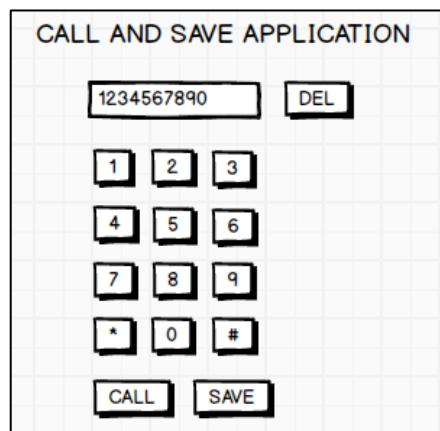

1. Create a New Android Project with Empty Activity.
2. Open activity_main.xml file from res → layout folder, check/add ConstraintLayout as the root view.
3. Create the layout design using Drag and Drop framework.
4. Add Listeners to Button Click Event:
 - Create a class which implements OnClickListener interface.
 - Override onClick() method of OnClickListener Interface.
 - Register the button for click event by calling setOnClickListener() method of View class and pass the object of the class that implemented OnClickListener Interface.
5. Declare uses permission android.permission.CALL_PHONE in the manifest file.
6. Use ACTION_CALL intent name and pass the “tel:<phone-number>” as URI in intent data and start the call activity.
7. Use intent name and pass the “Telephone Number” and “unknown” as name as intent data call Contacts Save Activity.

Design

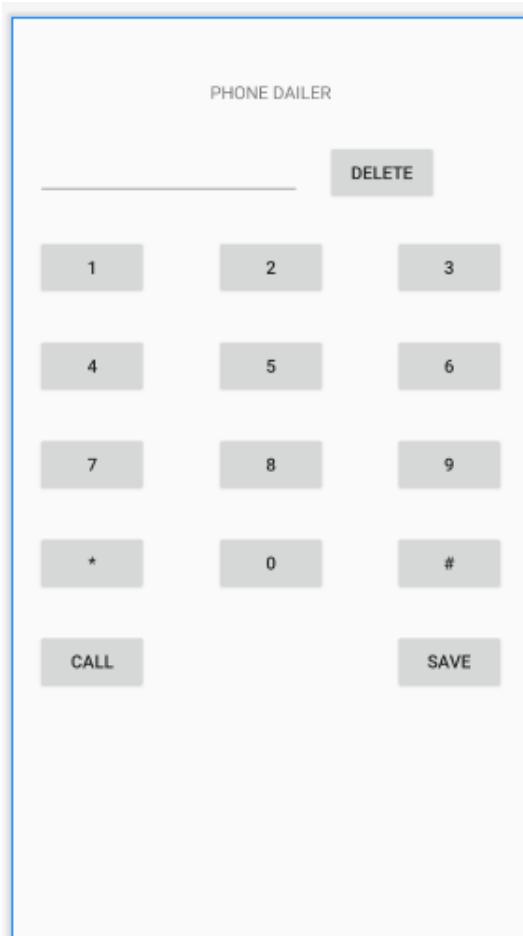

activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MainActivity">

    <TextView
        android:id="@+id/textView"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="50dp"
        android:text="PHONE DAILER"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toTopOf="parent" />

    <EditText
        android:id="@+id/txt_phonenumber"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginStart="20dp"
        android:layout_marginTop="30dp"
        android:ems="10"
        android:inputType="textPersonName"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/textView" />

    <Button
        android:id="@+id/btn_delete"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginStart="20dp"
        android:layout_marginTop="30dp"
        android:text="Delete"
        app:layout_constraintStart_toEndOf="@+id/txt_phonenumber"
        app:layout_constraintTop_toBottomOf="@+id/textView" />

    <Button
        android:id="@+id/btn_one"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginStart="20dp"
        android:layout_marginTop="30dp"
        android:text="1"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/txt_phonenumber" />

    <Button
        android:id="@+id/btn_two"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="30dp"
        android:text="2"
```

```
app:layout_constraintEnd_toStartOf="@+id(btn_three"
app:layout_constraintStart_toEndOf="@+id(btn_one"
app:layout_constraintTop_toBottomOf="@+id(txt_phonenumber" />

<Button
    android:id="@+id	btn_three"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginTop="30dp"
    android:layout_marginEnd="20dp"
    android:text="3"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintTop_toBottomOf="@+id(txt_phonenumber" />

<Button
    android:id="@+id	btn_four"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginStart="20dp"
    android:layout_marginTop="30dp"
    android:text="4"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toBottomOf="@+id(btn_one" />

<Button
    android:id="@+id	btn_five"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginTop="30dp"
    android:text="5"
    app:layout_constraintEnd_toStartOf="@+id(btn_six"
    app:layout_constraintStart_toEndOf="@+id(btn_four"
    app:layout_constraintTop_toBottomOf="@+id(btn_two" />

<Button
    android:id="@+id	btn_six"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginTop="30dp"
    android:layout_marginEnd="20dp"
    android:text="6"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintTop_toBottomOf="@+id(btn_three" />

<Button
    android:id="@+id	btn_seven"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginStart="20dp"
    android:layout_marginTop="30dp"
    android:text="7"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toBottomOf="@+id(btn_four" />

<Button
    android:id="@+id	btn_eight"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginTop="30dp"
```

```
        android:text="8"
        app:layout_constraintEnd_toStartOf="@+id(btn_nine"
        app:layout_constraintStart_toEndOf="@+id(btn_seven"
        app:layout_constraintTop_toBottomOf="@+id(btn_five" />

    <Button
        android:id="@+id	btn_nine"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="30dp"
        android:layout_marginEnd="20dp"
        android:text="9"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintTop_toBottomOf="@+id	btn_six" />

    <Button
        android:id="@+id	btn_zero"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="30dp"
        android:text="0"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id	btn_eight" />

    <Button
        android:id="@+id	btn_call"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginStart="20dp"
        android:layout_marginTop="30dp"
        android:text="Call"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id	btn_zero" />

    <Button
        android:id="@+id	btn_save"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="30dp"
        android:layout_marginEnd="20dp"
        android:text="Save"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintTop_toBottomOf="@+id	btn_zero" />

    <Button
        android:id="@+id	btn_start"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginStart="20dp"
        android:layout_marginTop="30dp"
        android:text ="*"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id	btn_seven" />

    <Button
        android:id="@+id	btn_hash"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
```

```
    android:layout_marginTop="30dp"
    android:layout_marginEnd="20dp"
    android:text="#"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintTop_toBottomOf="@+id(btn_nine)"/>
</androidx.constraintlayout.widget.ConstraintLayout>
```

MainActivity.java

```
package com.example.part_a_program_8;

import androidx.appcompat.app.AppCompatActivity;
import android.content.Intent;
import android.net.Uri;
import android.os.Bundle;
import android.provider.ContactsContract;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;

public class MainActivity extends AppCompatActivity implements View.OnClickListener{

    Button btnOne,btnTwo,btnThree,btnFour,btnFive;
    Button btnSix,btnSeven,btnEight,btnNine,btnZero;
    Button btnDel,btnStar,btnHash,btnCall,btnSave;

    EditText txtPhonenumber;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        btnOne=(Button)findViewById(R.id.btn_one);
        btnOne.setOnClickListener(this);

        btnTwo=(Button)findViewById(R.id.btn_two);
        btnTwo.setOnClickListener(this);

        btnThree=(Button)findViewById(R.id.btn_three);
        btnThree.setOnClickListener(this);

        btnFour=(Button)findViewById(R.id.btn_four);
        btnFour.setOnClickListener(this);

        btnFive=(Button)findViewById(R.id.btn_five);
        btnFive.setOnClickListener(this);

        btnSix=(Button)findViewById(R.id.btn_six);
        btnSix.setOnClickListener(this);

        btnSeven=(Button)findViewById(R.id.btn_seven);
        btnSeven.setOnClickListener(this);

        btnEight=(Button)findViewById(R.id.btn_eight);
        btnEight.setOnClickListener(this);
```

```
btnNine=(Button)findViewById(R.id.btn_nine);
btnNine.setOnClickListener(this);

btnZero=(Button)findViewById(R.id.btn_zero);
btnZero.setOnClickListener(this);

btnStar=(Button)findViewById(R.id.btn_start);
btnStar.setOnClickListener(this);

btnHash=(Button)findViewById(R.id.btn_hash);
btnHash.setOnClickListener(this);

btnCall=(Button)findViewById(R.id.btn_call);
btnCall.setOnClickListener(this);

btnSave=(Button)findViewById(R.id.btn_save);
btnSave.setOnClickListener(this);

btnDel=(Button)findViewById(R.id.btn_delete);
btnDel.setOnClickListener(this);

txtPhonenumber=(EditText)findViewById(R.id.txt_phonenumber);

txtPhonenumber.setText("");
}

public void onClick(View v)
{
if(v.equals(btnOne))
txtPhonenumber.append("1");

else if(v.equals(btnTwo))
txtPhonenumber.append("2");

else if(v.equals(btnThree))
txtPhonenumber.append("3");

else if(v.equals(btnFour))
txtPhonenumber.append("4");

else if(v.equals(btnFive))
txtPhonenumber.append("5");

else if(v.equals(btnSix))
txtPhonenumber.append("6");

else if(v.equals(btnSeven))
txtPhonenumber.append("7");

else if(v.equals(btnEight))
txtPhonenumber.append("8");

else if(v.equals(btnNine))
txtPhonenumber.append("9");

else if(v.equals(btnZero))
txtPhonenumber.append("0");
}
```

```
else if(v.equals(btnStar))
txtPhonenumber.append("*");

else if(v.equals(btnHash))
txtPhonenumber.append("#");

else if(v.equals(btnSave))
{
Intent contactIntent= new Intent
        (ContactsContract.Intents.Insert.ACTION);
contactIntent.setType
        (ContactsContract.RawContacts.CONTENT_TYPE);

contactIntent
.putExtra(ContactsContract.Intents.Insert.NAME, "Unknown");
contactIntent.putExtra(ContactsContract.Intents.Insert.PHONE,
txtPhonenumber.getText().toString());

startActivity(contactIntent);

}

else if(v.equals(btnDel))
{
String data=txtPhonenumber.getText().toString();
if(data.length()>0)
{
txtPhonenumber.setText
        (data.substring(0,data.length()-1));

}
else
{
txtPhonenumber.setText("");
}
}

btnCall.setOnClickListener(new View.OnClickListener()
{
@Override
public void onClick(View v) {

String data = txtPhonenumber.getText().toString();
Intent intent=new Intent(Intent.ACTION_DIAL);
intent.setData(Uri.parse("tel:"+ data));
startActivity(intent);
}
);
}

}
```

AndriodManifest.xml


```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
package="com.example.part_a_program_8">


<uses-permission android:name="android.permission.CALL_PHONE"/>

<application
    android:allowBackup="true"
    android:icon="@mipmap/ic_launcher"
    android:label="@string/app_name"
    android:roundIcon="@mipmap/ic_launcher_round"
    android:supportsRtl="true"
    android:theme="@style/AppTheme">
    <activity android:name=".MainActivity">
        <intent-filter>
            <action android:name="android.intent.action.MAIN" />
            <category android:name="android.intent.category.LAUNCHER" />
        </intent-filter>
    </activity>
</application>

</manifest>
```

Sample Output

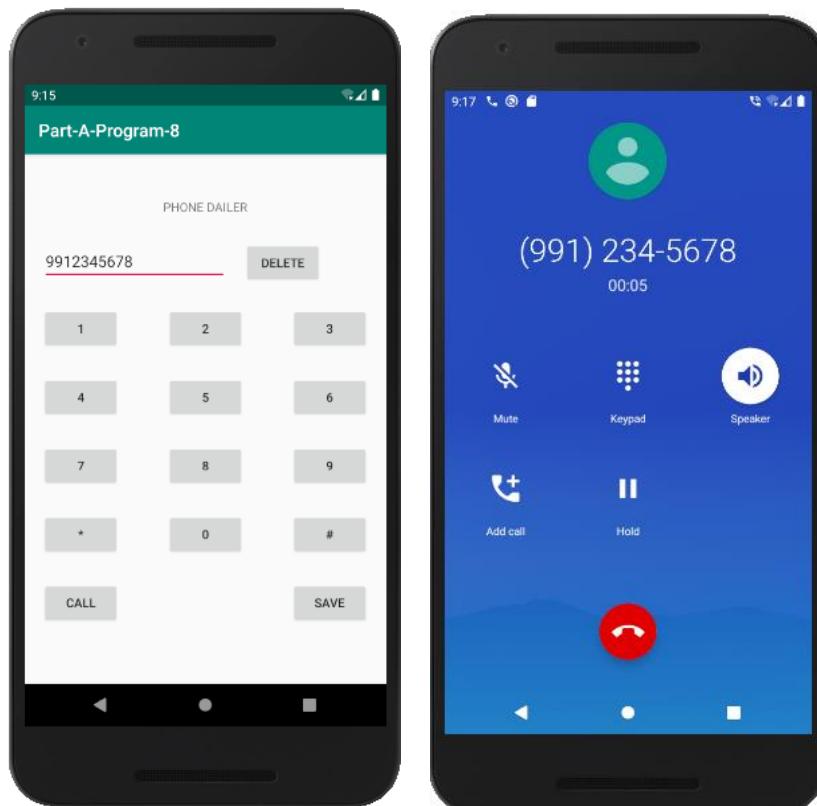

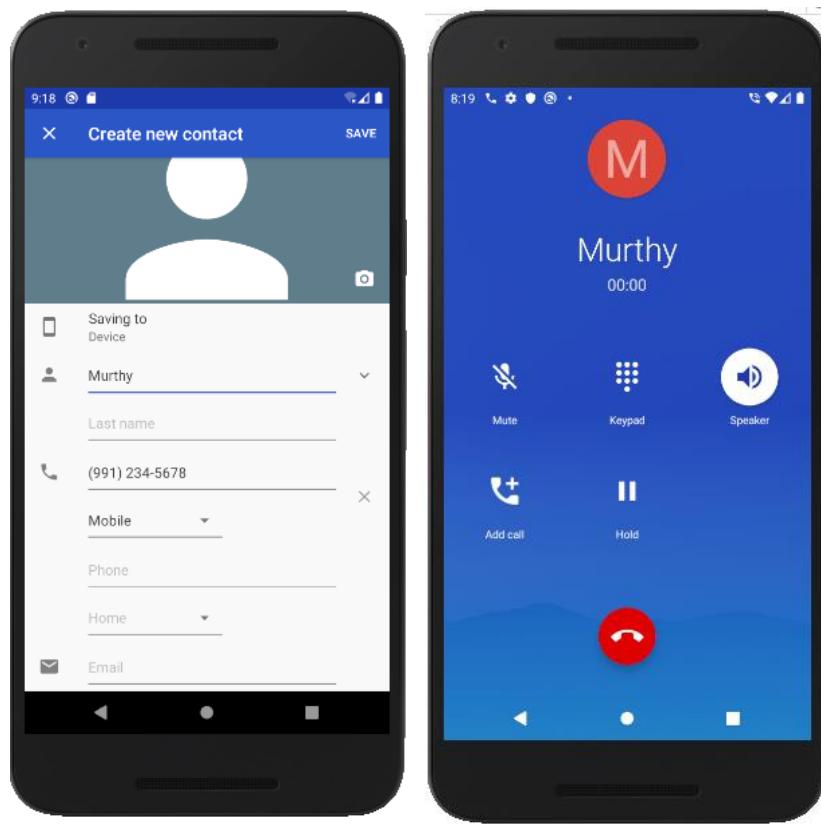

PART B

Part B programs should be developed as an application and are to be demonstrated as a mini project in a group by adding extra features or the students can also develop their application and demonstrate it as a mini-project. (Projects/programs are not limited to the list given in Part B).

Program 1

Write a program to enter Medicine Name, Date and Time of the Day as input from the user and store it in the SQLite database. Input for Time of the Day should be either Morning or Afternoon or Evening or Night. Trigger an alarm based on the Date and Time of the Day and display the Medicine Name.

MEDICINE DATABASE	
Medicine Name:	<input type="text"/>
Date:	<input type="text"/>
Time of the Day:	<input type="text"/>
<input type="button" value="Insert"/>	

Design



activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MainActivity">

    <TextView
        android:id="@+id/textView2"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="80dp"
        android:text="Medicine Database"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toTopOf="parent" />

    <TextView
        android:id="@+id/textView3"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginStart="20dp"
        android:text="Medicine Name"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toTopOf="@+id/txt_medicine_name" />
```

```
<TextView  
    android:id="@+id/textView4"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:layout_marginStart="20dp"  
    android:text="Date"  
    app:layout_constraintBottom_toBottomOf="@+id/txt_date"  
    app:layout_constraintStart_toStartOf="parent"  
    app:layout_constraintTop_toBottomOf="@+id/txt_medicine_name" />  
  
<TextView  
    android:id="@+id/textView5"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:layout_marginStart="20dp"  
    android:text="Time"  
    app:layout_constraintStart_toStartOf="parent"  
    app:layout_constraintTop_toTopOf="@+id/txt_time" />  
  
<EditText  
    android:id="@+id/txt_medicine_name"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:layout_marginStart="20dp"  
    android:layout_marginTop="50dp"  
    android:ems="10"  
    android:inputType="textPersonName"  
    app:layout_constraintStart_toEndOf="@+id/textView3"  
    app:layout_constraintTop_toBottomOf="@+id/textView2" />  
  
<EditText  
    android:id="@+id/txt_date"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:layout_marginTop="15dp"  
    android:ems="10"  
    android:inputType="textPersonName"  
    app:layout_constraintStart_toStartOf="@+id/txt_medicine_name"  
    app:layout_constraintTop_toBottomOf="@+id/txt_medicine_name" />  
  
<EditText  
    android:id="@+id/txt_time"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:layout_marginTop="20dp"  
    android:ems="10"  
    android:inputType="textPersonName"  
    app:layout_constraintStart_toStartOf="@+id/txt_date"  
    app:layout_constraintTop_toBottomOf="@+id/txt_date" />  
  
<Button  
    android:id="@+id/btn_save"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:layout_marginTop="50dp"  
    android:text="Save"  
    app:layout_constraintStart_toStartOf="@+id/txt_time"  
    app:layout_constraintTop_toBottomOf="@+id/txt_time" />
```

```
<Button  
    android:id="@+id	btn_show"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:layout_marginTop="50dp"  
    android:text="Show"  
    app:layout_constraintEnd_toEndOf="@+id/txt_time"  
    app:layout_constraintTop_toBottomOf="@+id/txt_time" />  
  
<TextView  
    android:id="@+id	lbl_data"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:layout_marginTop="50dp"  
    android:text="Data"  
    app:layout_constraintEnd_toEndOf="parent"  
    app:layout_constraintStart_toStartOf="parent"  
    app:layout_constraintTop_toBottomOf="@+id	btn_save" />  
</androidx.constraintlayout.widget.ConstraintLayout>
```

MyDatabase.java

```
package com.example.partb_program1;  
  
import android.content.Context;  
import android.database.sqlite.SQLiteDatabase;  
import android.database.sqlite.SQLiteOpenHelper;  
  
import androidx.annotation.Nullable;  
  
public class MyDatabase extends SQLiteOpenHelper {  
  
    public static String DATABASE_NAME="medicine.db";  
  
    public MyDatabase(@Nullable Context context, @Nullable String name, @Nullable  
        SQLiteDatabase.CursorFactory factory, int version) {  
        super(context, name, factory, version);  
    }  
  
    @Override  
    public void onCreate(SQLiteDatabase db) {  
  
        db.execSQL("CREATE TABLE MEDICINE_NAMES (NAME TEXT, MDATE TEXT, MTIME TEXT)");  
    }  
  
    @Override  
    public void onUpgrade(SQLiteDatabase db, int oldVersion, int newVersion) {  
    }  
}
```

MainActivity.java

```
package com.example.partb_program1;

import androidx.appcompat.app.AppCompatActivity;

import android.content.ContentValues;
import android.database.Cursor;
import android.database.sqlite.SQLiteDatabase;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.TextView;
import android.widget.Toast;

import org.w3c.dom.Text;

public class MainActivity extends AppCompatActivity implements View.OnClickListener {

EditText txtMedicineName, txtDate, txtTime;
Button btnSave, btnShow;
TextView lblData;

MyDatabase myDatabase;

@Override
protected void onCreate(Bundle savedInstanceState) {
super.onCreate(savedInstanceState);
setContentView(R.layout.activity_main);
txtMedicineName=(EditText)findViewById(R.id.txt_medicine_name);
txtDate=(EditText)findViewById(R.id.txt_date);
txtTime=(EditText)findViewById(R.id.txt_time);

btnSave=(Button)findViewById(R.id.btn_save);
btnSave.setOnClickListener(this);
btnShow=(Button)findViewById(R.id.btn_show);
btnShow.setOnClickListener(this);
lblData=(TextView)findViewById(R.id.lbl_data);

myDatabase=new MyDatabase(getApplicationContext(),
MyDatabase.DATABASE_NAME,null,1);


}

public void onClick(View v)
{
if(v.equals(btnSave))
{
String medicineName= txtMedicineName.getText().toString();
String date=txtDate.getText().toString();
String time=txtTime.getText().toString();

SQLiteDatabase database=myDatabase.getWritableDatabase();
ContentValues cv=new ContentValues();
cv.put("NAME",medicineName);
cv.put("MDATE",date);
cv.put("MTIME",time);
}
```


```
database.insert("MEDICINE_NAMES",null,cv);
Toast.makeText(getApplicationContext(),"Data Saved",Toast.LENGTH_LONG).show();
}
else if(v.equals(btnShow))
{
    SQLiteDatabase database=myDatabase.getReadableDatabase();
    Cursor cursor= database.query("MEDICINE_NAMES",
    new String[]{"NAME","MDATE","MTIME"},null,null,null,null,null);
    lblData.setText("NAME\tDATE\tTIME\n");
    while(cursor.moveToNext())
    {
        lblData.append(cursor.getString(0)+"\t");
        lblData.append(cursor.getString(1)+"\t");
        lblData.append(cursor.getString(2)+"\n");
    }
}
}
```

Sample Output

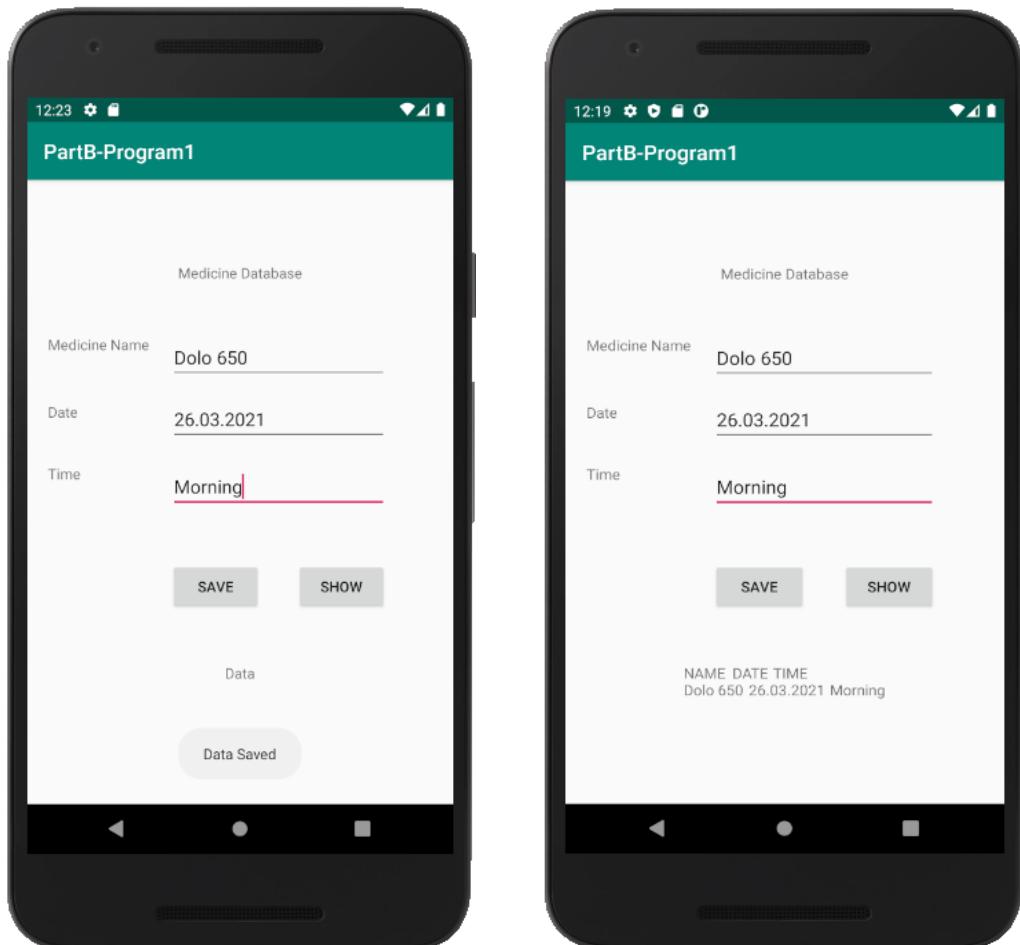

Program 7

Develop an application that makes use of the clipboard framework for copying and pasting of the text. The activity consists of two EditText controls and two Buttons to trigger the copy and paste functionality.

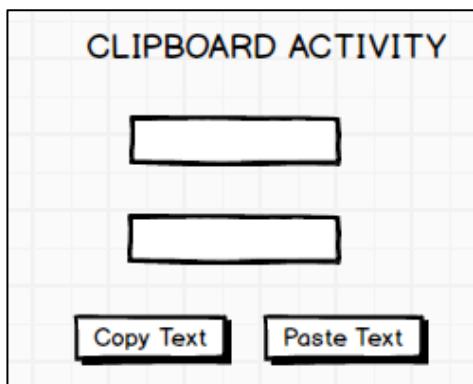

Design



activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:id="@+id/layout"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MainActivity">

    <Button
        android:id="@+id	btn_create"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginStart="10dp"
        android:layout_marginTop="40dp"
        android:text="Create"
        app:layout_constraintEnd_toStartOf="@+id/textView2"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/textView2" />

    <Button
        android:id="@+id	btn_open"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="40dp"
        android:layout_marginEnd="10dp"
        android:text="Open"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toEndOf="@+id/textView2"
        app:layout_constraintTop_toBottomOf="@+id/textView2" />

    <TextView
        android:id="@+id	textView2"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="50dp"
        android:text="File Application"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toTopOf="parent" />

    <EditText
        android:id="@+id	txt_content"
        android:layout_width="272dp"
        android:layout_height="138dp"
        android:layout_marginTop="50dp"
        android:ems="10"
        android:inputType="textPersonName"
        app:layout_constraintTop_toBottomOf="@+id	btn_create"
        tools:layout_editor_absoluteX="65dp" />

    <Button
        android:id="@+id	btn_save"
        android:layout_width="wrap_content"
```

```

    android:layout_height="wrap_content"
    android:layout_marginTop="50dp"
    android:text="Save"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toBottomOf="@+id/txt_content" />
</androidx.constraintlayout.widget.ConstraintLayout>

```

MainActivity.java

```

package com.example.partbprogram7;

import androidx.appcompat.app.AppCompatActivity;
import android.content.ClipData;
import android.content.ClipboardManager;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;

public class MainActivity extends AppCompatActivity implements View.OnClickListener {
    EditText txtCopy, txtPaste;
    Button btnCopy, btnPaste;

    ClipboardManager myClipboard;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        txtCopy = (EditText) findViewById(R.id.txt_copy);
        txtPaste = (EditText) findViewById(R.id.txt_paste);

        btnCopy = (Button) findViewById(R.id.btn_copy);
        btnCopy.setOnClickListener(this);

        btnPaste = (Button) findViewById(R.id.btn_paste);
        btnPaste.setOnClickListener(this);

        myClipboard = (ClipboardManager) getSystemService(CLIPBOARD_SERVICE);
    }

    @Override
    public void onClick(View v) {
        if(v.equals(btnCopy))
        {
            ClipData myClip;
            String data = txtCopy.getText().toString();
            myClip = ClipData.newPlainText("text", data);
            myClipboard.setPrimaryClip(myClip);
            Toast.makeText(getApplicationContext(), "Copied..", Toast.LENGTH_LONG).show();
        }
    }
}

```


```
else if(v.equals(btnPaste))
{
ClipDataabc = myClipboard.getPrimaryClip();
ClipData.Item item = abc.getItemAt(0);
txtPaste.setText(item.getText().toString());
}
}
```

AndroidManifest.xml

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
package="com.example.partbprogram7">

<application
    android:allowBackup="true"
    android:icon="@mipmap/ic_launcher"
    android:label="@string/app_name"
    android:roundIcon="@mipmap/ic_launcher_round"
    android:supportsRtl="true"
    android:theme="@style/AppTheme">
    <activity android:name=".MainActivity">
        <intent-filter>
            <action android:name="android.intent.action.MAIN" />
            <category android:name="android.intent.category.LAUNCHER" />
        </intent-filter>
    </activity>
</application>
</manifest>
```

Sample Output

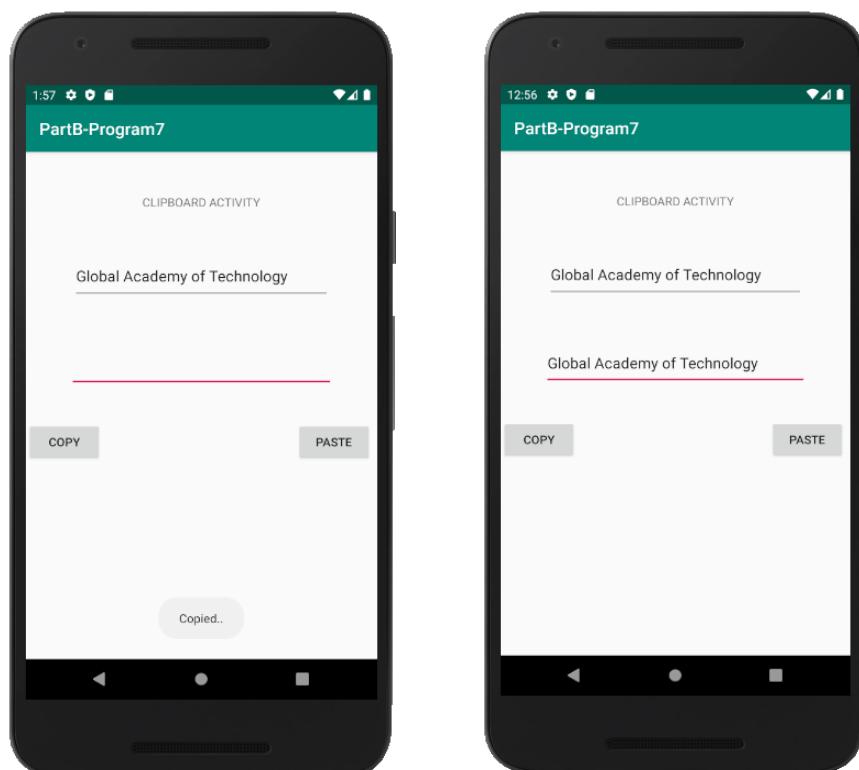

Program 8

Create an AIDL service that calculates Car Loan EMI. The formula to calculate EMI is

$$E = P * (r(1+r)^n) / ((1+r)^n - 1)$$

where


E = The EMI payable on the car loan amount

P = The Car loan Principal Amount


r = The interest rate value computed on a monthly basis

n = The loan tenure in the form of months

The down payment amount has to be deducted from the principal amount paid towards buying the car. Develop an application that makes use of this AIDL service to calculate the EMI. This application should have four EditText to read the PrincipalAmount, Down Payment, Interest Rate, Loan Term (in months) and a button named as “Calculate Monthly EMI”. On click of this button, the result should be shown in a TextView. Also, calculate the EMI by varying the Loan Term and Interest Rate values.

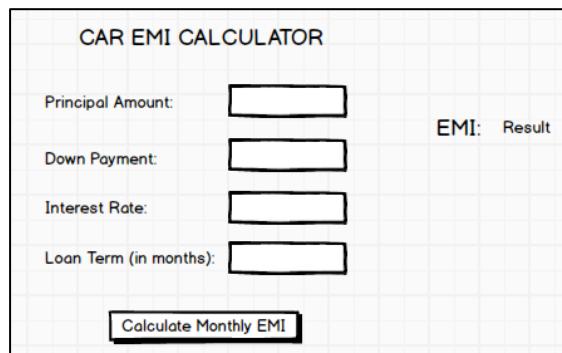

Design

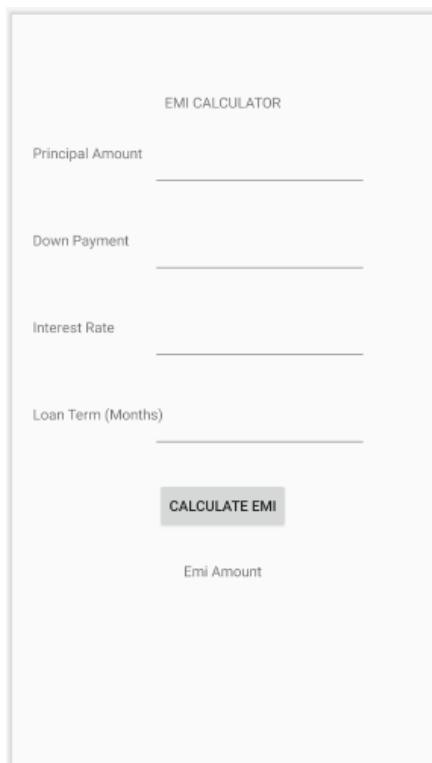

activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:id="@+id/lblpayment"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MainActivity">

    <TextView
        android:id="@+id/textView"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="EMI CALCULATOR"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        tools:layout_editor_absoluteY="76dp" />

    <TextView
        android:id="@+id/textView2"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginStart="20dp"
        android:layout_marginTop="30dp"
        android:text="Principal Amount"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/textView" />

    <EditText
        android:id="@+id/txt_principal"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginStart="10dp"
        android:layout_marginTop="30dp"
        android:ems="10"
        android:inputType="textPersonName"
        app:layout_constraintStart_toEndOf="@+id/textView2"
        app:layout_constraintTop_toBottomOf="@+id/textView" />

    <TextView
        android:id="@+id/downpayment"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Down Payment"
        app:layout_constraintStart_toStartOf="@+id/textView2"
        app:layout_constraintTop_toTopOf="@+id/txt_downnpayment" />

    <EditText
        android:id="@+id/txt_downnpayment"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="40dp"
        android:ems="10"
        android:inputType="textPersonName"
        app:layout_constraintStart_toStartOf="@+id/txt_principal"
```

```
app:layout_constraintTop_toBottomOf="@+id/txt_principal" />

<TextView
    android:id="@+id/textView4"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Interest Rate"
    app:layout_constraintStart_toStartOf="@+id/downpayment"
    app:layout_constraintTop_toTopOf="@+id/txt_interestrate" />

<EditText
    android:id="@+id/txt_interestrate"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginTop="40dp"
    android:ems="10"
    android:inputType="textPersonName"
    app:layout_constraintStart_toStartOf="@+id/txt_downnpayment"
    app:layout_constraintTop_toBottomOf="@+id/txt_downnpayment" />

<TextView
    android:id="@+id/textView5"
    android:layout_width="130dp"
    android:layout_height="33dp"
    android:layout_marginTop="8dp"
    android:text="Loan Term (Months)"
    app:layout_constraintStart_toStartOf="@+id/textView4"
    app:layout_constraintTop_toTopOf="@+id/txt_termmonths" />

<EditText
    android:id="@+id/txt_termmonths"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginStart="20dp"
    android:layout_marginTop="32dp"
    android:ems="10"
    android:inputType="textPersonName"
    app:layout_constraintStart_toStartOf="@+id/txt_interestrate"
    app:layout_constraintTop_toBottomOf="@+id/txt_interestrate" />

<Button
    android:id="@+id/btn_calculate"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginTop="30dp"
    android:text="Calculate EMI"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toBottomOf="@+id/txt_termmonths" />

<TextView
    android:id="@+id/lbl_emiamount"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginTop="30dp"
    android:text="Emi Amount"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintStart_toStartOf="parent"
```

```
app:layout_constraintTop_toBottomOf="@+id(btn_calculate" />  
</androidx.constraintlayout.widget.ConstraintLayout>
```

MainActivity.java


```
package com.example.partb_program8;  
  
import androidx.appcompat.app.AppCompatActivity;  
import android.os.Bundle;  
import android.view.View;  
import android.widget.Button;  
import android.widget.EditText;  
import android.widget.TextView;  
import android.widget.Toast;  
  
import java.text.DecimalFormat;  
import java.util.logging.SimpleFormatter;  
  
public class MainActivity extends AppCompatActivity implements View.OnClickListener {  
  
    EditText txtPrinciple, txtDownPayment, txtInterestRate, txtLoanTerm;  
  
    Button btnCalculate;  
  
    TextView lblResult;  
  
    @Override  
    protected void onCreate(Bundle savedInstanceState) {  
        super.onCreate(savedInstanceState);  
        setContentView(R.layout.activity_main);  
        txtPrinciple=(EditText)findViewById(R.id.txt_principal);  
        txtDownPayment=(EditText)findViewById(R.id.txt_downnpayment);  
        txtInterestRate=(EditText)findViewById(R.id.txt_interestrate);  
        txtLoanTerm=(EditText)findViewById(R.id.txt_termmonths);  
  
        btnCalculate=(Button)findViewById(R.id.btn_calculate);  
        btnCalculate.setOnClickListener(this);  
  
        lblResult=(TextView)findViewById(R.id.lbl_emiamount);  
    }  
  
    public void onClick(View v)  
    {  
        try  
        {  
  
            DecimalFormat formatter = new  
            DecimalFormat("#0.00");  
  
            double principleAmount=  
            Double.parseDouble(txtPrinciple.  
            getText().toString());  
            double downPayment=Double.parseDouble(txtDownPayment.getText().toString());  
        }  
    }  
}
```

```
principleAmount=principleAmount-downPayment;
double interestRate=Double.parseDouble(txtInterestRate.getText().toString());
interestRate=interestRate/(12*100);
double loanTerm=Double.parseDouble(txtLoanTerm.getText().toString());

double emi=principleAmount*
    (interestRate*Math.pow((1+interestRate),loanTerm))
    /(Math.pow((1+interestRate),loanTerm)-1);
lblResult.setText(String.valueOf(formatter.format(emi)));
}

catch(Exception e)
{
Toast.makeText(getApplicationContext(),"Invalid Input",Toast.LENGTH_LONG).show();
}
}
```

Sample Output

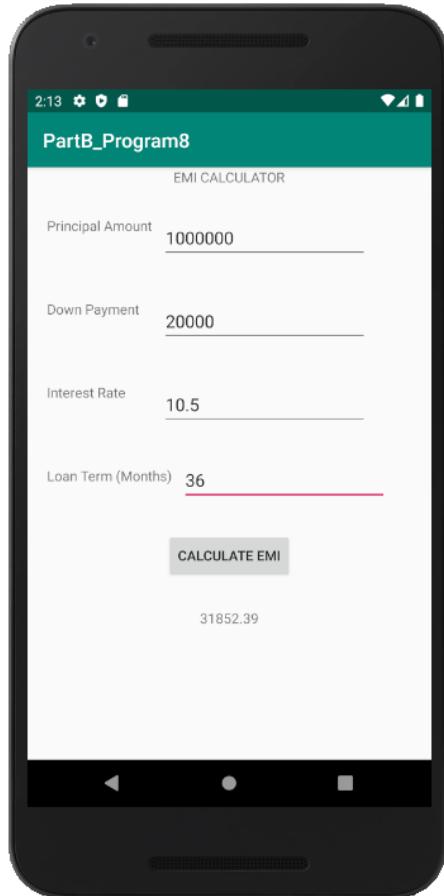

Reference Books

1. Google Developer Training, "Android Developer Fundamentals Course – Concept Reference", Google Developer Training Team, 2017.
<https://www.gitbook.com/book/google-developer-training/android-developer-fundamentals-course-concepts/details>
(Download pdf file from the above link)
2. Erik Hellman, "Android Programming – Pushing the Limits", 1st Edition, Wiley India Pvt Ltd, 2014. ISBN-13: 978-8126547197
3. Dawn Griffiths and David Griffiths, "Head First Android Development", 1st Edition, O'Reilly SPD Publishers, 2015. ISBN-13: 978-9352131341
4. Bill Phillips, Chris Stewart and Kristin Marsicano, "Android Programming: The Big Nerd Ranch Guide", 3rd Edition, Big Nerd Ranch Guides, 2017. ISBN-13: 978-0134706054