


Configure IP address to routers in packet tracer. Explore the following messages ping, responses, destination unreachable ,request timed out, reply.

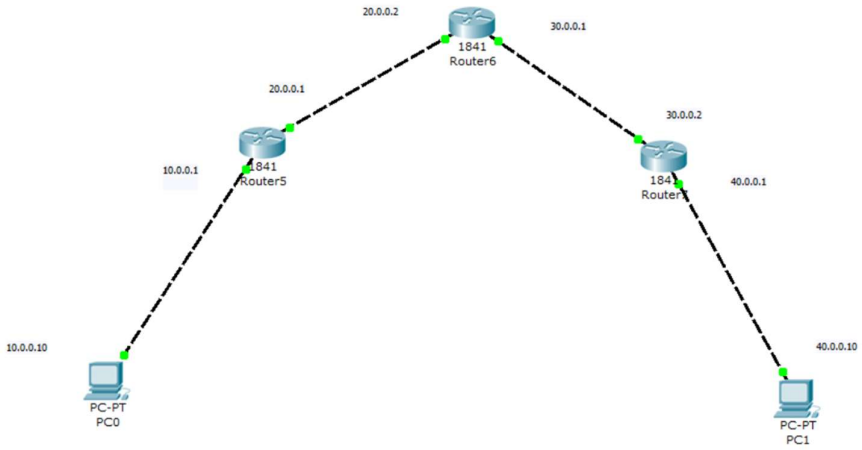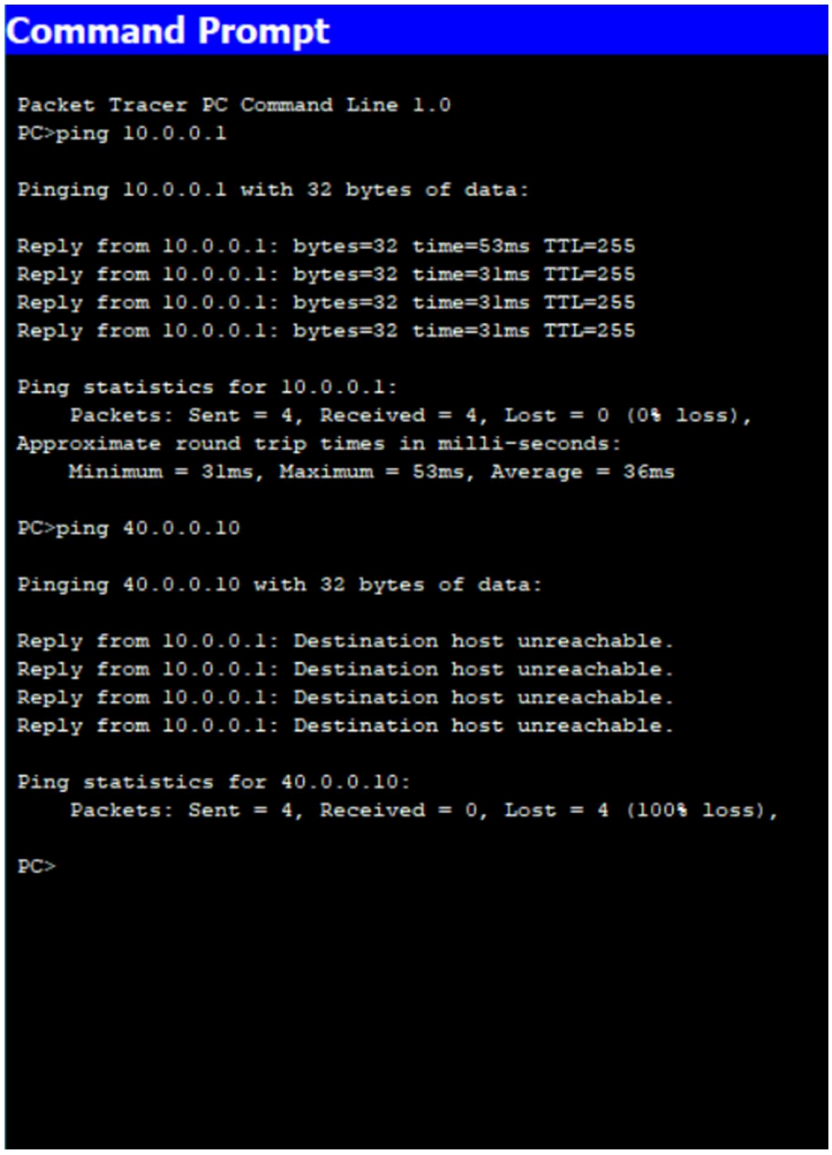

Output:


Command Prompt
Packet Tracer PC Command Line 1.0
PC>ping 10.0.0.1
Pinging 10.0.0.1 with 32 bytes of data:
Reply from 10.0.0.1: bytes=32 time=53ms TTL=255
Reply from 10.0.0.1: bytes=32 time=31ms TTL=255
Reply from 10.0.0.1: bytes=32 time=31ms TTL=255
Reply from 10.0.0.1: bytes=32 time=31ms TTL=255
Ping statistics for 10.0.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 31ms, Maximum = 53ms, Average = 36ms
PC>ping 40.0.0.10
Pinging 40.0.0.10 with 32 bytes of data:
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Ping statistics for 40.0.0.10:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
PC>

2) Configure Ip address to routers in packet tracer Explore the following responses: ping responses, destination unreachable, request timed out, reply.

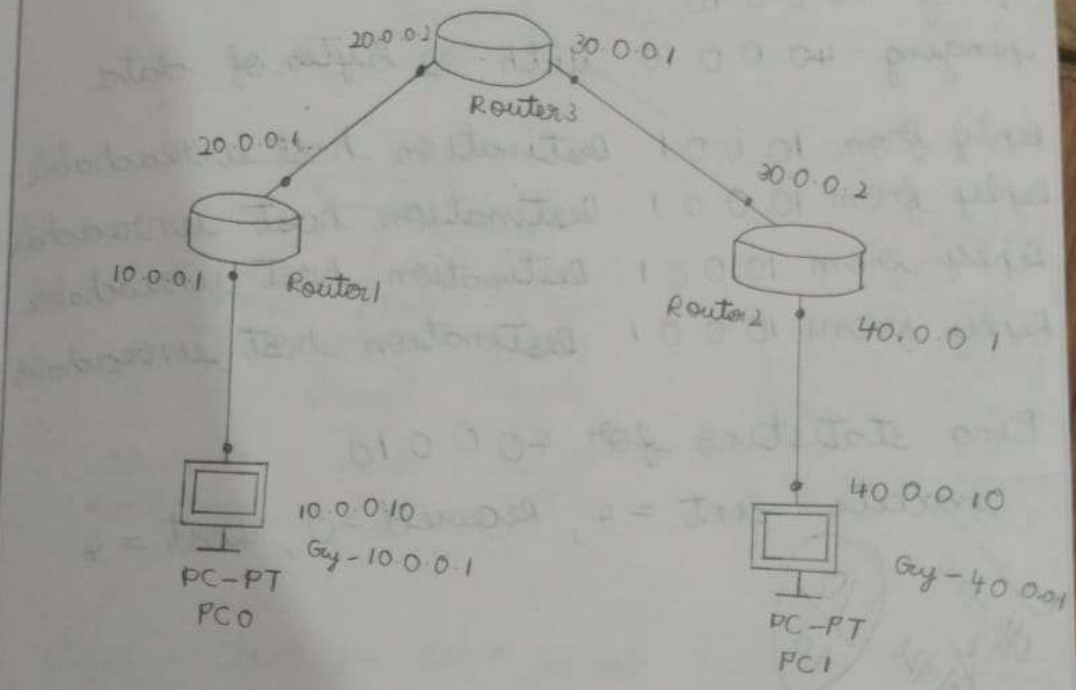

Output :-

ping 10.0.0.1

Pinging 10.0.0.1 with 32 bytes of data

Reply from 10.0.0.1: bytes = 32 time = 0 ms
TTL = 255

Reply from 10.0.0.1: bytes = 32 time = 0 ms
TTL = 255

Reply from 10.0.0.1 bytes = 32 time = 1 ms TTL = 255

Reply from 10.0.0.1 bytes = 32 time = 0 ms TTL = 255

Ping statistics for 10.0.0.1
packets sent = 4, Received = 4 Lost = 0
Approx round trip in milli-seconds:
minimum = 0 ms, maximum = 1 ms, Average
= 0 ms

ping 40.0.0.10
pinging 40.0.0.10 with 32 bytes of data

Reply from 10.0.0.1: Destination host unreachable
Reply from 10.0.0.1: Destination host unreachable
Reply from 10.0.0.1: Destination host unreachable
Reply from 10.0.0.1: Destination host unreachable

Ping statistics for 40.0.0.10:
packets: sent = 4, Received = 0, Lost = 4

O/P seen 28/9/26 10/10