

app-routing.module.ts

```
import { NgModule } from '@angular/core';
import { RouterModule, Routes } from '@angular/router';
import { HeroDetailComponent } from './hero-detail/hero-detail.component';
import { LoginComponent } from './login/login.component';
import { RegisterComponent } from './register/register.component';

const routes: Routes = [
  {path: "login", component:LoginComponent},
  {path:"register", component:RegisterComponent},
  {path:"hero-detail",component:HeroDetailComponent}
];

@NgModule({
  imports: [RouterModule.forRoot(routes)],
  exports: [RouterModule]
})
export class AppRoutingModule { }
```

app.component.html

```
<app-hero-detail></app-hero-detail>
<router-outlet></router-outlet>
```

Hero-detail.component.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/bootstrap.min.css"
rel="stylesheet" integrity="sha384-
```

```

1BmE4kWbQ78iYhFldvKuhfTAU6auU8tT94WrHftjDbrCEXSU1oBoqyl2QvZ6jIW3"
crossorigin="anonymous">
  <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootstrap.bundle.min.js
" integrity="sha384-
ka7Sk0GlIn4gmtz2MlQnikT1wXgYsOg+OMhuP+IlRH9sENB00LRn5q+8nbTov4+1p"
crossorigin="anonymous"></script>
  <script
src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.10.2/dist/umd/popper.min.js"
integrity="sha384-
7+zcNj/IqJ95wo16oMtfsKbZ9ccEh31eOz1HGYDuCQ6wgnyJNSYdrPa03rtR1zdB"
crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootstrap.min.js"
integrity="sha384-
QJHtvGhmr9XOIpI6YVutG+2QOK9T+ZnN4kzFN1RtK3zEFEIsxhlmWl5/YESvpZ13"
crossorigin="anonymous"></script>

  <title>Document</title>
</head>
<body>
  <nav class="navbar navbar-expand-lg navbar-light bg-light">
    <div class="container-fluid">
      <a class="navbar-brand" href="#">Navbar</a>
      <button class="navbar-toggler" type="button" data-bs-toggle="collapse"
data-bs-target="#navbarSupportedContent" aria-controls="navbarSupportedContent"
aria-expanded="false" aria-label="Toggle navigation">
        <span class="navbar-toggler-icon"></span>
      </button>
      <div class="collapse navbar-collapse" id="navbarSupportedContent">
        <ul class="navbar-nav me-auto mb-2 mb-lg-0">
          <button
onclick="document.getElementById('id01').style.display='block'"
style="width:auto;" routerLink="/login">Login</button>

          <button
onclick="document.getElementById('id01').style.display='block'"
style="width:auto;" routerLink="/register">Sign Up</button>

        </ul>

      </div>
    </div>
  </nav>

```

```
</body>
</html>
```

Hero-detail.component.css

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/bootstrap.min.css"
rel="stylesheet" integrity="sha384-
1BmE4kWBq78iYhFtdvKuhfTAU6auU8tT94WrHftjDbrCEXSU1oBoqyl2QvZ6jIW3"
crossorigin="anonymous">
  <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootstrap.bundle.min.js"
" integrity="sha384-
ka7Sk0GlN4gmtz2MlQnikT1wXgYs0g+OMhuP+IlRH9sENB00LRn5q+8nbTov4+1p"
crossorigin="anonymous"></script>
  <script
src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.10.2/dist/umd/popper.min.js"
integrity="sha384-
7+zcCNj/IqJ95wo16oMtfS KbZ9ccEh31e0z1HGyDuCQ6wgnyJNSYdrPa03rtR1zdB"
crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootstrap.min.js"
integrity="sha384-
QJHtvGhmr9X0IpI6YVutG+2Q0K9T+ZnN4kzFN1RtK3zEFEIsxhlmWl5/YESvpZ13"
crossorigin="anonymous"></script>

  <title>Document</title>
</head>
<body>
  <nav class="navbar navbar-expand-lg navbar-light bg-light">
    <div class="container-fluid">
      <a class="navbar-brand" href="#">Navbar</a>
      <button class="navbar-toggler" type="button" data-bs-toggle="collapse"
data-bs-target="#navbarSupportedContent" aria-controls="navbarSupportedContent"
aria-expanded="false" aria-label="Toggle navigation">
        <span class="navbar-toggler-icon"></span>
      </button>
```

```

        <div class="collapse navbar-collapse" id="navbarSupportedContent">
            <ul class="navbar-nav me-auto mb-2 mb-lg-0">
                <button
onclick="document.getElementById('id01').style.display='block'"
style="width:auto;" routerLink="/login">Login</button>

                <button
onclick="document.getElementById('id01').style.display='block'"
style="width:auto;" routerLink="/register">Sign Up</button>

            </ul>

        </div>
    </div>
</nav>
</body>
</html>

```

Login.component.html

```

<div id="id01" class="modal">

    <form class="modal-content animate" action="/action_page.php" method="post">
        <div class="imgcontainer">
            <span onclick="document.getElementById('id01').style.display='none'"
class="close" title="Close Modal">&times;</span>
            
        </div>

        <div class="container">
            <label for="uname"><b>Username</b></label>
            <input type="text" placeholder="Enter Username" name="uname" required>

            <label for="psw"><b>Password</b></label>
            <input type="password" placeholder="Enter Password" name="psw" required>

            <button type="submit">Login</button>
            <label>
                <input type="checkbox" checked="checked" name="remember"> Remember me
            </label>
        </div>
    </form>
</div>

```

```

        <div class="container" style="background-color:#f1f1f1">
            <button type="button"
onclick="document.getElementById('id01').style.display='none'"
class="cancelbtn">Cancel</button>
            <span class="psw">Forgot <a href="#">password?</a></span>
        </div>
    </form>
</div>
<script>
    // Get the modal
    var modal = document.getElementById('id01');

    // When the user clicks anywhere outside of the modal, close it
    window.onclick = function(event) {
        if (event.target == modal) {
            modal.style.display = "none";
        }
    }
</script>

```

Register.component.html

```

<div id="id01" class="modal">
    <span onclick="document.getElementById('id02').style.display='none'"
class="close" title="Close Modal">&times;</span>
    <form class="modal-content" action="/action_page.php">
        <div class="container">
            <h1>Sign Up</h1>
            <p>Please fill in this form to create an account.</p>
            <hr>
            <label for="email"><b>Email</b></label>
            <input type="text" placeholder="Enter Email" name="email" required>

            <label for="psw"><b>Password</b></label>
            <input type="password" placeholder="Enter Password" name="psw" required>

            <label for="psw-repeat"><b>Repeat Password</b></label>
            <input type="password" placeholder="Repeat Password" name="psw-repeat"
required>

```

```

        <label>
            <input type="checkbox" checked="checked" name="remember" style="margin-
bottom:15px"> Remember me
        </label>

        <p>By creating an account you agree to our <a href="#"
style="color:dodgerblue">Terms & Privacy</a>.</p>

        <div class="clearfix">
            <button type="button"
onclick="document.getElementById('id01').style.display='none'"
class="cancelbtn">Cancel</button>
            <button type="submit" class="signupbtn">Sign Up</button>
        </div>
    </div>
</form>
</div>


<script>
// Get the modal
var modal = document.getElementById('id01');

// When the user clicks anywhere outside of the modal, close it
window.onclick = function(event) {
    if (event.target == modal) {
        modal.style.display = "none";
    }
}
</script>


```

Output:

Navbar -page

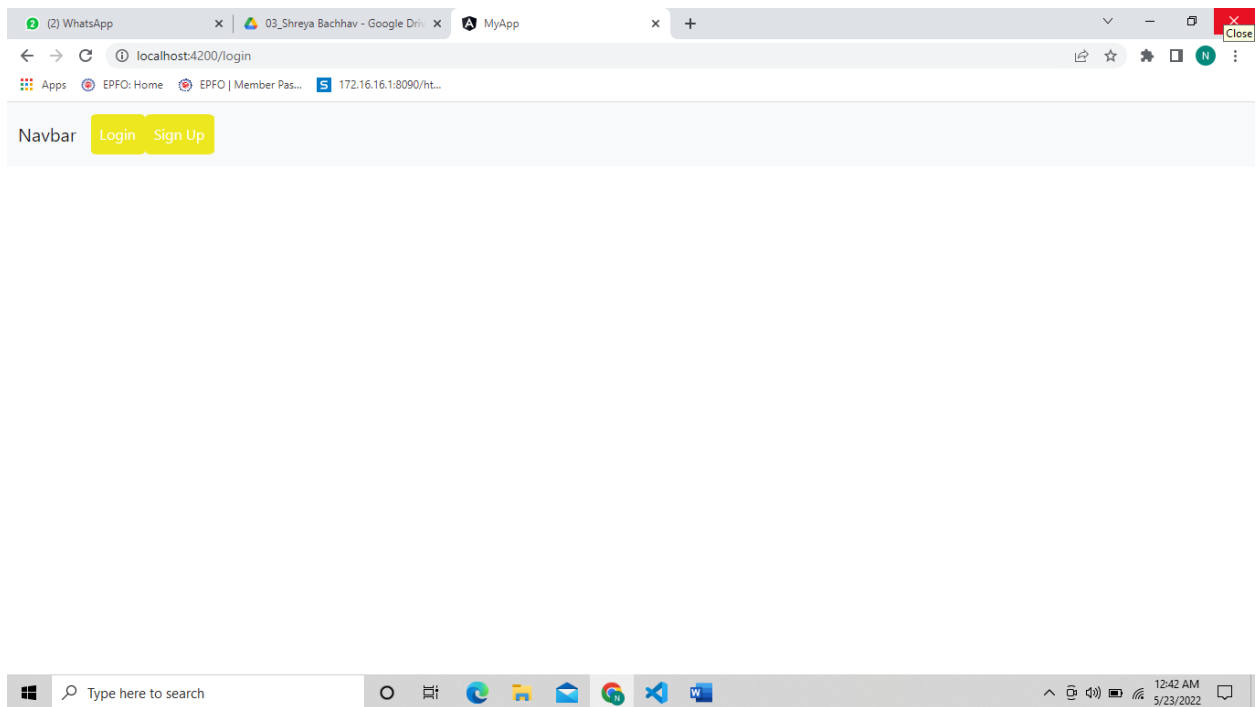

Login page

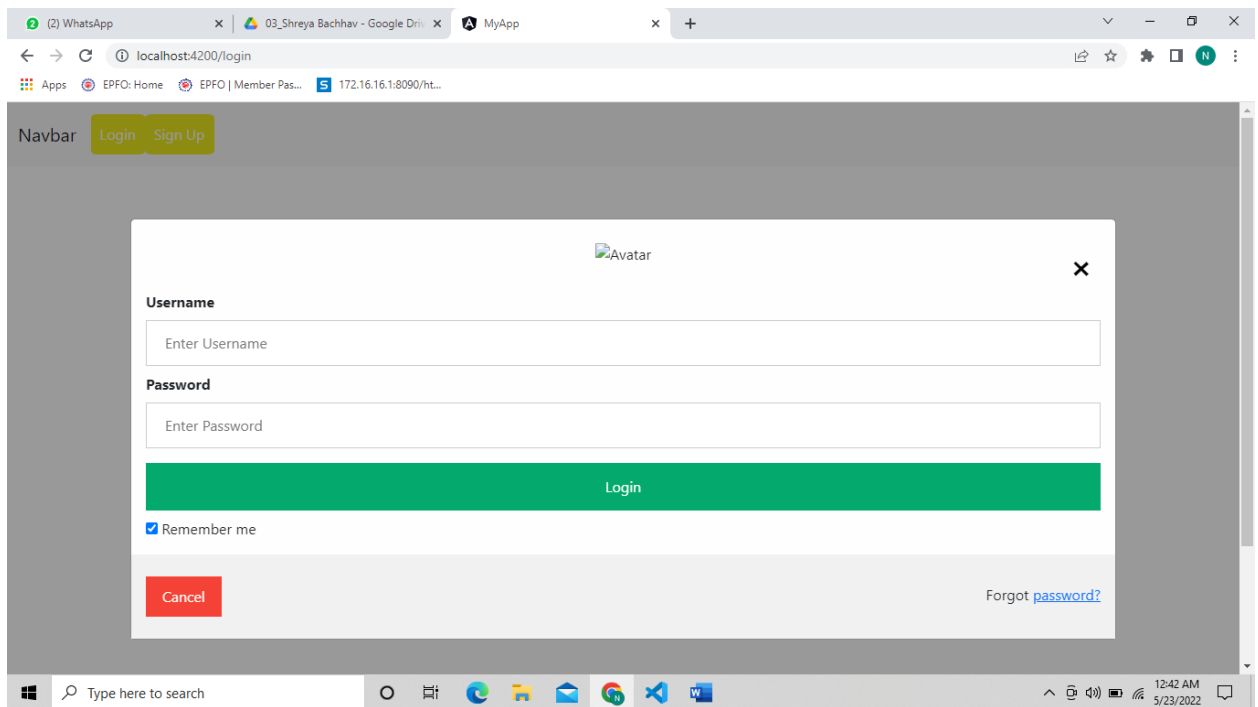

Register Page

