

10 . Jo dikhta hai , woh bikta hai

Ways to write CSS

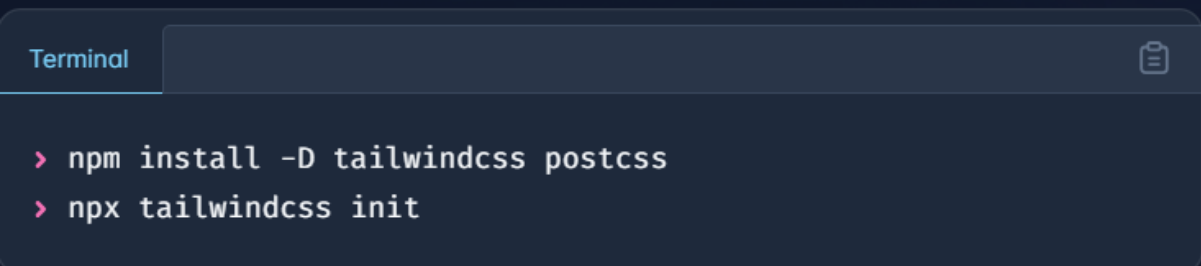
- 1.Normal css (that we using)
- 2.Sass
- 3.Scss
- 4.Styled components
- 5.Tailwind
- 6.Different libraries and framework
 - 1.Material UI
 - 2.Bootstrap
 - 3.Chakra UI
 - 4.Ant design

Latest framework Tailwind

Just installing tailwind following this steps

<https://tailwindcss.com/docs/guides/parcel>

1. Run this commands on terminal

A screenshot of a terminal window with a dark background. The title bar at the top says "Terminal" in light blue. There are two lines of text in the terminal, each preceded by a red prompt character. The first line is "npm install -D tailwindcss postcss" and the second line is "npx tailwindcss init".

```
Terminal  
  
> npm install -D tailwindcss postcss  
> npx tailwindcss init
```

Run this command on terminal so it will install 2 packages for us

1. Tailwind css
2. Post css

Here we did npx tailwindcss when we do this it will create tailwind.config.js file

2. Create .postcssrc file (is config for post css)
3. Write this in .postcssrc file

```
{ } .postcssrc U X
10 . Jo dikhta hai, wo bikta hai > { } .postcssrc > ...
1  {
2    "plugins": {
3      "tailwindcss": {}
4    }
5  }
```

Now complete the config for tailwind

4. Inside content we need to write this (tailwind.config.js file)

```
tailwind.config.js
/** @type {import('tailwindcss').Config} */
module.exports = {
  content: [
    "./src/**/*.html,js,ts,jsx,tsx",
  ],
  theme: {
    extend: {},
  },
  plugins: [],
}
```

We only using html & js file so we can put only that also it's fine

```
"./src/**/*.html,js",
```

- 5 . write only this three line inside index.css file

```
index.css
@tailwind base;
@tailwind components;
@tailwind utilities;
```

Then we never touch index.css file 😊

Our project Now config to use tailwind

Tailwind CSS gives className for every css that we can put inside the our app

Classes

width = w-
Padding = p-
Margin = m

Install this extension for tailwind class suggestion



If we want specific value of css then we need to write hardcoded value inside []

```
<img className="logo w-[80px] mx-2 items-center"
src={LOGO_URL} alt="" />
```

