
RUNPOD PROOF OF USE

PaySah | UTeMkuCemerlang | Domain 2 - Orbyte Smart SME Challenge

01 Endpoint and model

RunPod Serverless endpoint using vLLM v2.29.0 and Qwen/Qwen2.5-VL-7B-Instruct.

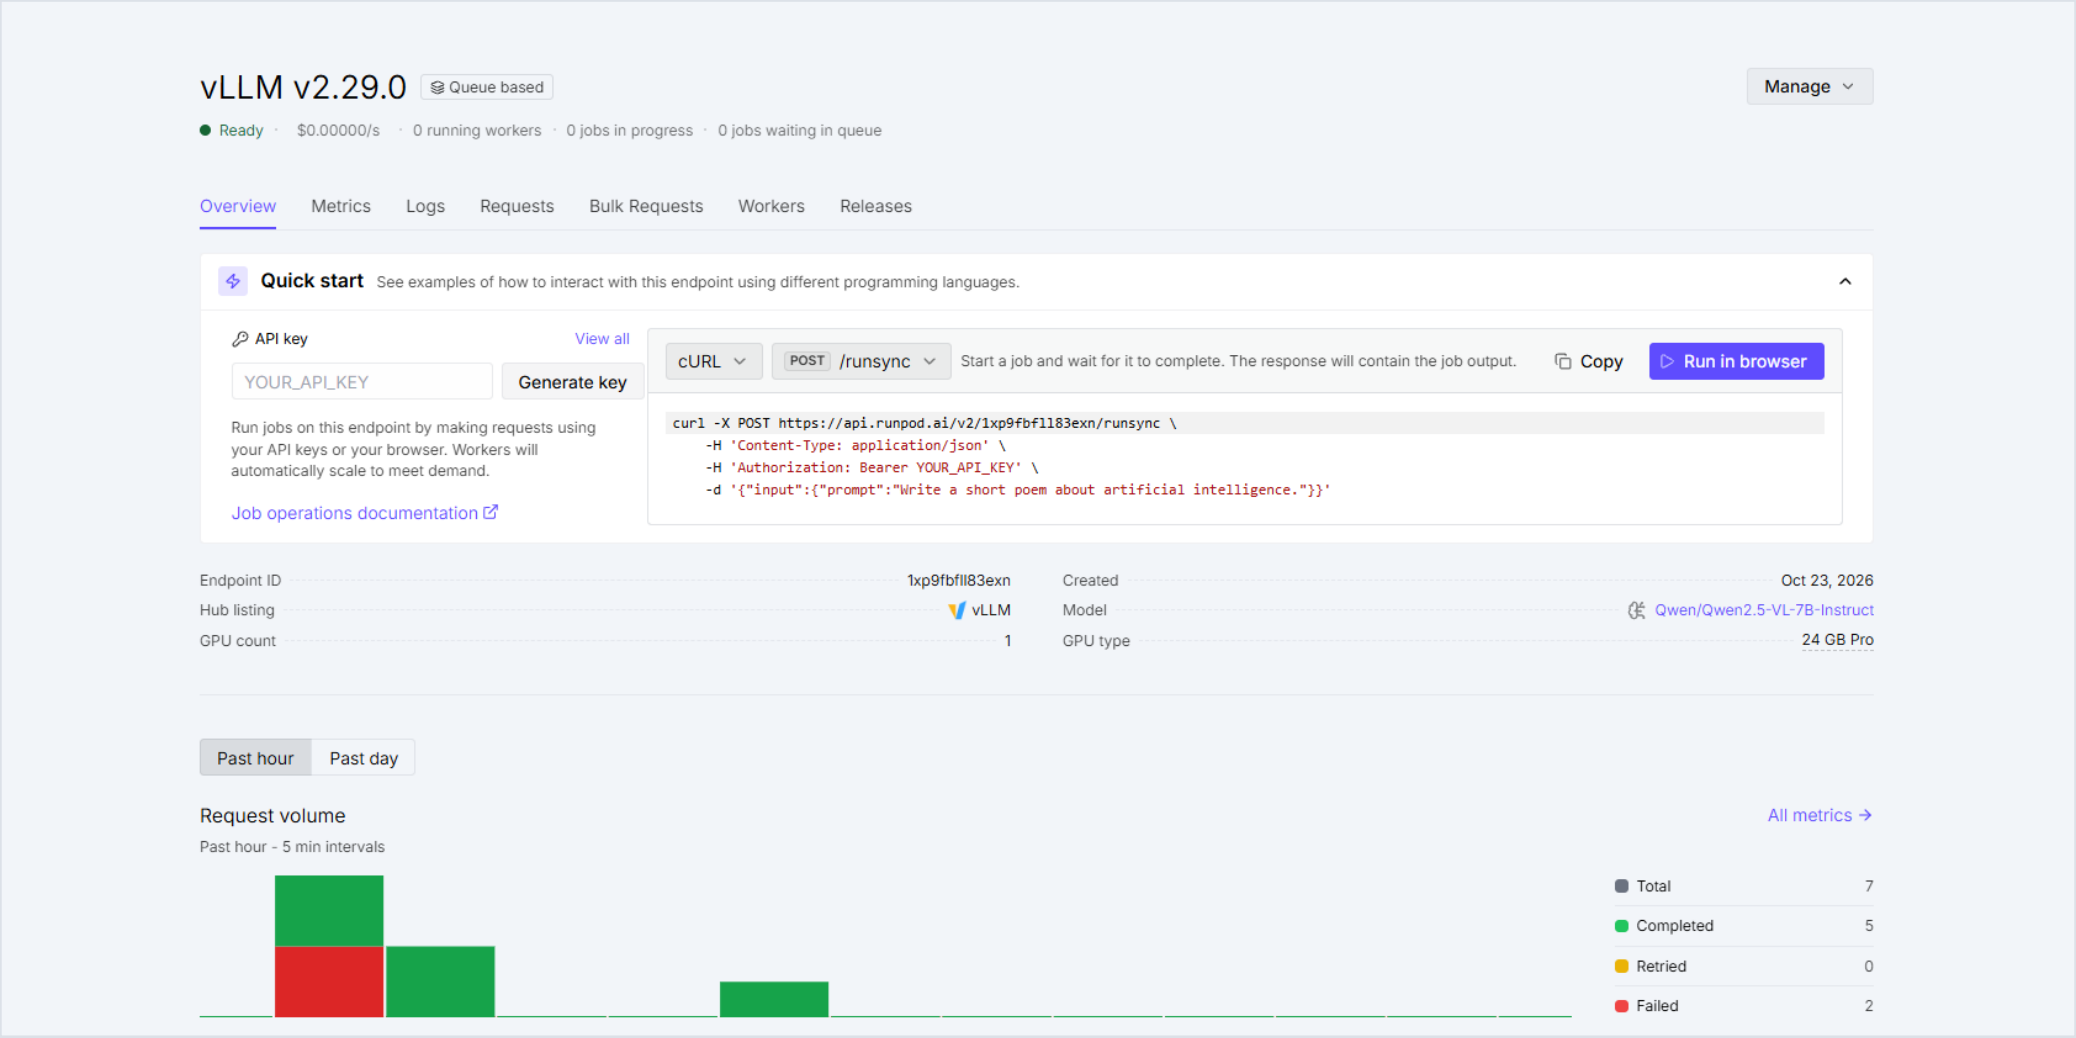


PaySah uses this GPU service to extract receipt fields before rule-based payment verification.

RUNPOD PROOF OF USE

PaySah | UTeMkuCemerlang | Domain 2 - Orbyte Smart SME Challenge

02 Recorded usage

The displayed metrics show 110 requests: 100 completed, 10 failed and 0 retried.

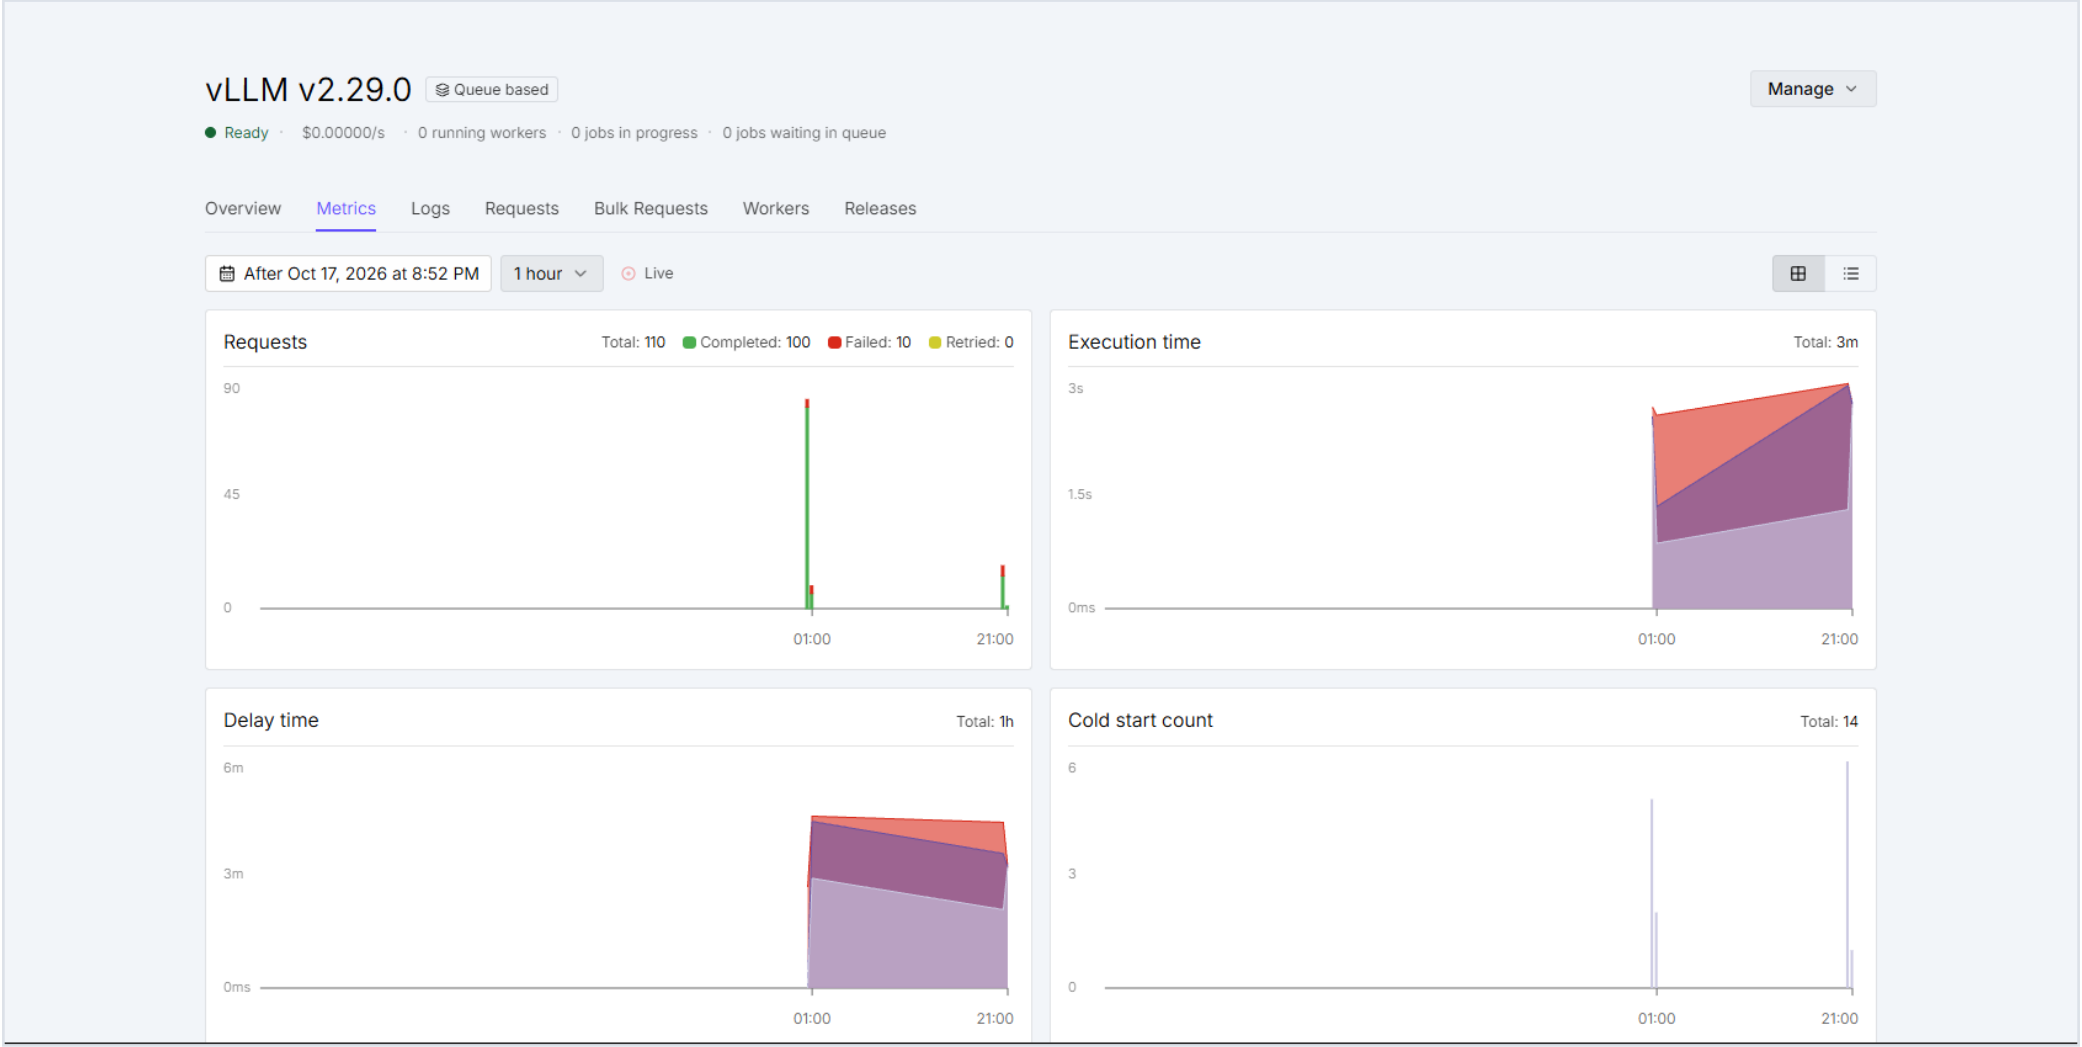


Counts refer to the selected dashboard interval; they are not receipt-reading accuracy results.

RUNPOD PROOF OF USE

PaySah | UTeMkuCemerlang | Domain 2 - Orbyte Smart SME Challenge

03 GPU worker

The Workers view lists an RTX 4090 worker in EUR-NO-1, shown idle at capture.

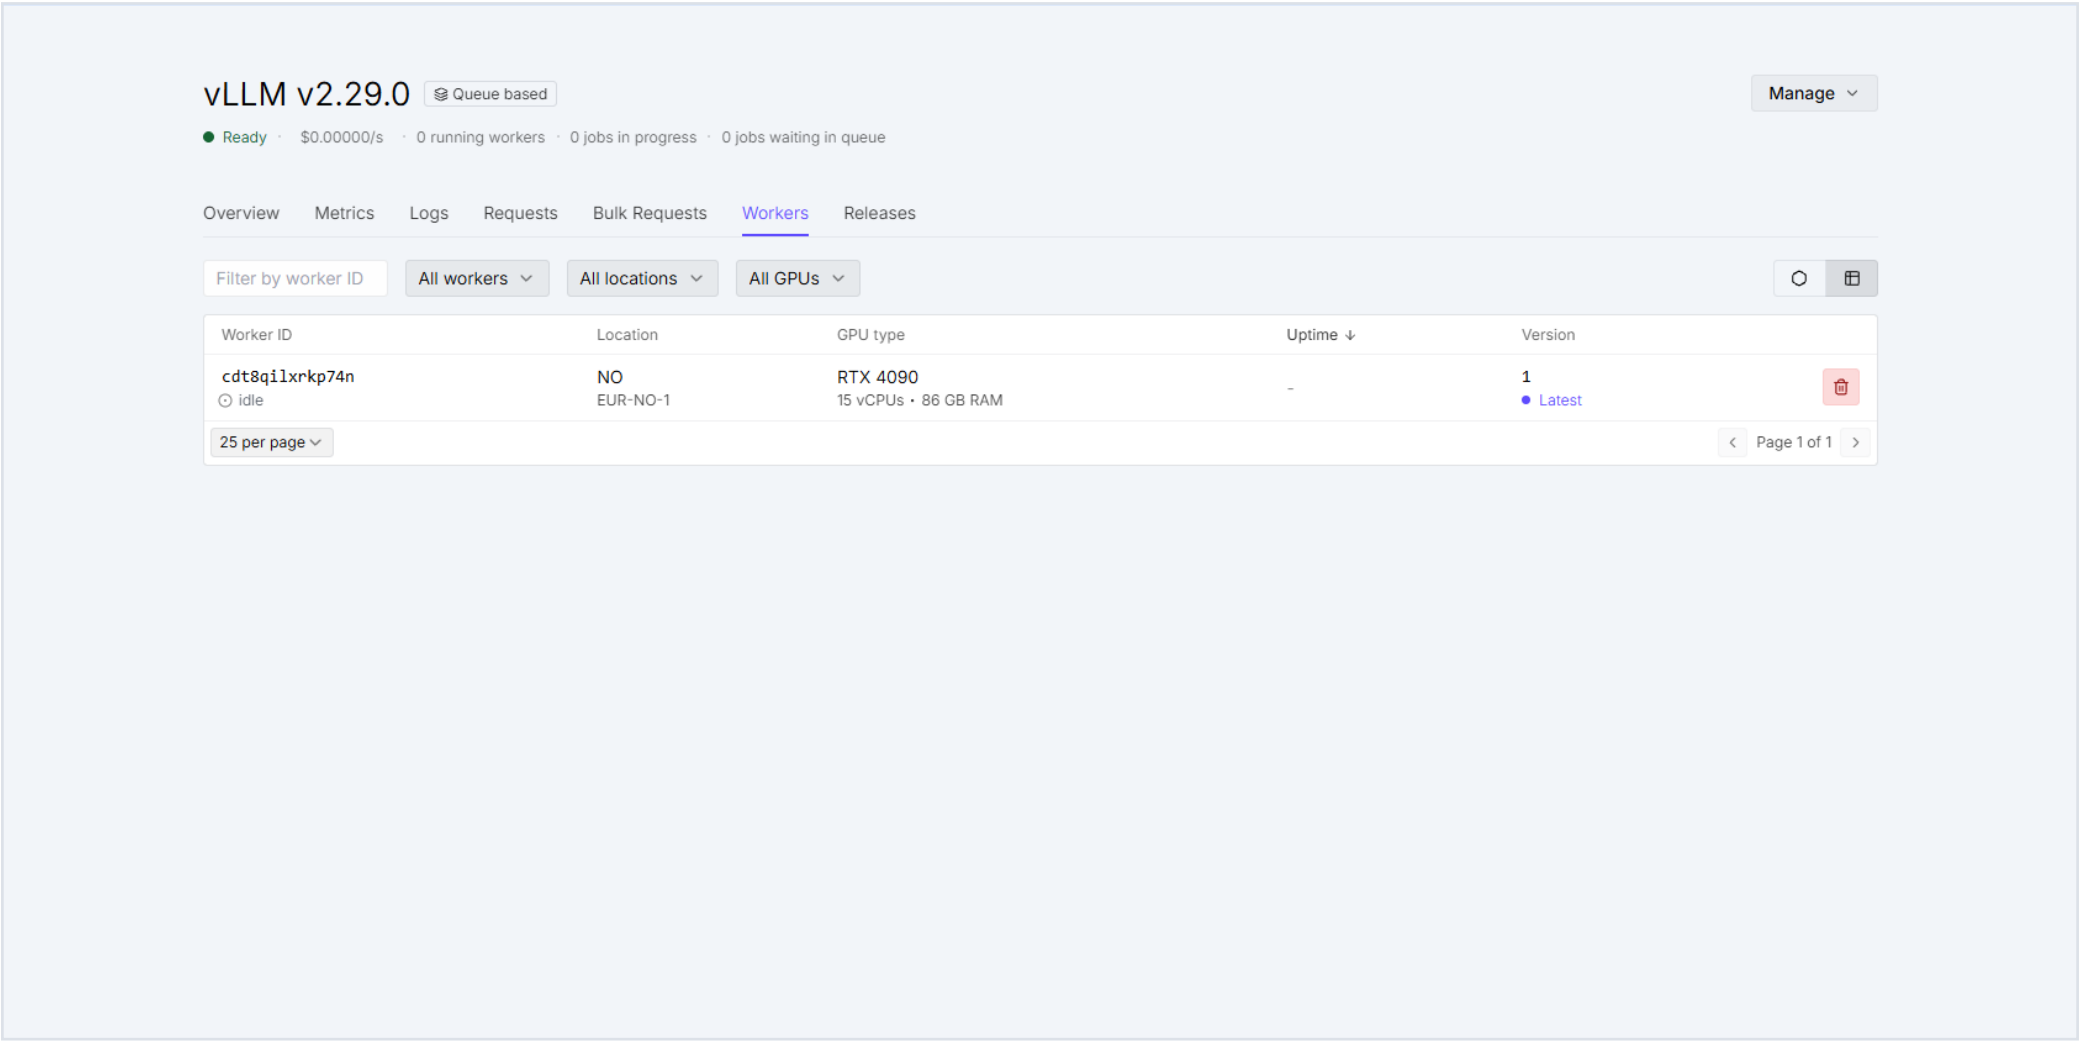


Idle is the captured worker state; it does not indicate continuous GPU execution.

RUNPOD PROOF OF USE

PaySah | UTeMkuCemerlang | Domain 2 - Orbyte Smart SME Challenge

04 Deployed endpoint

The endpoint list shows the queue-based vLLM deployment and one idle worker.

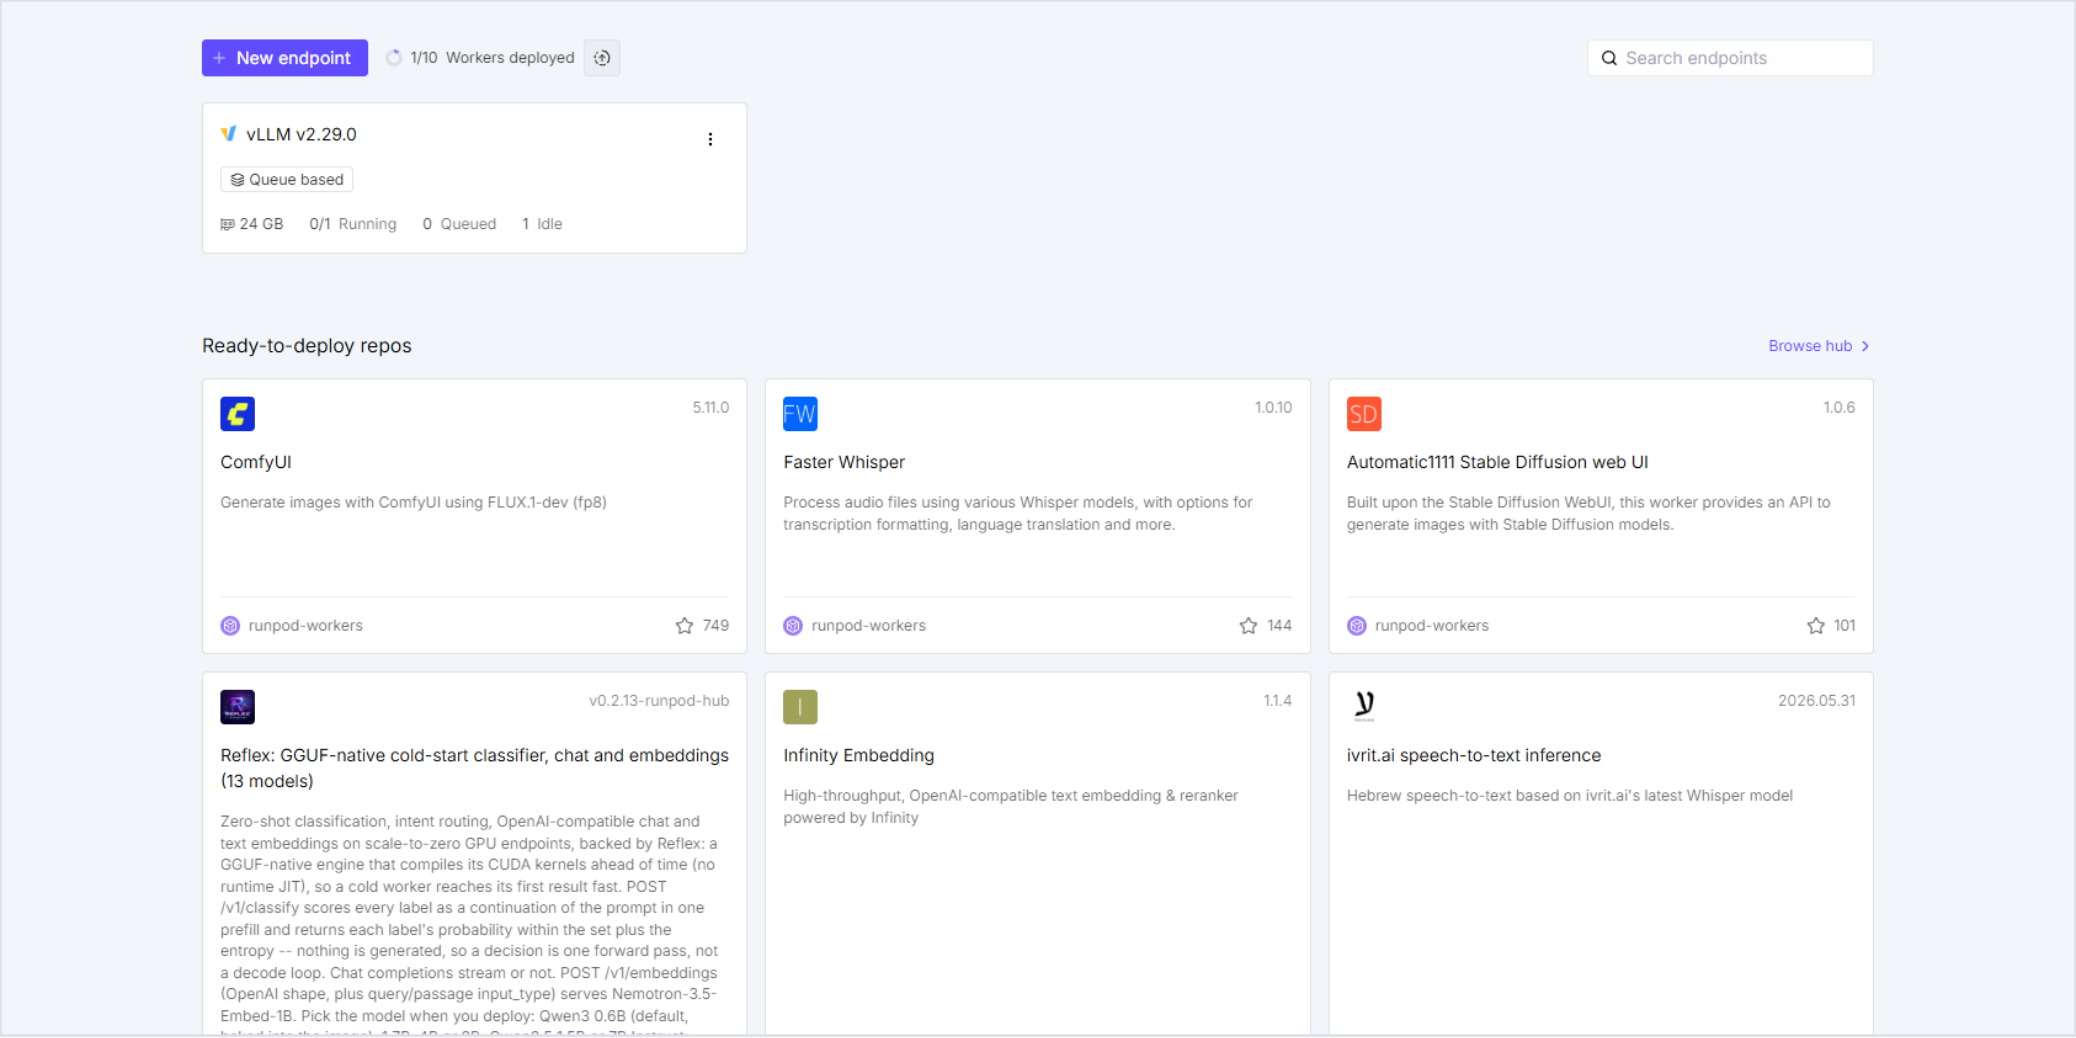


The ready-to-deploy catalog below is platform navigation, not additional PaySah deployments.

RUNPOD PROOF OF USE

PaySah | UTeMkuCemerlang | Domain 2 - Orbyte Smart SME Challenge

05 Account and usage context

The screenshot shows a USD 24.17 balance and a USD 0.000/hr spend rate at capture.

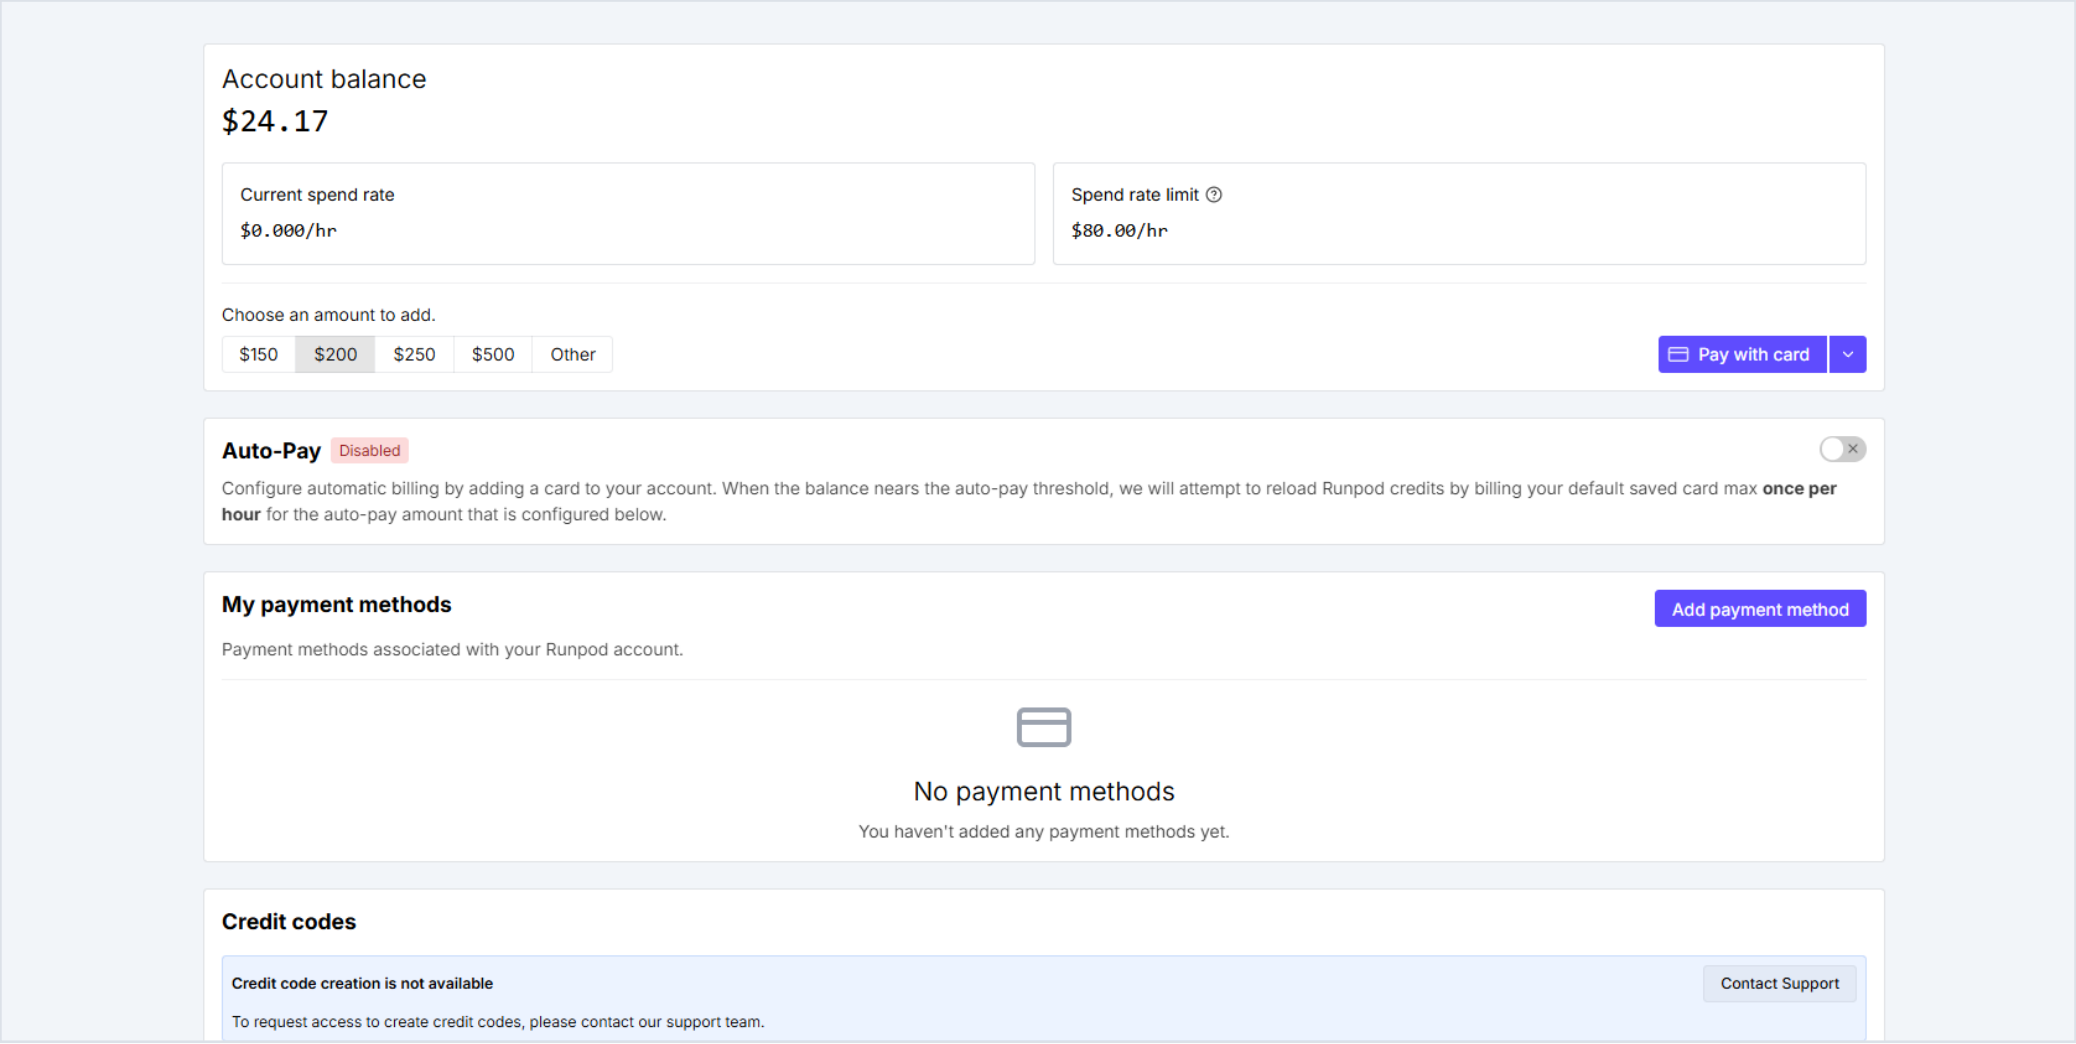

These are historical account values, not a statement of total project cost or current pricing.