



Monitoring of Agents for Dynamic Pricing in different (Re-)Commerce Markets

Monitoring von Agenten zur dynamischen Bepreisung
in unterschiedlichen (Re-)Commerce Märkten

Nikkel Mollenhauer

Universitätsbachelorarbeit
zur Erlangung des akademischen Grades

Bachelor of Science
(*B. Sc.*)

im Studiengang IT-Systems Engineering
eingereicht am 30. Juni 2022 am Fachgebiet
Enterprise Platform and Integration Concepts
der Digital-Engineering-Fakultät der Universität Potsdam

Gutachter

Betreuer

Dr. Michael Perscheid

Dr. Rainer Schlosser

Johannes Huegle

Alexander Kastius

Abstract

Sustainable recommerce markets are growing faster than ever. However, businesses now face the challenge of having to price the same item three times: One price for the new item, one for its refurbished version and the price at which items are bought back from customers. Since these prices are heavily influenced by each other, traditional pricing methods become less effective. To solve this dynamic pricing problem, a simulation framework was built which can be used to train artificial vendors to set optimal prices using Reinforcement-Learning algorithms. Before employing these trained agents in real markets, their fitness must be monitored and evaluated, as even the smallest mistake by the agent can lead to high costs for the business. This thesis introduces a number of ways that agents can be monitored. We come to the conclusion that the most effective tools are...

...todo

Zusammenfassung

Nachhaltige Recommerce-Märkte befinden sich in stetigem Wachstum. Dies stellt Unternehmen jedoch vor die neuartige Herausforderung, dasselbe Produkt mehrfach bepreisen zu müssen: Preise sowohl für die neue und generalüberholte Version sowie ein Ankaufpreis für gebrauchte Ware müssen gesetzt werden. Da diese Preise voneinander abhängig sind, greifen traditionelle Methoden der Preissetzung schlechter. Zur Lösung dieses dynamischen Bepreisungsproblems wurde eine Simulationsplattform gebaut, auf der mithilfe von Reinforcement-Learning Algorithmen maschinelle Verkäufer für den Einsatz in realen Märkten trainiert werden können. Bevor dies jedoch geschehen kann müssen die trainierten Modelle bezüglich ihrer Eignung überprüft und bewertet werden, da bereits der kleinste Fehler zu hohen Verlusten aufseiten des Unternehmens führen kann. Diese Arbeit führt Methoden und Tools ein, die für ein solches Monitoring verwendet werden können. Es wird festgestellt, dass die effektivsten Tools dabei...

...todo

Contents

Abstract	iii
Zusammenfassung	v
Contents	vii
1 Introduction	1
1.1 Objective of the Thesis	1
1.2 The Circular Economy model	1
2 Related Work	5
3 Simulating the marketplace	7
3.1 Market scenarios	7
3.2 Customers	8
3.3 Vendors	10
3.4 Diverging from the real market	14
4 Approaches to monitoring agents	17
4.1 When to monitor what	17
4.2 Monitoring during a training session	18
4.3 Monitoring complete agents	19
4.4 Features for the future	22
5 The <i>recommerce</i> workflow	23
5.1 Configuring the run	23
5.2 Choosing what to show the user during training	25
6 Interpreting the results	27
Bibliography	29
Appendix	31
Declaration of Authorship	33

This thesis builds upon the bachelors project ‘Online Marketplace Simulation: A Testbed for Self-Learning Agents’ of the Enterprise Platform and Integration Concepts research group at the Hasso-Plattner-Institute. Therefore, the project will be referenced and all examples and experiments will have been conducted using its framework.

1.1 Objective of the Thesis

This thesis introduces ways to monitor and evaluate different agents (rule-based as well as trained using various Reinforcement-Learning approaches) tasked with dynamically pricing products in a *Circular Economy* marketplace. We will first introduce the general concept of a *recommerce* market ([The Circular Economy model](#)) and the structure of the framework we built (). In [Related Work](#) we will explore other approaches to market simulations for dynamic pricing, the general concept of Reinforcement-Learning as well as novel approaches to evaluating those agents. This will be followed by an overview of the specific features of a *recommerce* market that we implemented in [Simulating the marketplace](#). In [Approaches to monitoring agents](#) we will give a detailed explanation of the different tools we built and used to monitor and evaluate our different agents. These tools will be put into context in [The recommerce workflow](#), where the different parts of the framework will be joined together and its modularity is highlighted. Finally, we will conduct a number of experiments using our tools in [Interpreting the results](#).

nameref in intro, where the diagram will be

implies plural, currently only one new approach

Highlight modularity in that chapter

1.2 The Circular Economy model

The main goal of the aforementioned bachelors project was to develop an online marketplace that simulates a realistic Circular Economy market environment. A market is most commonly referred to as being a *Circular Economy* if it includes the three activities of reduce, reuse and recycle [KRH17]. This means that while in a classical Linear Economy market each product is being sold once at its *new price* and after use being thrown away, in a Circular Economy, a focus is put on recycling and thereby waste reduction. In our project, we first started by modelling

Better name for the section

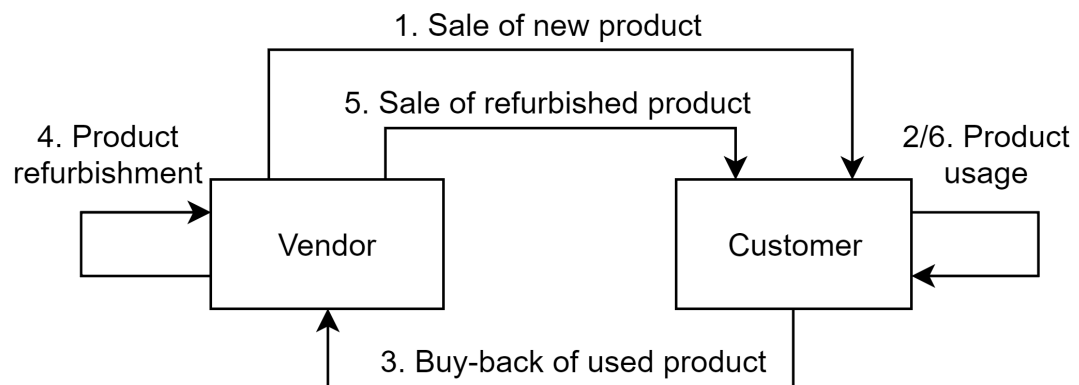


Figure 1.1: The product lifecycle in a Circular Economy. In a Linear Economy, the product lifecycle ends with step No. 2

the simpler Linear Economy, upon which we then built the more complex Circular Economy markets. This was done by adding two additional price channels, *re-buy price* and *used price*, to the pre-existing *new price* of a product. Refer to [Figure 1.1](#) for an overview of the product lifecycle in a Circular economy.

The *re-buy price* is defined as the price a vendor is willing to pay a customer to buy back a used product, while the *used price* is defined as the price the vendor sets for products they previously bought back and now want to sell alongside new products (whose price is defined by the *new price*). We will go into more detail of how we modelled different market scenarios in [Market scenarios](#).

In the context of e-commerce, Circular Economy markets are also referred to as *recommerce* markets. From now on, when mentioning a general *market* or *marketplace*, we are referencing a Circular Economy marketplace with re-buy prices.

Using the simulated marketplace to train agents

After the initial market was modelled the goal was to train agents using different reinforcement-learning algorithms to dynamically set prices on this marketplace, both in monopolistic scenarios as well as in competition with rule-based vendors which set prices following a strict set of pre-defined rules. These rules can range from simply undercutting the lowest competitor's price to more advanced techniques such as smart inventory management and reliance on previous sales data, which can in some cases and combinations even lead to price-fixing and -gouging between competing vendors (see [Vendors](#) for a more in-depth analysis). Further-

Alex: 'Du bringst in der Einführung in der Erklärung des Marktes recht überraschend die Grundidee von RL. Das würde ich vielleicht in eine Extra-Sektion schieben.' -> evtl. in related work?

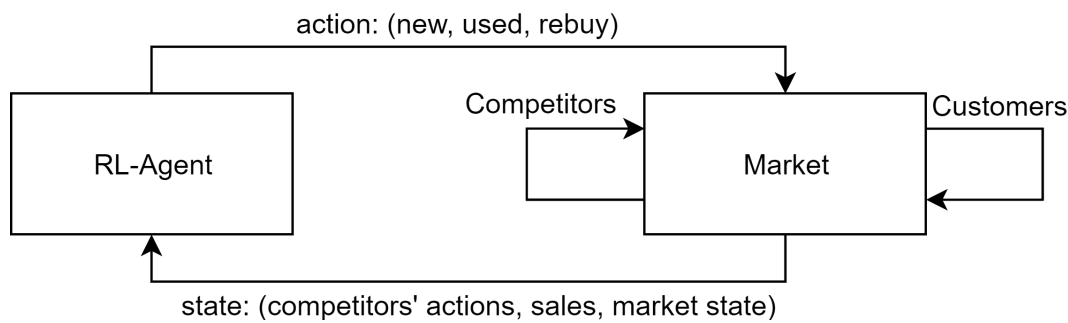


Figure 1.2: The standard reinforcement-learning model in the context of our market.

more, functionality was added that allows for different Reinforcement learning algorithms to be trained against each other on the same marketplace, as well as functionality for so-called *self-play*, where an agent plays against itself, or more precisely, against its own policy.

Reinforcement-learning agents are trained through a process of trial-and-error. They interact with the market through an observable state and an action which influences the following state. [Figure 1.2](#) illustrates the RL-model in the context of our market. The goal of the agent is to maximize its reinforcement signal, which in our case is the profit the agent made during the last episode, since we want to train agents to maximize profits on real markets. An episode consists of a fixed, configurable number of timesteps, where in each step each vendor (agent) sets their prices and customers make purchasing decisions. By observing which prices lead to which profits (reinforcement signal), the agents get more effective in their pricing decisions over the course of training.

2

Related Work

This section will outline approaches to modelling and simulating recommerce market-places, as well as give an introduction into the concepts of Reinforcement-Learning, the technology the framework is built for. Additionally, novel and unconventional approaches to monitoring and evaluation of these Reinforcement-Learning agents will be discussed.

Do you 'discuss'
in the context of
related work?

3

Simulating the marketplace

In this section we will outline the requirements and challenges of transferring the vast amount of features and parameters that influence vendor and customer decisions in real recommerce markets to our simulated market environment. We will take a brief look at different market scenarios as well as how our customers work, with a focus on the unique feature of recommerce markets; the buyback of used items by the vendors. The focus of this chapter will however lie on the vendors, the rule based as well as the ones trained using Reinforcement Learning, comparing their features and how they fare against each other. These comparisons will be done using our various monitoring tools, which will be explained in the following chapter, [Approaches to monitoring agents](#). While results of these experiments will be shortly touched upon, we will go into further detail in the closing chapter, [Interpreting the results](#).

3.1 Market scenarios

In our framework, we implemented a number of ‘market blueprints’ both for classic Linear Economy markets, as well as for Circular Economy markets both with and without rebuy-prices enabled. There are marketplaces available for each combination of the following two features:

1. Marketplace type: Linear Economy, Circular Economy, Circular Economy with rebuy-prices
2. Market environment: Monopoly, Duopoly, Oligopoly

The marketplace type defines the number of prices the vendor has to set. In a Linear Economy, vendors only set prices for new items, in a Circular Economy prices for refurbished items need to be set as well. In order to simulate a recommerce market, the user can choose a Circular Economy with rebuy-prices. The market environment defines the number of competing vendors in the simulation: Monopolistic and competitive markets are available, where the Duopoly is simply a particular version of an Oligopoly. Depending on the chosen market environment, one, two, or any number of vendors can be chosen to be used in the experiment.

In the most common usecase of our framework, the training of Reinforcement-Learning agents, only the agent that is to be trained needs to be configured by the user. For this reason, each market environment is equipped with a pre-defined set of competitors that will play against the agent defined by the user. To allow for more control over the simulation, users are however also able to customize this ‘competitor-list’ to use any vendors they want - as long as they are a valid fit for the marketplace type and the number of competitors chosen matches the market environment. In certain situations, such as the [Agent-monitoring](#) tool, multiple Reinforcement Learning agents can be chosen to compete on one market.

Market state random shuffle

3.2 Customers

Customers are at the center of every type of marketplace, which makes them an integral part of our market simulation. However, since each customer in the real market is an individual with different reasonings and makes purchase decisions based upon personal preferences, modelling a realistic depiction of real-world customers proves to be very difficult and time-consuming. For this reason we decided to keep our initial implementation of the customers as simple as possible, taking into account future extension and scalability concerns.

Most customers’ behaviour can be classified into one of a (non-exhaustive) number of categories, such as *Perfectionistic* or *Impulsive* consumers, proposed in [EIT13] (see [Table 6.1](#)). As we are focussing on dynamic pricing and our vendors can only change/influence the prices of their products, we decided on primarily building customers that value price over any other features a product may have, thereby incentivizing our vendors to make the most of their pricing power. This behaviour coincides with the shopping style of the *Price Conscious* or ‘*Value for money*’ consumer.

To make Linear markets a little more complex and add another dimension than just the *new price* of a product for vendors to consider, random quality values are assigned to each vendor’s products. Customers in this economy model were modelled take this quality value into account when making their purchasing decisions, further reinforcing the shopping style mentioned above. As Circular Economy markets are inherently more complex than their linear counterparts (through the addition of two new price channels, which influence each other through their effect on customers), it was decided to remove the additional layer of quality values from these markets.

Within each simulated step, after the various vendors have set their prices, purchase decisions are made by the customers. To save on computational time,

probability distributions are used to determine what part of the total number of customers will decide to take which action. See below the way these distributions are calculated for an exemplary Circular Economy marketplace:

► **Definition 3.1.** Let P_{in} be the price of the new and P_{ir} the price of the refurbished product of vendor i . Using these prices, for each vendor, we define R_{in} as the *preference ratio* regarding P_{in} :

$$R_{in} := \frac{10}{P_{in}} - e^{P_{in}-8}$$

and similarly, R_{ir} as the *preference ratio* regarding P_{ir} :

$$R_{ir} := \frac{5.5}{P_{ir}} - e^{P_{ir}-5}$$



In order to be usable as a probability distribution, the different ratios need to add up to 1. We use *softmax* to normalize our values, after which each *preference ratio* will be within the interval $(0, 1)$, with all ratios adding up to 1 as needed.

Following this, the market uses a *multinomial* distribution to draw n samples, with n being the number of customers making a purchasing decision in this step of the simulation.

As mentioned above, the current decisionmaking process of customers in our simulation is still quite basic. [Diverging from the real market](#) introduces a number of parameters and circumstances that can be used to make customer behaviour more realistic. Through the modular approach when building the framework, any customer behaviour implemented in the future can easily be added to the pool of available options, as long as it manifests in the form of a probability distribution, at which point the number of customers can be split between different distributions when drawing from the *multinomial* distribution (or any other distribution if so desired).

Owners

Once a customer has decided to buy a product from any of the available vendors, they turn into an *owner*. In the next step of the simulation, they are offered the option of selling their now used product back to one of the vendors. If they decide to do so, the vendor pays them the advertised *re-buy price* and adds the used product

to their inventory, from where it can then be sold as a refurbished product in the next step.

In our simulation, all owners are memoryless, meaning that they do not remember the original price they paid for the product. Additionally, each vendor in the market is obligated to buy back any product, independent of the original vendor. In each step, every owner has the option to either keep the product for another step, discard it (meaning it is removed from circulation and not sold back to a vendor), or sell it to any one of the vendors in the market. Similarly to the way we compute customer purchasing decisions, the decisions owners take are also represented through probability distributions. When deciding if and to which vendor a product should be sold, the following formula is used:

► **Definition 3.2.** We keep the definitions from [Definition 3.1](#). Additionally, let P_{ib} be the price at which vendor i is willing to buy back an owner's product. For each vendor, we define P_{im} as the purchase option with the lowest price:

$$P_{im} := \min(P_{in}, P_{ir})$$

We define the likelihood R_{ib} that the owner will return their product to vendor i as follows:

$$R_{ib} := 2 \cdot e^{(P_{ib} - P_{im})/P_{im}}$$

Additionally, the owner's *discard preference* R_d is updated for each vendor as follows:

$$R_d := \min(R_d, \frac{2}{P_{ib} + 1})$$

Meaning the owner is more likely to discard their product if re-buy prices are low across the board. ◀

3.3 Vendors

Vendors are the main focus of our market simulation. While our framework will not be able to reproduce all types of pricing models used in the real market, we strive to model as many different models as possible (and feasible in the scope of the project). We will use the following four types of dynamic pricing models, as described in 'Dynamic pricing models for electronic business' [[Nar+05](#)], to group our different approaches and see how each type performs in the context of our simulation framework:

Alex: 'Die Erklärung der Methoden die ihr zum Pricing benutzt leidet ein wenig an der selben Angelegenheit, da werden Klassennamen genannt, mit denen der Leser potenziell nichts anfangen kann, aber eine Erklärung was die einzelnen Methoden tun fehlt fast völlig, oder benutzt sehr unspezifische Formulierungen wie 'This agent does not take pricing decisions of its competitors in the market into account, 10 but simply acts according to its own storage costs.' Der letzte Satz gibt zwar eine gute Einleitung ab, aber erklärt nicht was der Algorithmus eigentlich

1. *Inventory-based models*: These are pricing models which are based on inventory levels and similar parameters, such as the number of items in circulation. In our framework, almost all rule-based agents consider their inventory levels when deciding which prices to set. The only exception to this rule are the simplest of our agents, the *FixedPriceAgents*, which will always set the same prices, no matter the current market state and competitor actions. We chose to implement this rather incompetent type of agent, as there are still many vendors in the real market which do not make use of dynamic pricing models, but use static pricing methods like these *FixedPriceAgents* instead. Not including these in our framework would therefore remove a fraction of realism.

Inventory-based models are comparatively easy to implement, as they only depend on data immediately available to the vendor. This has the advantage that rule based agents based on this technique are relatively simple to create and modify. Examples of *Inventory-based agents* in our framework can be found in the *RuleBasedCEAgent*, one of *RuleBasedCEAgent* the first rule based agents we created. This agent does not take pricing decisions of its competitors in the market into account, but simply acts according to its own storage costs. While its performance is not necessarily bad, it is still one of the weakest competitors currently available in the framework.

Compare this agent with other agents, RL, FixedPrice, better rule-based!

2. *Data-driven models*: *Data-driven* models take dynamic pricing decisionmaking one level further. They utilize their knowledge of the market, such as customer preferences, past sales data or competitor prices, to derive optimal pricing decisions. Aside from the aforementioned *FixedPriceAgents* and the basic *RuleBasedCEAgent*, all of our other rule based agents fall into this category. One of the most prominent examples of a *Data-driven model* is the *RuleBasedCERebuyAgentStorageMinimizer*. This agent bases its prices on two major factors. First, it reacts to its competitors prices by matching its initial prices to the median price of its competitors, and then adjusts them according to current inventory. Notably, all of our *Data-driven models* are also *Inventory-based* to a certain extent, as handling storage plays a big part in a Circular Economy market setting, where used products need to be bought back from customers and subsequently undergo refurbishment while in inventory of the company. *Data-driven models* have proven to be the most competent rule based agents in our recommerce market scenario, in particular the above described *RuleBasedCERebuyAgentStorageMinimizer*, which only consists of ten lines of code but is still able to outperform seemingly more complex *Inventory-based models*.

Graphs

3. *Game theory models*: Game theory concerns itself with the study of models for conflict and cooperation between rational, intelligent entities [Mye97]. It is therefore often applicable in situations where competing individuals, acting rationally and selfishly interact with each other. In our framework, competitors in the market are influenced in their decisionmaking processes by the actions of other participants of the scenario. While none of our rule based agents have been specifically designed to act according to game theoretic strategies, due to the fact that almost all of them consider their competitors prices in their pricing decision, and due to the nature of Reinforcement Learning trying to maximize their own profits without regard to their competitors performance, behaviour according to Game theory can sometimes be observed. During training, Reinforcement Learning agents observe the market state, which includes prices and sales data not only of themselves but also the other vendors in the market. Using this data, the algorithms try to predict how their prices will influence customer behaviour as well as the competing vendors. In some cases, depending on the concrete behaviour of the competitors, vendors may cooperate in driving prices higher together, in other cases the agents may act more selfishly, sacrificing own profits to stay ahead of their competitors in other regards.

Need graphs to back this claim up! Especially price-graphs, moving up and down etc.

Graphs

Alex: 'Ich würde die SB Algorithmen hier lieber bei den anderen mit einordnen, da gehören sie ja schematisch dazu. Dann am Ende kurz erwähnen, dass die Implementierung dieser Algos aus der SB Lib kam. Die Kategorie Q-Learning wäre mit Value-Learning oder Temporal Difference Algorithmen besser beschriftet, das wären die beiden üblichen Oberbegriffe für die Algorithmen die auf Basis vergangener Beobachtungen (Q-) Values schätzen'

Make sure to get some comparisons between these algorithms going!

This must not be 'cited', right?

4. *Machine learning models*: All of our Reinforcement learning agents fall into the category *Machine learning models*. As it is not the focus of this thesis, we will not go into detailed explanations of the various models used, but instead focus on how they perform in relation to each other. The algorithms used by us can be grouped together into the following three categories:

- *Q-Learning*: *Q-Learning* agents were the first Reinforcement Learning agents we introduced in our framework, as it is one of the easier Reinforcement-Learning algorithms to implement [KLM96]. However, the drawback of using *Q-Learning* in our framework is that it can only be applied to discrete action and state spaces. In the initial exploration-phase of our simulation framework this was not a problem, as relatively small action spaces were used, adapted to this limitation. This means that when using *Q-Learning*, only 'whole' prices can be set, and any decimal places must be omitted. This of course limits the framework in its realism, as the fine-tuning of prices using decimal places can be critical in influencing customer decisions. It should be mentioned that while this limitation is known to us, our simulation framework still operates on discrete action and state spaces, both to allow algorithms like *Q-Learning* to still function and to not overly complicate the simula-

tion, as many of the other components (such as customer behaviour, see [Customers](#)) are still very basic in their nature as well. The *Q-Learning* used in our framework have been custom implemented by us, using the *pytorch*¹ framework. While approaches for *Q-Learning* algorithms that can work with continuous action and state spaces have been presented in the past ([[GWZ99](#)], [[MPD02](#)]), we have chosen not to implement such an algorithm in our framework, but rather explore more approaches other than *Q-Learning*, introduced below.

- *Actor-Critic*: *Actor-Critic* algorithms are more complex than *Q-Learning* algorithms, and have therefore been implemented later in the process. They are structured different than *Q-Learning* algorithms in the way that they are ‘split’ into two parts: The *actor* is responsible for selecting actions, while the *critic* is responsible for criticizing the actions taken by the *actor*, thereby improving its performance [[SB18](#)]. Similar to the *Q-Learning* agents, the *Actor-Critic* algorithms have also been implemented by us. In total, one discrete and two continuous *Actor-Critic* agents can be used, in addition to those provided through *Stable-Baselines*, see the next section.
- *Stable-Baselines*: *Stable-Baselines* provides a number of open-source implementations for various Reinforcement-Learning algorithms. In our framework, we use the latest version of these algorithms, through *Stable-Baselines3* [[Raf+21](#)]. The advantage when using algorithms provided through *Stable-Baselines* lies in the fact that they need close to no custom implementation from our end, we can instead interact with them through very simple interfaces. This cuts down on the amount of time and effort that needs to be spent developing, implementing and maintaining these powerful algorithms, and allows us to introduce a higher number of algorithms than would otherwise be possible. Currently, five different *Stable-Baselines3* algorithms are used in our simulation framework, see the *Stable-Baselines3* documentation for more information [[Bas22](#)]:
 - *A2C*: Advantage-Actor-Critic
 - *DDPG*: Deep deterministic policy gradient
 - *PPO*: Proximal Policy Optimization
 - *SAC*: Soft Actor-Critic

¹ <https://pytorch.org/docs/stable/index.html>

- TD3: Twin-delayed deep deterministic policy gradient

We will be using some of these algorithms in our experiments and briefly compare them with our Rule-Based approaches using our various monitoring tools, which are introduced in [Approaches to monitoring agents](#).

3.4 Diverging from the real market

This focusses mostly on customer behaviour, should it perhaps be a subsection of the customer section?

We do not claim in any way that our simulation framework is exhaustive or complete. There are a number of parameters influencing market dynamics, small and great, which have not been modelled due to time constraints or their unpredictability in their effect on the market state or customer decisions. Seasonality of demand, customer retention, loyalty through branding and unforeseen effects on market dynamics such as global events (for example, the Covid-19 pandemic) are just some of the places where our market simulation diverges from the real market, following its inability to model these circumstances. However, all of these factors are either very rare in nature (global, unforeseen events), only applicable to a subset of markets (brand loyalty) or can initially be discarded as their effect on market dynamics is predictable, making them a lower priority than other parameters (seasonality).

The factors mentioned above all have an impact on both Linear and Circular markets, but there are also a number of parameters that are specific to Circular or even recommerce markets in particular. In the modern recommerce market, more and more consumers make their initial purchasing decisions with the product's eventual resale value already in mind [TP19]. Additionally, a great number of different motivations for choosing second-hand or refurbished products over traditional new ones can be identified. An exemplary study conducted in 2008 ([RG08]) classified such motivations into 15 different categories (see [Table 6.2](#)), all of which could be used to add dimensions to customer behaviour in our simulation framework, thereby making the whole simulation more realistic.

Of course, this results in the fact that our framework can not be used out-of-the-box for any kind of market. However, great care was taken during the development process to build each part of the simulation in a modular way, so that new functionality can easily be integrated into it. Marketplaces, customers and vendors (rule-based as well as those using Reinforcement learning) have all been implemented as classes disconnected from each other, so that new variants of each can easily be added to the pool of available options to be used in experiments. The

Diagram for modularity here/reference here

same goes for our monitoring tools, all of which have been built to work with any (valid) combination of input parameters.

The lack of realism on certain areas of the framework does not directly impact the way that our monitoring tools work or can be used. It must however be noted that the interpretation of results must always be based on the knowledge of these limitations.

4

Approaches to monitoring agents

In this section we will take a look at the different approaches we took to monitoring agents in our framework, explaining the reasons why we chose to implement specific features and how they help us in determining an agents strengths and weaknesses.

Alex:
'Klassendiagramm/FMC-Diagramm für die Übersicht? Du nennst recht Häufig Komponenten, eine Gesamtübersicht wie sie interagieren wäre gar nicht schlecht.' -> Würde ich in die introduction packen

4.1 When to monitor what

Our *workflow* (which will be explained in more detail in [The recommerce workflow](#)) can generally be split into two parts when it comes to monitoring and evaluating agents: *during* and *after* training. When talking about the *workflow* we refer to the process of configuring and starting a training session, where a Reinforcement-Learning agent is being trained on a specific marketplace against competitors. The *workflow* also includes the subsequent collection of data used to evaluate the agent's performance. We are also introducing the term of the *complete agent* in this section, which will be used to refer to both Reinforcement-Learning agents that have been fully trained as well as rule-based agents which do not need training.

As mentioned above, we split our monitoring tools into the following two categories:

1. During training: Having data available as soon as possible without having to wait for a long training session to end is crucial to an efficient workflow. Our framework enables us to collect, visualize and analyze data while a training session is still running. This enables us to filter out agents with sub-par performance prematurely. This can be done using user-defined thresholds or on the basis of previously collected data (e.g. only keeping agents that are performing better than at least 50% of other agents after the same amount of training in comparable scenarios.)
2. On complete agents: After a training session has finished we have a complete and final set of data available for an agent, which enables us to perform more thorough and reliable tests. These can include simulating runs of a marketplace to gather data on the agent's performance in different scenarios and against different competitors, or running a static analysis of the agent's

Implement this feature. It should at least be able to temporarily halt the training to start an intermediate monitoring session

Also implement this feature. Allow users to set rules for when a training session should be terminated if the agent is not performing well at a certain point. Also, it should be able to give the program a set of datapoints and have it set rules if possible

policy in different market states. The tools available for trained agents are in the same way also usable on rule-based agents.

If we also conduct experiments in this chapter, mention it here

In the following sections, we will take a look at all of the tools our framework provides for monitoring agents, distinguishing between the two general types of monitoring mentioned above. The goal of this section is to give a short overview of each tool, how and why they were implemented and what value they offer to the framework as a whole and to the analysis of agent reliability and robustness in particular. We will also discuss features that are currently not available, explaining how they could benefit the entire workflow or enrich the overall experience.

4.2 Monitoring during a training session

Alex: 'Der erste Satz in 4.2 ist nicht nur keine Footnote, sondern durchaus wichtig, mir wurde aus Kap 3 nicht unbedingt klar, welche der Pricing-Systeme ausgemessen werden. Bei nicht-lernenden Strategien ließen sich ja durchaus Performance-Kriterien ableiten, die in der Praxis ausgemessen werden müssten (zB wenn man wissen will wie 2 unterschiedlich konfigurierte Rule-Based Agents miteinander interagieren oder welche Rand-Szenarien dazu führen dass eine rule-based Strategie 'exploitet' wird).'

When talking about monitoring agents during a training session, we are always talking about Reinforcement-Learning agents, since Rule-Based agents always perform the same and cannot be trained. Monitoring agents while they are still being trained enables us to be more closely connected to the training process. Ultimately, the goal of such monitoring tools is to be able to predict the estimated 'quality' of the final trained agent as reliably as possible while the training is still going. Users must however be careful when interpreting the results of monitoring tools that work on 'incomplete' agents, we will go more into this in [Interpreting the results](#).

Tensorboard

The *Tensorboard* is an external tool from the from the Reinforcement-Learning library *Tensorflow*². With just a few lines of code a training session can be connected to a Tensorboard. We are then able to pass any number of parameters and metrics we deem interesting or useful to the Tensorboard, which then offers visualizations for each of them, updating live as the training progresses. Though the Tensorboard does not interpret data in any way, it is an immensely useful tool for quickly and easily recording data and offering a first rough comparison of competitors in the market.

Citation or footnote?

Question for the tutors: Do I give an example of such code?

Create some sample diagrams. Perhaps these can be re-used in the workflow section, so they could perhaps be moved to the Appendix for reference?

Live-monitoring

Unlike the Tensorboard, the monitoring tools summarised under the term *live-monitoring* were completely and from the ground up built by our team. For most

² <https://www.tensorflow.org/>

of the visualizations, the *matplotlib*³ library was used. Live-monitoring aims to be more configurable and in-depth with the metrics it offers than the aforementioned Tensorboard. During a training session, ‘intermediate’ models, as we will call them, are being saved after a set number of episodes. These models contain the current policy of the agent and can be used the same as models of complete agents, the only difference being the quality of the agent, as those with a lower amount of trained episodes generally perform worse. These intermediate models can then be used by a range of monitoring tools available to us. Since the models only contain the current policy of an agent but not the history of states and actions preceding the model, we need to run separate simulations on these models to be able to analyze and evaluate them. For this, we utilize our *agent-monitoring* toolset, which will be explained in more detail in the [Agent-monitoring](#) section.

make the current live-monitoring so that graphs are actually being created while the training is running, not like it is now with graphs only being created afterwards

Have we introduced the concept of episodes before? Should a Glossary be introduced, or do we do this stuff in the introduction?

Alex: ‘das ist eine Behauptung, die du definitiv untermauern musst. Gerade RL Agenten neigen zu Catastrophic Forgetting, was deiner These hier diametral widerspricht. Wenn das bei eurem Use-Case nicht auftritt, wäre es hier an der Stelle den empirischen Beweis dafür aus euren Messungen wenigstens zu nennen, sollte er später noch folgen.’

4.3 Monitoring complete agents

The following tools offer a wide range of functionalities for monitoring complete agents. We can use these tools to both determine the reliability and robustness of one certain agent, but also to compare different agents, either during a joined monitoring session or by comparing results of monitoring runs on identically parametrized market situations.

Agent-monitoring

Using the *Agent-monitoring* toolset, users can configure a custom market simulation, using the following parameters:

1. Episodes: This parameter decides how many independent simulations are run in sequence. At the start of each episode, the market state will be reset. Within an episode, each vendor runs through 50 timesteps, during each of which a price is set (depending on the chosen economy type, this can range from only one price for new items to three prices, including a re-buy price for used items) and a set number of customers interact with the vendors.
2. Plot interval: A number of diagram types enable the user to view averaged or aggregated data over a period of time. The plot interval parameter decides the size of these intervals. Smaller intervals mean more accurate but also more convoluted data points. Computational time also increases with a smaller interval size.

These diagrams can be seen/are explained in...

³ <https://matplotlib.org/stable/index.html>

3. Marketplace: Using this parameter, the user can set the marketplace on which the monitoring session will be run. See [Market scenarios](#) for an explanation of the different available marketplaces.
4. Separate marketplaces: This parameter is a boolean flag that determines the way in which the monitoring session will handle the agents given by the user. If the flag is enabled, each agent will be initialized on a separate instance of the set marketplace, meaning that the agents will be monitored independently from each other. In this case, each agent will play against the pre-defined set of competitors, depending on the chosen marketplace (see also [Market scenarios](#)). This functionality is most useful when directly comparing two or more agents against each other, as all of them will be playing under the same circumstances, without influencing each other. While it may seem like the same results could be reached by simply starting multiple monitoring sessions with a different agent each, this is not the case. Using this flag, it is ensured that all agents get the exact same starting conditions for each episode. Normally, the market state is randomly shuffled at the beginning of each episode (see [Market scenarios](#)), which would lead to inconsistent results. By running multiple marketplaces in parallel using the *Agent-monitoring* tool, we can ensure that all agents are given the same states at the start of an episode, to match the simulations as closely as possible. However, we cannot influence the competitors' behaviour in the different marketplaces, as these are always dependent on the agents' actions and can therefore not be replicated on different markets. If the flag is disabled, the monitoring tool will initialize only one marketplace and set the passed agents to directly compete against each other on this marketplace. In this case, the number of agents that must be passed is determined by the number of competing vendors defined by the market environment. This functionality is most useful when evaluating a single agent, trying to determine its specific strengths and weaknesses against certain opponents, something that would not be possible with the static pre-set competitors. In this sense, the configuration can be used in two ways: To either have multiple trained agents play against each other to find out which one beats the other, or to monitor a single agent against a custom selection of rule-based competitors not available otherwise. In order to confirm trends seen during the training process, the same configuration can be re-used for this tool to have the trained agent play against the same competitors on the same market again. Similarly, micro-adjustments can be made to analyze how the trained agent reacts to changes to his learnt environment.

5. Agents: Depending on the chosen marketplace, only a select number of valid agents can be chosen to be monitored, as each agent is built to interact with a specific type of marketplace. First off, all agents belong to one of the two major categories: *Reinforcement Learning agent* or *Rulebased agent*. Reinforcement Learning agents can only be monitored on the same marketplace type they were trained on, while the market environment may be changed. Rulebased agents can similarly only be used on the marketplace type they were built for, as each of them makes assumptions about the number of prices they will need to set. This leads to not all marketplace types having the same amount of rule based vendors available. Following their importance for our simulation framework, the Linear Economy has the least and most often weakest vendors available, while the more refined competitors are most of the times only available as a version compatible with the Circular Economy with rebuy prices.

During each episode and for each vendor, all actions and market events are being recorded using *watchers*. At the end of a monitoring session, the collected data is evaluated in different visual formats. First of all, all data that would be available to see in the *tensorboard* during a training session is visualized using density plots. These plots can be used to compare the vendors in a more granular way, if for example the effect of a parameter on the customer's sell-back behaviour of used items should be tested. Another view that is created is a bar diagram containing the cumulative profits per episode for each agent plotted against each other. This allows for a quick overview to see which agent had an overall better performance.

Do I keep this new word? If yes, it should be explained at least a little bit!

The most common usecase of the *Agent-monitoring* tool is to test trained agents against competitors other than the ones it was trained against. This is done to test the *Reliability* of the agent, an important factor in deciding an agent's quality, as its competitors in the real market will differ from any it has encountered in training, due to the sheer vastness of options when it comes to dynamic pricing models available nowadays, see [Vendors](#).

Exampleprinter

The *Exampleprinter* is a tool meant for quickly evaluating an agent in-depth. When run, each action the monitored agent takes is being recorded, in addition to market states and events, such as the number of customers arriving and the amount of products thrown away. For certain market scenarios such as the *CircularEconomyRebuyPriceDuopoly*, which simulates a circular economy model with rebuy prices in which two vendors compete against each other, these actions and events are also

being summarised as an animated graphic, where each time-step is being illustrated.

Add in a graphic here. Perhaps have two of the time-steps to 'simulate' the animation

Policyanalyzer

The *Policyanalyzer* is our only tool which does not simulate a run of the market scenario. Instead, the tool can be used to monitor an agent's reaction to different market events. The user can decide on up to two different features to give as an input, such as the competitor's new and used prices, and the Policyanalyzer will feed all possible input combinations to the agent and record its reactions.

Diagram

4.4 Features for the future

This section is meant as a collection of ideas and approaches for tools that could further enhance the workflow, but which have not been implemented and therefore not been tested for their feasibility and usefulness.

5

The *recommerce* workflow

The main goal of the bachelor's project is to provide a simple-to-use but powerful interface for training Reinforcement-Learning algorithms on highly configurable markets for users in both a research and a business context. To achieve this, multiple components had to be developed and connected to create the workflow we now provide. This section will go over the most important parts of the workflow, focusing on the way each of them supports the monitoring capabilities of the framework.

Alex: 'Wenn du am Anfang eine Auflistung deiner Messkriterien Reliability und Robustness abgeliefert hast, wäre das hier ein guter Ort um alles zusammenzubringen und zu sagen: 'Und so messe ich die jetzt und zwar deswegen:'"

Better word for components

Diagram for the whole workflow?

Is this 'zu wertend'?

5.1 Configuring the run

Unarguably, the most important part of the whole workflow is its configuration. Without it, each simulation and training session would produce similar, if not the same results. By tweaking different parameters of a run, market dynamics can be changed and agent performance be influenced. The goal of our monitoring tools is to enable users to assess the extent to which each parameter influences certain characteristics of the training and/or monitoring session, and to enable them to make informed decisions for subsequent experiments.

Ultimately, all configuration is done using various .json files which contain key-value pairs of the different configurable items. We further differentiate between different groups of configurations, which means that hyperparameters influencing the market, such as maximum possible prices or storage costs, are being handled separate from parameters needed for Reinforcement-Learning Agents, such as their learning rates, allowing users to easily change and tweak parameters involving different parts of the framework.

Our main goals when building our configuration tools were to make sure that users are able to quickly and safely configure their experiments in a way that is also easily reproducible. To be as user-friendly as possible, a lot of validation logic has been implemented to be able to catch invalid configurations as early as possible, making sure that whenever a training session is started, it is confirmed that the configuration is valid and the training will not fail due to wrongly set parameters at any point. Since our project has also been deployed to a remotely accessible, high-performant machine, we decided on creating an approachable web-interface

for our configuration tools, which can now be used for both configuring, starting and evaluating experiments.

The webserver/Docker-API

Example screenshot of the webserver. Configuration and running page?

On our webserver, users can upload .json files containing any number of (valid) key-value pairs, or create configurations using a self-validating form, always making sure that it contains only valid values. For example, if the user chooses a Circular Economy market scenario with re-buy prices enabled, the user will not be able to configure agents that cannot operate on such a market.

Aside from uploading or configuring complete, ready-to-go configurations, users can also choose to upload or create partial configurations, which can then be combined with other configuration objects to create a complete, valid configuration. This allows users to create multiple incomplete configurations containing only select parameters and then test all permutations of these configurations to observe the effect the different parameter combinations have on the experiment.

Mention that this currently needs to be done manually, future work section?

An example of one such approach can be found below:

Example of a mix and match of parameters

After having configured the experiment, the webserver also offers the option of starting multiple runs of the same configuration simultaneously. Most of the times this is recommended, as singular runs are prone to misleading results due to the trained agents training with specific market states, which in some cases may lead to behaviour unique to this starting configuration. By running the same configuration multiple times using different starting circumstances for both the agent that is to be trained as well as its competitors, a configuration's effect on the agent's performance can be disconnected from the pseudo-random market states which influence the vendor's decision making processes.

Example: Two completely different runs with the same configuration

Is this perhaps too much interpretation for this section?

A configuration can be interpreted as producing 'reliable' agents if any number of simulations all converge on similar agent performances (meaning similar mean rewards). The more singular runs diverge from the mean, the more the agent's performance is dependent on the initial market state, meaning that its performance is less stable, as it will produce unpredictable results on new, unknown market scenarios. A higher number of runs that produce agents which perform on similar levels of performance means that the specific configuration, to be exact the parameters responsible for the Reinforcement-Learning algorithm, produces 'reliable' agents: No matter the state of the market, the agent can always be expected to perform on the same level that was observed during the training process, setting prices that lead to similar profits. Reliability is therefore one of the most important factors in determining an agent's overall quality, as the ultimate goal is always to be able to deploy the agent onto the real market, which will always differ from

Alex: 'In 5.1 kommt, völlig ohne Vorankündigung und an einer Stelle an der ich nicht damit gerechnet habe plötzlich deine Erklärung von Reliability. Zum einen kann die ruhig vielvielviel früher kommen. Und zum anderen zu deiner Anmerkung: Du hast 2 Optionen um so etwas zu betrachten, entweder Mean + Standardabweichung oder Median + Quantile/Dezile bei sehr stark asymmetrischen Verteilungen. Was für deinen Use-Case besser ist kann ich nicht ausm Stehgreif sagen ohne die Daten gesehen zu haben'

mean or median? What do I use?

the simulated environments the agent experienced during training, simply due to the fact that real markets are being influenced by so many more parameters than one could model in our, or for that matter any simulation framework. It should be noted that the chosen Reinforcement Learning algorithm drives the reliability of a configuration, as many of the other hyperparameters most often have no impact on this aspect of an experiments results.

5.2 Choosing what to show the user during training

During the training process, we of course record all actions the different vendors take, both for the training agent and its competitors, be they Reinforcement Learning agents as well, or Rulebased agents. Market states and events are also being recorded, to be able to match them to the agent's actions later on. Users of course want to have an indicator of how the training run is going so far, both to inform themselves about the total progress of the training, but also about the quality of the agent they are training. We now have to decide what information is shown to the user, making sure that the user is well informed, whilst also holding back on displaying too much information at once to prevent confusion, as the underlying data and states are ever-evolving, leading to many datapoints being invalidated shortly after their creation. This potential overflow of information is the reason why we decided on displaying minimal information to the user while the training session is still running: Training progress and current performance, in the form of the current overall mean profit.

The first choice and a save bet when looking at datapoints that will be shown to users is the current training progress. Each training run is defined in its length by a parameter that sets the number of episodes that should be simulated. Each episode consists of an independently initialized market state on which a configurable amount of steps is run. Within each step, the vendors take turns in observing the current market state and then setting their prices for the new and used products and depending on the chosen marketplace, a rebuy price. We use the training progress to drive the frequency with which data is being shown to the user using the console: Every 10 episodes, we output the current progress, containing both the current number of steps and episodes completed, as well as the mean reward over all episodes the agent has completed. Additionally, to give a more visual component to the training progress a progress bar is displayed, which also tries to estimate the training-time remaining, based on the previous length the simulation of an episode took.

Using only these two datapoints, the user knows the two most important things:

Alex: 'Die Struktur von 5.2 ist mir noch nicht ganz klar, aber da hört dein Draft ja auch auf, insofern ist das wohl harmlos'

Should episodes and steps be defined/explained earlier than this? In the introduction? Specific section/Chapter for important terms and phrases?

Small paragraph
for rl-vs-rl and self-
training having dif-
ferent output

How far along in the training process he is, and how the agent is currently performing.

The monitoring workflow

Within the *recommerce* workflow, there are two points in time where our monitoring tools are or can be used. While a training session is running, the [Tensorboard](#) tool is used to give insights into the current training run and detailed explanations of current states and actions. By saving intermediate models, the [Live-monitoring](#) enables the user to compare agent models saved at different times within the training process. This can be especially useful when trying to determine the most effective amount of training steps after which a model does not improve further, to optimize future runs. After the training has finished, or at any point disconnected from a training session, our tools described in [Monitoring complete agents](#) can be used to further analyze the trained models.

After training

After training has completed, the most crucial phase of the workflow starts. As has been mentioned before, the end-goal of users using the simulation framework is to be able to deploy trained agents into real markets to set prices independently of human inputs or guidance. Starting from this premise, the goal of the training process is therefore to model the marketplace as realistically as possible, so that the trained agents can transfer the knowledge from their training to the real market ‘without noticing a difference’. Before deploying agents to the real market, they need to be tested on their reliability and robustness, to make sure that their policies are not just effective under certain circumstances, but that they are also able to adapt to different market scenarios and behave accordingly.

Which datapoints prove to be/are most effective?

6

Interpreting the results

Graphs and diagrams are available...

...comparing with other agents/models

...which hyperparameters influence the results in what ways?

...can we augment e.g. Grid-Search with our analysis?

-> Would need to make results 'machine-readable' again

Bibliography

- [Bas22] Stable Baselines3. *RL Algorithms*. Accessed: 2022-06-06. 2022. URL: <https://stable-baselines3.readthedocs.io/en/master/guide/algos.html> (see page 13).
- [EIT13] Jacqueline K Eastman, Rajesh Iyer and STEPHANIE P Thomas. **The impact of status consumption on shopping styles: An exploratory look at the millennial generation**. *Marketing Management Journal* 23:1 (2013), 57–73 (see pages 8, 31).
- [GWZ99] Chris Gaskett, David Wettergreen and Alexander Zelinsky. **Q-Learning in Continuous State and Action Spaces**. In: *Advanced Topics in Artificial Intelligence*. Ed. by Norman Foo. Berlin, Heidelberg: Springer Berlin Heidelberg, 1999, 417–428. ISBN: 978-3-540-46695-6 (see page 13).
- [KLM96] Leslie Pack Kaelbling, Michael L. Littman and Andrew W. Moore. **Reinforcement Learning: A Survey**. *Journal of Artificial Intelligence Research* 4 (1996), 237–285. DOI: <https://doi.org/10.1613/jair.301>. URL: <https://www.jair.org/index.php/jair/article/view/10166> (see page 12).
- [KRH17] Julian Kirchherr, Denise Reike and Marko Hekkert. **Conceptualizing the circular economy: An analysis of 114 definitions**. *Resources, Conservation and Recycling* 127 (2017), 221–232. ISSN: 0921-3449. DOI: <https://doi.org/10.1016/j.resconrec.2017.09.005>. URL: <https://www.sciencedirect.com/science/article/pii/S0921344917302835> (see page 1).
- [MPD02] José del R. Millán, Daniele Posenato and Eric Dedieu. **Continuous-Action Q-Learning**. *Machine Learning* 49:2 (Nov. 2002), 247–265. ISSN: 1573-0565. DOI: [10.1023/A:1017988514716](https://doi.org/10.1023/A:1017988514716). URL: <https://doi.org/10.1023/A:1017988514716> (see page 13).
- [Mye97] Roger B Myerson. **Game theory: analysis of conflict**. Harvard university press, 1997, 1 (see page 12).
- [Nar+05] Y. Narahari, C. V. L. Raju, K. Ravikumar and Sourabh Shah. **Dynamic pricing models for electronic business**. *Sadhana* 30:2 (Apr. 2005), 231–256. ISSN: 0973-7677. DOI: [10.1007/BF02706246](https://doi.org/10.1007/BF02706246). URL: <https://doi.org/10.1007/BF02706246> (see page 10).
- [Raf+21] Antonin Raffin, Ashley Hill, Adam Gleave, Anssi Kanervisto, Maximilian Ernestus and Noah Dormann. **Stable-Baselines3: Reliable Reinforcement Learning Implementations**. *Journal of Machine Learning Research* (2021) (see page 13).

- [RG08] Dominique Roux and Denis Guiot. **Measuring Second-Hand Shopping Motives, Antecedents and Consequences**. *Recherche et Applications en Marketing (English Edition)* 23:4 (2008), 63–91. DOI: [10.1177/205157070802300404](https://doi.org/10.1177/205157070802300404). eprint: <https://doi.org/10.1177/205157070802300404>. URL: <https://doi.org/10.1177/205157070802300404> (see pages 14, 32).
- [SB18] Richard S Sutton and Andrew G Barto. **Reinforcement learning: An introduction**. MIT press, 2018 (see page 13).
- [SK86] George B. Sprotles and Elizabeth L. Kendall. **A Methodology for Profiling Consumers’ Decision-Making Styles**. *Journal of Consumer Affairs* 20:2 (1986), 267–279. DOI: <https://doi.org/10.1111/j.1745-6606.1986.tb00382.x>. eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1111/j.1745-6606.1986.tb00382.x>. URL: <https://onlinelibrary.wiley.com/doi/abs/10.1111/j.1745-6606.1986.tb00382.x> (see page 31).
- [TP19] Linda Lisa Maria Turunen and Essi Pöyry. **Shopping with the resale value in mind: A study on second-hand luxury consumers**. *International Journal of Consumer Studies* 43:6 (2019), 549–556. DOI: <https://doi.org/10.1111/ijcs.12539>. eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1111/ijcs.12539>. URL: <https://onlinelibrary.wiley.com/doi/abs/10.1111/ijcs.12539> (see page 14).

Appendix

Consumer Characteristic	Description
Perfectionistic, High-Quality Conscious	Consumer searches carefully and systematically for the very best quality in products
Brand Conscious, 'Price = Quality'	Consumer is oriented towards buying the more expensive, well-known brands
Novelty and Fashion Conscious	Consumers who like new and innovative products and gain excitement from seeking out new things
Recreational and Shopping Conscious	Consumer finds shopping a pleasant activity and enjoys shopping just for the fun of it
Price Conscious/ Value for the Money	Consumer with a particularly high consciousness of sale prices and lower prices in general
Impulsive/ Careless	Consumer who buys on the spur of the moment and appears unconcerned about how much he/she spends
Confused by Overchoice	Consumer perceiving too many brands and stores from which to choose and experiences information overload in the market
Habitual/ Brand Loyal	Consumer who repetitively chooses the same favorite brands and stores

Table 6.1: Consumer Shopping Styles, taken from [EIT13], including information from [SK86]

I - Economic dimensions
1. ECO1 - Buying cheaper, spending less (anxiety expressed in regard to expenditure)
2. ECO2 - Paying fair prices
3. ECO3 - Allocative role of price (what is obtained for a particular budget)
4. ECO4 - Bargain hunting
II - Dimensions relating to the nature of the offering
5. OFF1 - Originality
6. OFF2 - Nostalgia
7. OFF3 - Congruence
8. OFF4 - Self-expression
III - Dimensions relating to the recreational aspects of second-hand channels
9. CIR1 - Social contact
10. CIR2 - Stimulation
11. CIR3 - Treasure hunting
IV - Power dimensions
12. PUIS1 - Smart shopping
13. PUIS2 - Power over the seller
V - 14. ETH - Ethical and ecological dimension
VI - 15 ANT-OST - Anti-ostentation dimension

Table 6.2: 15 areas of motivation toward second-hand shopping, taken from [RG08] (descriptions omitted)

Declaration of Authorship

I hereby declare that this thesis is my own unaided work. All direct or indirect sources used are acknowledged as references.

Potsdam, 11th June 2022

Nikkel Mollenhauer