Qwen3.8-Flash-Next: which quant should YOU run?

10 local files · 3 quant/finetune labs · 20 effort arms · 20 five-run tool arms · one measured RTX 5070 Ti (16 GB).

Ryzen 9800X3D · 64 GB RAM · Windows + WSL2 | Oct 7–13, 2026 local study | Engine column: Strata 0.1.40.3 / AgentionAI rc1 / rc2

Blue = ISTA-DASLab · Orange = UkisAI · Green = AgentionAI | GPT-6-luna MAX (OpenAI) · hosted reference | GPT-6.1-SOL ultra (OpenAI) · hosted reference

PR #1850 · revised 2026-10-14

IN A HURRY? Choose a daily driver, not a benchmark trophy

- **Recommended default:** S-IQ3_S (UkisAI) low on the stock study setup. This is a reasoned choice across the full evidence matrix, not a master-score winner or a command to change the deployed model.
- **Broad capability:** Swift IQ3_S low scored 157/164 coding, first 92.7%, in 13m52s; tool mean 88.2 and all-five floor 76.1. Its per-file samples scored math 98%, algebra 85%, instructions 84.0/89.5% prompt/instruction, hidden debugging 20/25, and retrieval 100% at 260,096 effective tokens.
- **Choose the trade-off:** Swift Q2_0 low is the fastest total workload (55m54s code+debug+tool) and has the best stock tool floor, with lower sampled knowledge/debug scores; Swift IQ3_XXS low completes coding fastest (62m31s total); Q-IQ3_S xhigh has the highest observed stock final coding score but takes far longer (~160m). The recommended default is mid-pack on speed (75m03s), chosen for breadth.
- **Fork results stay visible, not silently promoted:** Gyro-S rc2 has valid coding/tools, math 96%, algebra 79%, IFEval 76.0/82.9%, debugging 21/25 visible and 16/25 hidden, and 100% retrieval at 129,024 tokens. Gyro-M has narrow memory headroom and campaign/safety caveats. Neither is the default recommendation.
- **All testing contributes:** coding/repair, five-run tools and hard chains, instruction following, sampled math/algebra, visible/hidden debugging, context retrieval, actual task times and deployment evidence. TPS is separate diagnostics, not a daily-driver score.
- **Confidence is limited:** small sampled suites and one rig do not establish universal model superiority, multi-day stability, comprehensive safety or a model-only causal difference. No fabricated missing values and no arbitrary master score.

THE FOUR QUESTIONS — practical trade-offs

Which default?

S-IQ3_S (UkisAI) low: broad stock-cohort capability with a short complete coding job.

Benchmark-backed recommendation, not long-term stability certification.

Which specialist?

S-Q2_0 (UkisAI) low for the tool floor and fastest total wall (56m); S-IQ3_XXS (UkisAI) low for coding latency.

A specialist advantage is not a universal default win.

Why not crown the fork?

Gyro-S offers a strong tool floor but lower observed algebra/instruction/debug scores and shorter tested recall capacity than the stock default. Gyro-M has narrow 16 GB margin, failed raw gates and campaign caveats.

Capability and deployment suitability are separate decisions.

How was the choice made?

The final matrix displays all test families, total wall time and limitations; the default rationale is explicit.

No weights, numeric overall rank or invented master score. Speed is shown as total wall, not folded into a score.

PR #1850

THE CAST — ten files, one base model, three lineages

All local files share Qwen3.8-Flash-Next ancestry (Qwen / Alibaba). Q- labels: ISTA-DASLab quants; S- labels: UkisAI Swift derivatives; Gyro: AgentionAI APR. File sizes are decimal GB, not VRAM requirements. The two OpenAI-hosted references — GPT-6-luna MAX via Responses API and GPT-6.1-SOL ultra via Codex CLI — appear only beside comparable quality suites. Neither is a local file, local run, or recommendation.

T01 · Model provenance and engine cohorts

File / lab	Quant	File GB	Engine	Status	Download
Q-IQ3_XXS ISTA-DASLab	IQ3_XXS	75.8	0.1.40.3	reference	HF repo
Q-Q2_0 ISTA-DASLab	Q2_0	66.4	0.1.40.3	reference	HF repo
Q-IQ3_S ISTA-DASLab	IQ3_S	83.6	0.1.40.3	reference	HF repo
Q-IQ2_XS ISTA-DASLab	IQ2_XS	67.2	0.1.40.3	reference	HF repo
S-IQ3_XXS UkisAI	IQ3_XXS	76.0	0.1.40.3	reference	HF repo
S-IQ2_XS UkisAI	IQ2_XS	68.2	0.1.40.3	reference	HF repo
S-IQ3_S UkisAI	IQ3_S	83.7	0.1.40.3	reference	HF repo
S-Q2_0 UkisAI	Q2_0	66.6	0.1.40.3	reference	HF repo
Gyro-S AgentionAI	TQ1_0	58.5	rc2	experimental fork · rc2	HF repo
Gyro-M AgentionAI	TQ2_0	92.0	rc2	experimental fork · rc2	HF repo

T01 · 10 rows · end of table

The eight reference files use stock Strata 0.1.40.3; Gyro-S and Gyro-M use separate AgentionAI rc2 setups. Shared evaluator and prompts do not remove the engine/configuration variable. Complete cross-engine setup ranks are descriptive and do not prove model-only causality.

THE SCORECARD — all models in one view

Tools: low-effort mean of five runs and empirical all-five floor. Coding: final percentage plus the actual solved/scored count. All local coding arms now have complete 164-task scoring. Knowledge/debugging are limited once-per-file tests; Gyro-S valid rc2 math, algebra, IFEval, Five Bugs and Needle measurements are included. The separate scoreboard keeps all 20 effort rows visible and shows all 20 effort setups with all test families and an explicit daily-driver recommendation, without an overall numeric rank.


T02 · Integrated headline scorecard

File / lab	Engine	Tool mean	Pass^5	HE+ low	HE+ xhigh	Math	Algebra	Debug
S-Q2_0 UkisAI	0.1.40.3	85.0 +/- 1.0	78.3 1	95.7 (157/164)	93.3 (153/164)	90	72	18/25
Q-IQ3_XXS ISTA-DASLab	0.1.40.3	87.0 +/- 2.0	76.1 2	94.5 (155/164)	95.7 (157/164)	99	79	16/25
S-IQ3_S UkisAI	0.1.40.3	88.2 +/- 1.5	76.1 2	95.7 (157/164)	94.5 (155/164)	98	85	20/25
S-IQ3_XXS UkisAI	0.1.40.3	84.6 +/- 0.5	75.0 3	95.1 (156/164)	95.1 (156/164)	96	80	19/25
S-IQ2_XS UkisAI	0.1.40.3	87.2 +/- 1.3	75.0 3	95.1 (156/164)	94.5 (155/164)	97	83	18/25
Q-IQ3_S ISTA-DASLab	0.1.40.3	86.8 +/- 0.8	73.9	94.5 (155/164)	96.3 (158/164)	97	82	19/25
Q-IQ2_XS ISTA-DASLab	0.1.40.3	86.2 +/- 0.8	73.9	95.7 (157/164)	94.5 (155/164)	97	83	19/25
Q-Q2_0 ISTA-DASLab	0.1.40.3	84.8 +/- 0.4	70.7	95.1 (156/164)	95.1 (156/164)	97	78	19/25
Gyro-S AgentionAI	rc2	88.6 +/- 1.5	79.3	95.7 (157/164)	95.7 (157/164)	96	79	16/25
Gyro-M AgentionAI	rc2	86.0 +/- 1.4	78.3	95.1 (156/164)	95.7 (157/164)	96	79	18/25

T02 · 10 rows · end of table

Medals show the top three distinct stock-reference score levels, ties share. Fork rows do not receive stock medals. Gyro-S rows use current rc2 measurements. Its algebra cell shows the valid rc2 79% (first 100 abstract-algebra questions, 5-shot); old rc1 algebra 76% is archived and not substituted. n/a is an intentional unavailable measurement, not zero.


External quality anchors, not picks: GPT-6-luna MAX and GPT-6.1-SOL ultra (OpenAI-hosted) appear as score-ordered reference rows/bars in comparable suite views, with no medal decoration. Neither ran on the RTX 5070 Ti; both are excluded from local counts, ranks, recommendations and the OVERALL composite.

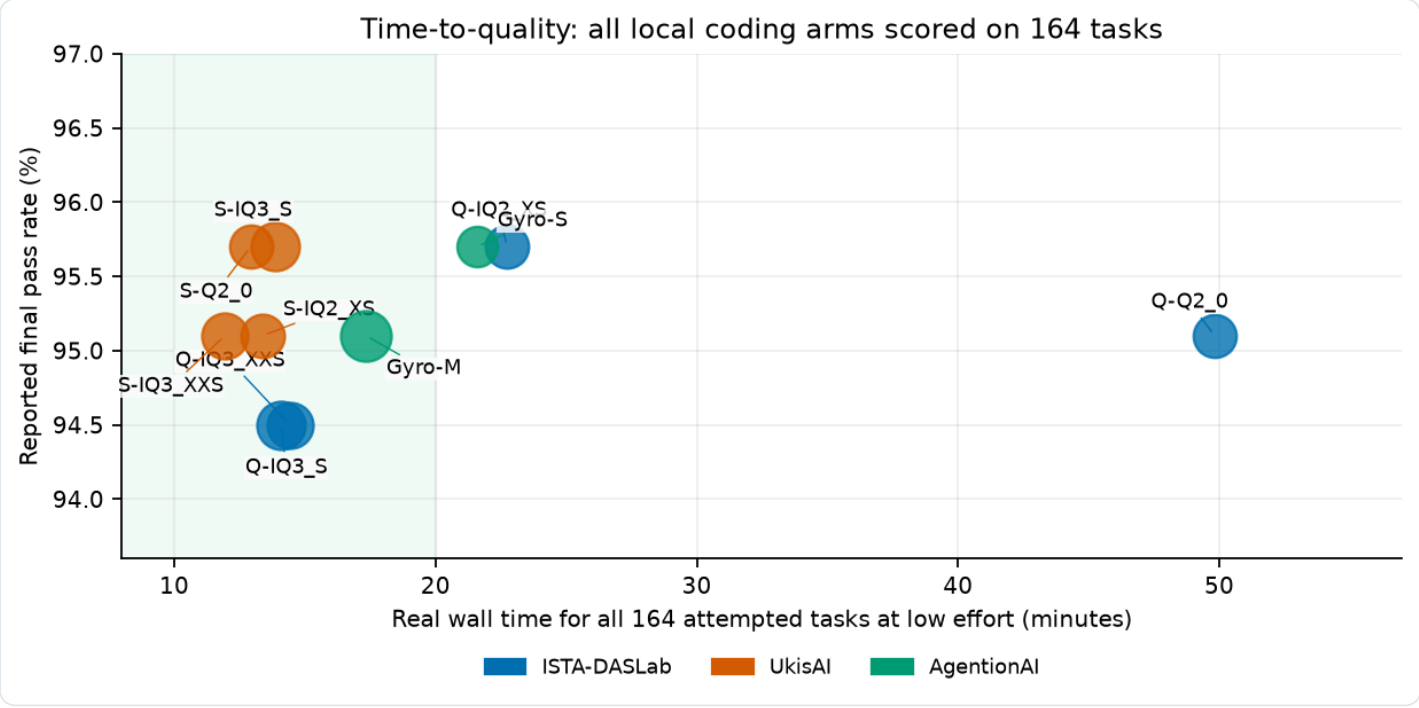

Low-effort observed time-to-quality. All local points have complete scoring; green points use separate fork engines. No model-only causal speedup is claimed.

RELIABILITY & SAFETY — averages are not guarantees

Tool-eval-bench: 92 realistic scenarios x five identical-seed runs at each effort. Score 0 / 1 / 2; 2 = full marks. Pass@5: full marks at least once, the empirical capability ceiling. Pass^5: full marks in ALL five, the reliability floor. Partial credit every run never passes the floor. These summaries are not deployment guarantees. The table is ordered by Pass^5 floor (descending); mean breaks ties.

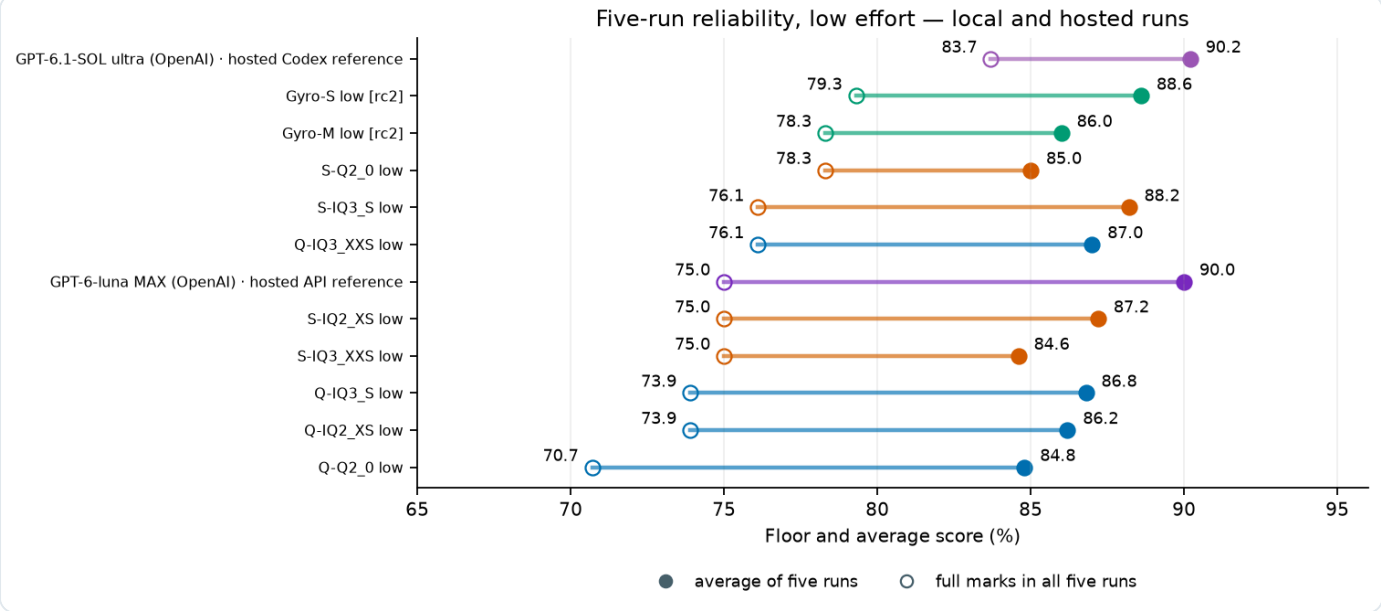

Local files and both hosted references are position-sorted by Pass^5. The line joins mean and floor; engine/source labels preserve local versus hosted provenance. The table gap is Pass@5 minus Pass^5.


T03 · Integrated tool reliability — sorted by Pass^5 floor

Arm / lab	Mean +/- SD	Pass@5	Pass^5 floor	Ceiling-floor gap	Warnings (last trial)	Engine
GPT-6.1-SOL ultra OpenAI · hosted Codex reference	90.2 +/- 0.4	88.0	83.7	4.3	0	OpenAI Codex CLI 0.162.1 · ultra
Gyro-S AgentionAI low	88.6 +/- 1.5	88.0	79.3	8.7	2	rc2
Gyro-M AgentionAI low	86.0 +/- 1.4	84.8	78.3	6.5	6	rc2
S-Q2_0 UkisAI low	85.0 +/- 1.0	82.6	78.3 1	4.3	5	0.1.40.3
S-IQ2_XS UkisAI xhigh	88.2 +/- 1.5 3	88.0	77.2 2	10.8	2	0.1.40.3
Gyro-S AgentionAI xhigh	89.0 +/- 1.2	88.0	76.1	11.9	1	rc2
S-IQ3_S UkisAI low	88.2 +/- 1.5 3	84.8	76.1 3	8.7	4	0.1.40.3
Q-IQ3_XXS ISTA-DASLab low	87.0 +/- 2.0	87.0	76.1 3	10.9	7	0.1.40.3
GPT-6-luna MAX OpenAI · hosted API reference	90.0 +/- 1.9	92.4	75.0	17.4	0	OpenAI Codex Responses API · max
S-IQ2_XS UkisAI low	87.2 +/- 1.3	87.0	75.0	12.0	4	0.1.40.3
S-IQ3_XXS UkisAI low	84.6 +/- 0.5	84.8	75.0	9.8	4	0.1.40.3
Q-Q2_0 ISTA-DASLab xhigh	89.4 +/- 0.5 1	89.1	73.9	15.2	2	0.1.40.3
Q-IQ3_S ISTA-DASLab low	86.8 +/- 0.8	85.9	73.9	12.0	3	0.1.40.3
Q-IQ2_XS ISTA-DASLab low	86.2 +/- 0.8	82.6	73.9	8.7	5	0.1.40.3
Q-IQ3_XXS ISTA-DASLab xhigh	88.6 +/- 1.1 2	89.1	72.8	16.3	3	0.1.40.3
S-Q2_0 UkisAI xhigh	86.8 +/- 2.2	87.0	72.8	14.2	2	0.1.40.3
S-IQ3_XXS UkisAI xhigh	86.6 +/- 1.5	89.1	72.8	16.3	4	0.1.40.3
Gyro-M AgentionAI xhigh	87.8 +/- 1.1	89.1	71.7	17.4	2	rc2
Q-IQ2_XS ISTA-DASLab xhigh	88.6 +/- 1.8 2	88.0	70.7	17.3	1	0.1.40.3
Q-Q2_0 ISTA-DASLab low	84.8 +/- 0.4	84.8	70.7	14.1	7	0.1.40.3
Q-IQ3_S ISTA-DASLab xhigh	86.8 +/- 1.3	87.0	68.5	18.5	4	0.1.40.3
S-IQ3_S UkisAI xhigh	85.6 +/- 0.5	85.9	68.5	17.4	5	0.1.40.3

T03 · 22 rows · end of table

Both hosted rows are distinct external runs: Luna MAX through the Responses API and SOL ultra through Codex CLI. Confidence intervals are not shown in this common table (SOL publishes one; Luna does not). The SOL tool protocol used concurrency 4 versus the study's 1 and a JSON-schema bridge; trial-2 TC-56 timeout recovery is disclosed in the source detail. Both rows stay outside the local recommendation cohort. Warning counts describe each final primary trial.

8/16 stock arms are capped on the stored last-trial rating. Gyro-M raw safety_gate.passed: low: failed (6 raw warnings); xhigh: failed (2 raw warnings). This authoritative gate is distinct from stored rating labels. Not capped is NOT the same as no warnings or production safety. Warning lists/rating describe the final primary trial, not a five-run union.

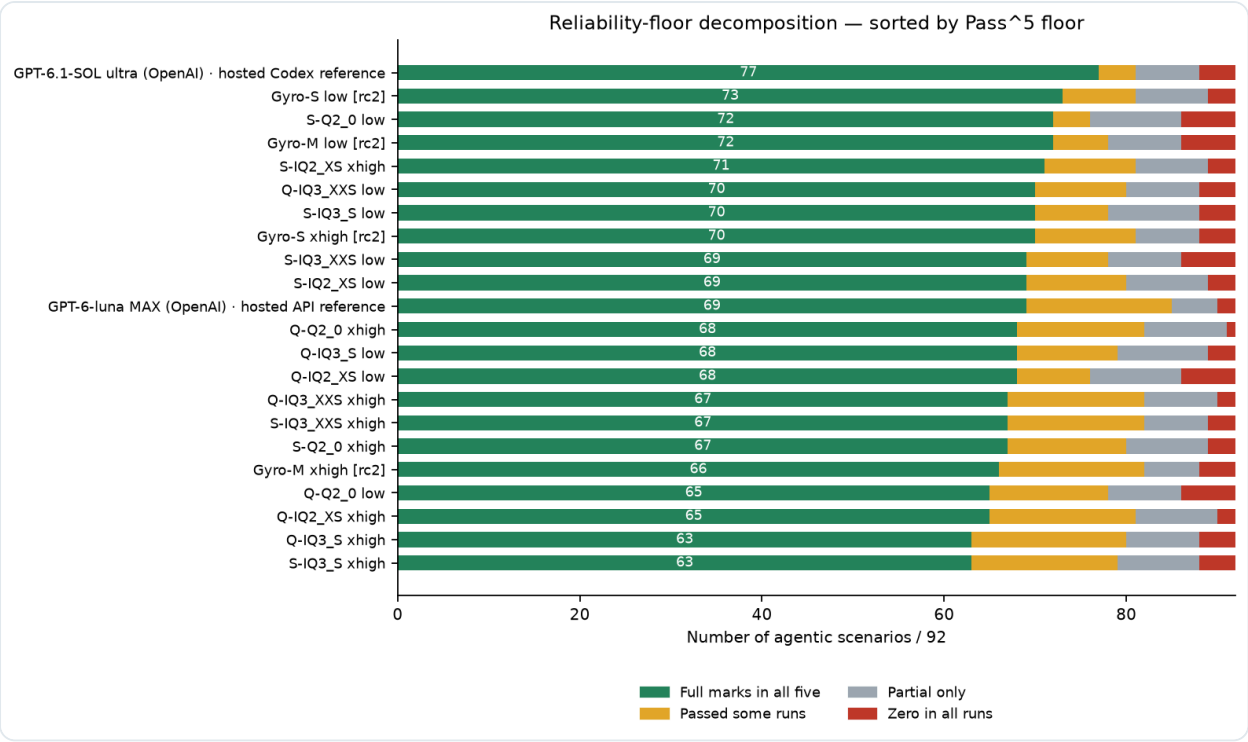


The all-five floor is the green count / 92. Rows are ordered by that floor; both hosted references are interleaved at their measured scores and remain outside the local scorecard and composite.

> Gyro-M illustrates the trade-off: always-full scenarios 72 low / 66 xhigh; flaky 6 / 16. Its mean confidence intervals overlap, so the observed mean gain is modest. No causal mechanism is inferred from the aggregate alone.

Tool-eval-bench

AGENTIC TOOL USE — hard chains reward extra thought

Hard Mode (P) stresses long chains and recovery. Every category figure uses the five-run mean, not the last-trial score. Effort comparisons stay within a measured file/build. The table orders local arms and separate hosted references by Hard Mode mean; hosted protocols are not identical.

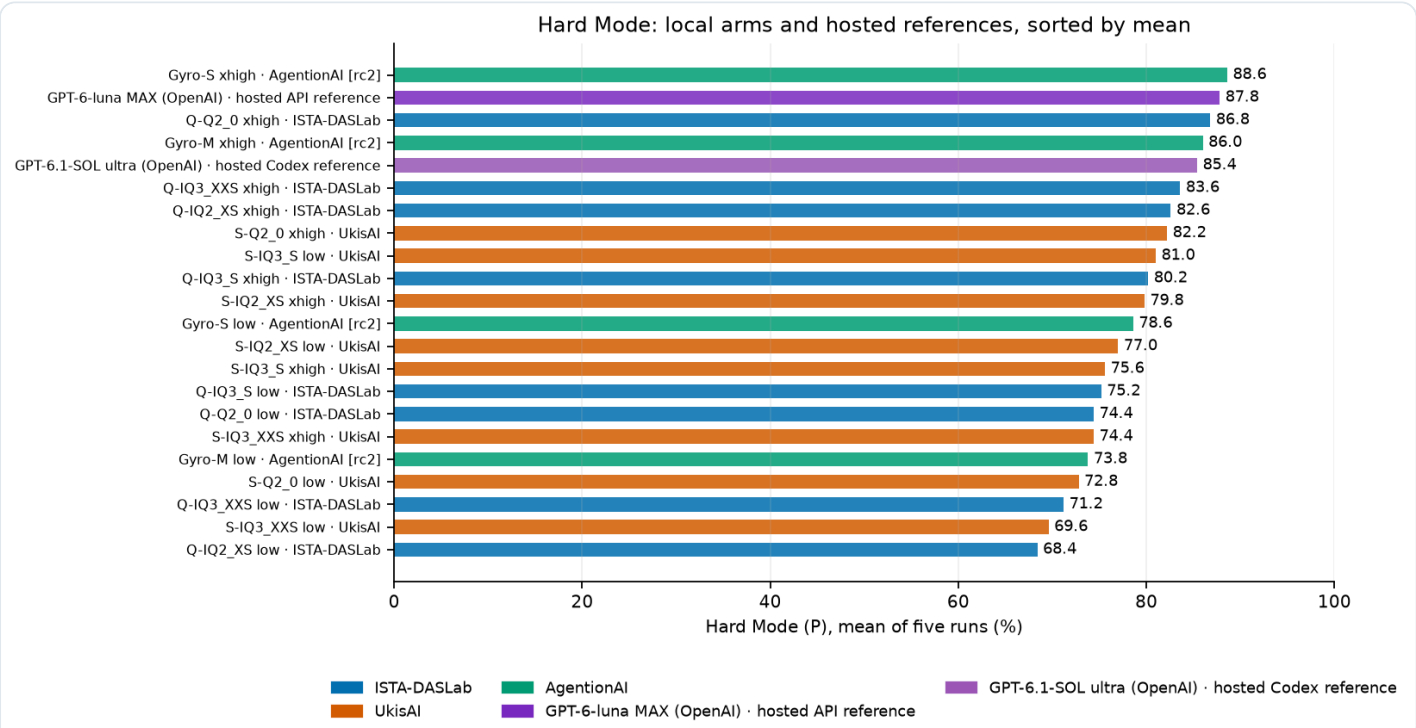

Local arms and both hosted references are shown as score-ordered bars. Hosted runs are external observations, not local models.

T04 · Multi-step tool-chain results — sorted by Hard Mode mean


Arm / lab	Hard Mode mean	SD across five	Turn budget	Engine
Gyro-S AgentionAI xhigh	88.6	1.7	8	rc2
GPT-6-luna MAX OpenAI · hosted API reference	87.8	7.0	8	OpenAI Codex Responses API · max
Q-Q2_0 ISTA-DASLab xhigh	86.8 1	4.8	8	0.1.40.3
Gyro-M AgentionAI xhigh	86.0	4.7	8	rc2
GPT-6.1-SOL ultra OpenAI · hosted Codex reference	85.4	2.6	8	OpenAI Codex CLI 0.162.1 · ultra
Q-IQ3_XXS ISTA-DASLab xhigh	83.6 2	2.6	8	0.1.40.3
Q-IQ2_XS ISTA-DASLab xhigh	82.6 3	4.9	8	0.1.40.3
S-Q2_0 UkisAI xhigh	82.2	4.3	8	0.1.40.3
S-IQ3_S UkisAI low	81.0	3.1	8	0.1.40.3
Q-IQ3_S ISTA-DASLab xhigh	80.2	3.9	8	0.1.40.3
S-IQ2_XS UkisAI xhigh	79.8	3.0	8	0.1.40.3
Gyro-S AgentionAI low	78.6	6.9	8	rc2
S-IQ2_XS UkisAI low	77.0	5.1	8	0.1.40.3
S-IQ3_S UkisAI xhigh	75.6	3.0	8	0.1.40.3
Q-IQ3_S ISTA-DASLab low	75.2	1.1	8	0.1.40.3
Q-Q2_0 ISTA-DASLab low	74.4	2.2	8	0.1.40.3
S-IQ3_XXS UkisAI xhigh	74.4	3.3	8	0.1.40.3
Gyro-M AgentionAI low	73.8	4.4	8	rc2
S-Q2_0 UkisAI low	72.8	3.3	8	0.1.40.3
Q-IQ3_XXS ISTA-DASLab low	71.2	7.2	8	0.1.40.3
S-IQ3_XXS UkisAI low	69.6	3.6	8	0.1.40.3
Q-IQ2_XS ISTA-DASLab low	68.4	2.3	8	0.1.40.3

T04 · 22 rows · end of table

- Gyro-M Hard Mode rises from 73.8% to 86.0%, while its all-five floor falls. Optimizing only one of those axes is not a reliable workload decision.
- Warnings include premature notifications, missed dependency ordering and claims that an invoice is paid while funds remain held. They are scripted failure traps, not permissions.
- rc1 forced tool calls were ignored with Gyro-S. Both Gyro-S and Gyro-M now have scored low/xhigh tool arms on the pinned rc2 engine; these remain engine-qualified setup results, not model-only causal claims.

CODE — every denominator visible

164 function-writing tasks via BenchKit / EvalPlus, greedy generation, one verifier-guided repair. First = one-shot score; final includes the replacement. Scored timeout/length/blank outputs remain failures. Excluded harness errors can reduce the denominator; those rows retain observed percentages but are qualified and excluded from full-coverage/composite claims. The table orders complete-coverage runs by final score.

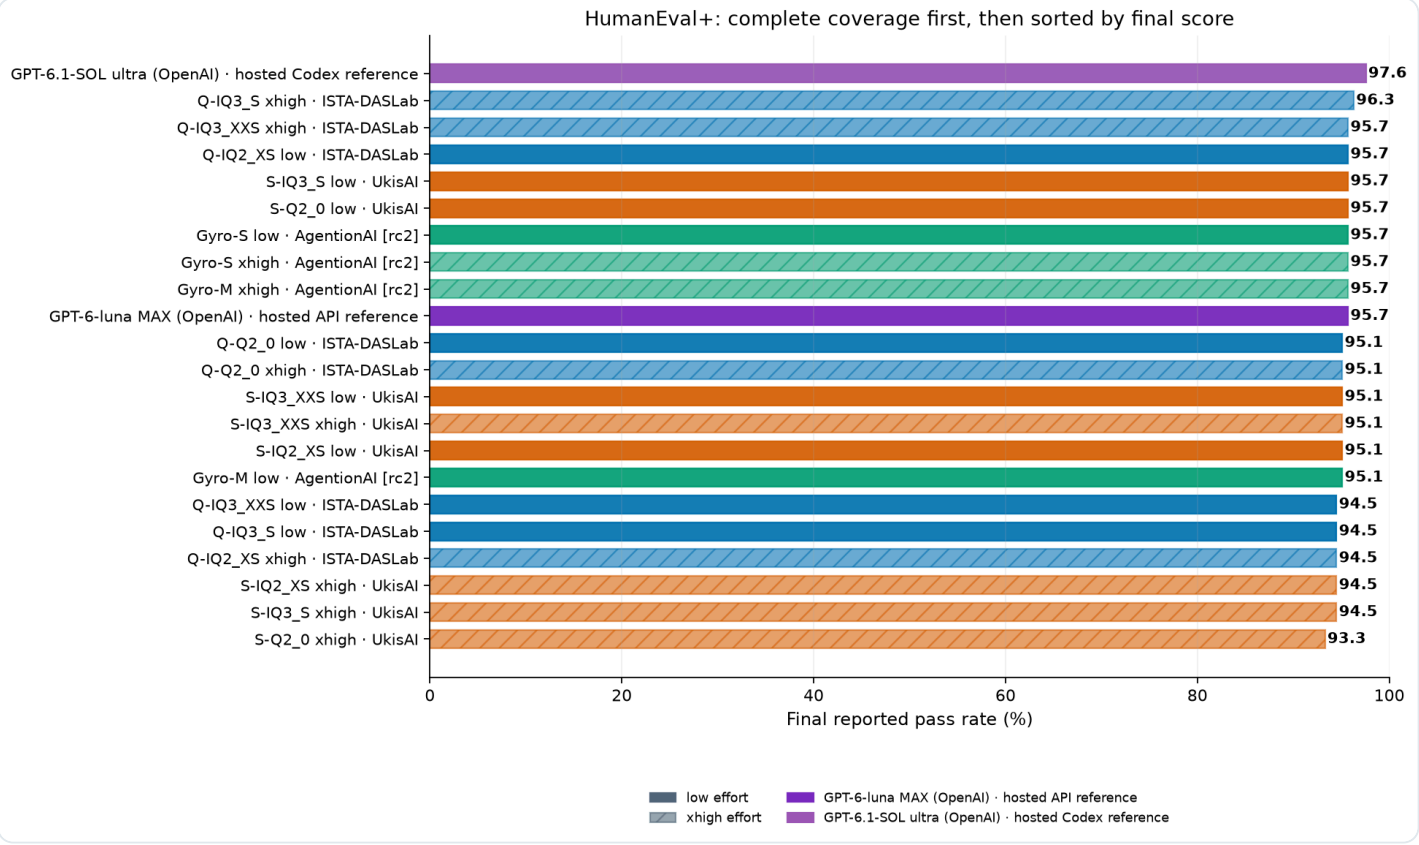

All local rows have complete scoring and are score-sorted. Both hosted quality references are positioned by final score.

T05 · Integrated coding results — sorted by final score

Arm / lab	First %	Final %	Solved / scored	Repairs	Infra / harness excluded	Run / protocol
GPT-6.1-SOL ultra OpenAI · hosted Codex reference	95.1	97.6	160/164	4/8	0	OpenAI Codex CLI 0.162.1 · ultra
Q-IQ3_S ISTA-DASLab xhigh	93.3	96.3 1	158/164	5/11	0	0.1.40.3
Q-IQ3_XXS ISTA-DASLab xhigh	92.7	95.7 2	157/164	5/11	0	0.1.40.3
Q-IQ2_XS ISTA-DASLab low	90.9	95.7 2	157/164	8/14	0	0.1.40.3
S-IQ3_S UkisAI low	92.7	95.7 2	157/164	5/11	0	0.1.40.3
S-Q2_0 UkisAI low	90.2	95.7 2	157/164	9/16	0	0.1.40.3
Gyro-S AgentionAI low	90.2	95.7	157/164	9/15	0	rc2
Gyro-S AgentionAI xhigh	88.4	95.7	157/164	12/19	0	rc2
Gyro-M AgentionAI xhigh	92.1	95.7	157/164	6/13	0	rc2
GPT-6-luna MAX OpenAI · hosted API reference	93.3	95.7	157/164	4/11	0	OpenAI Codex Responses API · max
Q-Q2_0 ISTA-DASLab low	92.7	95.1 3	156/164	4/10	0	0.1.40.3
Q-Q2_0 ISTA-DASLab xhigh	88.4	95.1 3	156/164	11/17	0	0.1.40.3
S-IQ3_XXS UkisAI low	92.7	95.1 3	156/164	4/12	0	0.1.40.3
S-IQ3_XXS UkisAI xhigh	92.1	95.1 3	156/164	5/10	0	0.1.40.3
S-IQ2_XS UkisAI low	89.6	95.1 3	156/164	9/16	0	0.1.40.3
Gyro-M AgentionAI low	93.3	95.1	156/164	3/11	0	rc2
Q-IQ3_XXS ISTA-DASLab low	92.1	94.5	155/164	4/13	0	0.1.40.3
Q-IQ3_S ISTA-DASLab low	92.7	94.5	155/164	3/12	0	0.1.40.3
Q-IQ2_XS ISTA-DASLab xhigh	89.6	94.5	155/164	8/16	0	0.1.40.3
S-IQ2_XS UkisAI xhigh	91.5	94.5	155/164	5/11	0	0.1.40.3
S-IQ3_S UkisAI xhigh	92.7	94.5	155/164	3/11	0	0.1.40.3
S-Q2_0 UkisAI xhigh	89.6	93.3	153/164	6/14	0	0.1.40.3

T05 · 22 rows · end of table

Hosted coding rows report scores only: wall time and token-rate columns are omitted because they are not comparable across the local engine, Luna Responses API and SOL Codex CLI. Luna's provider-reported 42 tok/s includes hidden reasoning and is not visible-text throughput; neither hosted result supplies a matched decode measurement.

GPT-6.1-SOL source: [first upload, commit a48292f](https://github.com/Jhacarreiro/Strata/commit/a48292f5766f66efcdb1e23396569b0907c44c04). Only that upload's independent-run scores are used; the later feedback-assisted Five Bugs validation is excluded.

Retrospective coverage correction: Q-IQ3_XXS low 155/163 is superseded by offline adjudication of its model SyntaxError failure: 155/164 (94.5%), first 92.1%, measured wall 865.8 s unchanged. Swift IQ3_S low 157/163 is superseded by the complete matched 2026-10-13 run: 157/164 (95.7%), first 92.7%, wall 831.7 s; no retry splicing. Original throughput aggregates retain 99.2% and 94.4% coverage respectively, not full-task decode timing. Current Gyro-S rc2 coding is 157/164 at low and xhigh with complete scoring. Historical Gyro-S rc1 xhigh 153/162 after two HTTP 502s is superseded and not mixed into rc2. Gyro-M xhigh blank finals on HumanEval/39 and HumanEval/99 ended on length and remain scored failures; 157/164 is not a clean-response certificate.

- Gyro-M xhigh costs 4.8x low wall and 4.9x tokens for one additional final pass. Hard Mode benefits do not imply a coding-efficiency benefit.
- Gyro-M low vs Gyro-S rc2 low differs by 3.1 points on first attempts and -0.6 points on final score. These are distinct model revisions/hashes; this setup pair does not establish broad quant-only causality.

EvalPlus BenchKit

KNOWLEDGE & DEBUGGING — the test we actually ran


GSM8K: 100 shuffled questions, 8-shot; SOL chose seed 42 but the source study seed was not retained, so exact question identity is unverified. MMLU: first 100, 5-shot, entirely abstract algebra — NOT a 57-subject exam. IFEval: first 50 prompts / 76 constraints. Five Bugs: five files x five independent sessions. For SOL, this table uses only the first-upload aggregate (25/25 visible, 20/20 hidden); the first score export has no per-task outcome matrix, and the later feedback-assisted validation is excluded. Needle results have different measured token bases; see the note below. These are limited samples, not a whole-model intelligence ranking. Rows are sorted by hidden Five Bugs score.

T06 · Integrated sampled suites — sorted by hidden debugging passes

File / lab	GSM8K /100	Algebra /100	IFEval prompt / instruction %	Bugs visible	Bugs hidden	Needle % @ measured context	Engine
S-IQ3_S UkisAI	98	85	84.0 / 89.5	25/25	20/25 1	100 @ 260,096 effective	0.1.40.3
GPT-6-luna MAX OpenAI · hosted API reference	97	93	86.0 / 90.8	25/25	20/25	100 @ 260,096 effective	OpenAI Codex Responses API · max
GPT-6.1-SOL ultra OpenAI · hosted Codex reference	98	96	90.0 / 92.1	25/25	20/25	100 @ 221,877 actual	OpenAI Codex CLI 0.162.1 · ultra
Q-Q2_0 ISTA-DASLab	97	78	84.0 / 89.5	24/25	19/25 2	100 @ 260,096 effective	0.1.40.3
Q-IQ3_S ISTA-DASLab	97	82	86.0 / 90.8	24/25	19/25 2	100 @ 260,096 effective	0.1.40.3
Q-IQ2_XS ISTA-DASLab	97	83	84.0 / 89.5	24/25	19/25 2	100 @ 260,096 effective	0.1.40.3
S-IQ3_XXS UkisAI	96	80	80.0 / 86.8	24/25	19/25 2	100 @ 260,096 effective	0.1.40.3
S-IQ2_XS UkisAI	97	83	82.0 / 88.2	23/25	18/25 3	100 @ 260,096 effective	0.1.40.3
S-Q2_0 UkisAI	90	72	80.0 / 86.8	23/25	18/25 3	100 @ 260,096 effective	0.1.40.3
Gyro-M AgentionAI	96	79	78.0 / 82.9	23/25	18/25	100 @ 129,024 effective	rc2
Q-IQ3_XXS ISTA-DASLab	99	79	80.0 / 85.5	21/25	16/25	100 @ 260,096 effective	0.1.40.3
Gyro-S AgentionAI	96	79	76.0 / 82.9	21/25	16/25	100 @ 129,024 effective	rc2

T06 · 12 rows · end of table

Top hidden Five Bugs score: 20/25, tied among S-IQ3_S (UkisAI), GPT-6-luna MAX, GPT-6.1-SOL ultra. S-IQ3_S (UkisAI) appears first because local rows precede hosted rows on ties; it is not a unique win.

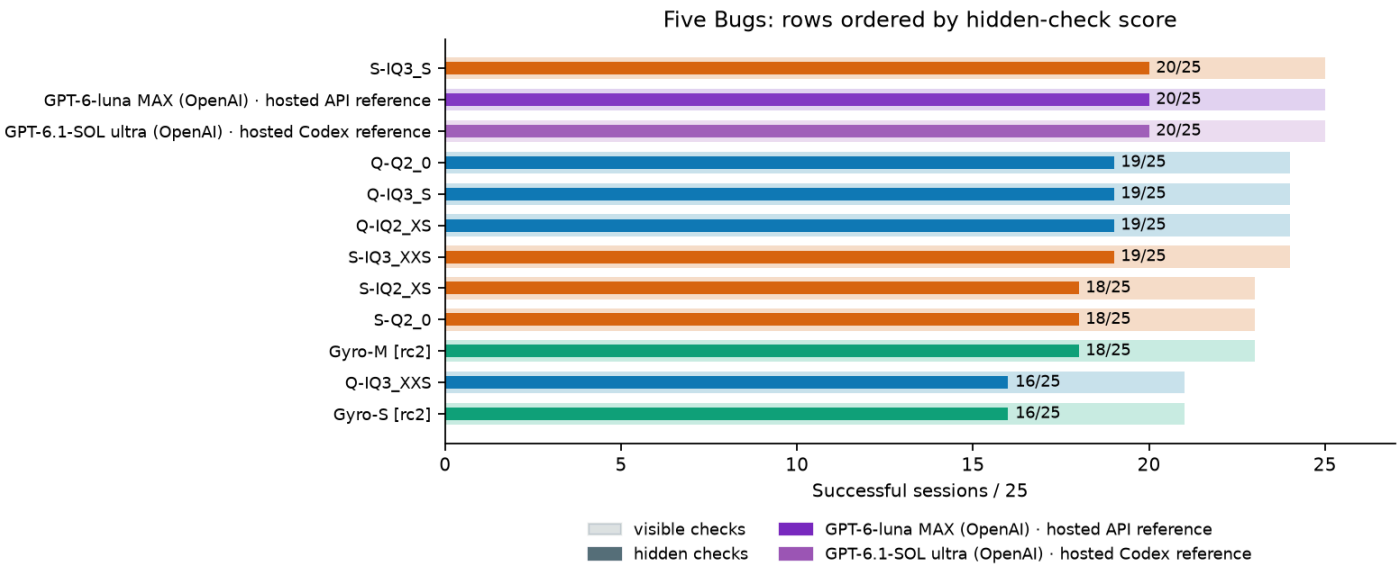

Ten local files plus both hosted quality references; hosted bars are separate observations, not local quant results.


Within the local stock cohort, S-IQ3_S (UkisAI) remains the debugging specialist at 20/25 hidden sessions and leads this algebra sample at 85%. Both hosted references report 20/25 hidden checks; SOL is specifically the first-upload independent-run score, not the later corrected validation.

Needle context qualification: SOL hit all 25 cells at a 260,096-token target, but the five largest inputs measured 221,595–221,877 actual tokens and used same-role history injection. Luna's 25/25 is recorded at 260,096 effective tokens. Keep these as distinct context/protocol observations, not equal-length tests.

Five Bugs upstream | TEB knowledge / needle plugins

REASONING ECONOMICS — what you wait for

Total output tokens include reasoning, repairs and failures. Wall includes request/harness overhead. Failure time share and passing-task cost come from task-level response times, not wall subtraction. Different engine/protocol rows remain descriptive.

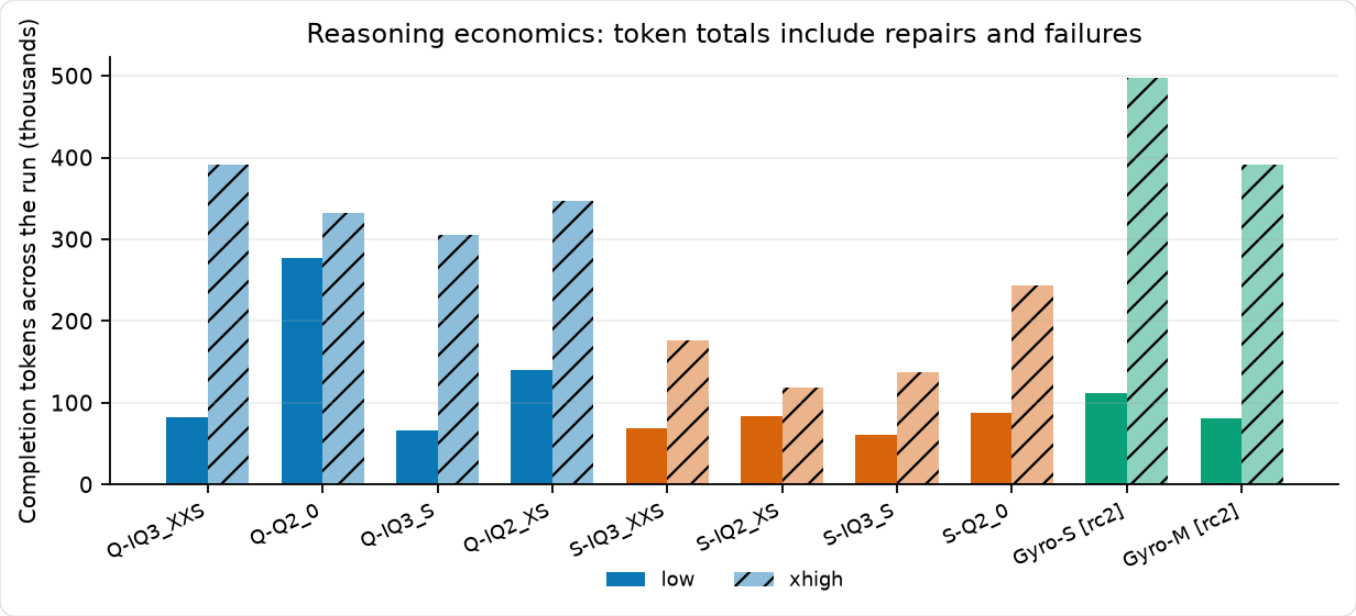

Completion-token totals for all attempted tasks, all files, both efforts. All local coding arms have 164 scored tasks; throughput coverage remains separately qualified.

T07 · Integrated time-to-result economics


Arm / lab	Output tokens	Passing tokens	Passing seconds	Failed response time %	Wall	Engine
S-IQ3_XXS UkisAI low	68,616	49,192	486	25.1%	11m56s	0.1.40.3
S-Q2_0 UkisAI low	87,634	64,502	542	23.4%	12m56s	0.1.40.3
S-IQ2_XS UkisAI low	83,746	56,476	468	36.3%	13m23s	0.1.40.3
S-IQ3_S UkisAI low	61,395	51,845	623	18.9%	13m52s	0.1.40.3
Q-IQ3_S ISTA-DASLab low	66,966	49,239	594	23.9%	14m05s	0.1.40.3
Q-IQ3_XXS ISTA-DASLab low	82,843	59,863	602	24.7%	14m26s	0.1.40.3
Q-IQ2_XS ISTA-DASLab low	140,583	97,239	883	32.1%	22m44s	0.1.40.3
S-IQ3_S UkisAI xhigh	137,839	81,261	1,017	60.2%	43m32s	0.1.40.3
S-IQ3_XXS UkisAI xhigh	175,860	133,095	1,363	50.7%	47m11s	0.1.40.3
Q-Q2_0 ISTA-DASLab low	277,084	174,148	1,498	48.8%	49m50s	0.1.40.3
S-Q2_0 UkisAI xhigh	243,330	151,062	1,329	60.0%	56m20s	0.1.40.3
Q-Q2_0 ISTA-DASLab xhigh	332,296	238,341	2,020	45.1%	62m18s	0.1.40.3
S-IQ2_XS UkisAI xhigh	118,588	105,555	2,472	33.6%	63m04s	0.1.40.3
Q-IQ3_S ISTA-DASLab xhigh	304,962	200,835	2,461	38.1%	67m19s	0.1.40.3
Q-IQ2_XS ISTA-DASLab xhigh	347,704	257,698	2,214	50.5%	75m40s	0.1.40.3
Q-IQ3_XXS ISTA-DASLab xhigh	390,930	230,123	2,328	48.5%	76m17s	0.1.40.3
Gyro-M AgentionAI low	80,523	60,016	752	23.2%	17m20s	rc2
Gyro-S AgentionAI low	111,805	65,403	710	42.4%	21m36s	rc2
Gyro-M AgentionAI xhigh	391,467	180,234	2,334	52.5%	82m51s	rc2
Gyro-S AgentionAI xhigh	497,873	310,023	3,018	39.8%	84m30s	rc2

T07 · 20 rows · end of table


Pick effort for the task: more deliberation can improve long tool chains while making code loops slower. The daily-driver choice considers all tested families, real task times and deployment caveats; no aggregate score replaces that judgment.

SPEED — real decode; corrected first-token timing

llama-benchy 0.4.0: prompt 2,048, generation 256, concurrency 1, three repeats/depth/effort. Raw pp_throughput in the old PDF was inflated by early SSE role chunks and is retired. Gyro-S decode values come from audited engine-log samples paired with direct-client TTFT; effective first-token rate includes queue/network/reasoning and is not kernel prefill. Gyro-M client observations are excluded from comparative speed views: the client targeted :8090, the recorded launcher used :8080, available router evidence is :8081→:8080, and no route proof or engine-side request log exists. Its exact zero-depth prompt-token count is also missing. Deep measured contexts differ: stock 131,072; rc2 122,880. Hosted rates remain withheld.

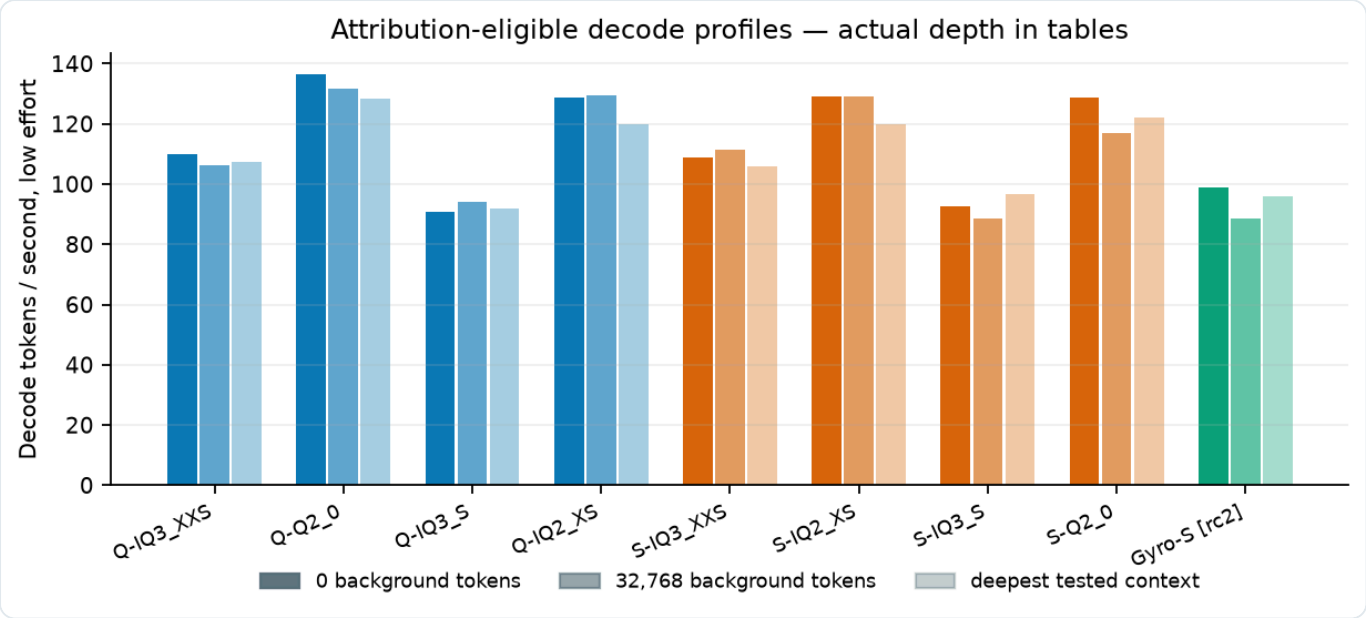

Attribution-eligible low-effort profiles only; Gyro-M is excluded because its client route to the pinned setup is unverified. The lightest bar is the deepest measured point; row tables state the actual depths.

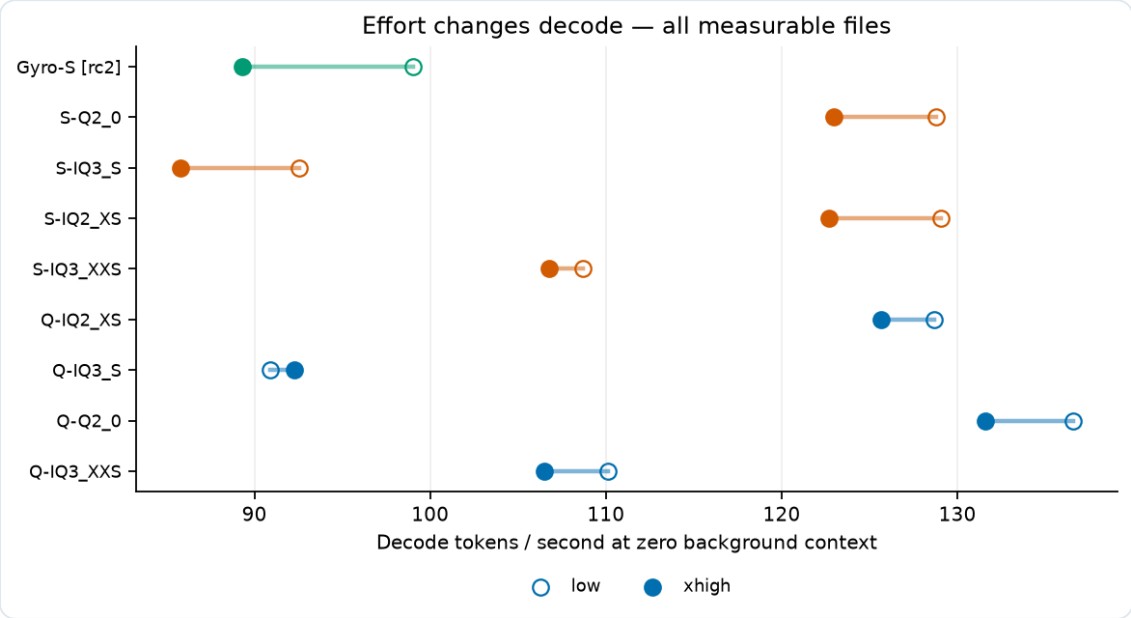

Attribution-eligible zero-background decode for both efforts; Gyro-M endpoint observations are excluded. A fork-engine result is not a same-engine model A/B.

T08 · Integrated low-effort performance profiles

File / lab	Engine	Context tokens: 0 / mid / deep	Decode tok/s: 0 / mid / deep	First-token rate: 0 / mid / deep	Deep TTFT s
Q-Q2_0 ISTA-DASLab	0.1.40.3	0 / 32,768 / 131,072	136.6 / 131.8 / 128.4	2,309 / 3,522 / 3,667	36.30
S-IQ2_XS UkisAI	0.1.40.3	0 / 32,768 / 131,072	129.1 / 129.1 / 119.9	1,970 / 3,283 / 3,334	39.93
S-Q2_0 UkisAI	0.1.40.3	0 / 32,768 / 131,072	128.8 / 116.9 / 121.9	1,892 / 3,229 / 3,329	39.99
Q-IQ2_XS ISTA-DASLab	0.1.40.3	0 / 32,768 / 131,072	128.7 / 129.4 / 120.0	2,011 / 3,195 / 3,280	40.59
Q-IQ3_XXS ISTA-DASLab	0.1.40.3	0 / 32,768 / 131,072	110.1 / 106.2 / 107.4	2,174 / 3,284 / 3,421	38.91
S-IQ3_XXS UkisAI	0.1.40.3	0 / 32,768 / 131,072	108.7 / 111.3 / 106.0	2,025 / 3,329 / 3,412	39.01
S-IQ3_S UkisAI	0.1.40.3	0 / 32,768 / 131,072	92.6 / 88.5 / 96.5	1,594 / 3,206 / 3,374	39.45
Q-IQ3_S ISTA-DASLab	0.1.40.3	0 / 32,768 / 131,072	90.9 / 94.0 / 91.7	1,641 / 3,164 / 3,041	43.77
Gyro-S AgentionAI	rc2	0 / 32,768 / 122,880	99.0 / 88.6 / 96.0	1,090 / 2,106 / 2,364	48.36
Gyro-M AgentionAI	rc2	0 / 32,768 / 122,880	93.4 / 87.5 / 86.5	1,239 / 2,144 / 2,821	44.28

T08 · 10 rows · end of table

T09 · Integrated xhigh-effort performance profiles


File / lab	Engine	Context tokens: 0 / mid / deep	Decode tok/s: 0 / mid / deep	First-token rate: 0 / mid / deep	Deep TTFT s
Q-Q2_0 ISTA-DASLab	0.1.40.3	0 / 32,768 / 131,072	131.6 / 130.5 / 117.2	2,676 / 3,836 / 3,663	36.35
Q-IQ2_XS ISTA-DASLab	0.1.40.3	0 / 32,768 / 131,072	125.7 / 118.9 / 117.5	2,135 / 3,341 / 3,339	39.87
S-Q2_0 UkisAI	0.1.40.3	0 / 32,768 / 131,072	123.0 / 121.9 / 128.9	2,219 / 3,167 / 3,332	39.96
S-IQ2_XS UkisAI	0.1.40.3	0 / 32,768 / 131,072	122.7 / 123.9 / 113.8	2,209 / 3,286 / 3,334	39.93
S-IQ3_XXS UkisAI	0.1.40.3	0 / 32,768 / 131,072	106.8 / 101.1 / 99.4	2,420 / 3,339 / 3,449	38.59
Q-IQ3_XXS ISTA-DASLab	0.1.40.3	0 / 32,768 / 131,072	106.5 / 101.7 / 95.3	2,406 / 3,361 / 3,409	39.05
Q-IQ3_S ISTA-DASLab	0.1.40.3	0 / 32,768 / 131,072	92.2 / 91.2 / 86.6	1,945 / 3,216 / 3,382	39.36
S-IQ3_S UkisAI	0.1.40.3	0 / 32,768 / 131,072	85.8 / 85.5 / 85.8	1,933 / 3,269 / 3,388	39.29
Gyro-S AgentionAI	rc2	0 / 32,768 / 122,880	89.3 / 89.1 / 87.4	1,580 / 2,546 / 2,268	50.10
Gyro-M AgentionAI	rc2	0 / 32,768 / 122,880	87.7 / 80.5 / 80.7	1,754 / 2,690 / 2,778	44.96

T09 · 10 rows · end of table

The Gyro-M endpoint audit retains all six raw observations and their source hashes; they are shown here as raw client-endpoint values (client :8090 vs launcher :8080, no engine-side request log) and stay excluded from the decode charts. Decode TPS is diagnostic only, not a default-selection score. Gyro-S speed uses the paired engine-log decode samples and observed full-prompt token ranges; client TG/PP metrics are not promoted. See data/gyro-s-speed-audit.json and data/gyro-m-speed-attribution-audit.json. Hosted performance is not comparable and remains withheld.

THE FINAL SCORECARD — comprehensive daily-driver decision matrix

Every test family contributes to the decision; no master score, weights or overall numeric ranking. Display order: recommended default, other low-effort stock options, higher-effort stock options, experimental setups. Coding/tools are effort-specific. Math/algebra, IFEval, Five Bugs and Needle are once-per-file samples repeated for context, NOT independent measurements at both efforts. Gyro-S current rc2 math/algebra/instructions/debug/recall are included; archived rc1 numbers are not mixed in. Gyro-S auxiliary tests were measured once at xhigh; repeating them beside both effort rows is context, not a new low-effort measurement. Missing matched evidence never becomes zero or a pass.

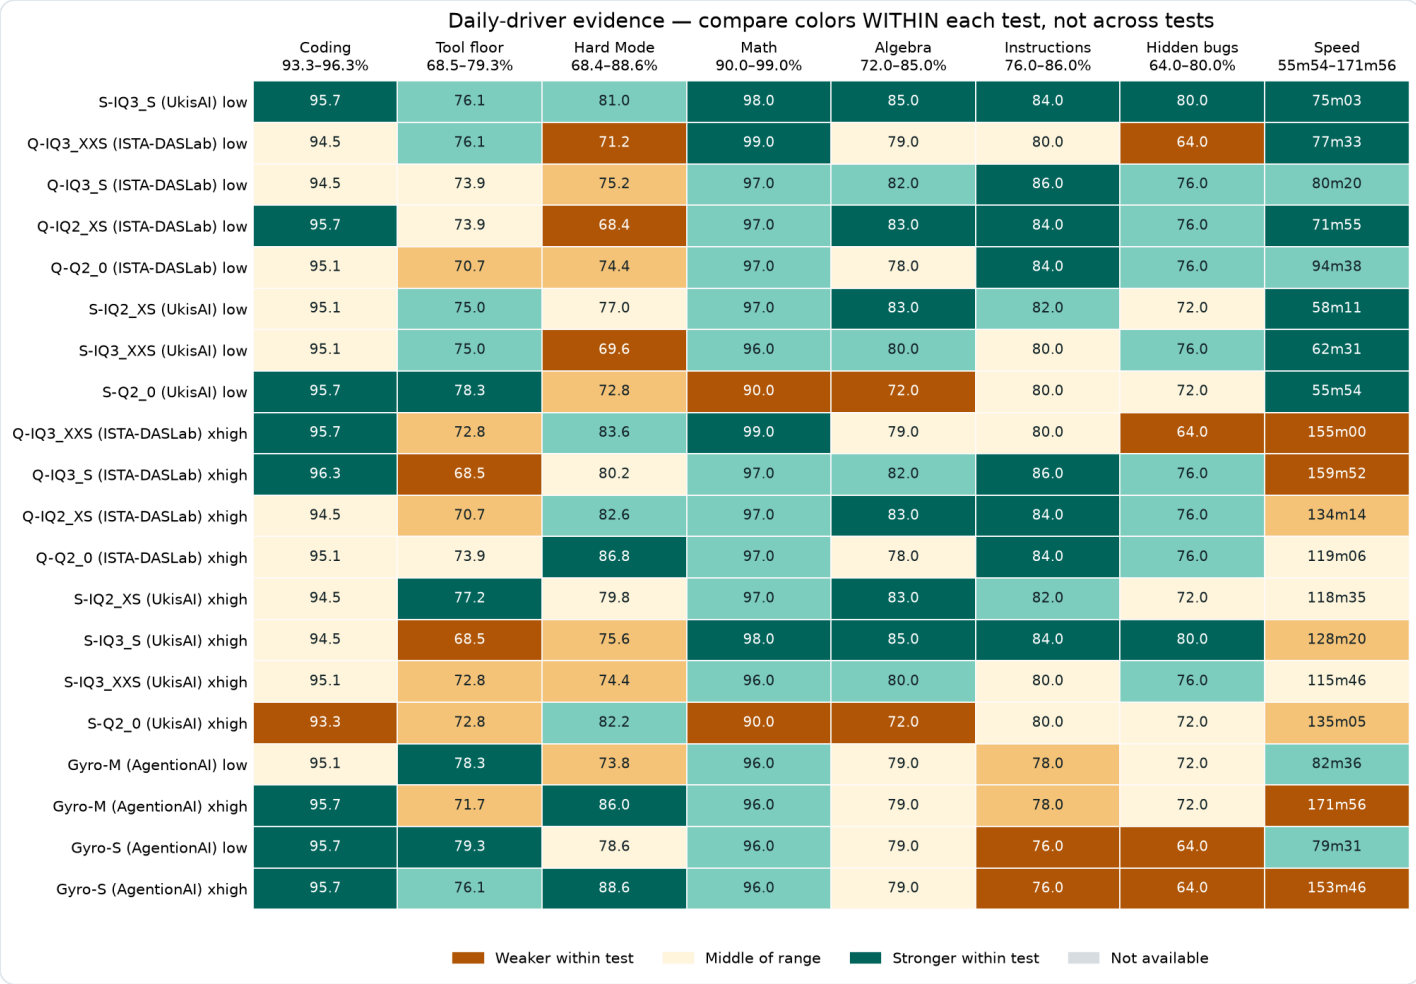

Cell numbers remain raw percentages, not an aggregate. Orange = weaker and teal = stronger WITHIN each test column; five color bands span that column's observed range (printed above). Narrow score differences are visually magnified, not proof of statistical significance or absolute pass/fail. Missing data stays gray. Hidden Bugs is shown as a percentage of /25. Speed is total wall time (code+debug+5-run tool), colored inverted so faster is stronger; its labels are minutes, not percentages. No model wins by summing colors.

T10 · All-test capability matrix — no overall score

Setup / effort	Code first/final %	Tool mean±SD / floor	Hard Mode	Math / algebra %	IFE prompt / instr %	Bugs visible / hidden	Needle % @ tokens	Speed (Total Wall)
S-IQ3_S UkisAI low	92.7 / 95.7	88.2±1.5 / 76.1	81.0	98 / 85	84.0 / 89.5	25/25 / 20/25	100 @ 260,096	75m03s
Q-IQ3_XXS ISTA-DASLab low	92.1 / 94.5	87.0±2.0 / 76.1	71.2	99 / 79	80.0 / 85.5	21/25 / 16/25	100 @ 260,096	77m33s
Q-IQ3_S ISTA-DASLab low	92.7 / 94.5	86.8±0.8 / 73.9	75.2	97 / 82	86.0 / 90.8	24/25 / 19/25	100 @ 260,096	80m20s
Q-IQ2_XS ISTA-DASLab low	90.9 / 95.7	86.2±0.8 / 73.9	68.4	97 / 83	84.0 / 89.5	24/25 / 19/25	100 @ 260,096	71m55s
Q-Q2_0 ISTA-DASLab low	92.7 / 95.1	84.8±0.4 / 70.7	74.4	97 / 78	84.0 / 89.5	24/25 / 19/25	100 @ 260,096	94m38s
S-IQ2_XS UkisAI low	89.6 / 95.1	87.2±1.3 / 75.0	77.0	97 / 83	82.0 / 88.2	23/25 / 18/25	100 @ 260,096	58m11s
S-IQ3_XXS UkisAI low	92.7 / 95.1	84.6±0.5 / 75.0	69.6	96 / 80	80.0 / 86.8	24/25 / 19/25	100 @ 260,096	62m31s
S-Q2_0 UkisAI low	90.2 / 95.7	85.0±1.0 / 78.3	72.8	90 / 72	80.0 / 86.8	23/25 / 18/25	100 @ 260,096	55m54s
Q-IQ3_XXS ISTA-DASLab xhigh	92.7 / 95.7	88.6±1.1 / 72.8	83.6	99 / 79	80.0 / 85.5	21/25 / 16/25	100 @ 260,096	155m00s
Q-IQ3_S ISTA-DASLab xhigh	93.3 / 96.3	86.8±1.3 / 68.5	80.2	97 / 82	86.0 / 90.8	24/25 / 19/25	100 @ 260,096	159m52s
Q-IQ2_XS ISTA-DASLab xhigh	89.6 / 94.5	88.6±1.8 / 70.7	82.6	97 / 83	84.0 / 89.5	24/25 / 19/25	100 @ 260,096	134m14s
Q-Q2_0 ISTA-DASLab xhigh	88.4 / 95.1	89.4±0.5 / 73.9	86.8	97 / 78	84.0 / 89.5	24/25 / 19/25	100 @ 260,096	119m06s
S-IQ2_XS UkisAI xhigh	91.5 / 94.5	88.2±1.5 / 77.2	79.8	97 / 83	82.0 / 88.2	23/25 / 18/25	100 @ 260,096	118m35s
S-IQ3_S UkisAI xhigh	92.7 / 94.5	85.6±0.5 / 68.5	75.6	98 / 85	84.0 / 89.5	25/25 / 20/25	100 @ 260,096	128m20s
S-IQ3_XXS UkisAI xhigh	92.1 / 95.1	86.6±1.5 / 72.8	74.4	96 / 80	80.0 / 86.8	24/25 / 19/25	100 @ 260,096	115m46s
S-Q2_0 UkisAI xhigh	89.6 / 93.3	86.8±2.2 / 72.8	82.2	90 / 72	80.0 / 86.8	23/25 / 18/25	100 @ 260,096	135m05s
Gyro-M AgentionAI low	93.3 / 95.1	86.0±1.4 / 78.3	73.8	96 / 79	78.0 / 82.9	23/25 / 18/25	100 @ 129,024	82m36s
Gyro-M AgentionAI xhigh	92.1 / 95.7	87.8±1.1 / 71.7	86.0	96 / 79	78.0 / 82.9	23/25 / 18/25	100 @ 129,024	171m56s
Gyro-S AgentionAI low	90.2 / 95.7	88.6±1.5 / 79.3	78.6	96 / 79	76.0 / 82.9	21/25 / 16/25	100 @ 129,024	79m31s
Gyro-S AgentionAI xhigh	88.4 / 95.7	89.0±1.2 / 76.1	88.6	96 / 79	76.0 / 82.9	21/25 / 16/25	100 @ 129,024	153m46s

T10 · 20 rows · end of table

Sample sizes matter: GSM8K 100 seeded questions; algebra first 100 abstract-algebra questions, not general MMLU; IFEval 50 prompts / 76 constraints; Five Bugs 25 sessions; Needle 25 cells. Retrieval 100% at 129,024 and 260,096 tokens is not equal context capacity. Gyro-S valid rc2 auxiliary results are shown, including a scored algebra run (79%) after the original dataset HTTP 429 was resolved offline. Failure/timeout/repair outcomes remain in coding scores. Shared per-file samples do not establish effort-specific performance. **Speed (Total Wall)** sums that setup's measured code, debugging and five-run tool job times (whole-workload wall, lower is faster); it is not a per-token rate and excludes hosted rows. The heatmap colors Speed inverted so faster reads stronger within the column.

T11 · Time-to-result, reliability and deployment decision matrix

Setup / effort	Code wall	Debug wall	5-run tool wall	Code tokens	Stored rating / warnings	Decision / deployment caveat
S-IQ3_S UkisAI low	13m52s	3m36s	57m36s	61,395	4/5 Good; 4 warnings	Recommended default; stock; long-duration stability not established
Q-IQ3_XXS ISTA-DASLab low	14m26s	9m01s	54m06s	82,843	3/5 safety-capped; 7 warnings	Stock alternative; stock; long-duration stability not established
Q-IQ3_S ISTA-DASLab low	14m05s	7m57s	58m18s	66,966	4/5 Good; 3 warnings	Stock alternative; stock; long-duration stability not established
Q-IQ2_XS ISTA-DASLab low	22m44s	4m28s	44m42s	140,583	3/5 safety-capped; 5 warnings	Stock alternative; stock; long-duration stability not established
Q-Q2_0 ISTA-DASLab low	49m50s	4m36s	40m12s	277,084	3/5 safety-capped; 7 warnings	Stock alternative; stock; long-duration stability not established
S-IQ2_XS UkisAI low	13m23s	2m24s	42m24s	83,746	3/5 safety-capped; 4 warnings	Stock alternative; stock; long-duration stability not established
S-IQ3_XXS UkisAI low	11m56s	2m10s	48m24s	68,616	4/5 Good; 4 warnings	Stock alternative; stock; long-duration stability not established
S-Q2_0 UkisAI low	12m56s	2m34s	40m24s	87,634	4/5 Good; 5 warnings	Stock alternative; stock; long-duration stability not established
Q-IQ3_XXS ISTA-DASLab xhigh	76m17s	9m01s	69m42s	390,930	3/5 safety-capped; 3 warnings	Task-specific effort; stock; long-duration stability not established
Q-IQ3_S ISTA-DASLab xhigh	67m19s	7m57s	84m36s	304,962	3/5 safety-capped; 4 warnings	Task-specific effort; stock; long-duration stability not established
Q-IQ2_XS ISTA-DASLab xhigh	75m40s	4m28s	54m06s	347,704	4/5 Good; 1 warnings	Task-specific effort; stock; long-duration stability not established
Q-Q2_0 ISTA-DASLab xhigh	62m18s	4m36s	52m12s	332,296	5/5 Excellent; 2 warnings	Task-specific effort; stock; long-duration stability not established
S-IQ2_XS UkisAI xhigh	63m04s	2m24s	53m06s	118,588	5/5 Excellent; 2 warnings	Task-specific effort; stock; long-duration stability not established
S-IQ3_S UkisAI xhigh	43m32s	3m36s	81m12s	137,839	3/5 safety-capped; 5 warnings	Task-specific effort; stock; long-duration stability not established
S-IQ3_XXS UkisAI xhigh	47m11s	2m10s	66m24s	175,860	3/5 safety-capped; 4 warnings	Task-specific effort; stock; long-duration stability not established
S-Q2_0 UkisAI xhigh	56m20s	2m34s	76m12s	243,330	4/5 Good; 2 warnings	Task-specific effort; stock; long-duration stability not established
Gyro-M AgentionAI low	17m20s	6m16s	58m59s	80,523	3/5 safety-capped; 6 warnings	Experimental; not default; 205 MiB free; raw gates failed; CTest/invalid slices
Gyro-M AgentionAI xhigh	82m51s	6m16s	82m49s	391,467	4/5 Good; 2 warnings	Experimental; not default; 205 MiB free; raw gates failed; CTest/invalid slices
Gyro-S AgentionAI low	21m36s	7m21s	50m34s	111,805	4/5 Good; 2 warnings	Experimental; not default; rc2 tested; experimental fork
Gyro-S AgentionAI xhigh	84m30s	7m21s	61m55s	497,873	5/5 Excellent; 1 warnings	Experimental; not default; rc2 tested; experimental fork

T11 · 20 rows · end of table

Walls are whole-job observations, not time per token; debugging/plugin times may use different harness scope from coding. Safety warnings and stored last-trial rating are not a safety certificate or five-trial warning union. Gyro-M raw safety_gate.passed is false for both efforts; Gyro-S current rc2 sampled coverage is incomplete. All stock options also lack a controlled multi-day stability evaluation. No daily-driver model swap was performed.

PICK YOUR FILE — one evidence-based recommendation

Recommended default: Swift IQ3_S (UkisAI), low, on the stock study setup. The recommendation uses breadth, reliable tool behavior, instruction following, hidden debugging, recall capacity and total wall time together. It is not guaranteed by a weighted master score. The default is mid-pack on speed (75m03s); if total workload time dominates, Swift Q2_0 low is fastest (55m54s) at the cost of sampled knowledge/debug depth. Different workload priorities justify the alternatives below; experimental results do not automatically become daily defaults.

Recommended daily-driver default

S-IQ3_S (UkisAI) low

Broad stock-cohort evidence: strong coding, tools, sampled knowledge, instructions and hidden debugging. Total workload wall is mid-pack (75m03s), not the fastest; chosen for breadth, not speed.

Fastest total workload time

S-Q2_0 (UkisAI) low

Lowest total wall (code+debug+5-run tool) at 55m54s and the best stock all-five floor; sampled math/algebra and hidden debugging trail the recommended default.

Tool-reliability specialist

S-Q2_0 (UkisAI) low

Highest observed stock all-five floor, and it doubles as the fastest total wall (55m54s); weaker sampled math/algebra and hidden debugging than the recommended default.

Coding-latency specialist

S-IQ3_XXS (UkisAI) low

Shortest complete coding job; total workload wall 62m31s. Not the strongest broad sampled capability profile.

Coding-score specialist

Q-IQ3_S (ISTA-DASLab) xhigh

Highest observed stock final coding score; substantially longer total wall (160m) than low-effort Swift options.

Sampled knowledge / debugging choice

S-IQ3_S (UkisAI) low

Highest local sampled algebra accuracy and hidden debugging score; limited samples, not a whole-model knowledge exam.

Experimental comparison, not a default pick

Gyro-M (AgentionAI) low

Scored quality is useful, but narrow 16 GB memory margin, raw safety-gate failures, CTest/campaign caveats and the slowest total wall (172m at xhigh) prevent a daily-driver endorsement.

FOR MAINTAINERS — measured findings and validity

- **Tool plumbing is build-specific:** rc1 forced calls were ignored with Gyro-S. rc2 live forced calls passed with Gyro-M on streaming and non-streaming; Gyro-S also has scored rc2 low/xhigh TEB arms. These are engine-qualified setup results, not model-only claims.
- **Gyro-S scored-slice gate:** overall aborted_or_invalid; required HE+/TEB low/xhigh slices eligible=True; invalid non-scoring slices=plugin-mmlu; controller error retained as RuntimeError('S battery exited 2'). Restoration closeout eligible=True; no clean overall completion is claimed.
- **Experimental fork fit:** 74 resource samples, minimum 205 MiB free, peak 78 C. cuda_error=0, engine_restart=0, no_progress=0, stall_report=0, verify_timeout=0. This is not long-term stability proof.
- **Campaign status:** `completed_with_invalid_slices`, finished 2026-10-12T17:27:48+02:00. CTest 49 pass / 2 skip / 1 fail. ple_parity lacks its required Q2_0 PLE shard/capture fixtures; separate ple_reader_selftest passed.
- **Audit bookkeeping:** both HumanEval+ task audits ran; a dictionary merge overwrote intended audit-step names, making done.json mark them absent. Xhigh validity logic also missed blank finals. Raw status/scores are preserved; no silently upgraded clean pass.
- **Monitoring:** corrected busy-vs-down logic after the first aborted attempt. Perf-low/needle static-counter warnings were not accompanied by engine-event counters. Standalone effort probe is excluded from scores; possible timing interference is disclosed.
- **Operations:** production Swift IQ3_S restoration passed health/chat/tool/vision and re-enabled guards/updater. Report revisions did not alter services.

METHOD & CORRECTIONS — reproducible without hiding caveats

The PDF, GitHub README, scoreboard and recommendation registry are generated from the same extracted store. New data is integrated throughout, not isolated in a model-specific chapter. Source records and hashes are packaged; the portable compiler rebuilds from this folder.

- **Coding:** BenchKit direct, 164 attempted tasks, greedy temperature 0, presence penalty 1.0, one repair. Gyro-M timeout 900 seconds, no injected client token cap. Serving protocol and engine changes qualify historical cross-cohort comparisons.
- **Tools:** 2.7.1.dev16+gf7c34a130, 92 scenarios x five trials per effort; seed 42, temperature 0.0, timeout 300 s, turn cap 8. Separate Swift v2.8.0 / 97-scenario data is NOT mixed in.
- **Corrections:** historical partial coding denominators resolved by documented offline adjudication and a complete matched replacement run; category scores changed to five-run means; inflated raw prefill removed; ceiling-minus-floor gap labeled correctly; peak temperature corrected from 64 C summary to measured 78 C. These corrections, not an unmeasured model promotion, change the earlier recommendation framing.
- **Hosted reference protocols:** Both GPT-6-luna MAX and GPT-6.1-SOL ultra are external OpenAI-hosted observations, not recommendations or local runs. Luna uses the Responses API at MAX; SOL uses Codex CLI 0.162.1 at ultra with a JSON-schema tool bridge, concurrency 4, and unenforced requested sampling controls. One trial-2 TC-56 timeout was recovered through a validated original-prefix continuation; the source detail retains both original and recovery records. MAX is explicitly pinned; unsupported/unverified Chat Completions sampling fields (temperature, presence_penalty, seed, top-p/top-k) are not forwarded by the Codex Responses bridge. GSM8K used seed 42, but the original study sampling seed was not retained, so exact sample identity is unverified. MMLU is only the first 100 abstract_algebra questions (5-shot); IFEval is only the first 50 prompts. Tool trials used concurrency 4 versus the reference study concurrency 1. Requested temperature, seed and token budgets are not enforced by Codex CLI. SOL's first-upload sampling and transport caveats are recorded here; its only published Five Bugs score is 20/25 hidden and 25/25 visible from the initial independent runs. No SOL decode-performance measures exist, and matched hosted rates remain withheld.
- **Not tested:** vision quality, multi-day agents, extra seeds, multi-GPU, other GPU sizes, full knowledge datasets, additional independent sampled-suite repeats, or Gyro-M beyond 131K. No automatic supported-memory or production-stability conclusion.

T12 · Version-pinned provenance

Provenance item	Pinned value
Stock engine digest	34CDE150B21148E6
Fork rc2 run	full-20261012-rerun-1230
Fork engine commit	`9ff02c9fa9c86a88088370925b3c9131cc5d6c26`
Fork binary SHA256	`08d70e30b9176dee5273ba74bd67c4d4c435bef92d449323168d7a8a3497585f`
Gyro-M model revision	`2cd4f24bcb0fa053149a4e4ec15506ecc64cafab`
Gyro-M model SHA256	`7aa36d15131d255179ab6c87fa9c9f81a0b541fc9e81e959d4c3e29eb20feb5f`
Fork context / KV	131,072 / int8
Rebuild	scripts/build_revision.py; data/ALL-METRICS.json; claims.json

T12 · 8 rows · end of table

PR #1850 · Strata · AgentionAI fork · Gyro source · Tool-eval-bench · EvalPlus · Five Bugs · GPT-6.1-SOL first upload (a48292f)

Revised 2026-10-14 · source-qualified observations · all recommendations use the same evidence-based decision registry, without numeric overall ranks. Numeric audit, whole-table pagination proof, source manifest and portable rebuild accompany the report.