Herd immunity in a network

Jens Kinch, Nikolai Plambech Nielsen & Mads Ehrhorn

28th of July 2017

Niels Bohr Institute
University of Copenhagen

Introduction

Herd immunity

Disease types

Networks

Herd immunity

Protect the flock by immunizing

Disease types

Networks

Herd immunity

- R_0: 'basic reproduction number'

  Avg. no. of people infected pr. person

- p_c: herd immunity threshold

  $p_c = 1 - 1/R_0$

- Herd immunity passively protects whole population

Diseases

	R_0	Mortality rate	HIT
Ebola	1.5-2.5	0.25-0.90	0.33-0.60
Measles	12-18	0.15	0.92-0.94
Polio	5-7	0.15-0.30	0.80-0.86

Table 1: Data from `https://en.wikipedia.org/wiki/Herd_immunity`

Code

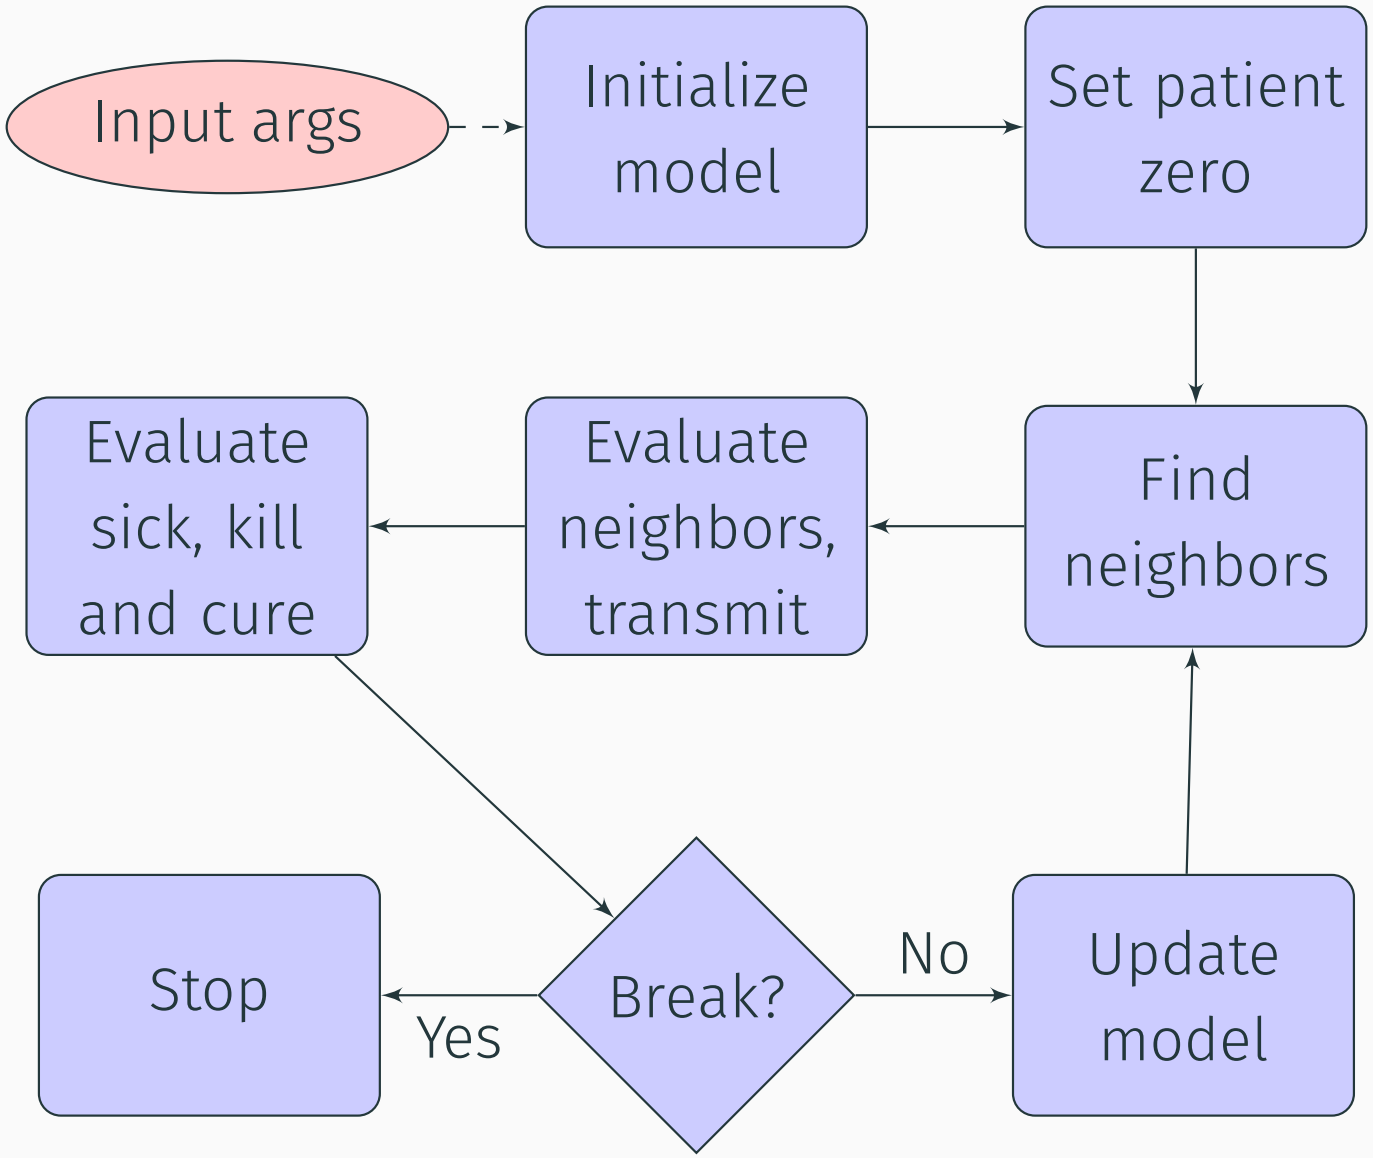
Input args
Initialize model
Set patient zero
Find neighbors
Evaluate neighbors, transmit
Evaluate sick, kill and cure
Break?
No
Yes
Update model
Stop

Networks

- Small world
- Scale free
- Random
- Custom network (two cities with commuters)

Movie time: two cities, death

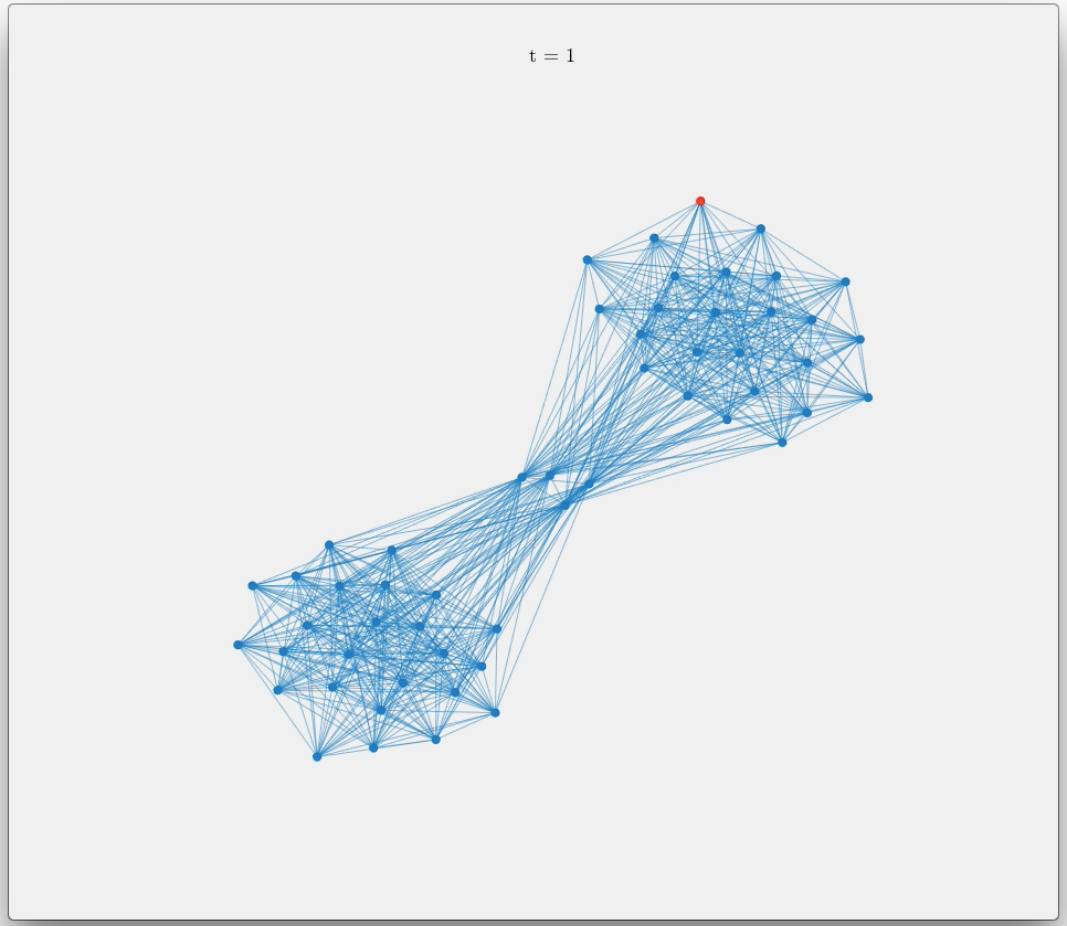

Custom network

Custom network, simulating two cities with commuters

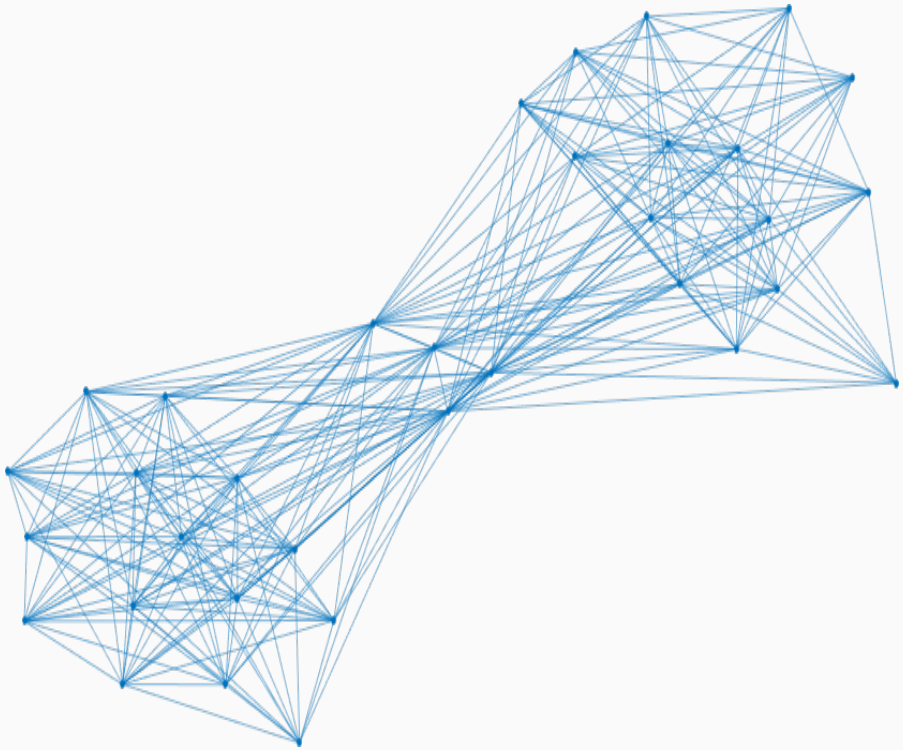

Success criteria

- Real world
  - No percolation
  - Disease no longer endemic
- Our model
  - Unable to define percolation
  - Discussion of alternate criteria
    - **Total sick $<$ arbitrary threshold**
    - Effective reproductive number ≤ 1
    - $n_{\text{sick}} = 0$ and $n_{\text{healthy}} \neq 0$
    - $n_{\text{healthy}} = 0$

The simulations

- Run each disease 50 times on each network
- With 20 p_I values
- Save relevant output

Results

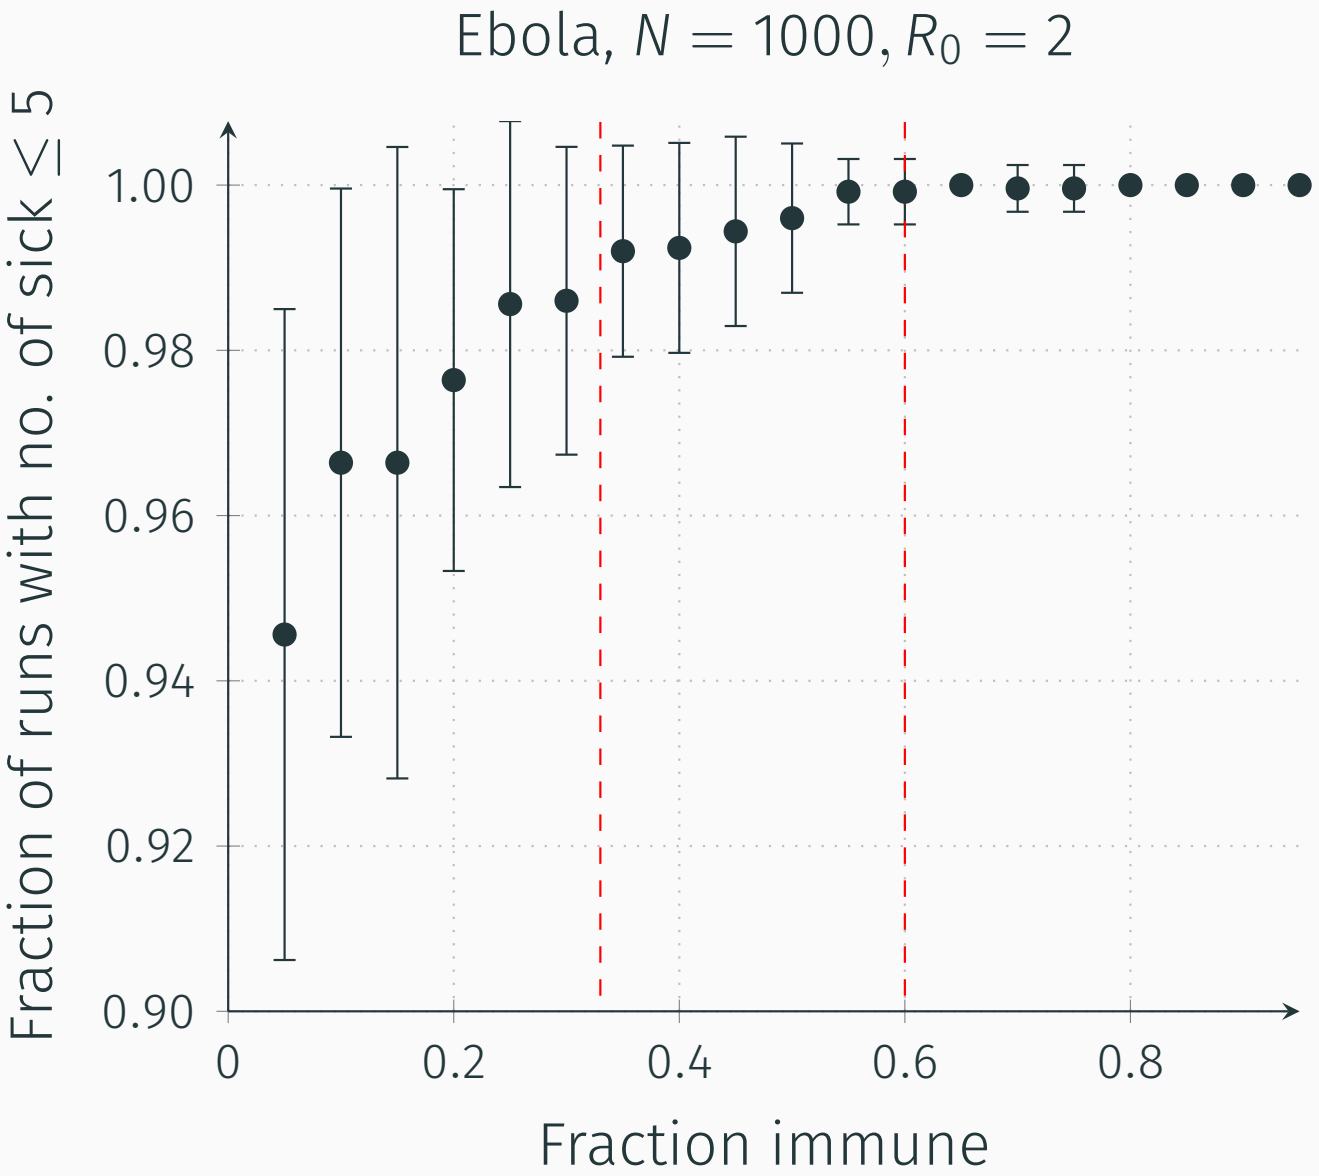
Ebola, $N = 1000, R_0 = 2$
Fraction of runs with no. of sick ≤ 5
1.00
0.98
0.96
0.94
0.92
0.90
0
0.2
0.4
0.6
0.8
Fraction immune

Results

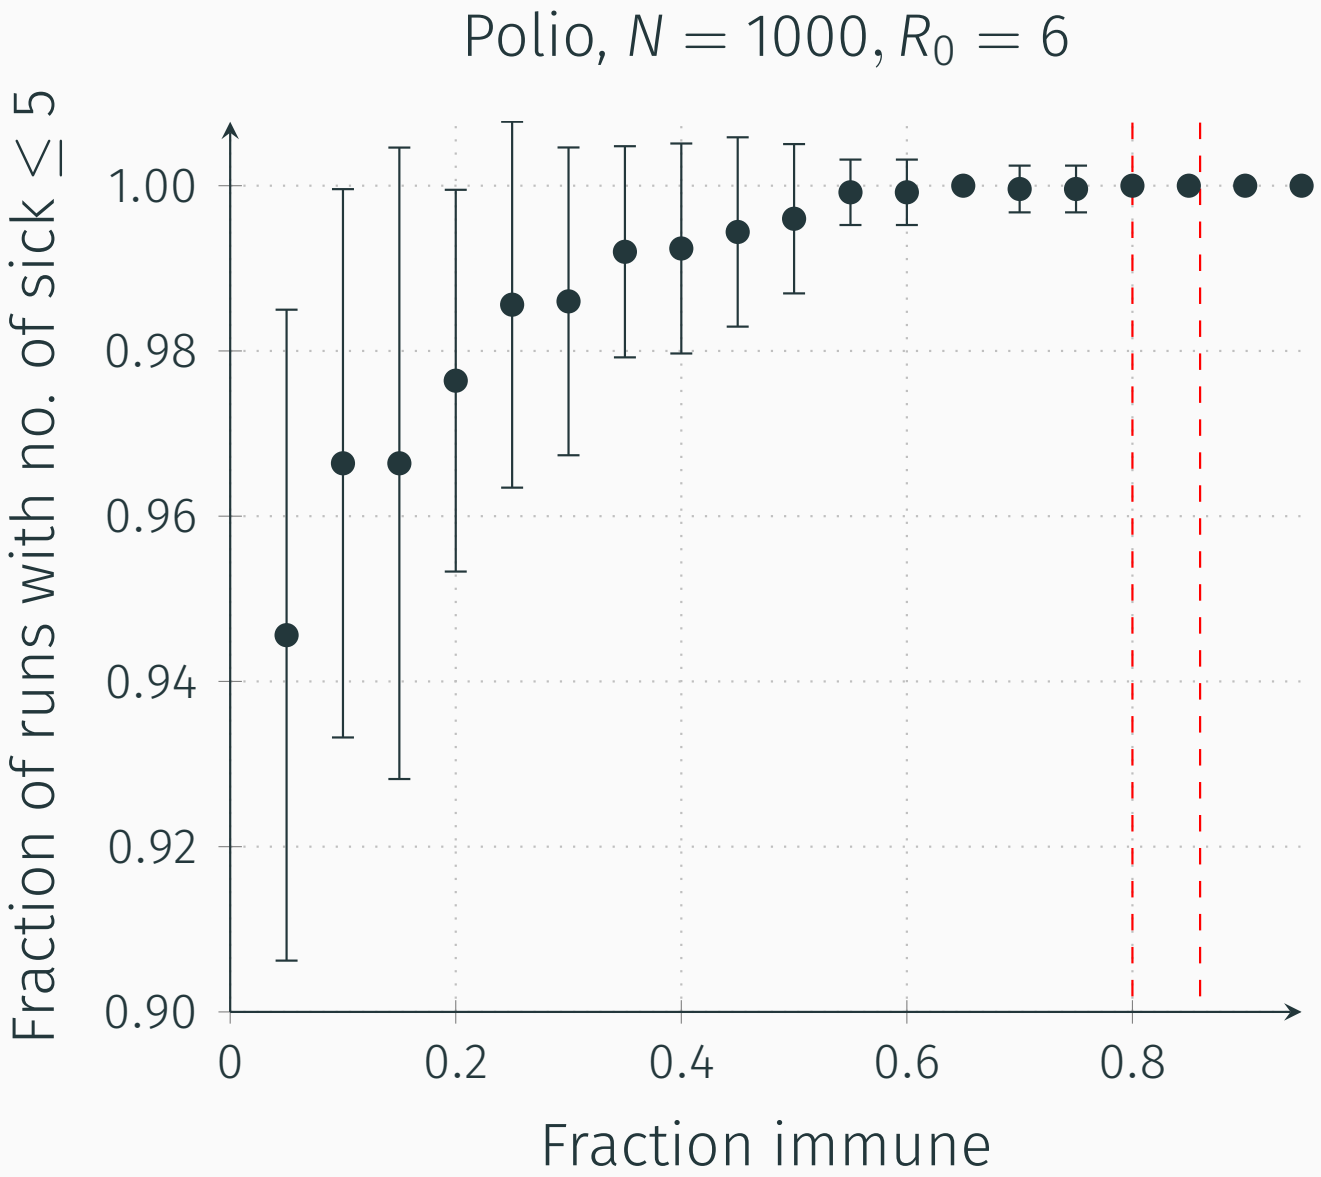
Polio, $N = 1000, R_0 = 6$
Fraction of runs with no. of sick ≤ 5
1.00
0.98
0.96
0.94
0.92
0.90
0
0.2
0.4
0.6
0.8
Fraction immune

Results

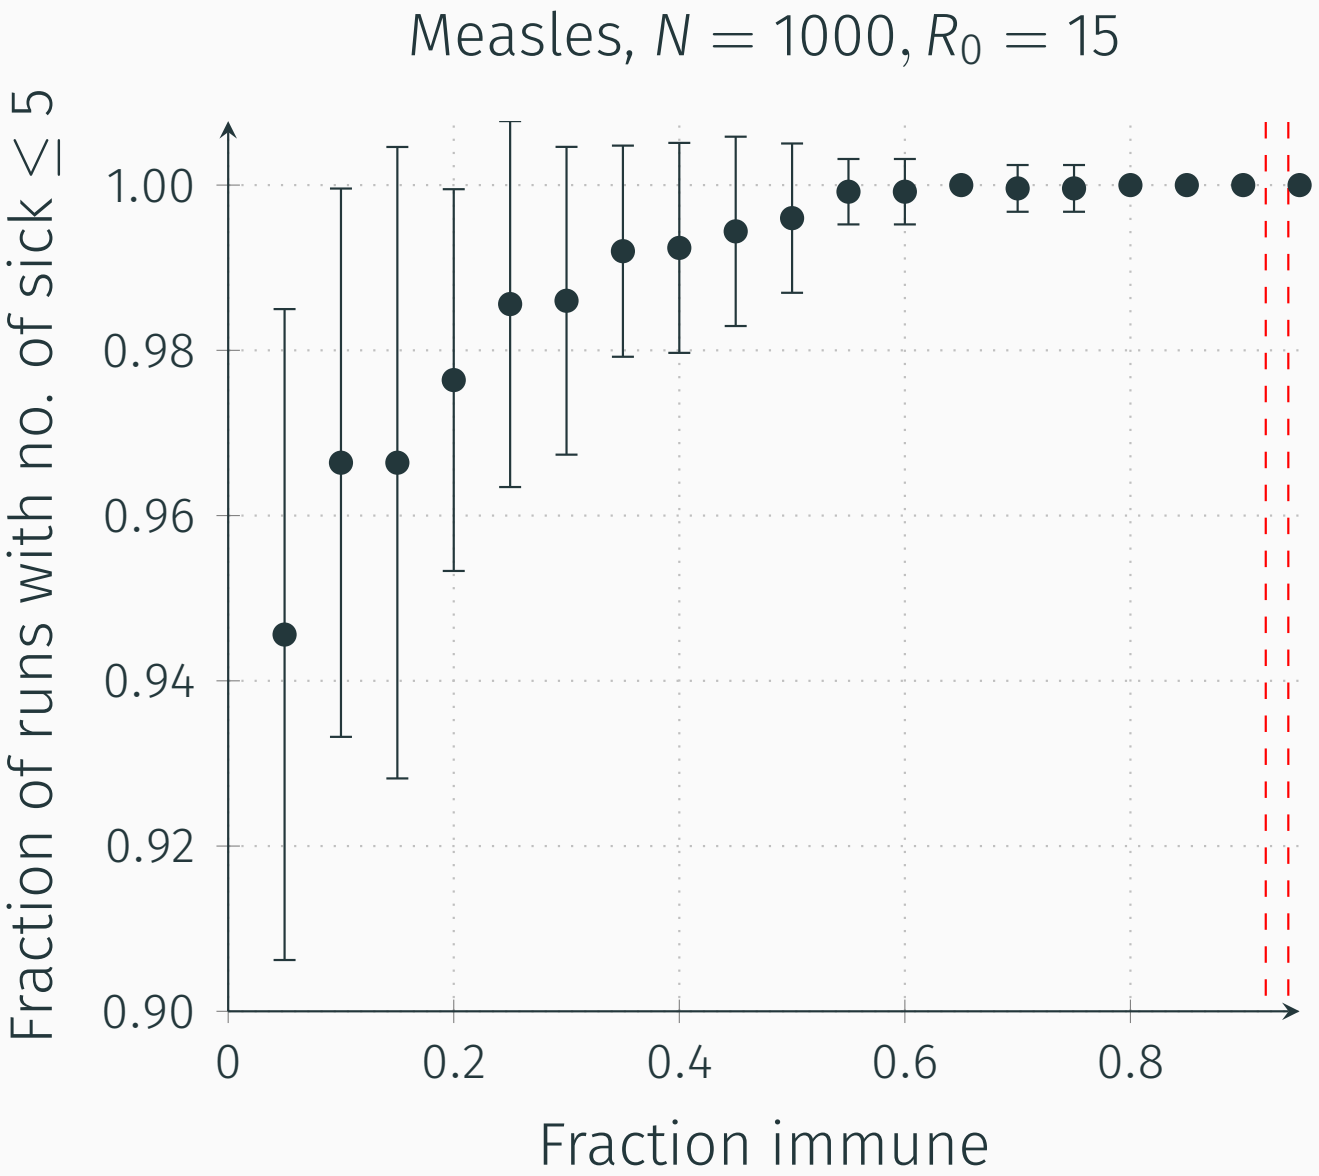
Measles, $N = 1000, R_0 = 15$
Fraction of runs with no. of sick ≤ 5
1.00
0.98
0.96
0.94
0.92
0.90
0
0.2
0.4
0.6
0.8
Fraction immune

Results

Video Galore