

Day-4 React JS

JS :-

variable Decl^r

JAVA Script run

data types

hoisting

TDZ

scope

funⁿ - define

types of funⁿ


lexical scope

closure

default parameter for funⁿ

operators

Non Primitive DT

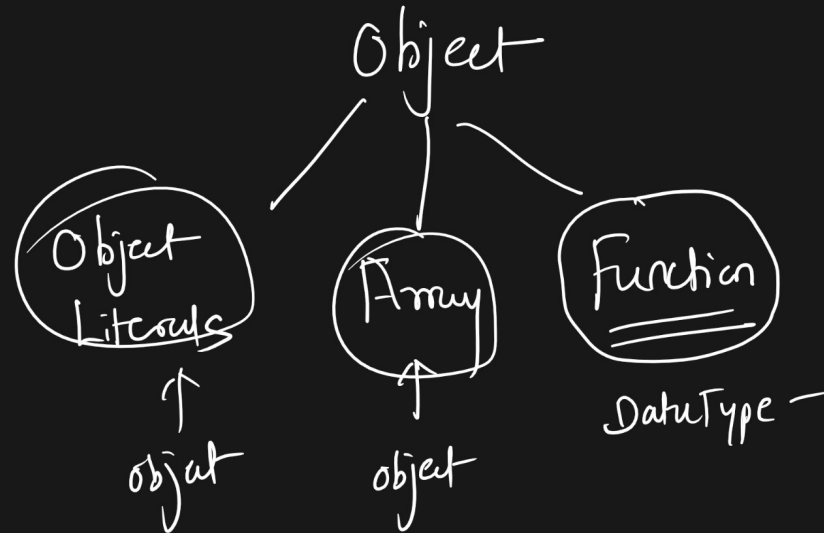

Array:- In JS Array collect the different type of elements

```
const arr = [10, 10.2, "Itnew", [20, 30, 40], {name: "xyz", age: 35},  
             true, function add(a, b) { } ]
```

c.log(arr) $\Rightarrow$ display all elements at a time

c.log(arr[2]) $\Rightarrow$ display specific index value

$\Rightarrow$ We want to display each an ele of array individual
one by one then use loop. (for loop)

```
for (let i = 0; i < arr.length; i++)  
{  
  c.log(arr[i])  
}
```

② for of

③ for Each

arr. forEach (ele, ^{0,1,2,3}index) $\Rightarrow$
{ arr[index] = ele * 2; }

)
{ _____ }

* Day - 5 :- Array, Object & String

Array :- for $\rightarrow$ loop

forEach $\rightarrow$ loop

forEach $\rightarrow$ funⁿ

map
filter
reduce } $\rightarrow$ funⁿ

Object :- We store the data in key values pair

key $\Rightarrow$ properties & values
& values

e.g.

let/const obj = {
 std_id : 1234, ✓
 → std_name : 'Abc', ✓
 std_dir : 'A' ✓
}

Object literals
= Non primitive data types

c.log (obj . std_name)

Object Literals :- They can store the values of any data type

let obj = {

string

no

boolean

null

undefined

array

object



obj . keyname

⇓
values

function		Object Literals
	Array	
To access individual element / entries	— for of For Each] vs map filter reduce	for in

Interview :-

- 1) Diff betn for of & For Each as well as for in
- 2) Diff betn For Each & map
- 3) Diff betn map, filter & reduce
- 4) Which loop we used to access individual entries in object (for in)
- 5) Can I apply For Each / on object ?
map / filter
- 6) what is object & what are the content inside?

7) How to access the object element?

8) What is `Object.keys()` & `Object.values()`, `Object.entries()`

* Destructuring of Object & Array (ES6) :-

$$\text{const arr} = [\underline{21}, \underline{13}, \underline{5}, \underline{67}, \underline{72}]$$

By using `for`, `for of`, `forEach` we can access all element of array individual.

But I want one single element of array.

const [a, b, c, d, e] = [a b c d e]
[21, 13, 5, 67, 72]
arr

$$c \cdot \log(\underline{c});$$

* Spread Operator & Rest Parameter (...)

— Both the operators their symbols are same but their operations are different.

Rest Parameter (...) : → collect the array element / object entries in new array. / object
(Rest Param)

— Used in LHS of assignment operator

— Use:- destructuring the array or object

Spread Operator (...) : → expand / spread the array elements

— used in RHS of assignment operator

— Uses :- 1) copy array in new variable

2) merge two array elements.

3) Pass the values to the fun^o.