

JAVA Script

- 1) History
- 2) what is JS ?
- 3) Data Type of JS

Primitive


- A) Numbers eg. $a = 12.35$
- B) BigInt - eg. $a = 12345678n$
- C) String - eg. $a = "Interview"$
- D) Boolean - eg. $a = \text{true} / \text{False}$
- E) null - eg. $a = \text{null}$
- F) undefined eg. $a = \text{undefined}$
- G) Symbol - eg. $a = \underline{\quad}$

```
var a = 10  
c.log(a)  
    ↪ a = 10 ✓
```

```
var a ;  
c.log(a)  
    ↪ a = undefined
```

Non Primitive

A) Object

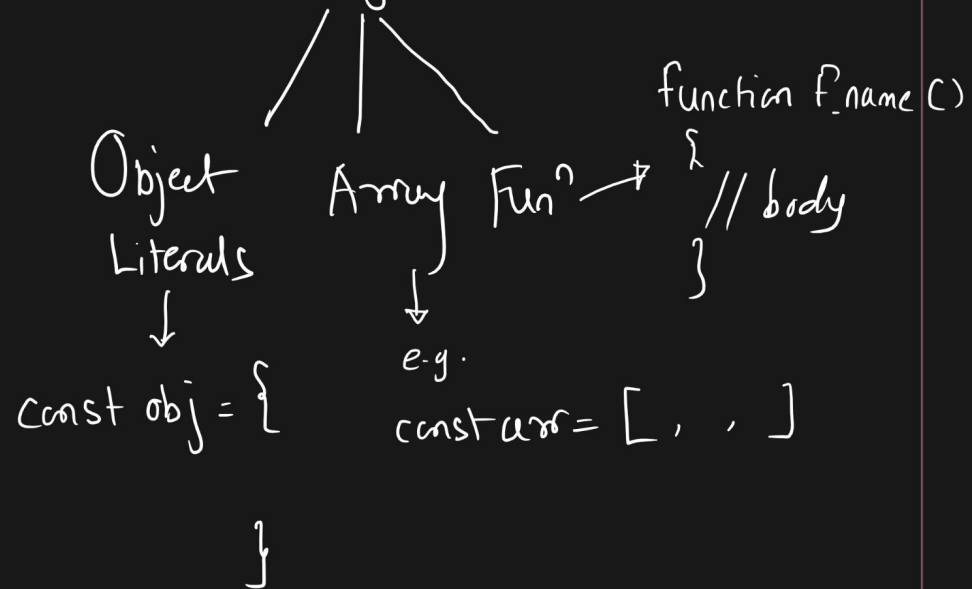

null $\rightarrow$ any variable or object as a null i.e. they don't point to any memory location.

var str;

str = " ";

typeof(undefined) $\Rightarrow$ undefined

~~*~~ ~~*~~ typeof(null) $\Rightarrow$ object

~~*~~ ~~*~~ typeof(fun) $\Rightarrow$ fun

~~*~~ typeof(array) $\Rightarrow$ object

Nan $\rightarrow$ not a number

$\downarrow$ not a datatype

result or cal $\xRightarrow{x}$ Nan typeof(Nan) $\Rightarrow$ number

c.log(2+2)

2-2

2*2

2/2

c.log(2-"2") $\Rightarrow$

(2) + "2"
"2" + "2" = "22"

2 - "2"

2 - 2

= 0

$\left| \begin{array}{l} 2 * \underline{\underline{"2"}} \\ 2 - 2 \\ = 4 \end{array} \right| \begin{array}{l} 2 - \text{"Iview"} \\ 2 * \text{"Iview"} \end{array}$

4) How to run JS Code ?

A) Through VSCode

- 1) - Node JS (download & install)
- run → terminal → node Filename.js
- 2) - Node JS install
- extension → Code Runner → ▶

B) Through Browser

- 1) - go to inspect
- 2) - snippet
- 3) - console

5) HomeWork

left operand		right operands
2	+	2
2	-	2
2	*	2
2	/	2
	>	2
	<	2
	==	2
	===	2

truthy
false
null
undefined

6) Operators :- A. Operator + - * /

> , >= , < , <= , == , ===

$\frac{2}{2} = 1$ $\frac{2}{2} = 1$

2 == "2" 2 === "2"

true false

truthy value
falsy value

all data type are truthy value except 0, -0, false, null, undefined, ""
falsy value

"trien" == ""

2 == "2"

2 == ""
= false

H.W. 2)

Make a practice on truthy & falsy value on with coding?

7) Variable Declr

There are three ways

A) var
↓
global scope
& Runⁿ scope

reinitialize

redeclare

B) let
↓
block
scope

C) const
— same as let

var
same scope
diff scope

same scope
diff scope

let
—
—

x
diff scope

const

const a = 10

x
x

x
x

 } x