

Day-2

Js

$c.log(a) \Rightarrow a \Rightarrow \text{undefined}$
 $\rightarrow \text{var } a = 10$
 $\downarrow$
 $c.log(a) \Rightarrow a \Rightarrow 10$

$c.log(a) \Rightarrow$
 $\text{let } a = 10$
 const
 $c.log(a) \Rightarrow$


How to execute the JS Code ?

↓
2 phases
Memory Creation phase Execution phase

Call stack

func
func
gee

 $\xrightarrow{\text{run}}$ Global Execution Context
GEC

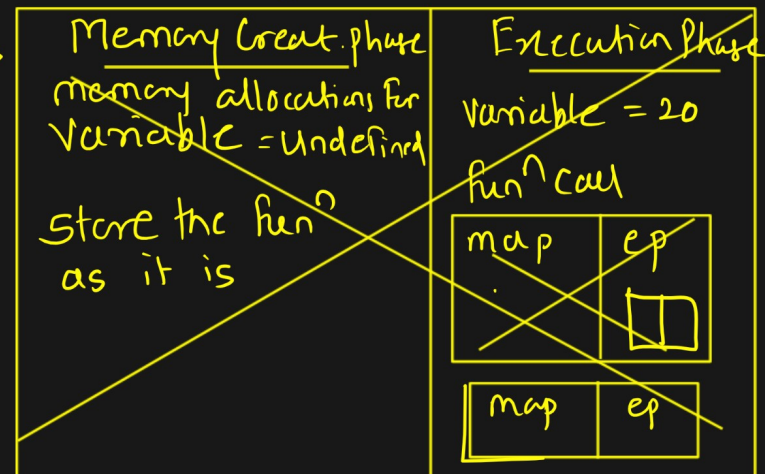



Global Execution Context

Call stack

```

c.log(a1) ✓
var a1=10 ✓
var b1=20 ✓

function add()
{
  var a2=30 ✓
  var b2=40
  console.log(a1+b1) ✓
  console.log(a2+b2) ✓
}
add()
  
```

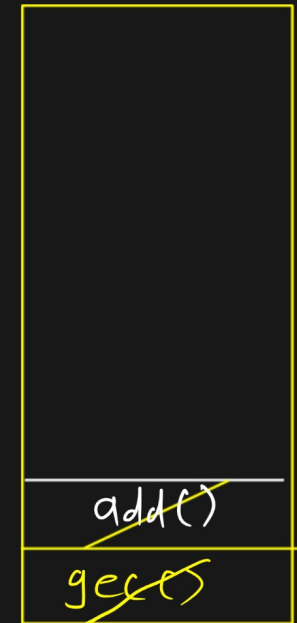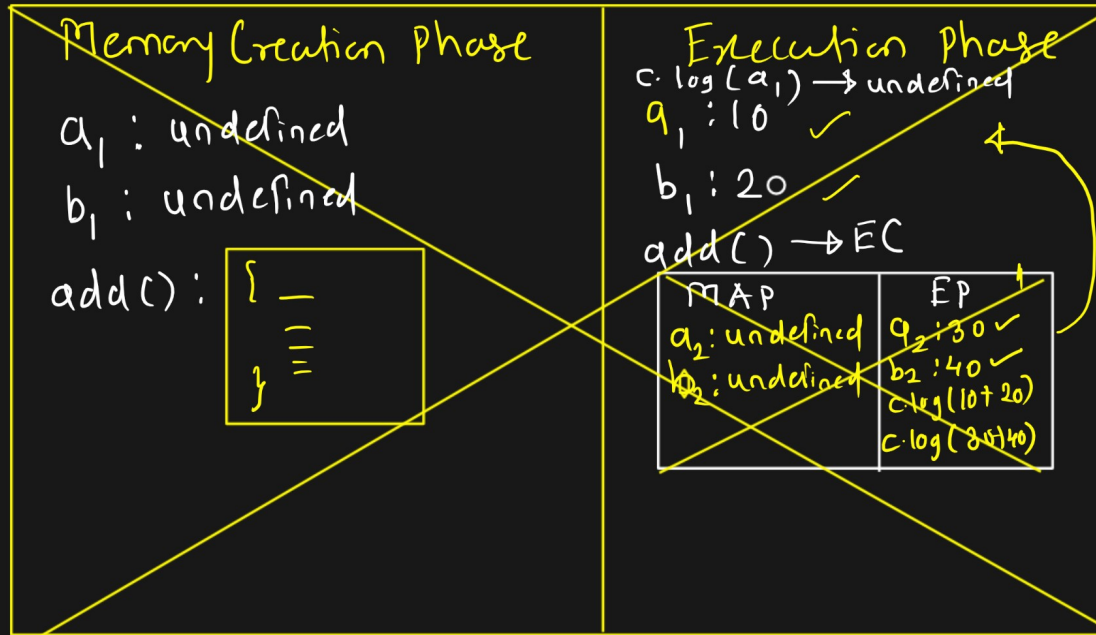

* Interview Que:-

- 1) what is execution context?
- 2) what is hoisting :- lifting the scope of var type of variable declar
- 3) what about let & const $\Rightarrow$ either they go to the script scope or block scope.
- 4) what are the scope in JS $\Rightarrow$ global, local, block, script, lexical
- 5) what is lexical scope in JS?
- 6) what is temporal dead zone?

6) what is the use of defer attribute?

7) How to debug the JS code?

* Function:-

1) How many types to define

2) How many type of funⁿ in JS

How many ways to define funⁿ in JS :-

1) Funⁿ Defⁿ :-

e.g. function funⁿname (parameter list)
 {
 // body
 }
 funⁿname ()

2) Function Expression :- ~~6A~~

const variable
 name = function ~~add~~ ()
 {
 }
 }

var a = 10;
 ↗ 10+2

Calling $\rightarrow$ variable name ()

3) Anonymous Funⁿ :- Funⁿ without name & assign to the variable

4) Arrow Fun² :-

```
const variable = (parameter list) =>
    name
    {
        // body
    }
```


5) IIFE :- Immediate Invoked Funⁿ Expression

↳ (function f.name (_____)
 {
 }) (argument);

* What are the different types of funⁿ:-

1) What is higher order funⁿ?

2) What is call back funⁿ?

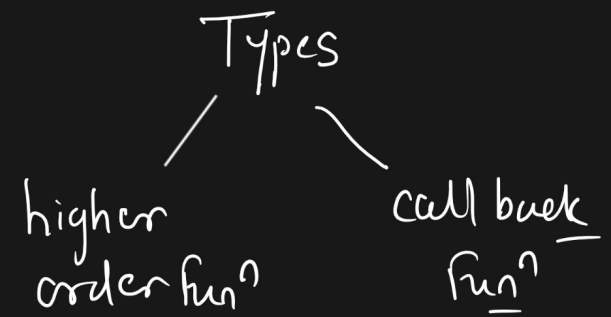

Higher Order funⁿ:-

⇒ Those funⁿ accept the funⁿ as a parameter that funⁿ we called as higher order funⁿ.

Call Back funⁿ:-

⇒ It is a funⁿ that we are passing as a parameter for higher order funⁿ.