
Virtual DOM

DOM - Document object model



Befor React :-


html + JS + CSS ⇒ DOM ⇒ manipulate → JS ⇒ fun^n

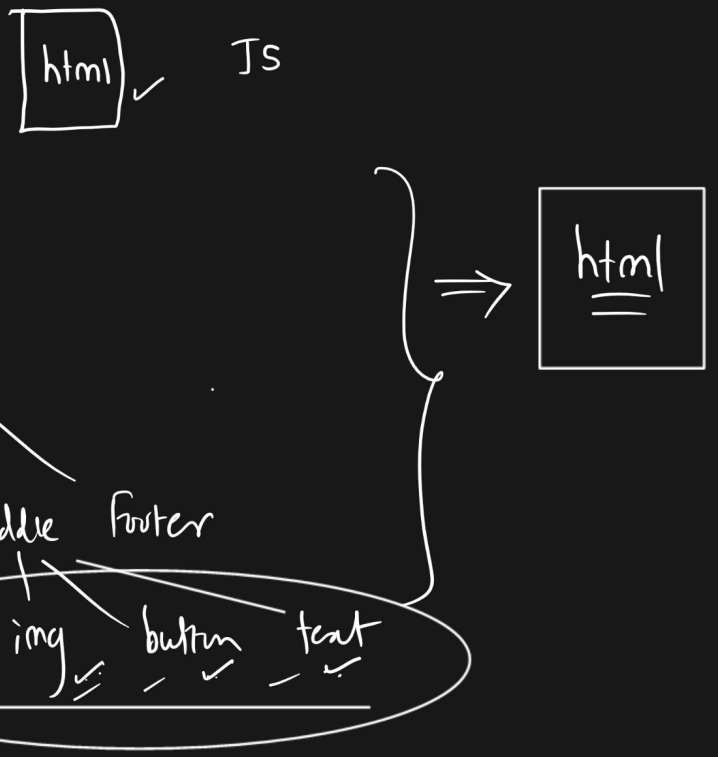

when I click on button → h1 text change


manually change the element and rerender the every element of html (rerender the complete page)

React :- virtual DOM ✓

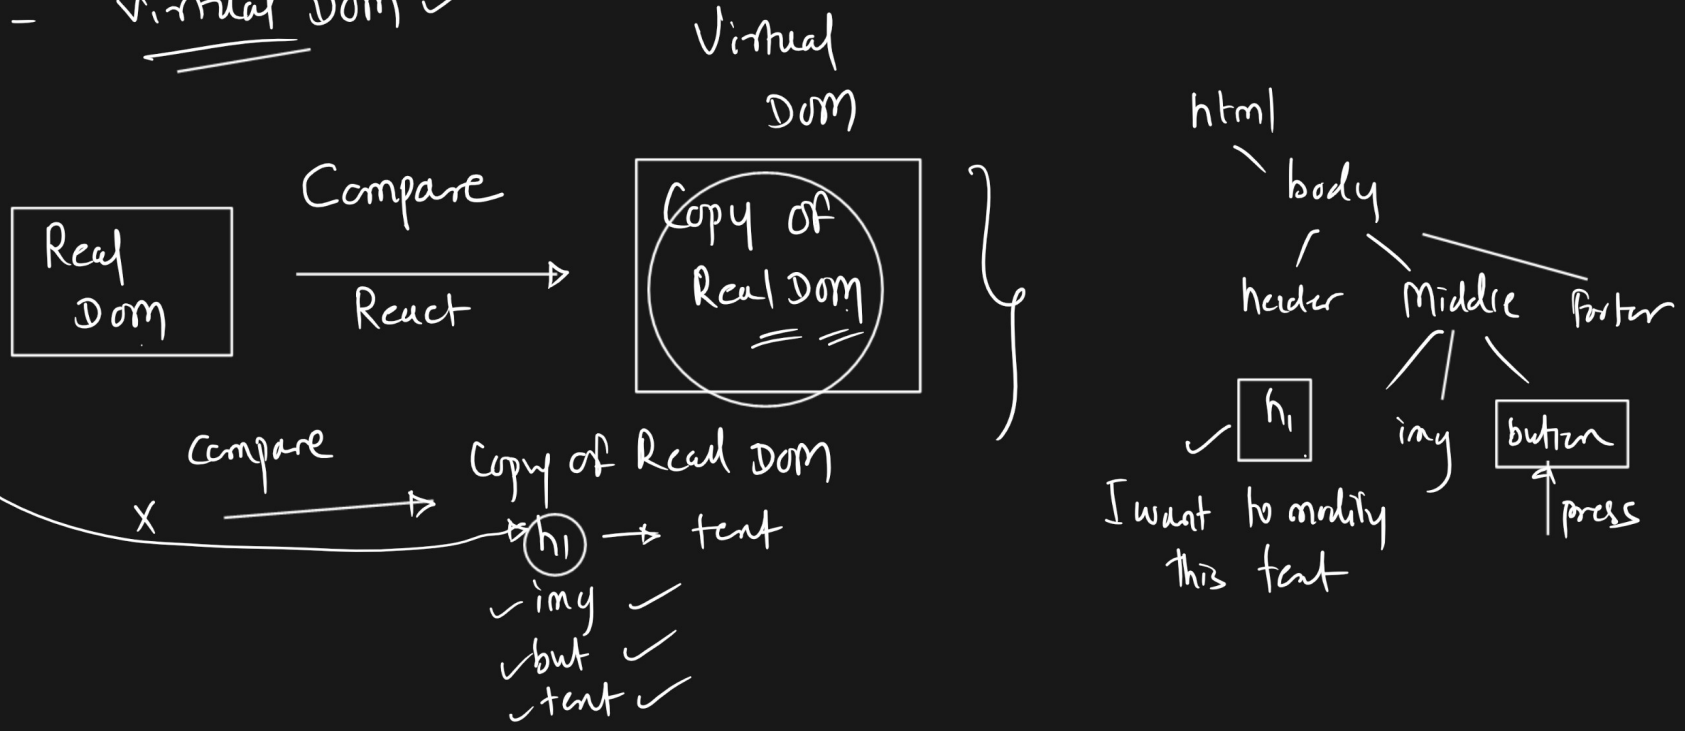

React ⟹ How JS run on browser ecosystem / How the react work on browser ecosystem



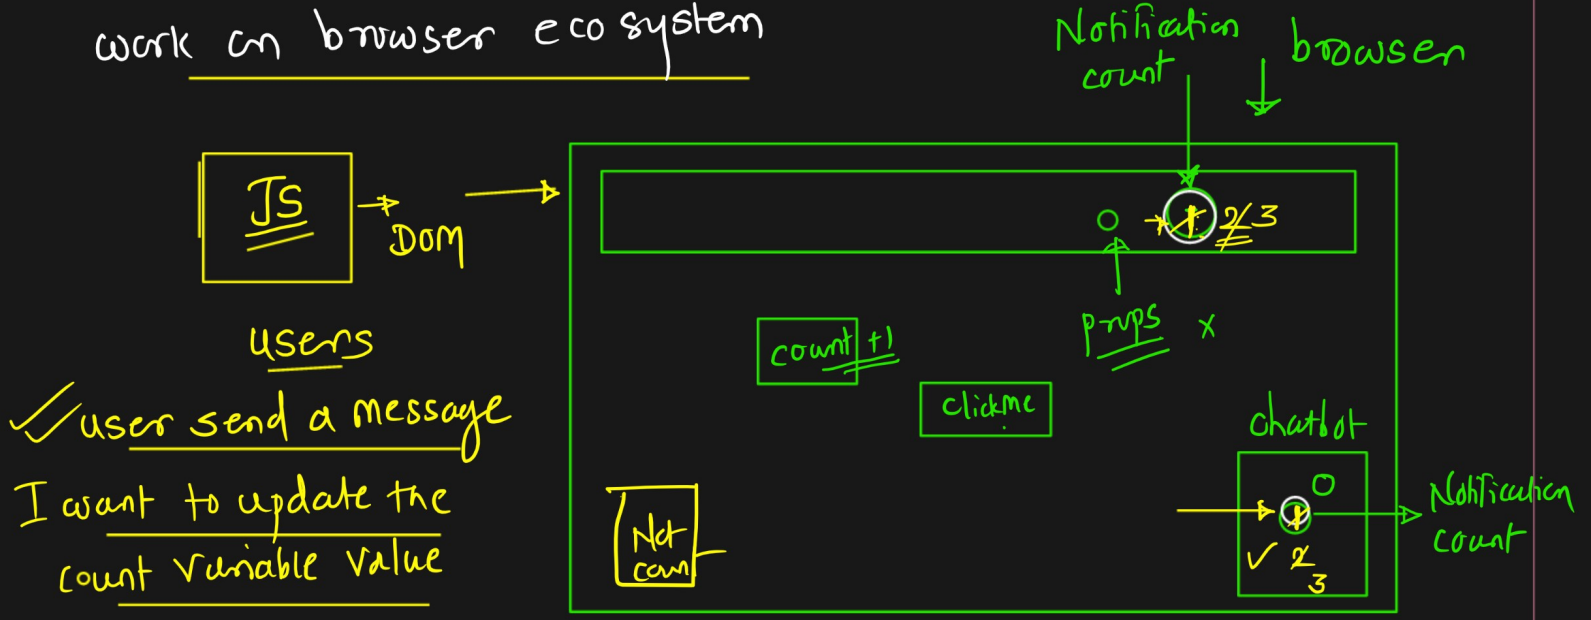


JS → access → DOM → count variable (id, class) → Navbar → access → manually change the value of count
chatbot → access → manually change the value of count.

overcome

1) Very time consuming process
2) Complex

React → local variable → count variable → Navbar, chatbot → Change



React take a responsibility to modify / change that value everywhere on webpage.

For that

They declare this variable not a ordinary variable.


let count = 0


These variable declare as a state of the component.

?


(variable)

Component :- It is a block of (basic building of block) code that control the UI.





Props :- whenever if you want to pass the data / info to the Fun^n component during calling of Fun^n component that will be declare as a props.

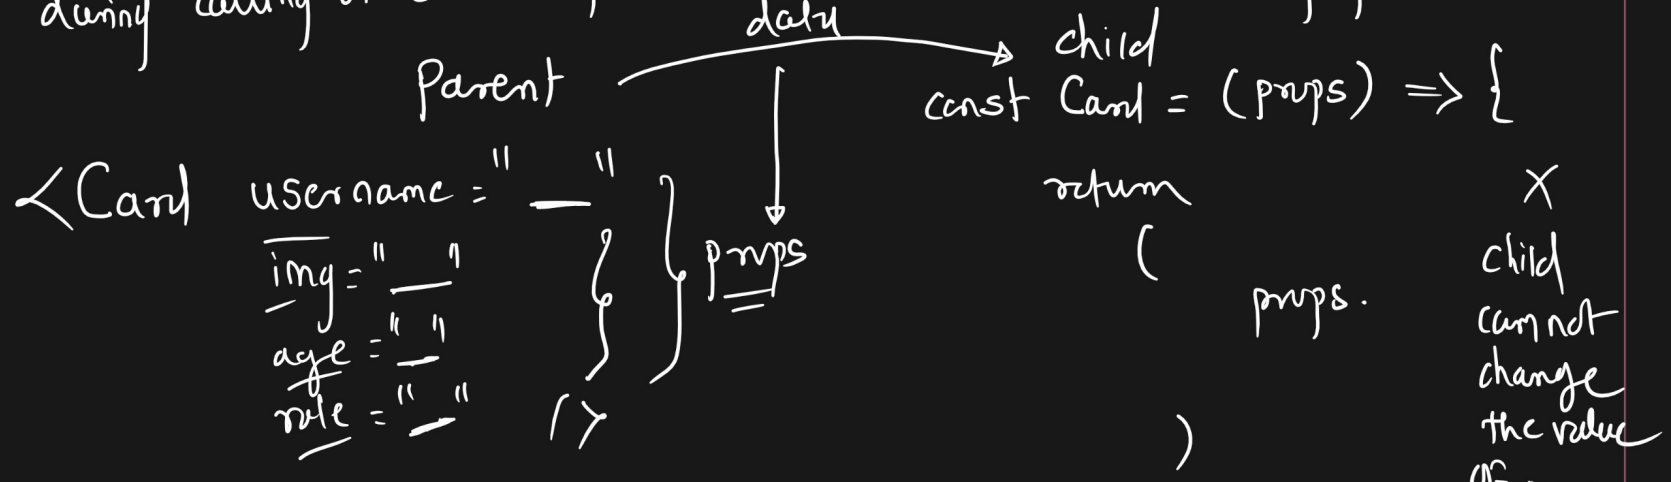

State :- → It is hold the information / data e.g. count-

→ It's declare in itself. Fun^n component (local variable)


→ It is a mutable variable → change ✓

— When we change the state value → then → re render the page/ component.

→ You can store any type of value in state → Number string array object Fun^n

→ name of state variable — anything → & logical

Control the state :- A) declr ✓
1) initial value of state ✓
2) change the value of state ⇒ +1, 5, +5, -1 ✓
3) How we can change this things ✓
4) when we can change this things ✓



features

Hook


React Hook :- For control the state / manage the state using some react fun^n that fun^n provided by react hook. (library)


Types of hook
1) useState
2) use Effect
3) useRef
4) use Content
5) useReducer

useState :-


⇒ It's manage the state or control the state.


⇒ It is a react fun^ / feature provide functionality to update the state value.

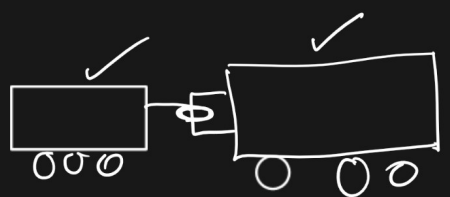

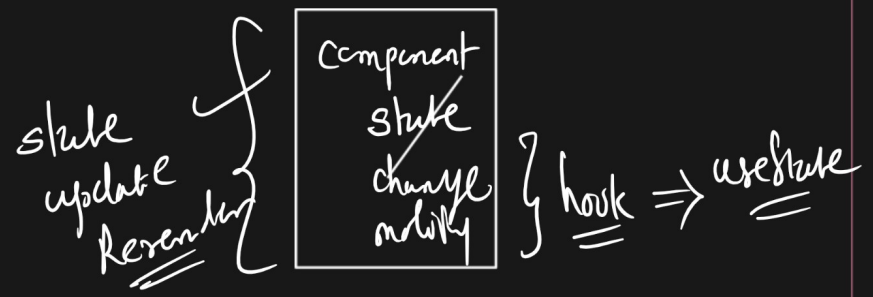

How to represent the useState or Syntax :-

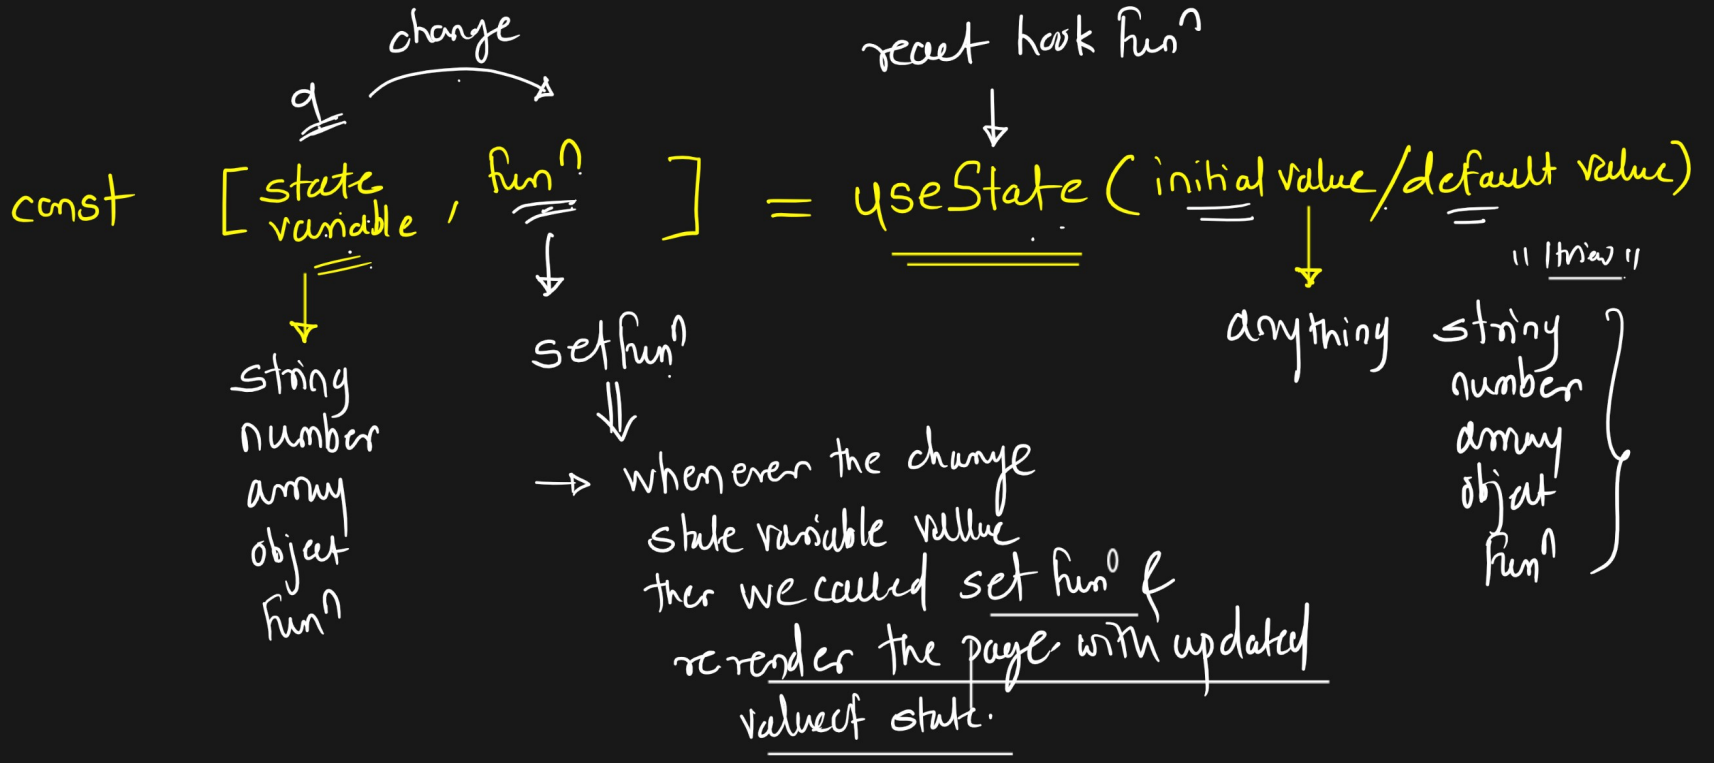

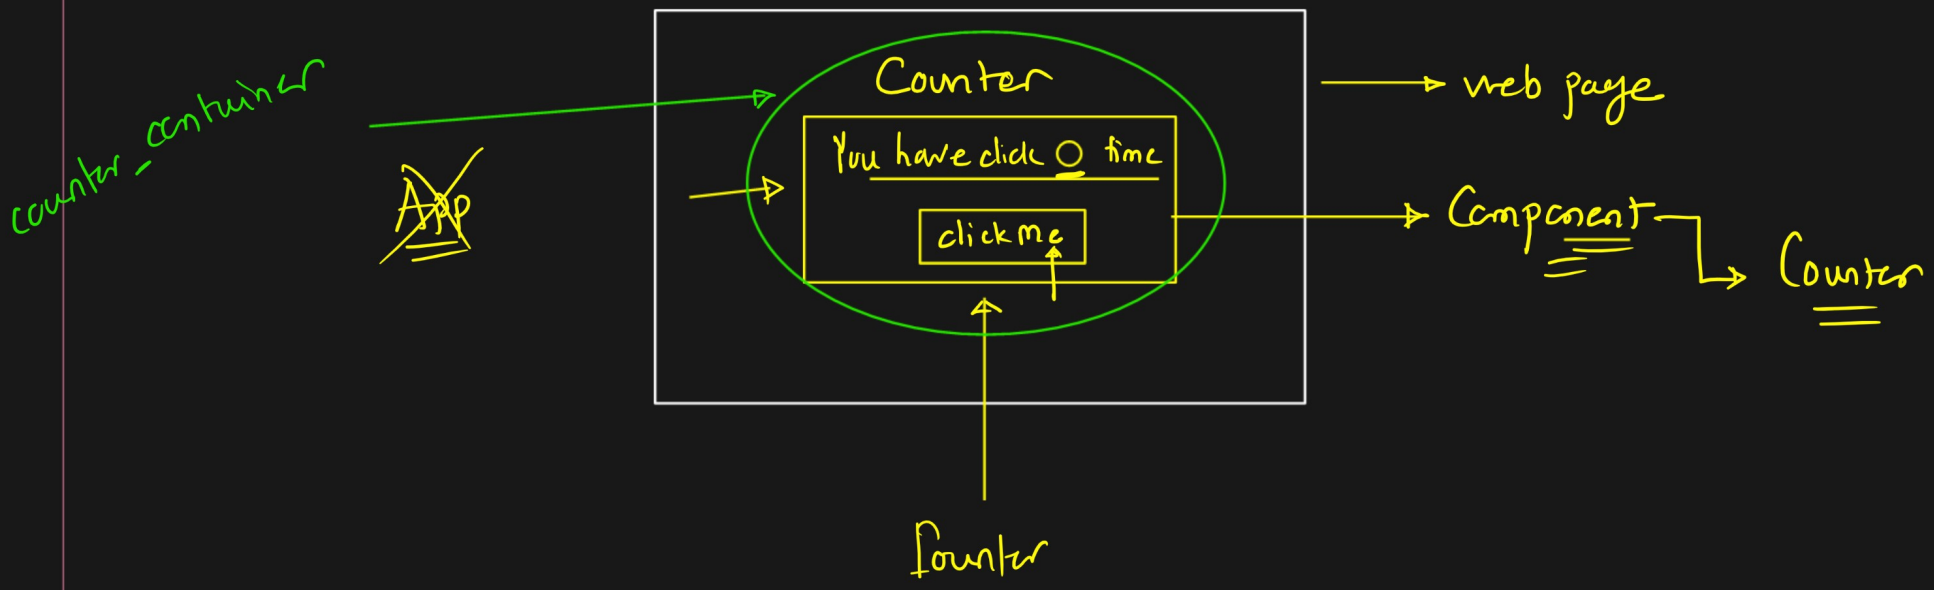
counter-container
App
Counter
You have click 0 time
click me
web page
Component
Counter
Counter