
Conditional Rendering

Cond^n statement ⟶ same thing in React

1) if else
2) else if ladder
3) switch case


e.g.

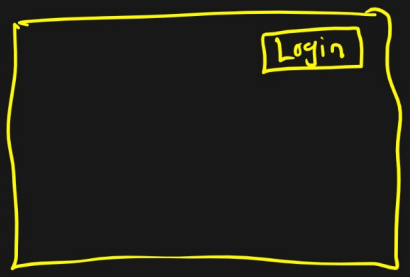

if it is not login then show Login button



if it is already loggin then Logout button

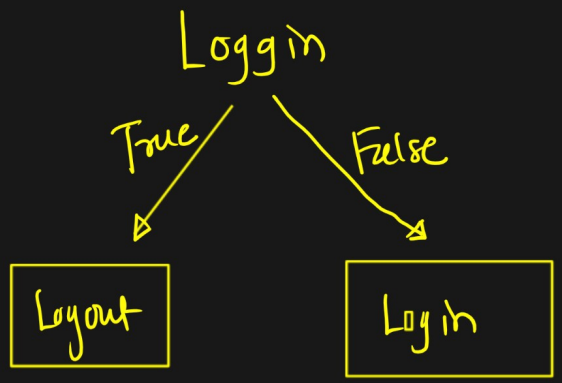


Event Handling :-


1) onClick Event (Button event)
2) onMouseOver (Paragraph Event)
3) onChange (Text field Event)
4) onSubmit (Form Event)

useEffect Hook :-

useEffect → use → Hook → when we performed any event then performed some logic action that will be handle by useEffect hook. performed

e.g. 1)

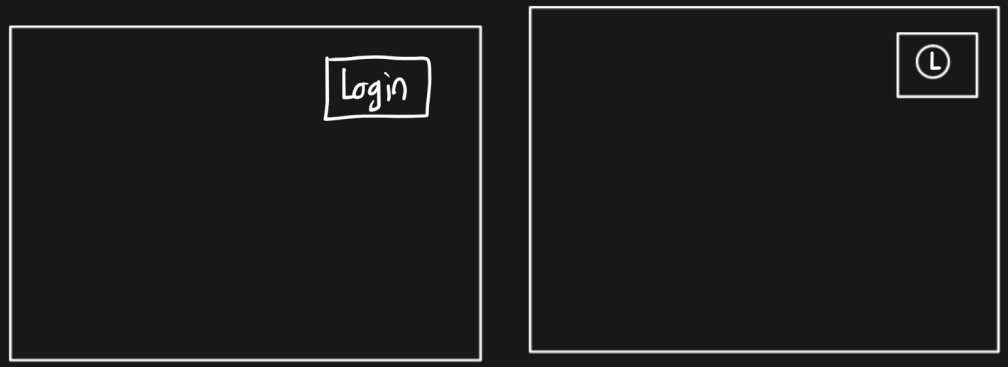

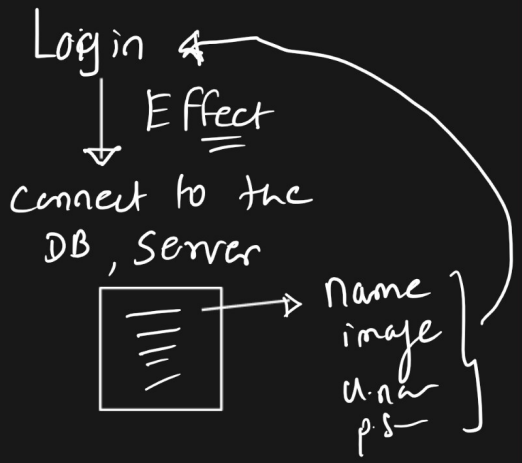

2) Page — render → First / Every

server

Request API fetch

Data show

useEffect (() => {

// first → side effect fun^n

{ return () => {
//second } → clean up fun^n → Component → unmounted → event fun^n clean up

}, [third])

Dependencies list (variable values)

count

