

05 What Is a Dynamics Model?

BY NILUSHANAN KULASINGHAM

17 MIN READ · INTERACTIVE

In training, the model is handed the truth at every step. The moment you deploy it, it gets its own last answer instead. What carries the past forward, and why the headline accuracy number measures a job the model will never be asked to do.

The figures in this chapter are interactive. Press and drag them online at worldmodels101.com/chapters/dynamics.

A dynamics paper leads with its one-step error, and it is the easiest number to be impressed by.

Show the model where things are and ask what happens next. Compare its answer to what happened, then do that ten thousand times and read off the average. The result will be small and honest.

It also measures a job the model will never be asked to do. You were going to ask it for a hundred steps. From step two it stops being handed the truth and starts being handed its own last answer.

Call that the second-step problem. The field put a name to it in 2015, tried two rival cures within a year, and has not solved it since.

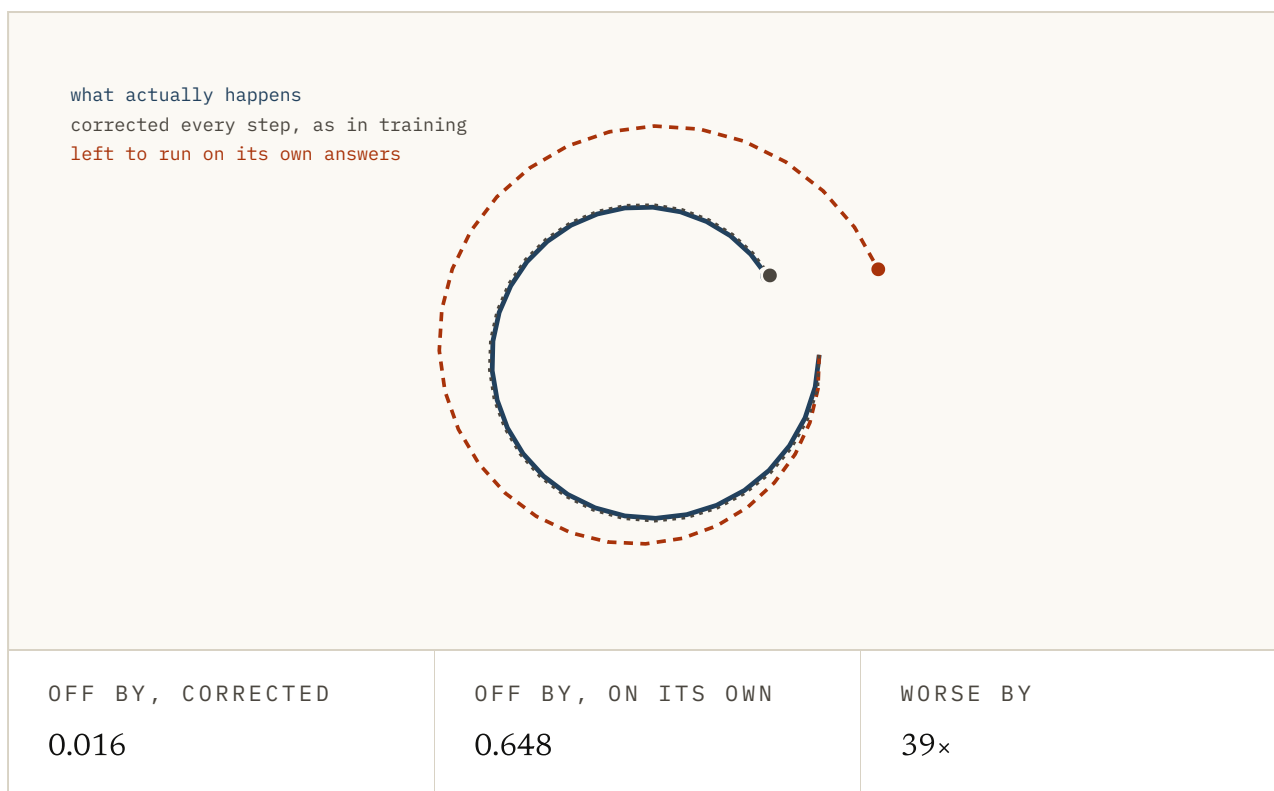


FIG. 5.1 One model, one bias, two ways of running it. The grey line is corrected at every step, the way it was during training, and mostly disappears underneath the truth. The vermilion line is the same model left to eat its own output, the way it will be run. Push the bias up and watch which line notices.

At four per cent error per step, the corrected line is still hugging the truth after thirty steps. The free-running line, same model, same bias, ends up thirty-nine times further away.

The inherited habit

The practice came with the first networks trained on sequences, decades before world models. During training a sequence model is shown the true previous value at every step. That is what the recording contains, and it keeps training stable. The field calls this **teacher forcing**.

The cost is that nobody teacher-forces you in production. At the moment of use the model gets its own last answer, which is slightly wrong. It has never once been asked to recover from being slightly wrong.

Samy Bengio and his co-authors named that gap in 2015, in *Scheduled Sampling for Sequence Prediction with Recurrent Neural Networks*. Bengio was at Google, working on networks that caption a photo one word at a time, each word fed back as the next input. That is a rollout, and the captions drifted the way the vermilion line drifts.

Calling the model bad at long horizons misreads it. It was trained on a distribution of inputs it will never see again once you start rolling it out. Nothing in the training loop noticed.

A paper that leads with the grey line is describing the wrong run.

The memory wars, 1997 to 2023

A transition model does one job. Take what you know, take what you did, and produce what you know next.

The awkward word is know, because it covers more than the last picture. It is everything that has happened and still matters, folded into something small enough to carry. A ball behind a wall is still moving. A door you opened four rooms ago is still open.

The question is how the past gets carried. Since 1997 it has had two answers, which take turns being fashionable.

Carry a summary. Keep one fixed block of numbers. Every time something new arrives, fold it in and throw the old block away. The work per step never changes however long the sequence gets.

This is what recurrent networks do (a network with a loop in it. Each step's output feeds back into the next step's input). The summary camp's founding paper is *Long Short-Term Memory*, from Sepp Hochreiter and Jürgen Schmidhuber in 1997. Their LSTM was a loop built to hold a fact longer than training pressure wanted, and it ended up running speech recognition and translation until transformers arrived.

Keep a window. Store the steps that fit in the context. When a new one arrives, look back over them to decide what matters. This is attention (for each new step, score the earlier steps for how much they matter, then read mostly from the ones that scored highest).

Transformers, the architecture under today's language models, have done it since 2017. That year Ashish Vaswani and colleagues at Google published *Attention Is All You Need*, and the title meant what it said: the loop went out. Within a few years the window had replaced the summary almost everywhere.

Then the summary came back. The state-space models keep the fixed summary and add better machinery. S4 came from Albert Gu and colleagues at Stanford in 2021, as *Efficiently Modeling Long Sequences with Structured State Spaces*. Mamba came from Gu and Tri Dao in 2023, as *Mamba: Linear-Time Sequence Modeling with Selective State Spaces*.

	CARRY A SUMMARY	KEEP A CONTEXT WINDOW
NUMBERS CARRIED FORWARD What the model is holding when the next step arrives.	256	32,768
WORK FOR ONE MORE STEP Multiply-adds to fold in one new observation.	65,536	32,768
CAN IT STILL SEE THE FIRST STEP? Whatever a fixed summary dropped is not recoverable later.	Only if the summary kept it	Yes, while it remains in context
BOTH COLUMNS USE A STATE 256 NUMBERS WIDE, SO THE ONLY THING CHANGING IS THE LENGTH.		

FIG. 5.2 Both columns use a state of the same width, so the only thing that changes is the sequence length. Drag the length up and watch the second row. Neither column wins: looking at everything is cheaper for short sequences and dearer for long ones.

Speed is the half of the trade that gets benchmarked, and the duller half. A fixed summary has to decide at every step what is worth keeping, without knowing what will be needed later. Mamba gave a little ground: its summary decides what to keep based on what it is looking at. Attention puts off the decision until the read, and pays by keeping a finite bank of earlier states.

This is the squeeze between a camera and a decision, one level up. Something has to be thrown away, and whatever is doing the throwing does not know the future. That is why twenty-six years of rivalry have no winner.

Splitting the difference

The systems that work share one trick. It arrived in 2018 with PlaNet, from Danijar Hafner and colleagues: *Learning Latent Dynamics for Planning from Pixels*. It learned a model from raw pixels and planned inside it instead of in the pixels.

Carry two things forward rather than one. One part is deterministic: computed the same way every time, it holds whatever reliably follows from the last state. The other is stochastic: sampled, so it holds whatever could still go either way.

A ball's motion goes in the first. Whether the door opens goes in the second. Keep only the deterministic part and the model has no way to say it is unsure, so it confidently invents one future. Keep only the stochastic part and it struggles to remember anything for long, because noise gets added at every step.

PlaNet ran the comparison and argued for carrying both, because each one fails alone in a different direction. Dreamer is what that argument bought. The same group published it a year later as *Dream to Control*, and let an agent learn to behave inside the model's imagined rollouts. The split state went into it, and into every Dreamer since, up to the *Nature* paper of 2025.

That is how a 2018 design choice became the spine of a seven-year dynasty: it is a state that can both remember and admit doubt.

Four truces with the second step

Nobody has removed the second-step problem, and I do not expect anyone to. Instead the field has four ways of not being destroyed by it.

Train it on its own output. If the complaint is that the model never practised recovering from its own mistakes, let it make some during training. Feed it its own predictions part of the time, and raise that share as it improves. This is Bengio's *scheduled sampling*, the most direct of the four.

Train the rollout, not the step. Instead of scoring one-step accuracy, score a whole imagined stretch against a whole real one. Then what gets optimised is what you will run. Marc'Aurelio Ranzato and colleagues at Facebook made that case in 2015 too, in *Sequence Level Training with Recurrent Neural Networks*. The two 2015 papers read as a pair: one fixes the input and the other the loss.

Do not go far. Keep the rollouts short and start them from real states. It is cheap, it works, and it gives up the part of the appeal that was infinite. Michael Janner and colleagues made it a method in 2019, under a title that is also the question: *When to Trust Your Model*.

Look again. Predict a few steps, act on one, take a fresh observation and start over. This is most of robotics, and the oldest idea here: Rudolf Kalman's filter from the 1960s (the maths inside every GPS receiver) is this loop. A measurement corrects the part of the state you can see. Error in the part you cannot see, and the model's bias, do not reset to zero.

The blend inside that filter is the cleanest picture of predict-then-correct there is, so it is worth a short detour. Picture a radar tracking a plane. At each moment you have two stories about where the plane is. One comes from physics: take the last position and the last speed, and predict where the plane should be now. The other comes from the radar, which hands you a blip.

Both stories are uncertain. Each is really a bell curve, a Gaussian, with the most likely spot in the middle and the less likely ones fading out either side. Multiply the two curves together and you get a third bell curve, which sits between the two and is narrower than either. That is the new belief.

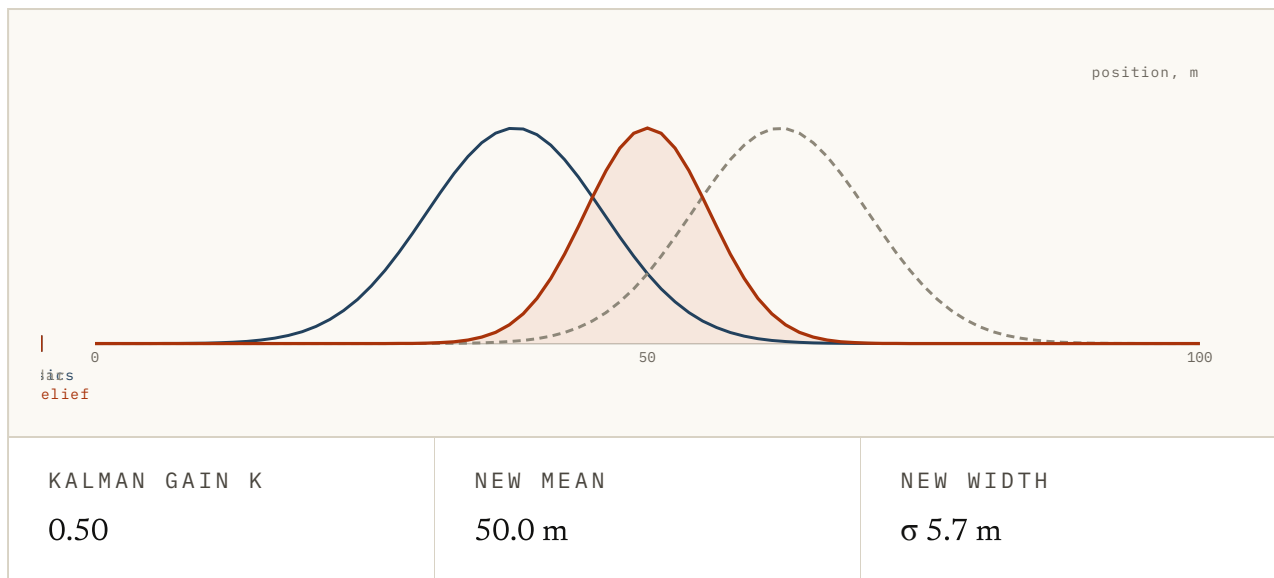


FIG. 5.3 Here are the two stories about where the plane is, drawn as bell curves on one axis. Slide how sure physics is and how noisy the radar is, and watch the new belief lean toward the sharper story while staying narrower than either. The gain is the number that says how far it leaned. Now press Correct to make the new belief the next physics prediction, and watch it widen again as the plane moves on.

How far the new belief leans from physics toward the radar is set by one number between zero and one, which the field calls the Kalman gain. As you can see from the figure, a noisy radar pulls the gain toward zero, so the filter sticks with physics. A sharp radar pulls it toward one, so the filter trusts the reading.

Then it repeats: predict, correct, predict, correct. Every new blip, however wrong on its own, tightens what the filter knows. The estimate hugs the truth even though every reading it ever got was off, and it does that one tick at a time without ever waiting for the future. That is the look-again truce in its original form, and it only works because fresh readings keep arriving.

None of these is a fix. A paper that sells one as a fix is overclaiming. Each admits that a learned transition model can be trusted over a limited horizon. Part of the engineering is measuring how long that horizon is.

Recovery is a separate skill

Two models can tie on the usual one-step test and behave in opposite ways when run. The test never asked what separates them. If both have only seen the demonstrated path, nothing in their scores says which way they move after a small mistake.

Training on perturbed or self-generated states does ask it. The answer is a separate skill, and that is the claim I would most want a sceptic to take away.

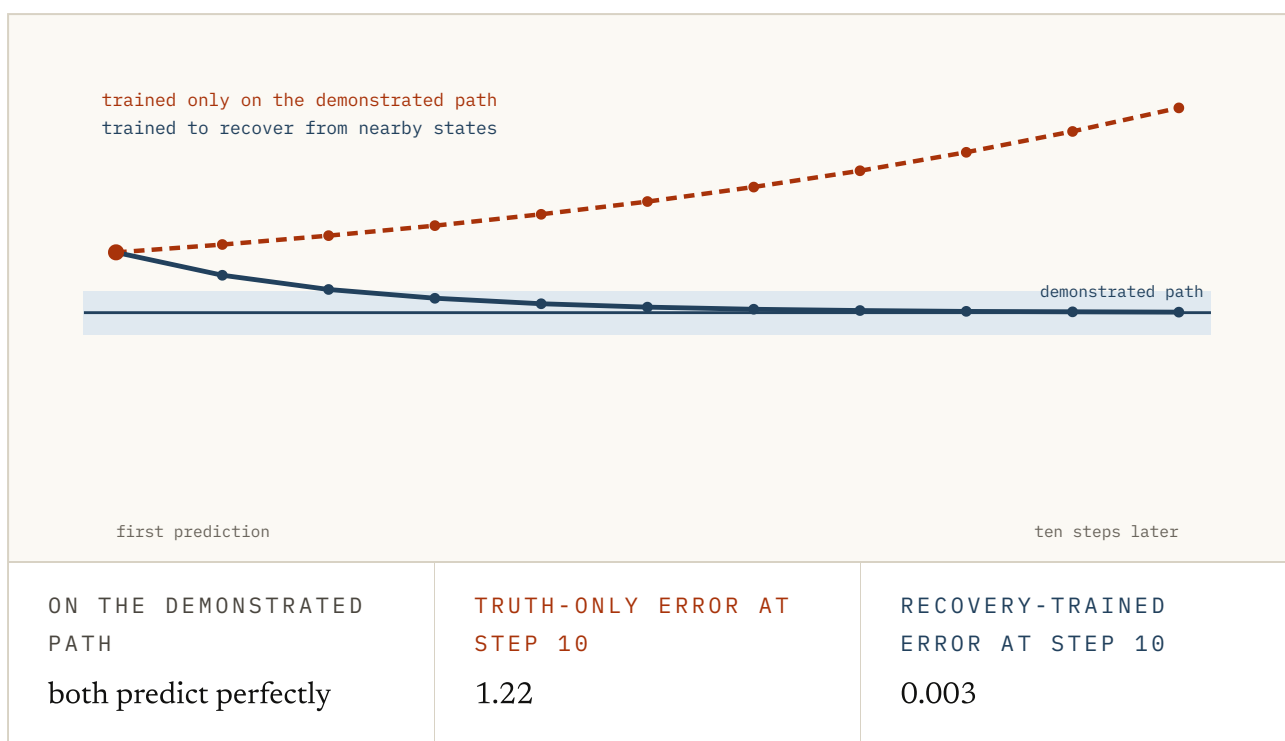


FIG. 5.4 Both toy models are exact on the demonstrated path. Drag the offset to start them off it. One has only learned what comes next on the line, and drifts away. The other has practised nearby states and bends back. The arithmetic is made up, but the distinction is real, and it is the finding behind Professor Forcing, described next.

Scheduled sampling shows a learner its own states and guarantees nothing, because those states keep changing as the model learns.

Professor Forcing came a year later, as *Professor Forcing: A New Algorithm for Training Recurrent Networks*. It was the work of Alex Lamb and colleagues in Yoshua Bengio's lab in Montreal. The two Bengios are brothers, and two of the best-known attacks on the gap came one from each.

It attacks the gap from the other side and leaves the input alone. Instead it trains the model until its internal states look the same whether it is teacher-forced or running free. The judge is a second network trained to tell the two kinds of run apart. The model has to fool it (the trick behind generative adversarial networks: one network forges, another spots forgeries).

I think it is the more under-read of the two, perhaps because transformers arrived the next year and took the field's attention. The problem moved into world models, where every rollout is a free run.

What the two papers share is that recovery has to appear somewhere in the training objective, or it does not appear at all.

Try it

1 A transition model reports a very low average one-step error. Why does that number not tell you what you want to know?

- a. It was probably measured wrong
- b. You will use it many steps at a time, and after the first step it is fed its own answer rather than the truth
- c. One-step errors are always understated
- d. Averages hide outliers

ANSWER b. You will use it many steps at a time, and after the first step it is fed its own answer rather than the truth. The measurement is honest. It is a measurement of a job the model will never be asked to do.

2 In the figure, the corrected line and the free-running line come from the same model with the same per-step bias. Why do they end up so far apart?

- a. The corrected one uses a different model
- b. Random noise differs between the runs
- c. The free-running one accumulates a larger bias
- d. One is given the true previous state at every step, so its mistakes never feed anything

ANSWER d. One is given the true previous state at every step, so its mistakes never feed anything. Correction resets the input to the truth every step, so error cannot compound. Nothing about the model changed between the two lines.

3 What is teacher forcing?

- a. Showing the model the true previous value at each training step, because that is what the recording contains
- b. Forcing the model to use a fixed learning rate
- c. Training only on the hardest examples
- d. Training on data labelled by a larger model

ANSWER a. Showing the model the true previous value at each training step, because that is what the recording contains. It makes training stable, and it also means the model is never once asked to recover from being slightly wrong, which is the only thing it will have to do later.

4 A sequence is longer than the transformer's context window. Which statement is accurate?

- a. A longer sequence changes accuracy but not compute
- b. Attention can still read every earlier step exactly
- c. The model must discard, compress or retrieve beyond the window; attention only postponed the decision

d. Only recurrent models have a finite memory

ANSWER c. The model must discard, compress or retrieve beyond the window; attention only postponed the decision. Attention avoids squeezing the past into one fixed state, but only inside a finite context. Its weighted read also compresses the available steps for the current prediction.

5 For a short sequence, which is cheaper per step?

- a. Always attention
- b. Attention, until the sequence gets long enough to cross over
- c. They are identical
- d. Always the summary

ANSWER b. Attention, until the sequence gets long enough to cross over. Updating a summary costs the same whatever the length, so it only wins once the sequence is long. Below the crossover, looking at everything is the cheaper option.

6 Why carry a deterministic part and a stochastic part in the state at the same time?

- a. To make the model differentiable
- b. To support larger batches
- c. To use more parameters
- d. Deterministic alone cannot represent real uncertainty; stochastic alone struggles to remember, because noise enters at every step

ANSWER d. Deterministic alone cannot represent real uncertainty; stochastic alone struggles to remember, because noise enters at every step. Each one fails alone, and in a different direction. A ball's motion belongs in the first; whether the door opens belongs in the second.

7 Two models tie on one-step error along a demonstrated path. After a small perturbation, only one returns. What did the original test miss?

- a. Recovery behaviour on states created by the model or by disturbances
- b. The camera resolution
- c. Whether the transition is deterministic
- d. The models' parameter counts

ANSWER a. Recovery behaviour on states created by the model or by disturbances. One-step testing on the centre line never visits the states deployment creates after a mistake. Recovery is a separate behaviour and must be trained or tested off that line.

8 What do scheduled sampling, rollout-level training, short horizons and replanning have in common?

- a. They fix the mismatch
- b. They all make the model more accurate per step
- c. None removes the mismatch; each limits how much damage it does
- d. They only apply to recurrent models

ANSWER c. None removes the mismatch; each limits how much damage it does. The honest summary is that a learned transition model is trustworthy over some horizon, and part of the engineering is knowing how long that is.

FIG. 5.5 Eight questions on the step and the second-step problem. The first three change how you read a paper's headline number.

Everything above was paid for in reality. The model was trained on recorded experience, checked against it and corrected by it.

Sources

Professor Forcing: A New Algorithm for Training Recurrent Networks

LAMB ET AL., 2016 ↗

Aligns hidden-state trajectories under teacher forcing with those produced during free running. A direct attempt to train the recovery behaviour a one-step test never asks for.

<https://arxiv.org/abs/1610.09038>

Scheduled Sampling for Sequence Prediction with Recurrent Neural Networks

BENGIO ET AL., 2015 ↗

The mismatch named and attacked head on: let the model eat its own predictions during training, and raise the dose as it improves.

<https://arxiv.org/abs/1506.03099>

Sequence Level Training with Recurrent Neural Networks RANZATO ET AL., 2015 ↗

Score the whole rollout rather than the single step, so the thing being optimised is the thing you will actually run.

<https://arxiv.org/abs/1511.06732>

Learning Latent Dynamics for Planning from Pixels (PlaNet) HAFNER ET AL., 2018 ↗

The argument for carrying a deterministic part and a stochastic part together, because each one fails alone in a different direction.

<https://arxiv.org/abs/1811.04551>

Dream to Control (Dreamer) HAFNER ET AL., 2019 ↗

What a latent transition model is for once it works: long imagined rollouts that behaviour can be learned from.

<https://arxiv.org/abs/1912.01603>

Long Short-Term Memory HOCHREITER & SCHMIDHUBER, 1997 ↗

The fixed summary, made to hold on to things for longer than the gradient wanted it to. Paywalled.

<https://doi.org/10.1162/neco.1997.9.8.1735>

Attention Is All You Need VASWANI ET AL., 2017 ↗

The other answer: retain the available context and choose what to read at each step, paying a cost that grows with sequence length.

<https://arxiv.org/abs/1706.03762>

Efficiently Modeling Long Sequences with Structured State Spaces (S4)

GU ET AL., 2021 ↗

The summary approach returning with better machinery, and the reason state-space models are back in the conversation.

<https://arxiv.org/abs/2111.00396>

Mamba: Linear-Time Sequence Modeling with Selective State Spaces GU & DAO, 2023

↗

A summary that decides what to keep based on what it is looking at, which is the concession the fixed version could not make.

<https://arxiv.org/abs/2312.00752>

FIG. 5.6 Ordered for someone building on this rather than for historical completeness.