
reformat this code, <section>
    <h2>Reinforcement Learning</h2>

    Reinforcement learning is primarily used when the surrounding environment is changing or the agent is learning through trial and error. The agent primarily learns by interacting with the environment. The agent is the main decision maker in this system. The environment is the main thing the agent interacts with. The current situation of the agent is represented by the initial state. From that state, the agent will decide its actions, which causes the environment to become a new state. The outcome of the actions will affect the reward the agent receives. The reward can be positive, negative, or neutral. After many trial-and-error interactions with the environment, the actions can determine a policy for the agent to follow.

    A major reinforcement learning algorithm is Q-learning. Q-learning is a value-based reinforcement learning algorithm that learns the quality (the Q-value) of performing a certain action to maximize long-term rewards. This can be represented by using a Q-table, where ...

Show more

Here is your reformatted code. I kept the original wording and content the same, but adjusted the formatting to match your second example, including bold section headings, consistent indentation, and paragraph spacing.

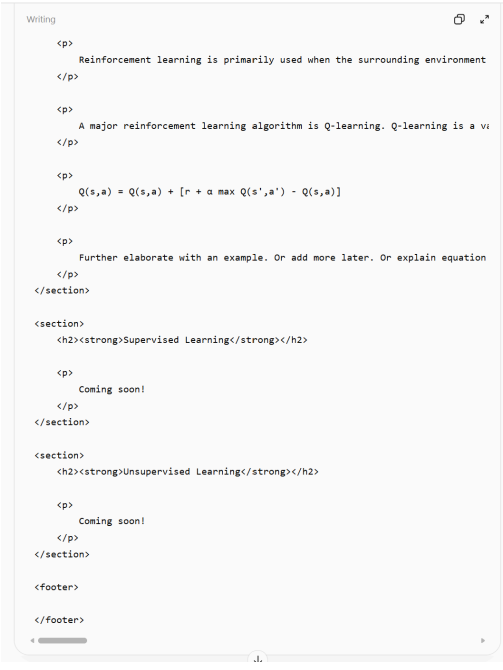

Writing

```
    <p>
        Reinforcement learning is primarily used when the surrounding environment
    </p>

    <p>
        A major reinforcement learning algorithm is Q-learning. Q-learning is a va
    </p>

    <p>
        Q(s,a) = Q(s,a) + [r + α max Q(s',a') - Q(s,a)]
    </p>

    <p>
        Further elaborate with an example. Or add more later. Or explain equation
    </p>
</section>

<section>
    <h2><strong>Supervised Learning</strong></h2>

    <p>
        Coming soon!
    </p>
</section>

<section>
    <h2><strong>Unsupervised Learning</strong></h2>

    <p>
        Coming soon!
    </p>
</section>

<footer>

</footer>
```



The format is different for some approaches. what to do?

The issue is most likely that your different approaches are using **different CSS styling**, even though the HTML structure is similar.

Looking at your screenshots, I can see the difference:

- **Reinforcement Learning:** The content appears directly on the page background, without a card or container.
- **Problem Solving/Search:** Each section appears inside a white card with rounded corners, padding, and spacing between sections.

If you want all the approaches to have the same appearance, I recommend using the **Problem Solving/Search design as the standard**.

1. Use consistent HTML

For your Reinforcement Learning page, structure the sections like this:

HTML

```
<main class="approaches-container">

    <section class="approach-card">
        <h2>Reinforcement Learning</h2>

        <p>
            Reinforcement learning is primarily used when the surrounding environment is changing or the agent
        </p>

        <p>
            A major reinforcement learning algorithm is Q-learning. Q-learning is a value-based reinforcement l
        </p>

        <p>
            Q(s,a) = Q(s,a) + [r + α max Q(s',a') - Q(s,a)]
        </p>

        <p>
            Further elaborate with an example. Or add more later. Or explain equation later.
        </p>
    </section>
```

CSS

```css
.approaches-container {
    max-width: 1160px;
    margin: 0 auto;
    padding: 40px 20px;
}

.approach-card {
    background-color: white;
    padding: 40px 45px;
    margin-bottom: 35px;
    border-radius: 22px;
    box-shadow: 0 8px 25px rgba(0, 0, 0, 0.06);
}

.approach-card h2 {
    color: #62409f;
    margin-top: 0;
    margin-bottom: 25px;
}

.approach-card p {
    color: #25233a;
```

3. Apply this to all your approaches

The important part is that **every approach section uses the same `approach-card` class**.

Page	Section class
Reinforcement Learning	`approach-card`
Supervised Learning	`approach-card`
Unsupervised Learning	`approach-card`
Problem Solving/Search	`approach-card`
DFS	`approach-card`
BFS	`approach-card`
A*	`approach-card`

This way, you only need to change the CSS once to update the appearance of every section.

One additional recommendation: If your different approaches are separate HTML files, make sure they all link to the same CSS stylesheet. Otherwise, the formatting may continue to look different even if the HTML is identical.

here is css file, fix it if needed, * {
    margin: 0;
    padding: 0;
    box-sizing: border-box;
}

body {
    font-family: Arial, sans-serif;
    background: #f5f3ff;
    color: #2d2a3d;
    line-height: 1.6;
}

/* Navigation */
nav {
    background: #2d1b4e;
    padding: 18px 8%;
    display: flex;
    justify-content: space-between;
...

Show more

Worked for 7s

Your CSS is already pretty good! The colors, fonts, navigation, and overall design are consistent. The main thing I would fix is making sure that **all sections across every page use the same card styling**.

I also recommend making the content width consistent with your Problem Solving/Search screenshot.

Here is the revised CSS. You can replace your existing stylesheet with this:

HTML

```
<main>

    <section>
        <!-- Reinforcement Learning content -->
    </section>

    <section>
        <!-- Supervised Learning content -->
    </section>

    <section>
        <!-- Unsupervised Learning content -->
    </section>

</main>
```

What I changed

Element	Previous	Updated
Content width	1000px	1200px
Card padding	35px	40px 45px
Card corners	18px	22px
Heading size	26px	32px
Paragraph size	17px	19px
Paragraph spacing	15px	20px
Card spacing	30px	35px

One last thing: Make sure every HTML page links to the exact same CSS file in its `<head>`:

HTML

```
<link rel="stylesheet" href="style.css">
```

This is particularly important because your screenshots suggest that the Reinforcement Learning page isn't displaying the same card styling as your Problem Solving/Search page.

With these changes, your different AI approaches sh[illegible] have a consistent appearance across the website.

for the approaches section the spacing between the borddr and the text cards are not the same as the rst of the sectiond. fix that.

The issue is likely that the **Approaches page has different section padding** than your other pages. Let's make the spacing consistent so the text has the same distance from the card borders everywhere.

Add this to the **very bottom of your CSS file** so it overrides previous styles:

CSS

```css
/* Approaches Page - Consistent Card Spacing */
.approaches-container section,
main.approaches-container > section {
    padding: 40px 45px;
    margin-bottom: 35px;
}

/* Consistent heading spacing */
.approaches-container section h2 {
    margin-top: 0;
    margin-bottom: 25px;
}

/* Consistent paragraph spacing */
.approaches-container section p {
    margin-bottom: 20px;
    line-height: 1.8;
}

.approaches-container section p:last-child {
    margin-bottom: 0;
}
```

Also, make sure your Approaches HTML uses:

HTML

```html
<main class="approaches-container">

    <section>
        <h2>Reinforcement Learning</h2>
        <!-- Content -->
    </section>

    <section>
        <h2>Supervised Learning</h2>
        <!-- Content -->
    </section>

    <section>
        <h2>Unsupervised Learning</h2>
        <!-- Content -->
    </section>

</main>
```

This will give all three approaches the same 40px top/bottom and 45px left/right spacing as your other content cards.

put this into HTML with a subheading of **Evidence**

An simple example where reinforcement learning would be present is in self automotive cars. The learning to drive stragtes would be the main aspect of where reinfocrment learning is present to improve safety and effeceiny of driving. The main way a self learning agent learns is that the cars state is the observation of the surrounding area via its cameras and sensors to capture information about the current environment. From there the car can select the action it can take based on the car's current policy such as steering or accleration. Based on the outcome of these actions the car will receive the positive or negative feedback reward of staying in the lane, avoiding collisions or a negative reward of a near miss or a move that breaks traffic safety.

Such an example can be seen in the "Learning to Drive in a Day" article by Alex Kendall et al, in the processes of the reinforcement learning of the Wayve self autonomous car. The

agent uses camera images, vehicle speed, and steering information to ...

Show more

Here is the HTML formatted to match your other sections, with **Evidence** as a bold subheading and consistent paragraph spacing.

Writing

```
<section>
    <h2><strong>Evidence</strong></h2>

    <p>
        A simple example where reinforcement learning would be present is in self·
    </p>

    <p>
        Such an example can be seen in the "Learning to Drive in a Day" article by
    </p>

    <p>
        The agent can take actions by adjusting the steering angle and speed set p
    </p>
</section>
```

redo it with fixed spelling and grammar.

Here is the revised HTML with spelling, grammar, punctuation, and sentence structure corrected while preserving your original ideas and matching the formatting of your other sections.

Writing

```
<section>
    <h2><strong>Evidence</strong></h2>

    <p>
        A simple example of reinforcement learning can be seen in self-driving car
    </p>

    <p>
        A real-world example can be found in the article "Learning to Drive in a [
    </p>

    <p>
        The agent takes actions by adjusting the steering angle and speed set poir
    </p>
</section>
```

fix this code, things are not showing up on github, <!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Machine Learning Approaches</title>
  <link rel="stylesheet" href="style.css">
</head>

<body>

  <header>
    <h1>Machine Learning Approaches</h1>
     Explain fundamental machine learning approaches and distinguish between major learning paradigms.
  </header>

...

Show more

I found the problem! Your HTML has several structural errors that are preventing the page from displaying correctly on GitHub Pages:

1. You accidentally included Markdown code fences (```` ```html ````) inside your HTML file. These should never be in the actual HTML.
2. There are extra closing `</p>` and `</section>` tags.
3. Your Reinforcement Learning and Evidence headings are not properly separated into sections.
4. You have duplicate footer elements.
5. Your `<main>` element is missing, which also affects the CSS formatting we worked on earlier.

Here is the **fully corrected HTML**. Replace your entire `machine-learning.html` file with this:

Important things to check on GitHub

After replacing the file, check these three things:

1. **File name:** Make sure the file is named exactly `machine-learning.html`, including the hyphen.
2. **CSS file:** Make sure `style.css` is in the same folder as `machine-learning.html`.
3. **GitHub Pages:** Commit your changes and allow GitHub Pages to rebuild the website.

One CSS adjustment

Since we previously added `.approaches-container`, make sure this CSS is still at the bottom of your stylesheet:

CSS

```css
.approaches-container {
    max-width: 1200px;
    width: 90%;
    margin: 50px auto;
    padding: 0;
}

.approaches-container > section {
    padding: 40px 45px;
    margin-bottom: 35px;
}

@media (max-width: 700px) {
    .approaches-container {
        width: 94%;
        margin: 30px auto;
    }

    .approaches-container > section {
        padding: 25px;
    }
}
```

One final tip: Your navigation now uses the same structure as your CSS (`nav .logo` and `nav .nav-links`), which should help keep the navigation consistent across your website.