

Last time

- Pseudo random generator (PRG)
- Encryption scheme using PRG that is EAV-secure
- Proof by reduction

The Two Definitions

EAV-indistinguishability. For every PPT A and every pair m_0, m_1 with $|m_0| = |m_1|$ that A outputs:

$$| \Pr[A(\text{Enc}_k(m_0)) = 1] - \Pr[A(\text{Enc}_k(m_1)) = 1] | \leq \text{negl}(n)$$

Semantic security. For every PPT A there is a PPT A' such that for every efficiently sampleable Samp , every poly-time target f , and every auxiliary info h :

$$| \Pr[A(1^n, \text{Enc}_k(m), h(m)) = f(m)] - \Pr[A'(1^n, |m|, h(m)) = f(m)] | \leq \text{negl}(n)$$

with $m \leftarrow \text{Samp}(1^n)$. The simulator A' sees no ciphertext — only the length and the side information.

Indistinguishability for multiple encryptions

Experiment $\text{PrivK}_{A,\Pi}(n)$:

1. Adversary A is given input 1^n , and outputs two **lists** of messages $M_0 = \{m_{01}, m_{02}, \dots, m_{0t}\}, M_1 = \{m_{11}, m_{12}, \dots, m_{1t}\}$, s.t. $|m_{0i}| = |m_{1i}| \forall i = 1, \dots, t$
2. A key k is generated using $\text{Gen}(1^n)$, a random bit $b \in \{0,1\}$ is chosen. A list $C = \{c_1, c_2, \dots, c_t\}$ is given to A , where $c_i = \text{Enc}_k(m_{bi}) \forall i = 1, \dots, t$
3. A outputs b'
4. Experiment outputs 1 if $b=b'$, and 0 otherwise.

Definition: a private-key encryption $\Pi = (\text{Gen}, \text{Enc}, \text{Dec})$ is secure, if for all probabilistic polynomial time adversaries A , there is a negligible function negl such that for all n ,

$$\Pr[\text{PrivK}_{A,\Pi}(n) = 1] \leq \frac{1}{2} + \text{negl}(n)$$

Chosen-plaintext attack (CPA) security

Experiment $\text{PrivK}_{A,\Pi}^{\text{CPA}}(n)$:

1. A key k is generated using $\text{Gen}(1^n)$
2. Adversary A is given input 1^n , and **oracle access to $\text{Enc}_k(\cdot)$** . A outputs two messages $m_0, m_1 \in \mathcal{M}$ s.t. $|m_0| = |m_1|$
3. A random bit $b \in \{0,1\}$ is chosen. $c = \text{Enc}_k(m_b)$ is given to A .
4. A continues to have **oracle access to $\text{Enc}_k(\cdot)$** and outputs b'
5. Experiment outputs 1 if $b=b'$, and 0 otherwise.

Definition: a private-key encryption $\Pi = (\text{Gen}, \text{Enc}, \text{Dec})$ is CPA-secure, if for all probabilistic polynomial time adversaries A , there is a negligible function negl such that for all n ,

$$\Pr[\text{PrivK}_{A,\Pi}^{\text{CPA}}(n) = 1] \leq \frac{1}{2} + \text{negl}(n)$$

- **Theorem:** any private-key encryption scheme that is CPA-secure, is also CPA-secure for **multiple** encryptions.

Stream cipher with Initialization Vector (IV)

- PRG with IV: $G(k, IV)$
- $\text{Enc}_k(m)$: on input a message $m \in \{0,1\}^{n+s}$, sample $IV \in \{0,1\}^n$, compute


$$c = (IV, G(k, IV) \oplus m)$$


- $\text{Dec}_k(c)$: on input a ciphertext c , compute

$$m = G(k, IV) \oplus c$$

Block Cipher

- In a **block cipher**:
 - Plaintext and ciphertext have fixed length b (e.g., 128 bits)
 - A plaintext of length n is partitioned into a sequence of m **blocks**, $P[0], \dots, P[m-1]$, where $n \leq bm < n + b$
- Each message is divided into a sequence of blocks and encrypted or decrypted in terms of its blocks.

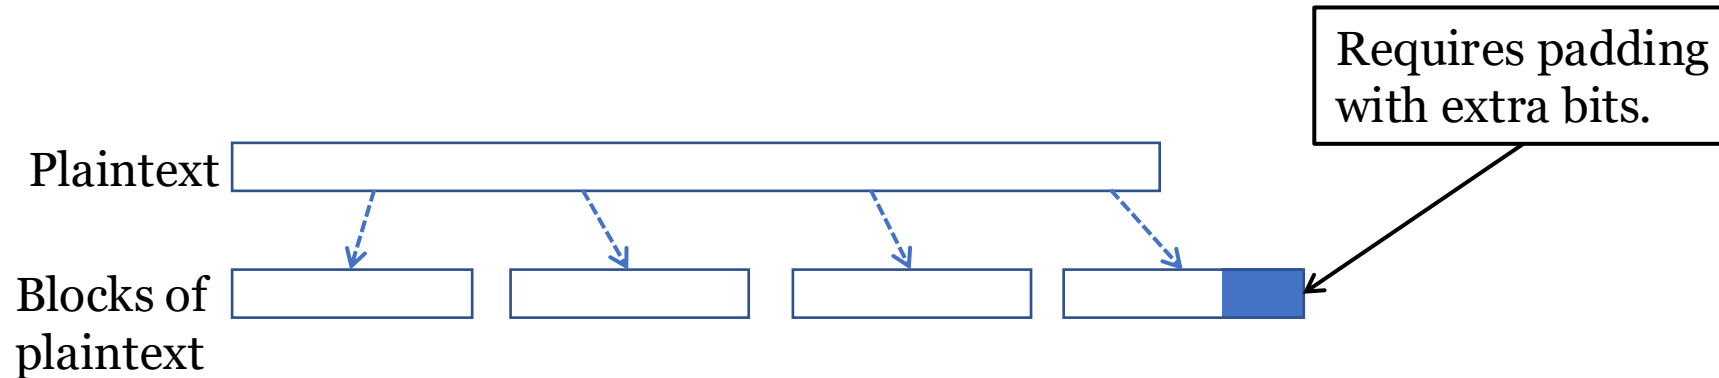

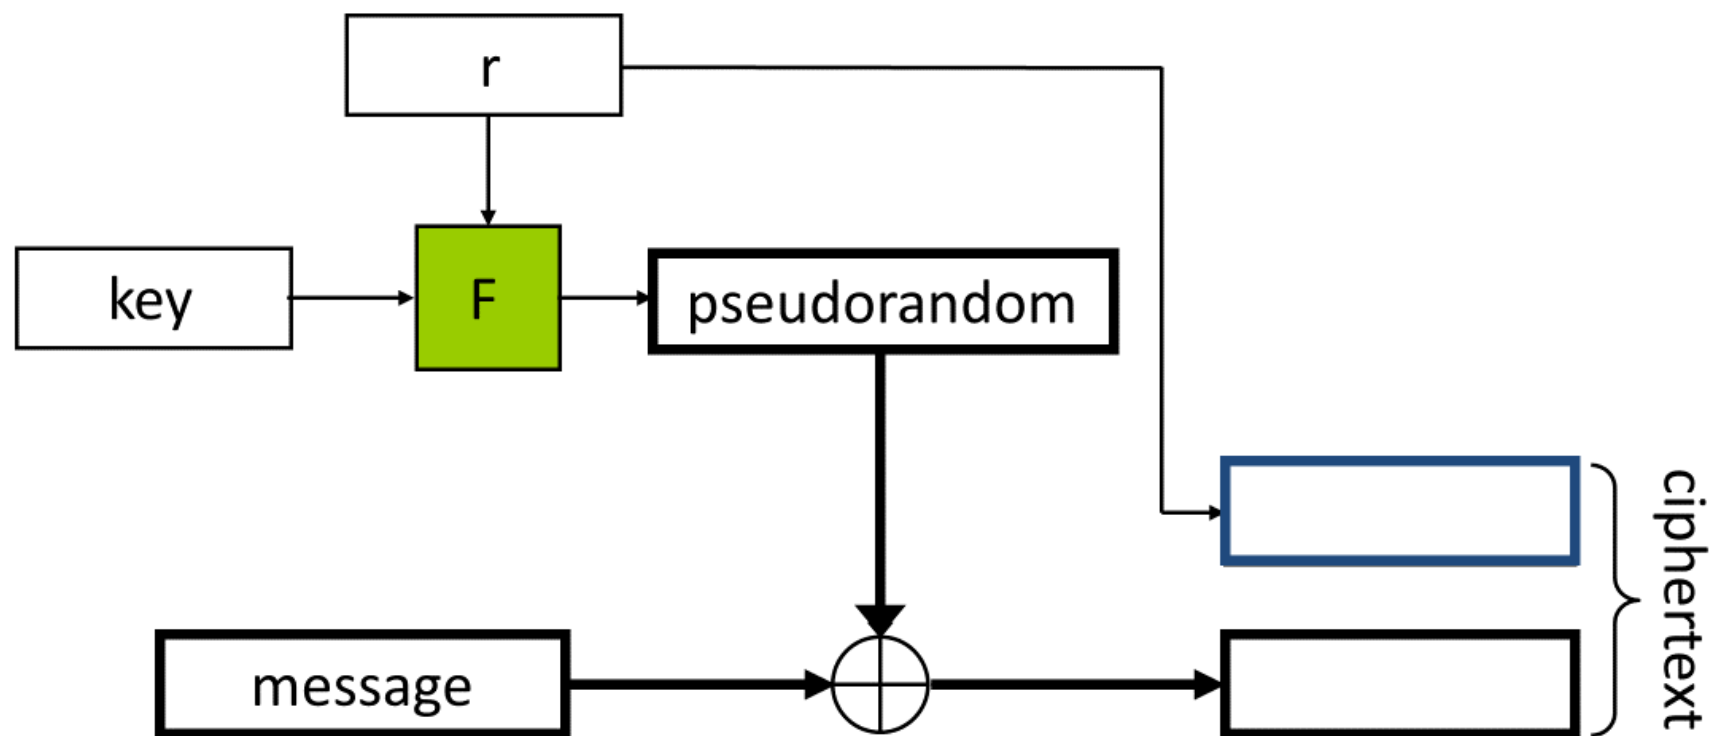

Pseudorandom Function (PRF)

- A random function instead of a random string in PRG
- $F: \{0,1\}^n \times \{0,1\}^n \rightarrow \{0,1\}^n \quad F(k, x) \rightarrow y$
- Or $F_k: \{0,1\}^n \rightarrow \{0,1\}^n \quad F_k(x) \rightarrow y$
- An efficient attacker cannot differentiate it from a random function

Number of functions

- How many functions with n bits of input and output? $F: \{0,1\}^n \rightarrow \{0,1\}^n$
- A big lookup table with 2^n entries
 1. 2^n possibilities each, so $(2^n)^{2^n} = 2^{n \cdot 2^n}$
 2. 2^n strings of size n . $n \cdot 2^n$ bits in total to represent a table. $2^{n \cdot 2^n}$ different tables.

Definition of PRF

A PRF is a function $F : \{0,1\}^n \times \{0,1\}^n \rightarrow \{0,1\}^n$ such that for any PPT distinguishers D , there is a negligible function negl such that

$$|\Pr[D^{F_k(\cdot)}(1^n) = 1] - \Pr[D^{f(\cdot)}(1^n) = 1]| \leq \text{negl}(n)$$

For uniformly random $k \in \{0,1\}^n$ and a random function $f \in \text{Func}_n$

PRF vs PRG

- $PRG : \{0,1\}^n \rightarrow \{0,1\}^{2n}$
 - Key space size: 2^n # of random strings: 2^{2n}
- $PRF : \{0,1\}^n \times \{0,1\}^n \rightarrow \{0,1\}^n$
 - Key space size: 2^n # of random functions : $2^{n \cdot 2^n}$

PRF vs PRG

PRF F immediately implies a PRG G :

Define $\text{PRG}(k) = F_k(1) \mid F_k(2) \mid F_k(3) \mid \dots$

PRF



PRG



Goldreich-Goldwasser-Micali construction

CPA-security from PRF


Construction:

- $\text{Gen}(1^n)$: choose uniform $k \in \{0,1\}^n$ and output it as the key
- $\text{Enc}_k(m)$: on input a message $m \in \{0,1\}^n$, sample uniform $r \in \{0,1\}^n$ and compute

$$c = (r, F_k(r) \oplus m)$$

- $\text{Dec}_k(c)$: on input a ciphertext $c = (r, s)$, compute

$$m = F_k(r) \oplus s$$

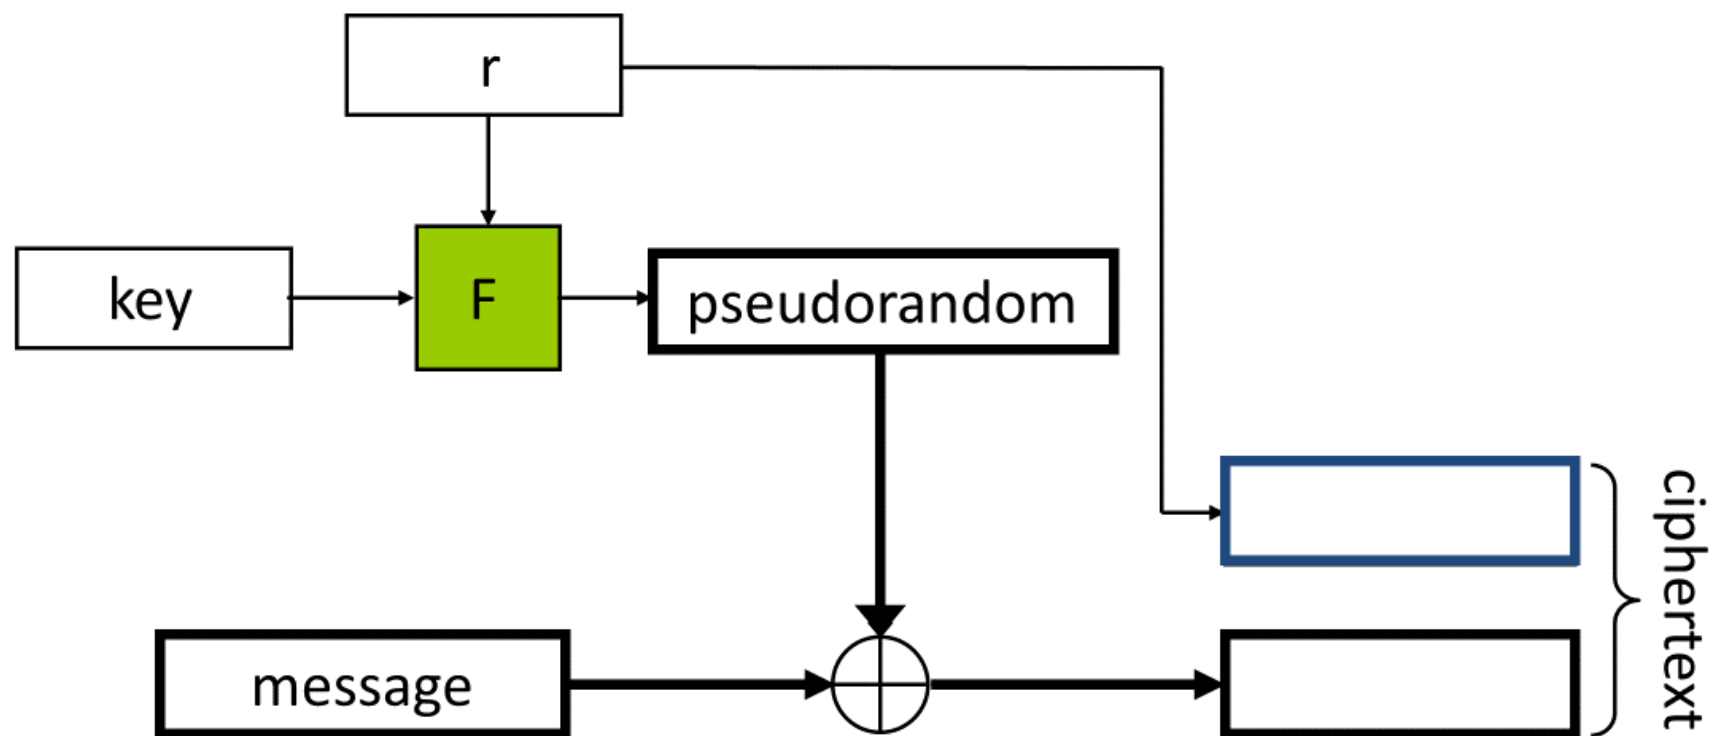

Chosen-plaintext attack (CPA) security

Experiment $\text{PrivK}_{A,\Pi}^{\text{CPA}}(n)$:

1. A key k is generated using $\text{Gen}(1^n)$
2. Adversary A is given input 1^n , and **oracle access to $\text{Enc}_k(\cdot)$** . A outputs two messages $m_0, m_1 \in \mathcal{M}$ s.t. $|m_0| = |m_1|$
3. A random bit $b \in \{0,1\}$ is chosen. $c = \text{Enc}_k(m_b)$ is given to A .
4. A continues to have **oracle access to $\text{Enc}_k(\cdot)$** and outputs b'
5. Experiment outputs 1 if $b=b'$, and 0 otherwise.

Definition: a private-key encryption $\Pi = (\text{Gen}, \text{Enc}, \text{Dec})$ is CPA-secure, if for all probabilistic polynomial time adversaries A , there is a negligible function negl such that for all n ,

$$\Pr[\text{PrivK}_{A,\Pi}^{\text{CPA}}(n) = 1] \leq \frac{1}{2} + \text{negl}(n)$$


Proof idea

- Reduction, build a **distinguisher** for PRF
- Build the big lookup table for function f . Give random output for the random function f , and $F_k(r)$ for PRF

Two cases: (1) r has been queried by the adversary $\rightarrow$ some gain of success; (2) r has not been queried by the adversary $\rightarrow$ negl from PRF

Total probability: $\leq \frac{1}{2} + \frac{q(n)}{2^n} + \text{negl}(n)$

Output Feedback (OFB) mode

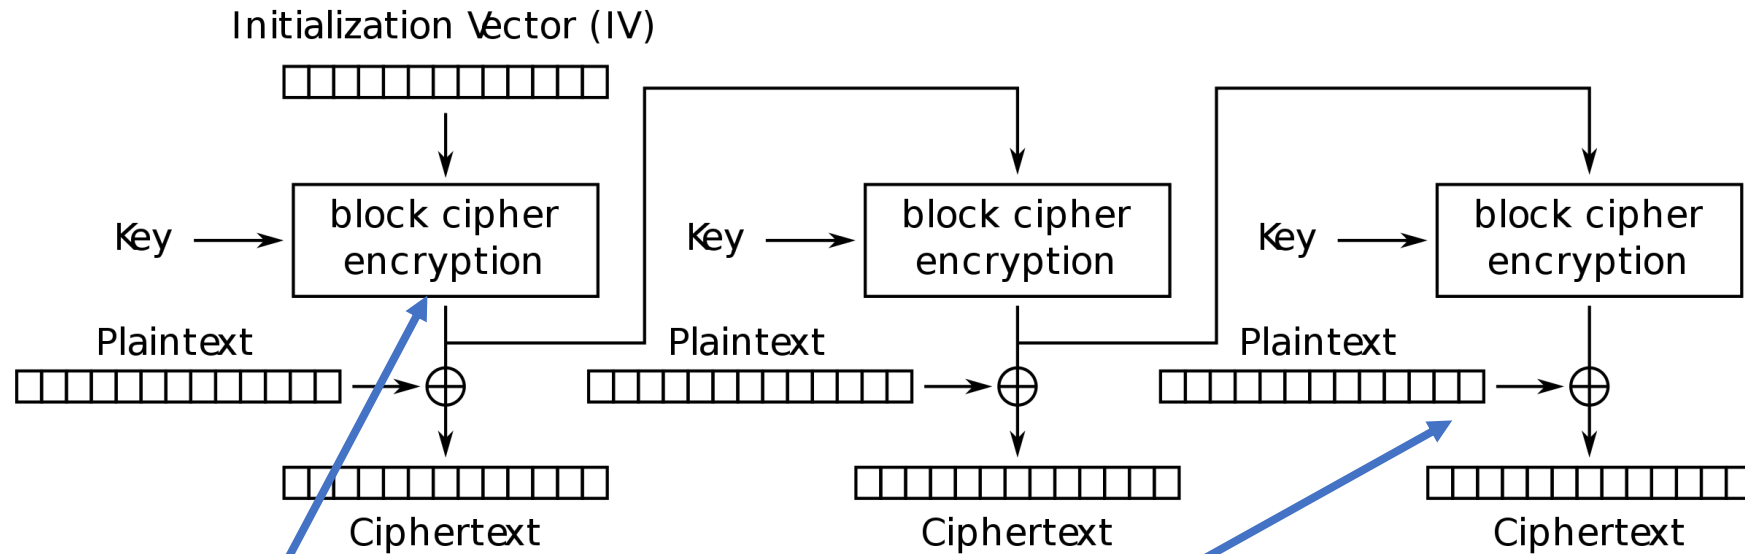

Output Feedback (OFB) mode encryption

1. Block cipher
2. Mode of encryption
3. Padding

Number of permutations

- How many one-to-one functions with n bits of input and output? $F: \{0,1\}^n \rightarrow \{0,1\}^n$
- $(2^n)!$
- Stirling's approximation: $n! \approx \sqrt{2\pi n} \left(\frac{n}{e}\right)^n$
- $(2^n)! \approx \left(\frac{2^n}{e}\right)^{2^n}$

Pseudorandom Permutations

- One-to-one, a subset of PRF
- Invertible. Both $F_k(x) \rightarrow y$ and $F_k^{-1}(y) \rightarrow x$ are efficiently computable.

$$\left| \Pr \left[D^{F_k(\cdot), F_k^{-1}(\cdot)}(1^n) = 1 \right] - \Pr \left[D^{f(\cdot), f^{-1}(\cdot)}(1^n) = 1 \right] \right| \leq \text{negl}(n)$$