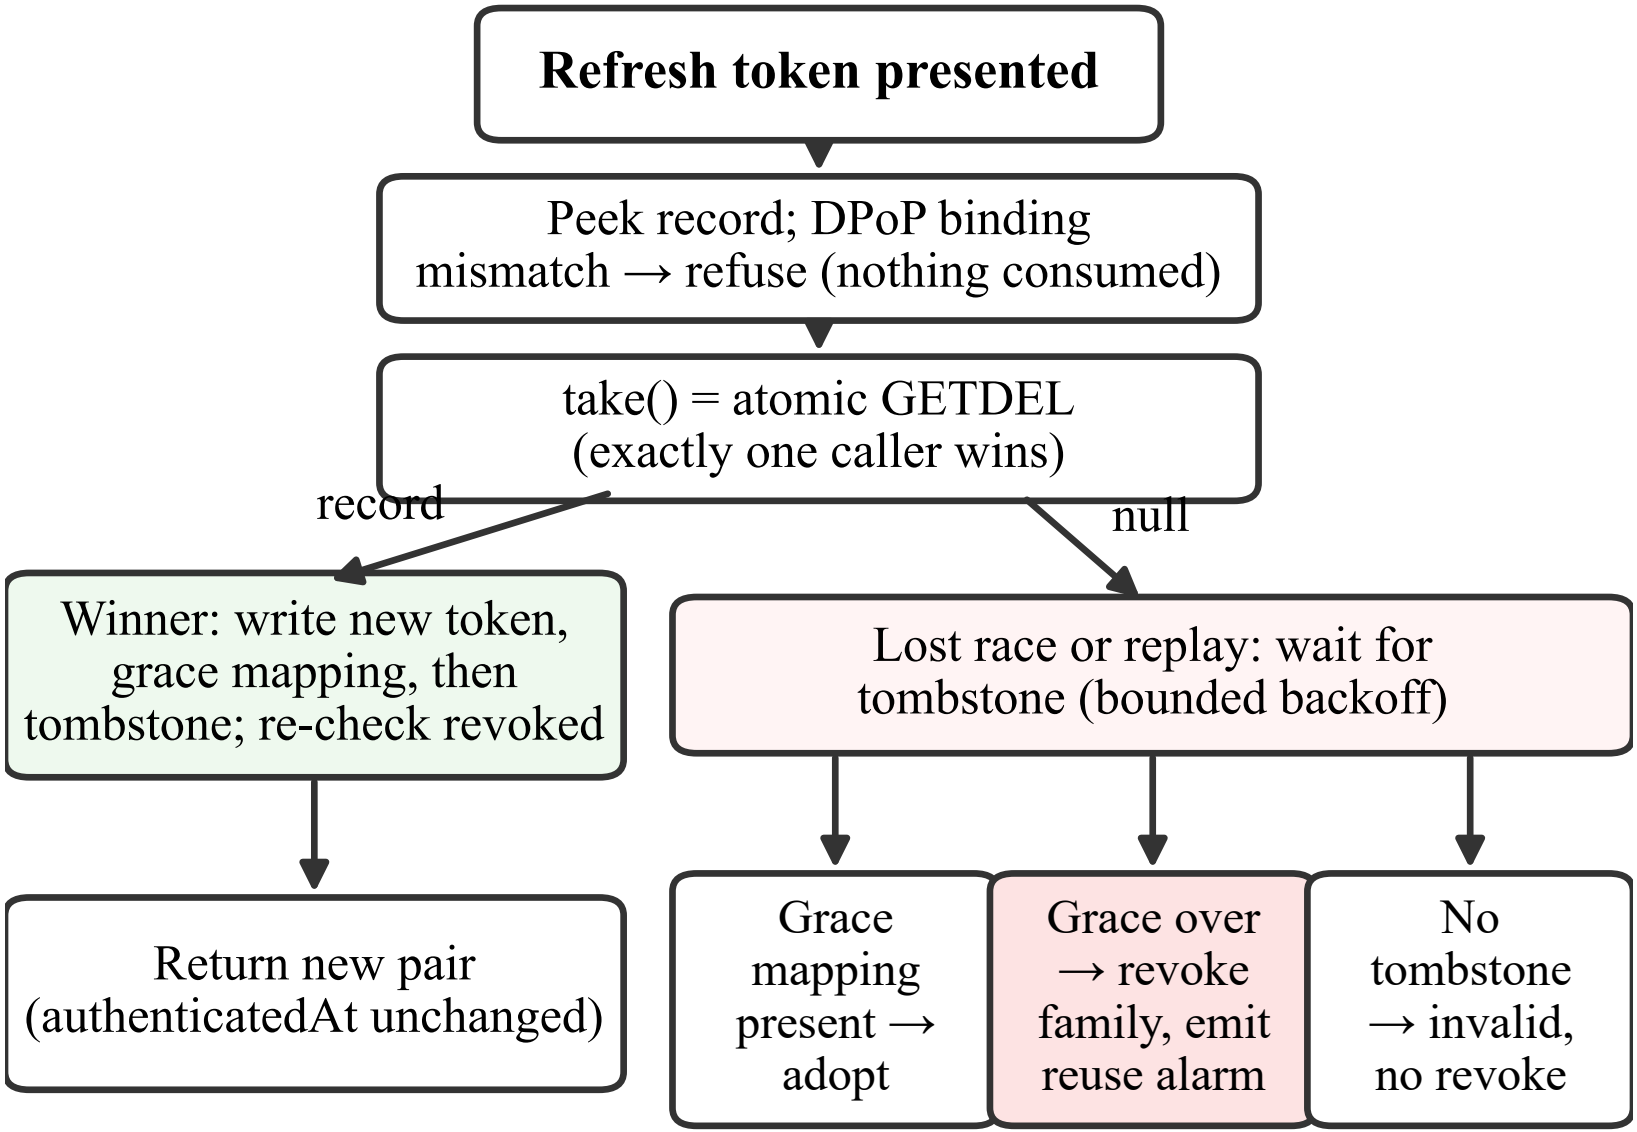
Refresh token presented
Peek record; DPoP binding mismatch → refuse (nothing consumed)
take() = atomic GETDEL (exactly one caller wins)
record
null
Winner: write new token, grace mapping, then tombstone; re-check revoked
Return new pair (authenticatedAt unchanged)
Lost race or replay: wait for tombstone (bounded backoff)
Grace mapping present → adopt
Grace over → revoke family, emit reuse alarm
No tombstone → invalid, no revoke