

Data Management Using Microsoft SQL Server

Session: 8

Accessing Data

For Aptech Centre Use Only

Objectives

- Describe the SELECT statement, its syntax, and use
- Explain the various clauses used with SELECT
- State the use of ORDER BY clause
- Describe working with typed and untyped XML
- Explain the procedure to create, use, and view XML schemas
- Explain the use of Xquery to access XML data

For Aptech Centre Use Only

Introduction

- The `SELECT` statement is a core command used to access data in SQL Server 2012.
- XML allows developers to develop their own set of tags and makes it possible for other programs to understand these tags.
- XML is the preferred means for developers to store, format, and manage data on the Web.

For Aptech Centre Use Only

SELECT Statement 1-2

A table with its data can be viewed using the SELECT statement.

The output of the SELECT statement is another table called resultset.

The SELECT statement defines the columns to be used for a query.

SELECT Statement 2-2

The syntax of `SELECT` statement can consist of a series of expressions separated by commas.

The columns appear in the same sequence as the order of the expression in the `SELECT` statement.

- The syntax for the `SELECT` statement is as follows:

Syntax:

```
SELECT <column_name1>...<column_nameN> FROM <table_name>
```

where,

`table_name`: is the table from which the data will be displayed.


`<column_name1>...<column_nameN>`: are the columns that are to be displayed.

SELECT Without FROM

Many SQL versions use FROM in their query, but in all the versions from SQL Server 2005, including SQL Server 2012, one can use SELECT statements without using the FROM clause.

```
SELECT LEFT('International',5)
```

- The code will display only the first five characters from the extreme left of the word 'International'.
- The output is shown in the following figure:

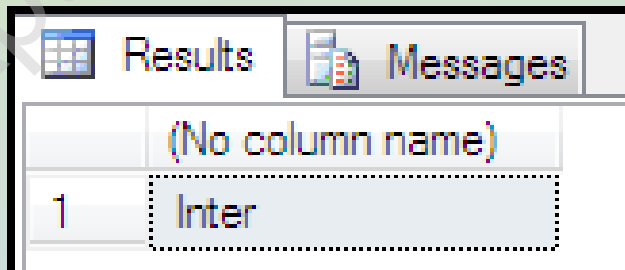

The screenshot shows a window with two tabs: 'Results' and 'Messages'. The 'Results' tab is active and displays a table with one row and one column. The column header is '(No column name)' and the row contains the value 'Inter'.

	(No column name)
1	Inter

Displaying All Columns 1-2

The asterisk (*) is used in the `SELECT` statement to retrieve all the columns from the table.

- The syntax for selecting all columns is as follows:

Syntax:

```
SELECT * FROM <table_name>
```

where,

*: specifies all columns of the named tables in the `FROM` clause.


<table_name>: is the name of the table from which the information is to be retrieved. It is possible to include any number of tables. When two or more tables are used, the row of each table is mapped with the row of others. This activity takes a lot of time if the data in the tables are huge. Hence, it is recommended to use this syntax with a condition.

Displaying All Columns 2-2

- Following code snippet demonstrates the use of ' * ' in the SELECT statement:

```
USE AdventureWorks2012
SELECT * FROM HumanResources.Employee
GO
```

- The partial output with some columns of HumanResources.Employee table is shown in the following figure:

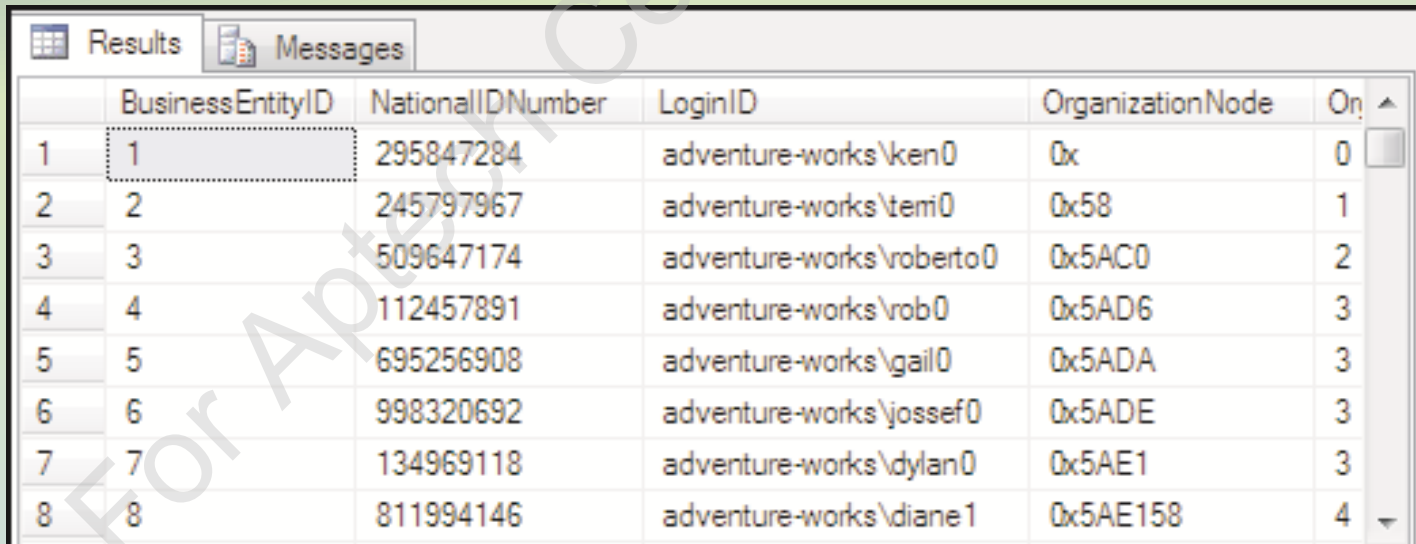

	BusinessEntityID	NationalIDNumber	LoginID	OrganizationNode	On	
1	1	295847284	adventure-works\ken0	0x	0	
2	2	245797967	adventure-works\temi0	0x58	1	
3	3	509647174	adventure-works\roberto0	0x5AC0	2	
4	4	112457891	adventure-works\rob0	0x5AD6	3	
5	5	695256908	adventure-works\gail0	0x5ADA	3	
6	6	998320692	adventure-works\jossef0	0x5ADE	3	
7	7	134969118	adventure-works\dylan0	0x5AE1	3	
8	8	811994146	adventure-works\diane1	0x5AE158	4	

Displaying Selected Columns 1-2

The **SELECT** statement displays or returns certain relevant columns that are chosen by the user or mentioned in the statement.

- The syntax for selecting specific columns is as follows:

Syntax:

```
SELECT <column_name1>..<column_nameN> FROM <table_name>
```

where,


<column_name1>..<column_nameN>: are the columns that are to be displayed.

Displaying Selected Columns 2-2

- For example, to display the cost rates in various locations from `Production.Location` table in AdventureWorks2012 database, the `SELECT` statement is as shown in the following code snippet:

```
USE AdventureWorks2012
SELECT LocationID, CostRate FROM Production.Location
GO
```

- Following figure shows `LocationID` and `CostRate` columns from AdventureWorks2012 database:

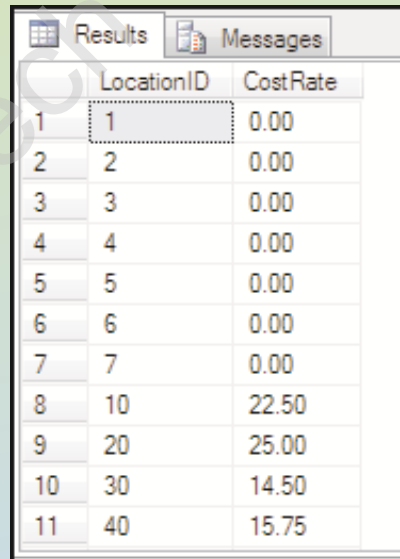

	LocationID	CostRate
1	1	0.00
2	2	0.00
3	3	0.00
4	4	0.00
5	5	0.00
6	6	0.00
7	7	0.00
8	10	22.50
9	20	25.00
10	30	14.50
11	40	15.75

Using Constants in Result Sets 1-2

Character string constants are used when character columns are joined.


These constants are not specified as a separate column in the resultset.

Using Constants in Result Sets 2-2

- For example, to include ' : ' and '→' in the resultset so as to display the country name, country region code, and its corresponding group, the `SELECT` statement is shown in the following code snippet:

```
USE AdventureWorks2012
SELECT [Name] + ': ' + CountryRegionCode + '→' + [Group] FROM
    Sales.SalesTerritory
GO
```

- Following figure displays the country name, country region code, and corresponding group from `Sales.SalesTerritory` of AdventureWorks2012 database:

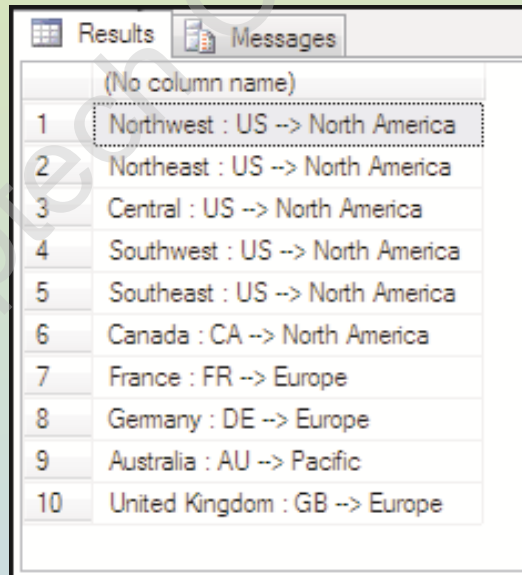

	(No column name)
1	Northwest : US -> North America
2	Northeast : US -> North America
3	Central : US -> North America
4	Southwest : US -> North America
5	Southeast : US -> North America
6	Canada : CA -> North America
7	France : FR -> Europe
8	Germany : DE -> Europe
9	Australia : AU -> Pacific
10	United Kingdom : GB -> Europe

Renaming ResultSet Column Names 1-2

When columns are displayed in the resultset they come with corresponding headings specified in the table.


Therefore, by customizing the headings, they become more understandable and meaningful.

Renaming ResultSet Column Names 2-2

- Following code snippet demonstrates how to display '**ChangedDate**' as the heading for **ModifiedDate** column in the **dbo.Individual** table, the SELECT statement:

```
USE CUST_DB  
SELECT ModifiedDate as 'ChangedDate' FROM dbo.Individual  
GO
```

- The output displays '**ChangedDate**' as the heading for **ModifiedDate** column in the **dbo.Individual** table.
- Following figure shows the original heading and the changed heading:

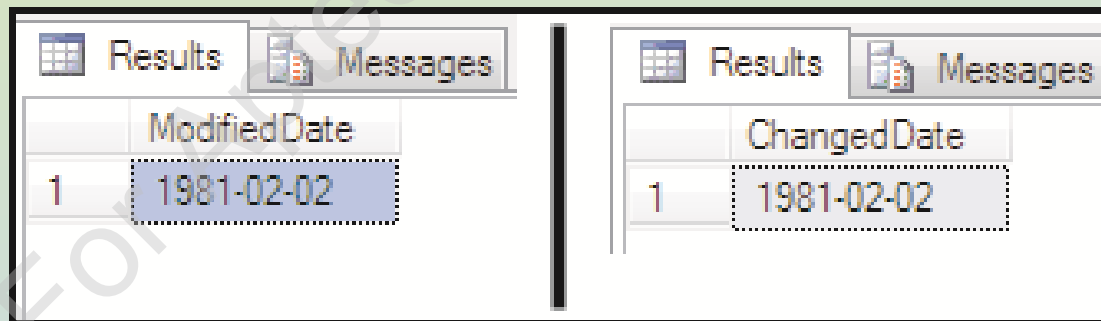

The figure displays two side-by-side screenshots of the SQL Server Enterprise Manager interface, specifically the 'Results' pane. The left screenshot shows the original query result with the column heading 'ModifiedDate' and a single row containing the value '1981-02-02'. The right screenshot shows the same query result after renaming the column, with the heading 'ChangedDate' and the same row value '1981-02-02'. Both panes also have a 'Messages' tab visible.

	ModifiedDate
1	1981-02-02

	ChangedDate
1	1981-02-02

Computing Values in ResultSet 1-2

A `SELECT` statement can contain mathematical expressions by applying operators to one or more columns.


For example, consider the table `Production.ProductCostHistory` from `AdventureWorks2012` database.

Computing Values in ResultSet 2-2

- The discount amount does not exist, but can be calculated by executing the `SELECT` statement shown in the following code snippet:

```
USE AdventureWorks2012
SELECT ProductID, StandardCost, StandardCost * 0.15 as Discount FROM
Production.ProductCostHistory
GO
```

- Following figure shows the output where discount amount is calculated using `SELECT` statement:

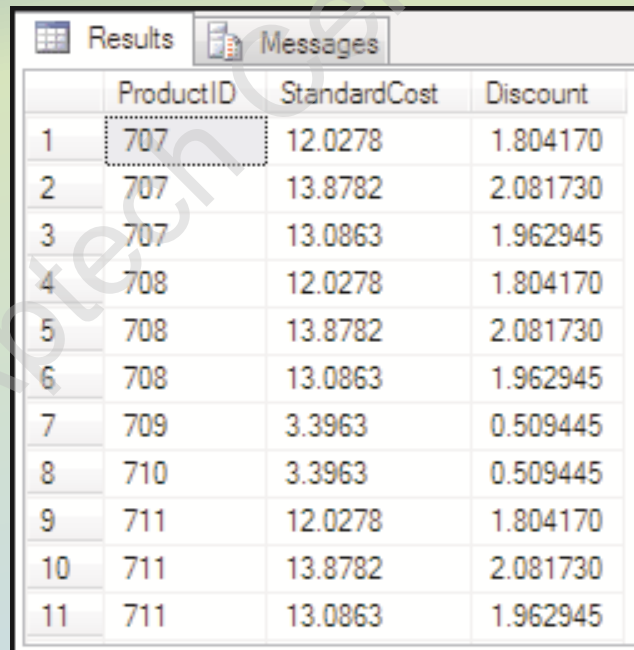

	ProductID	StandardCost	Discount
1	707	12.0278	1.804170
2	707	13.8782	2.081730
3	707	13.0863	1.962945
4	708	12.0278	1.804170
5	708	13.8782	2.081730
6	708	13.0863	1.962945
7	709	3.3963	0.509445
8	710	3.3963	0.509445
9	711	12.0278	1.804170
10	711	13.8782	2.081730
11	711	13.0863	1.962945

Using DISTINCT

The keyword `DISTINCT` prevents the retrieval of duplicate records.

For example, if the `StandardCost` column is selected without using the `DISTINCT` keyword, it will display all the standard costs present in the table.

```
USE AdventureWorks2012
SELECT DISTINCT StandardCost FROM Production.ProductCostHistory
GO
```

Using TOP and PERCENT

The TOP keyword will display only the first few set of rows as a resultset.

The TOP expression can also be used with other statements such as INSERT, UPDATE, and DELETE.

- The syntax for the TOP keyword is as follows:

Syntax:

```
SELECT [ALL|DISTINCT] [TOP expression [PERCENT] [WITH TIES]]
```

where,

expression: is the number or the percentage of rows to be returned as the result.

PERCENT: returns the number of rows limited by percentage.

WITH TIES: is the additional number of rows that is to be displayed.

SELECT with INTO 1-3

The INTO clause creates a new table and inserts rows and columns listed in the SELECT statement into it.

In order to execute this clause with the SELECT statement, the user must have the permission to CREATE TABLE in the destination database.

- The syntax for the SELECT statement is as follows:

Syntax:

```
SELECT <column_name1>...<column_nameN> [INTO new_table] FROM table_list
```

where,

new_table: is the name of the new table that is to be created.

SELECT with INTO 2-3


- Following code snippet uses an INTO clause which creates a new table `Production.ProductName` with details such as the product's ID and its name from the table `Production.ProductModel`:

```
USE AdventureWorks2012
SELECT ProductModelID,Name INTO Production.ProductName FROM
Production.ProductModel
GO
```

- After executing the code, a message stating '(128 row(s) affected)' is displayed.

SELECT with INTO 3-3

- If a query is written to display the rows of the new table, the output will be as shown in the following figure:

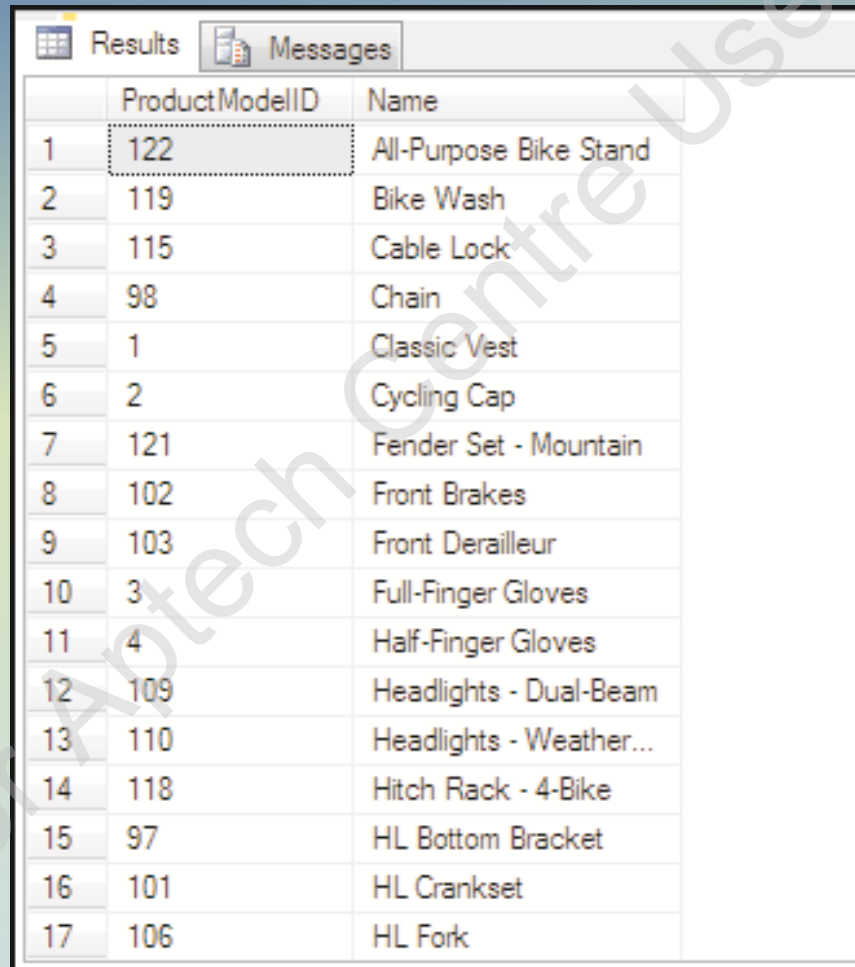

The screenshot shows a SQL Server Enterprise Manager window with a 'Results' tab selected. It displays a table with two columns: 'ProductModelID' and 'Name'. The table contains 17 rows of data. The first row is highlighted with a dotted border, indicating it is the current row. A large, semi-transparent watermark 'For Aptechnet Use Only' is overlaid diagonally across the table.

	ProductModelID	Name
1	122	All-Purpose Bike Stand
2	119	Bike Wash
3	115	Cable Lock
4	98	Chain
5	1	Classic Vest
6	2	Cycling Cap
7	121	Fender Set - Mountain
8	102	Front Brakes
9	103	Front Derailleur
10	3	Full-Finger Gloves
11	4	Half-Finger Gloves
12	109	Headlights - Dual-Beam
13	110	Headlights - Weather...
14	118	Hitch Rack - 4-Bike
15	97	HL Bottom Bracket
16	101	HL Crankset
17	106	HL Fork

SELECT with WHERE 1-8

The **WHERE** clause with **SELECT** statement is used to conditionally select or limit the records retrieved by the query.

The row is returned if the expression is true and is discarded if it is false.

- The syntax for the **SELECT** statement is as follows:

Syntax:

```
SELECT <column_name1>...<column_nameN> FROM <table_name> WHERE <
search_condition>]
```

where,

search_condition: is the condition to be met by the rows.

SELECT with WHERE 2-8

- Following table shows the different operators that can be used with the WHERE clause:


Operator	Description
=	Equal to
< >	Not equal to
>	Greater than
<	Less than
> =	Greater than or equal to
< =	Less than or equal to
!	Not
BETWEEN	Between a range
LIKE	Search for an ordered pattern
IN	Within a range

SELECT with WHERE 3-8

Following code snippet demonstrates the equal to operator with WHERE clause to display data with EndDate 6/30/2007 12:00:00 AM:

```
USE AdventureWorks2012
SELECT * FROM Production.ProductCostHistory WHERE EndDate = '6/30/2007
12:00:00 AM'
GO
```

- The output SELECT with WHERE clause is shown in the following figure:

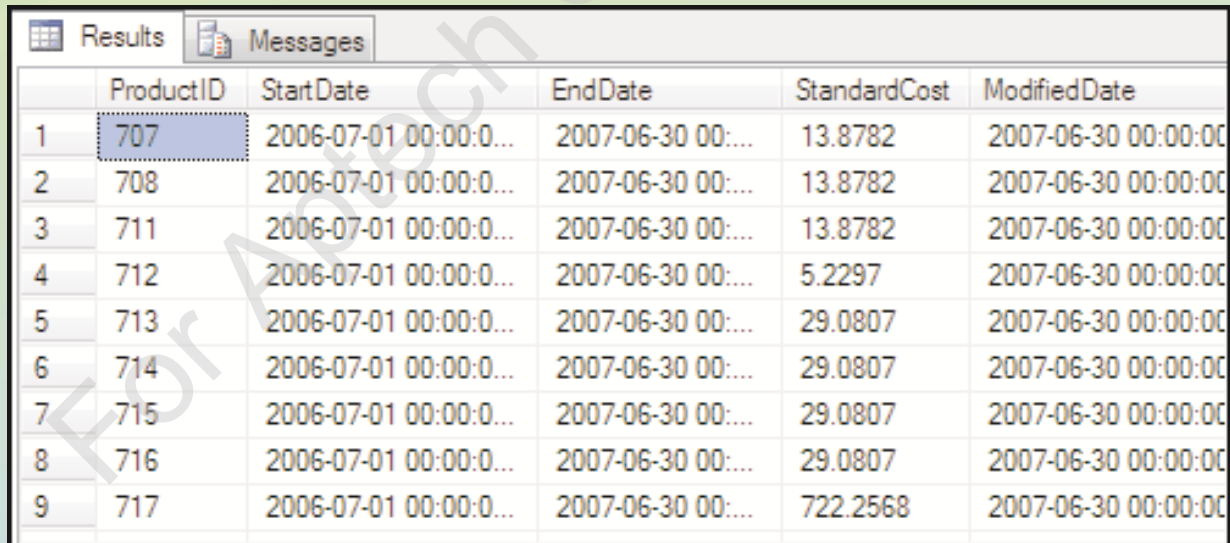


	ProductID	StartDate	EndDate	StandardCost	ModifiedDate
1	707	2006-07-01 00:00:0...	2007-06-30 00:...	13.8782	2007-06-30 00:00:00
2	708	2006-07-01 00:00:0...	2007-06-30 00:...	13.8782	2007-06-30 00:00:00
3	711	2006-07-01 00:00:0...	2007-06-30 00:...	13.8782	2007-06-30 00:00:00
4	712	2006-07-01 00:00:0...	2007-06-30 00:...	5.2297	2007-06-30 00:00:00
5	713	2006-07-01 00:00:0...	2007-06-30 00:...	29.0807	2007-06-30 00:00:00
6	714	2006-07-01 00:00:0...	2007-06-30 00:...	29.0807	2007-06-30 00:00:00
7	715	2006-07-01 00:00:0...	2007-06-30 00:...	29.0807	2007-06-30 00:00:00
8	716	2006-07-01 00:00:0...	2007-06-30 00:...	29.0807	2007-06-30 00:00:00
9	717	2006-07-01 00:00:0...	2007-06-30 00:...	722.2568	2007-06-30 00:00:00

SELECT with WHERE 4-8

- All queries in SQL use single quotes to enclose the text values.
- For example, consider the following query, which retrieves all the records from `Person.Address` table having `Bothell` as city.
- Following code snippet demonstrates the equal to operator with `WHERE` clause to display data with address having `Bothell` city.

```
USE AdventureWorks2012
SELECT DISTINCT StandardCost FROM Production.ProductCostHistory
GO
```

- The output of the query is shown in the following figure:

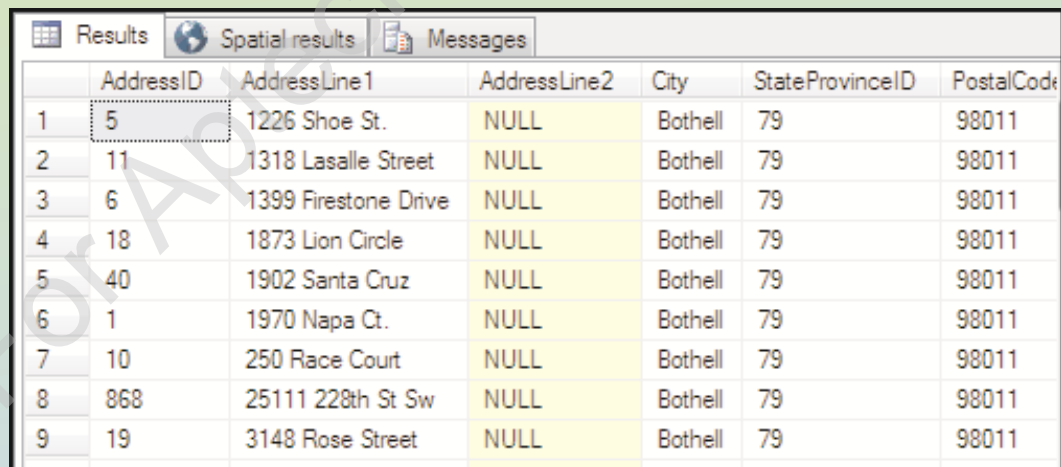


	AddressID	AddressLine1	AddressLine2	City	StateProvinceID	PostalCode
1	5	1226 Shoe St.	NULL	Bothell	79	98011
2	11	1318 Lasalle Street	NULL	Bothell	79	98011
3	6	1399 Firestone Drive	NULL	Bothell	79	98011
4	18	1873 Lion Circle	NULL	Bothell	79	98011
5	40	1902 Santa Cruz	NULL	Bothell	79	98011
6	1	1970 Napa Ct.	NULL	Bothell	79	98011
7	10	250 Race Court	NULL	Bothell	79	98011
8	868	25111 228th St Sw	NULL	Bothell	79	98011
9	19	3148 Rose Street	NULL	Bothell	79	98011

SELECT with WHERE 5-8

- Numeric values are not enclosed within any quotes as shown in the following code snippet:

```
USE AdventureWorks2012
SELECT * FROM HumanResources.Department WHERE DepartmentID < 10
GO
```

- The query displays all those records where the value in DepartmentID is less than 10.
- The output of the query is shown in the following figure:

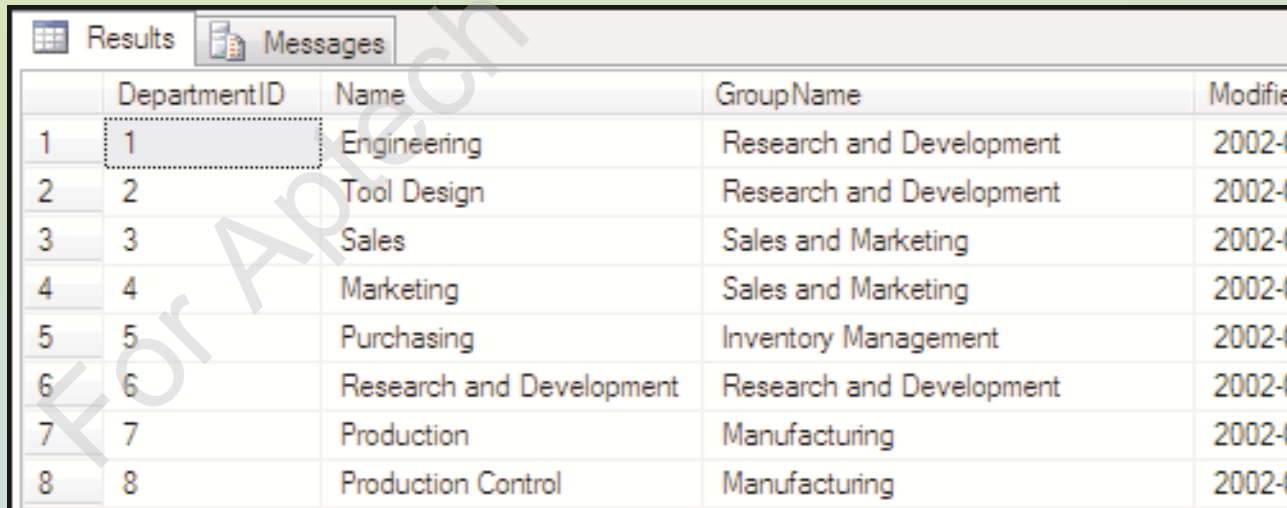

The screenshot shows a SQL Server Enterprise Manager window with two tabs: 'Results' and 'Messages'. The 'Results' tab is active, displaying a table with 5 columns: 'DepartmentID', 'Name', 'GroupName', and 'ModifiedDate'. The table contains 8 rows of data, all with DepartmentID values less than 10. The first row is highlighted with a dotted border.

	DepartmentID	Name	GroupName	ModifiedDate
1	1	Engineering	Research and Development	2002-1
2	2	Tool Design	Research and Development	2002-1
3	3	Sales	Sales and Marketing	2002-1
4	4	Marketing	Sales and Marketing	2002-1
5	5	Purchasing	Inventory Management	2002-1
6	6	Research and Development	Research and Development	2002-1
7	7	Production	Manufacturing	2002-1
8	8	Production Control	Manufacturing	2002-1

SELECT with WHERE 6-8

- WHERE clause can also be used with wildcard characters as shown in the following table:

Wildcard	Description	Example
—	It will display a single character	<code>SELECT * FROM Person. Contact WHERE Suffix LIKE 'Jr_ '</code>
%	It will display a string of any length	<code>SELECT * FROM Person. Contact WHERE LastName LIKE 'B% '</code>
[]	It will display a single character within the range enclosed in the brackets	<code>SELECT * FROM Sales. CurrencyRate WHERE ToCurrencyCode LIKE 'C[AN][DY] '</code>
[^]	It will display any single character not within the range enclosed in the brackets	<code>SELECT * FROM Sales. CurrencyRate WHERE ToCurrencyCode LIKE 'A[^R][^S] '</code>

- All wildcard characters are used along with LIKE keyword to make the query accurate and specific.

SELECT with WHERE 7-8

WHERE clause also uses logical operators such as AND, OR, and NOT. These operators are used with search conditions in WHERE clauses.

So, it returns all the rows from the tables where both the conditions that are listed are true. Following code snippet demonstrates the use of AND operator:

```
USE AdventureWorks2012
SELECT * FROM Sales.CustomerAddress WHERE AddressID > 900 AND
AddressTypeID = 5
GO
```

SELECT with WHERE 8-8

- OR operator returns TRUE and displays all the rows if it satisfies any one of the conditions. Following code snippet demonstrates the use of OR operator:

```
USE AdventureWorks2012
SELECT * FROM Sales.CustomerAddress WHERE AddressID < 900 OR
AddressTypeID = 5
GO
```

- The query will display all the rows whose AddressID is less than 900 or whose AddressTypeID is equal to five.
- The NOT operator negates the search condition.
- Following code snippet demonstrates the use of NOT operator:

```
USE AdventureWorks2012
SELECT * FROM Sales.CustomerAddress WHERE NOT AddressTypeID = 5
GO
```

- The code will display all the records whose AddressTypeID is not equal to 5.
- Multiple logical operators in a single SELECT statement can be used.
- When more than one logical operator is used, NOT is evaluated first, then AND, and finally OR.

GROUP BY Clause 1-2

The GROUP BY clause partitions the resultset into one or more subsets. Each subset has values and expressions in common.

Every grouped column restricts the number of rows of the resultset. For every grouped column, there is only one row.

Syntax:

```
SELECT <column_name1>..<column_nameN> FROM <table_name> GROUP BY <column_name>
```

where,


column_name1: is the name of the column according to which the resultset should be grouped.

GROUP BY Clause 2-2

- For example, consider that if the total number of resource hours has to be found for each work order, the query in the following code snippet would retrieve the resultset:

```
USE AdventureWorks2012
SELECT WorkOrderID, SUM(ActualResourceHrs) FROM
Production.WorkOrderRouting GROUP BY WorkOrderID
GO
```

- The output is shown in the following figure:

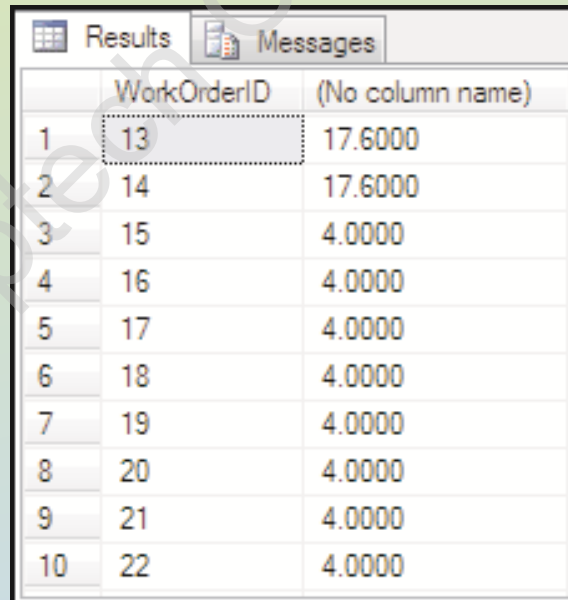

The screenshot shows a SQL Server Results window with two tabs: 'Results' and 'Messages'. The 'Results' tab is active, displaying a table with two columns: 'WorkOrderID' and '(No column name)'. The table contains 10 rows of data, with the first row highlighted. The 'WorkOrderID' column contains values from 13 to 22, and the '(No column name)' column contains the sum of actual resource hours for each work order.

	WorkOrderID	(No column name)
1	13	17.6000
2	14	17.6000
3	15	4.0000
4	16	4.0000
5	17	4.0000
6	18	4.0000
7	19	4.0000
8	20	4.0000
9	21	4.0000
10	22	4.0000

Clauses and Statements 1-7

- Microsoft SQL Server 2012 provides enhanced query syntax elements for more powerful data accessing and processing.


Common Table Expression (CTE) in SELECT and INSERT statement

- A CTE is a named temporary resultset based on the regular SELECT and INSERT query.
- Following code snippet demonstrates the use of CTE in INSERT statement:

```
USE CUST_DB
CREATE TABLE NewEmployees (EmployeeID smallint, FirstName char(10),
LastName char(10), Department varchar(50), HiredDate datetime, Salary
money );
INSERT INTO NewEmployees
VALUES(11, 'Kevin', 'Blaine', 'Research', '2012-07-31', 54000);
WITH EmployeeTemp (EmployeeID, FirstName, LastName, Department,
HiredDate, Salary)
AS
(
SELECT * FROM NewEmployees
)
SELECT * FROM EmployeeTemp
```


Clauses and Statements 2-7

- The query inserts a new row for the `NewEmployees` table and transfers the temporary resultset to `EmployeeTemp` as shown in the following figure:

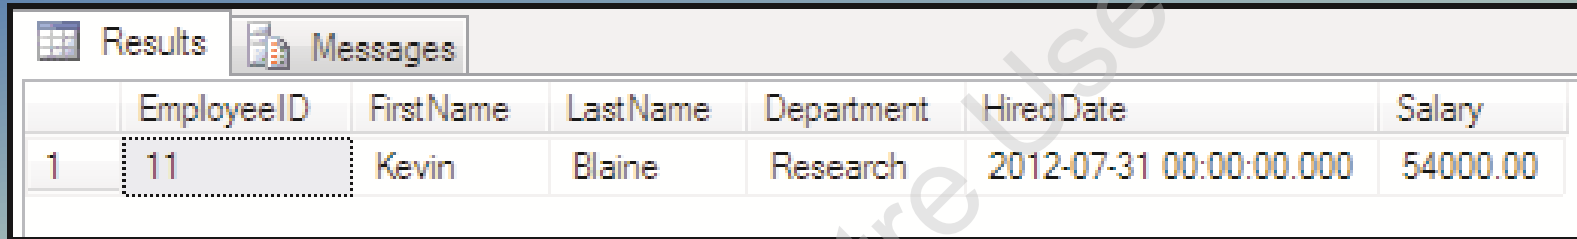

	EmployeeID	FirstName	LastName	Department	HiredDate	Salary
1	11	Kevin	Blaine	Research	2012-07-31 00:00:00.000	54000.00

OUTPUT clause in INSERT and UPDATE statements

- The **OUTPUT** clause returns information about rows affected by an **INSERT** statement and an **UPDATE** statement.
- Following code snippet demonstrates how to use **UPDATE** statement with an **INSERT** statement:

```
USE CUST_DB;  
GO
```

Clauses and Statements 3-7

```
CREATE TABLE dbo.table_3
(
id INT,
employee VARCHAR(32)
)
go
INSERT INTO dbo.table_3 VALUES
(1, 'Matt')
, (2, 'Joseph')
, (3, 'Renny')
, (4, 'Daisy');
GO
DECLARE @updatedTable TABLE
(
id INT, olddata_employee VARCHAR(32), newdata_employee VARCHAR(32)
);
UPDATE dbo.table_3
Set employee= UPPER(employee)
```

Clauses and Statements 4-7

OUTPUT

```
inserted.id,  
deleted.employee,  
inserted.employee  
INTO @updatedTable  
SELECT * FROM @updatedTable
```

- The output where rows are affected by an INSERT statement and an UPDATE statement is shown in the following figure:

	id	olddata_employee	newdata_employee
1	1	Matt	MATT
2	2	Joseph	JOSEPH
3	3	Renny	RENNY
4	4	Daisy	DAISY

Clauses and Statements 5-7

.WRITE clause

- .WRITE clause is used in an UPDATE statement to replace a value in a column having large value data type.
- The syntax for the .WRITE clause is as follows:

Syntax:

```
.WRITE(expression, @offset, @Length)
```

where,

expression: is the character string which is to be placed into the large value data type column.

@offset: is the starting value (units) where the replacement is to be done.

@Length: is the length of the portion in the column, starting from @offset that is replaced by expression.


Clauses and Statements 6-7

- Following code snippet demonstrates how .WRITE clause is used in UPDATE statement:

```
USE CUST_DB;
GO
CREATE TABLE dbo.table_5
(
Employee_role VARCHAR(max),
Summary VARCHAR(max)
)
INSERT INTO dbo.table_5(Employee_role, Summary) VALUES ('Research', 'This
a very long non-unicode string')
SELECT *FROM dbo.table_5
UPDATE dbo.table_5 SET Summary .WRITE('n incredibly', 6,5)
WHERE Employee_role LIKE 'Research'
SELECT *FROM dbo.table_5
```

Clauses and Statements 7-7

- Following figure displays the output of .WRITE clause query:

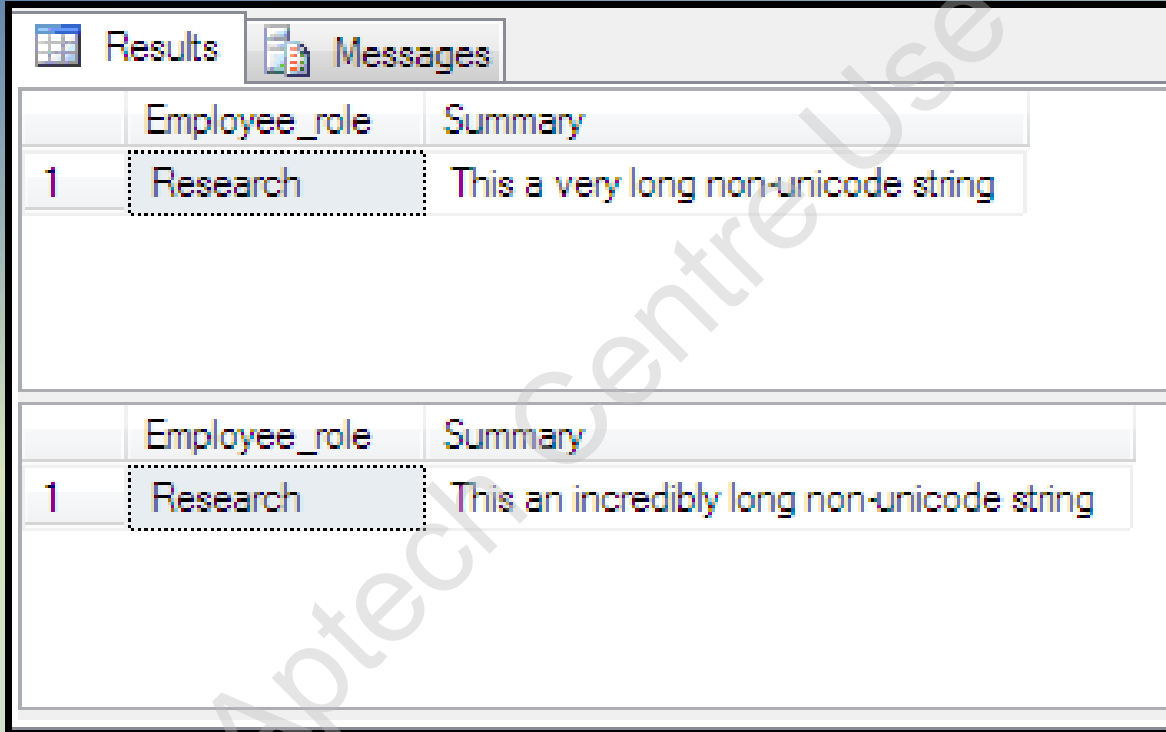

	Employee_role	Summary
1	Research	This a very long non-unicode string

	Employee_role	Summary
1	Research	This an incredibly long non-unicode string

ORDER BY Clause 1-2

It specifies the order in which the columns should be sorted in a resultset.

By default, records are sorted in an ASC order. To switch to the descending mode, use the optional keyword DESC.

Syntax:

```
SELECT <column_name> FROM <table_name> ORDER BY column_name> {ASC|DESC}
```

ORDER BY Clause 2-2

- The SELECT statement in the following code snippet sorts the query results on the SalesLastYear column of the Sales.SalesTerritory table:

```
USE AdventureWorks2012
SELECT * FROM Sales.SalesTerritory ORDER BY SalesLastYear
GO
```

- The output is shown in the following figure:



The screenshot displays the 'Results' pane of SQL Server Enterprise Manager. The query results are sorted by the 'SalesLastYear' column in descending order. The first row, representing Germany, is highlighted with a blue selection bar. The table has 8 columns: TerritoryID, Name, Country..., Group, Sales..., SalesLastYear, and Cos.

	TerritoryID	Name	Country...	Group	Sales...	SalesLastYear	Cos
1	8	Germany	DE	Europe	3805...	1307949.7917	0.0
2	10	United Kingdom	GB	Europe	5012...	1635823.3967	0.0
3	9	Australia	AU	Pacific	5977...	2278548.9776	0.0
4	7	France	FR	Europe	4772...	2396539.7601	0.0
5	3	Central	US	North America	3072...	3205014.0767	0.0
6	1	Northwest	US	North America	7887...	3298694.4938	0.0
7	2	Northeast	US	North America	2402...	3607148.9371	0.0
8	5	Southeast	US	North America	2538...	3925071.4318	0.0
9	4	Southwest	US	North America	1051...	5366575.7098	0.0

Working with XML 1-2

Extensible Markup Language (XML) allows developers to develop their own set of tags and makes it possible for other programs to understand these tags.

Applications of today have a mix of technologies such as ASP, Microsoft .NET technologies, XML, and SQL Server 2012 working in tandem.

Working with XML 2-2

- Native XML databases in SQL Server 2012 have a number of advantages. Some of them are listed as follows:

Easy Data Search and Management

- All the XML data is stored locally in one place, thus making it easier to search and manage.

Better Performance

- Queries from a well-implemented XML database are faster than queries over documents stored in a file system.
- Also, the database essentially parses each document when storing it.

Easy data processing

- Large documents can be processed easily.

- SQL Server 2012 supports native storage of XML data by using the xml data type.

XML Data Type 1-3

In addition to regular commonly used data types, SQL Server 2012 provides a brand new data type in the form of xml data type.

An XML fragment is an XML instance with the top-level element missing from its structure.

- The syntax to create a table with columns of type xml is as follows:

Syntax:

```
CREATE TABLE <table_name> ( [ column_list,] <column_name> xml [,  
column_list])
```

XML Data Type 2-3

- Following code snippet creates a new table named PhoneBilling with one of the columns belonging to xml data type:


```
USE AdventureWorks2012
CREATE TABLE Person.PhoneBilling (Bill_ID int PRIMARY KEY, MobileNumber
bigint UNIQUE, CallDetails xml)
GO
```

- A column of type xml can be added to a table at the time of creation or after its creation.
- The xml data type columns support DEFAULT values as well as the NOT NULL constraint.
- Data can be inserted into the xml column in the Person.PhoneBilling table as shown in the following code snippet:

```
USE AdventureWorks2012
INSERT INTO Person.PhoneBilling VALUES (100,9833276605,
'<Info> <Call>Local</Call> <Time>45 minutes </Time> <Charges> 200
</Charges> </Info>')
SELECT CallDetails FROM Person.PhoneBilling
GO
```

XML Data Type 3-3

- The output is shown in the following figure:

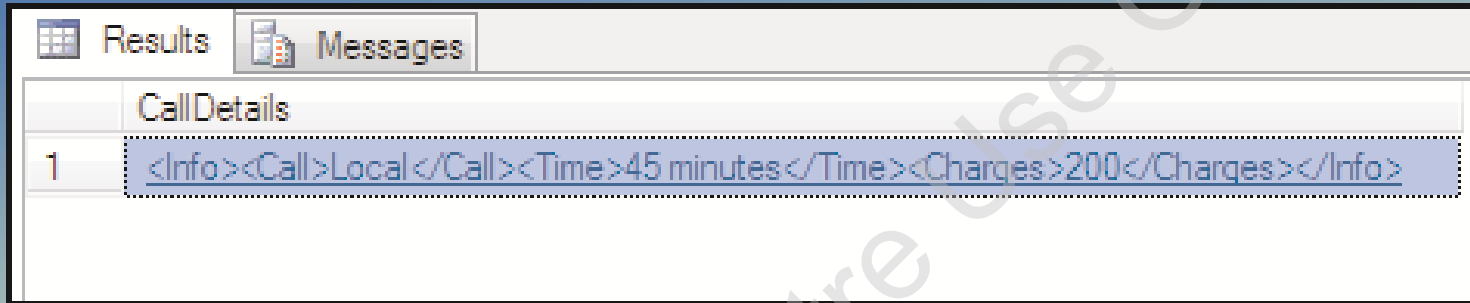

The screenshot shows a SQL Server Enterprise Manager window with two tabs: 'Results' and 'Messages'. The 'Results' tab is active, displaying a table named 'CallDetails'. The table has one row with the ID '1'. The data in this row is an XML string: `<Info><Call>Local</Call><Time>45 minutes</Time><Charges>200</Charges></Info>`. The XML string is highlighted with a blue selection box.

	CallDetails
1	<code><Info><Call>Local</Call><Time>45 minutes</Time><Charges>200</Charges></Info></code>

- The DECLARE statement is used to create variables of type xml.
- Following code snippet shows how to create a variable of type xml:

```
DECLARE @xmlvar xml
SELECT @xmlvar='<Employee name="Joan" />'
```

- The xml data type columns cannot be used as a primary key, foreign key, or as a unique constraint.

Typed and Untyped XML 1-4

There are two ways of storing XML documents in the xml data type columns, namely, typed and untyped XML.

It describes the structure and limits the contents of XML documents by associating xml data types with XML element types and attributes.

SQL Server does not perform any validation for data entered in the xml column. However, it ensures that the data that is stored is well-formed.

Typed and Untyped XML 2-4

- The first step in using typed XML is registering a schema.
- This is done by using the `CREATE XML SCHEMA COLLECTION` statement as shown in the following code snippet:

```
USE SampleDB
CREATE XML SCHEMA COLLECTION CricketSchemaCollection
AS N'<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema" >
<xsd:element name="MatchDetails">
<xsd:complexType>
<xsd:complexContent>
<xsd:restriction base="xsd:anyType">
<xsd:sequence>
<xsd:element name="Team" minOccurs="0" maxOccurs="unbounded">
<xsd:complexType>
<xsd:complexContent>
<xsd:restriction base="xsd:anyType">
<xsd:sequence />
<xsd:attribute name="country" type="xsd:string" />
<xsd:attribute name="score" type="xsd:string" />

```

Typed and Untyped XML 3-4

```
</xsd:restriction>
</xsd:complexContent>
</xsd:complexType>
</xsd:element>
</xsd:sequence>
</xsd:restriction>
</xsd:complexContent>
</xsd:complexType>
</xsd:element>
</xsd:schema>'
GO
```

- The `CREATE XML SCHEMA COLLECTION` statement creates a collection of schemas, any of which can be used to validate typed XML data with the name of the collection.
- This example shows a new schema called `CricketSchemaCollection` being added to the `SampleDB` database.
- Once a schema is registered, the schema can be used in new instances of the `xml` data type.

Typed and Untyped XML 4-4

- Following code snippet creates a table with an xml type column and specifies a schema for the column:

```
USE SampleDB

CREATE TABLE CricketTeam ( TeamID int identity not null, TeamInfo
xml(CricketSchemaCollection) )

GO
```

- To create new rows with the typed XML data, the INSERT statement can be used as shown in the following code snippet:

```
USE SampleDB

INSERT INTO CricketTeam (TeamInfo) VALUES ('<MatchDetails><Team
country="Australia" score="355"></Team><Team country="Zimbabwe"
score="200"></Team><Team country="England"
score="475"></Team></MatchDetails>')

GO
```

- A typed XML variable can also be created by specifying the schema collection name as shown in the following code snippet:

```
USE SampleDB

DECLARE @team xml(CricketSchemaCollection)

SET @team = '<MatchDetails><Team
country="Australia"></Team></MatchDetails>'

SELECT @team

GO
```

XQuery 1-4

After XML data has been stored using the `xml` data type, it can be queried and retrieved using a language named XQuery.

XQuery can be query structured or semi-structured XML data.

Developers need to query XML documents, and this involves transforming XML documents in the required format.

XQuery 2-4


- Some of the xml data type methods used with XQuery are described as follows:

exist()

- This method is used to determine if one or more specified nodes are present in the XML document.
- It returns 1 if the XQuery expression returned at least one node, 0 if the Xquery expression evaluated to an empty result, and NULL if the xml data type instance against which the query was executed is NULL.
- Following code snippet demonstrates the use of `exist()` method:

```
USE SampleDB  
SELECT TeamID FROM CricketTeam WHERE  
TeamInfo.exist('(/MatchDetails/Team)') = 1  
GO
```

- This will return only those TeamID values where the Team element has been specified in the TeamInfo. The output is shown in the following figure:

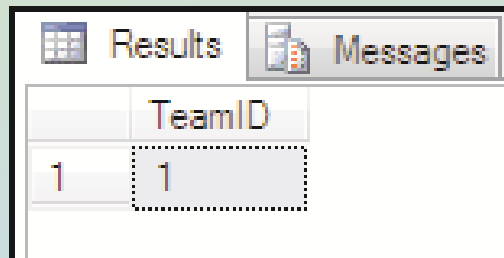

The screenshot shows a SQL Server interface with two tabs: 'Results' and 'Messages'. The 'Results' tab is active, displaying a table with two columns: 'TeamID' and an empty column. The first row contains the value '1' in the 'TeamID' column. The table is highlighted with a dashed border.


	TeamID	
1	1	

query()

- The `query()` method can be used to retrieve either the entire contents of an XML document or a selected section of the XML document.
- Following code snippet shows the use of `query()` method:

```
USE SampleDB
SELECT TeamInfo.query('/MatchDetails/Team') AS Info FROM CricketTeam
GO
```

- The output is shown in the following figure:

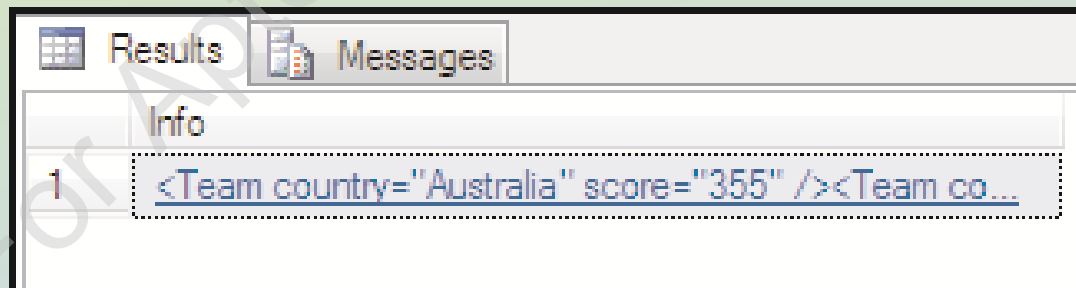


	Info
1	<code><Team country="Australia" score="355" /><Team co...</code>

value()

- The `value()` method can be used to extract scalar values from an xml data type.
- Following code snippet demonstrates the use of this method:

```
USE SampleDB  
SELECT TeamInfo.value('(/MatchDetails/Team/@score)[1]', 'varchar(20)') AS  
Score FROM CricketTeam where TeamID=1  
GO
```

- The output is shown in the following figure:

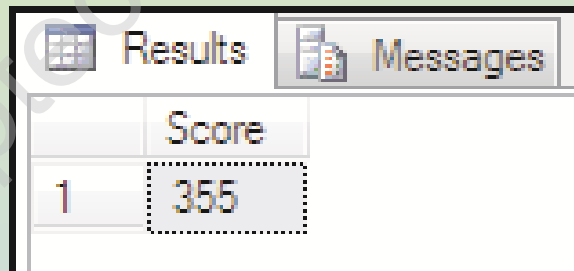

The screenshot shows the SQL Server Enterprise Manager interface. The 'Results' pane is active, displaying a single row of data. The column is labeled 'Score' and the value is '355'. The 'Messages' pane is also visible but empty.

	Score
1	355

Summary

- The SELECT statement retrieves rows and columns from tables.
- SELECT statement allows the users to specify different expressions in order to view the resultset in an ordered manner.
- A SELECT statement can contain mathematical expressions by applying operators to one or more columns.
- The keyword DISTINCT prevents the retrieval of duplicate records.
- XML allows developers to develop their own set of tags and makes it possible for other programs to understand these tags.
- A typed XML instance is an XML instance which has a schema associated with it.
- XML data can be queried and retrieved using XQuery language.