<u>Program 5: Working with Selenium</u>: Maven Project To Connect To Web Servers Using Selenium Dependency (**<u>AutomationExercise.com)</u>**

Step 1: create a maven project on terminal by typing the command **<u>mvn archetype:generate -DgroupId=com.example -DartifactId=MyMavenSeleniumApp03 -DarchetypeArtifactId=maven-archetype-quickstart -DinteractiveMode=false</u>**

```
vboxuser@niranjan: ~/devop
vboxuser@niranjan:~/devop$ mvn archetype:generate -DgroupId=com.example -DartifactId=MyMavenSeleniumApp03 -DarchetypeArtifactId=maven-archetype-quickstart -DinteractiveMode=false
[INFO] Scanning for projects...
[INFO]
[INFO] ------------------< org.apache.maven:standalone-pom >-------------------
[INFO] Building Maven Stub Project (No POM) 1
[INFO] --------------------------------[ pom ]---------------------------------
[INFO]
[INFO] >>> maven-archetype-plugin:3.4.1:generate (default-cli) > generate-sources @ standalone-pom >>>
[INFO]
[INFO] <<< maven-archetype-plugin:3.4.1:generate (default-cli) < generate-sources @ standalone-pom <<<
[INFO]
[INFO]
[INFO] --- maven-archetype-plugin:3.4.1:generate (default-cli) @ standalone-pom ---
[INFO] Generating project in Batch mode
[INFO] No archetype defined. Using maven-archetype-quickstart (org.apache.maven.archetypes:maven-archetype-quickstart:1.0)
[INFO] ----------------------------------------------------------------------------
[INFO] Using following parameters for creating project from Old (1.x) Archetype: maven-archetype-quickstart:1.0
[INFO] ----------------------------------------------------------------------------
[INFO] Parameter: basedir, Value: /home/vboxuser/devop
[INFO] Parameter: package, Value: com.example
[INFO] Parameter: groupId, Value: com.example
[INFO] Parameter: artifactId, Value: MyMavenSeleniumApp03
[INFO] Parameter: packageName, Value: com.example
[INFO] Parameter: version, Value: 1.0-SNAPSHOT
[INFO] project created from Old (1.x) Archetype in dir: /home/vboxuser/devop/MyMavenSeleniumApp03
[INFO] ----------------------------------------------------------------------------
[INFO] BUILD SUCCESS
[INFO] ----------------------------------------------------------------------------
[INFO] Total time:  1.161 s
[INFO] Finished at: 2026-03-24T21:34:18+05:30
[INFO] ----------------------------------------------------------------------------
vboxuser@niranjan:~/devop$
```

Step 2 : edit the pom.xml file and add the dependencies

```
Open   *pom.xml   ~/Devops/MyMavenSeleniumApp03   Save
1 <project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
2   xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://maven.apache.org/maven-v4_0_0.xsd">
3   <modelVersion>4.0.0</modelVersion>
4   <groupId>com.example</groupId>
5   <artifactId>MyMavenSeleniumApp03</artifactId>
6   <packaging>jar</packaging>
7   <version>1.0-SNAPSHOT</version>
8   <name>MyMavenSeleniumApp03</name>
9   <url>http://maven.apache.org</url>
10    <dependencies>
11    <dependency>
12      <groupId>junit</groupId>
13      <artifactId>junit</artifactId>
14      <version>3.8.1</version>
15      <scope>test</scope>
16    </dependency>
17    <dependency>
18    <groupId>org.seleniumhq.selenium</groupId>
19    <artifactId>selenium-java</artifactId>
20    <version>4.41.0</version>
21    <scope>compile</scope>
22 </dependency>
23   </dependencies>
24   <!-- Build: Configuring plugins and build settings -->
25 <build>
26 <plugins>
27 <!-- Example: Maven Compiler Plugin to compile Java code -->
28 <plugin>
29 <groupId>org.apache.maven.plugins</groupId>
30 <artifactId>maven-compiler-plugin</artifactId>
31 <version>3.8.1</version>
32 <configuration>
33 <source>1.7</source>
34 <target>1.7</target>
35 </configuration>
36 </plugin>
37 <!-- Example: Maven Surefire Plugin to run tests -->
38 <plugin>
```

The pom.xml has the code

Open *pom.xml ~/Devops/MyMavenSeleniumApp03 Save

```xml
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-surefire-plugin</artifactId>
<version>2.22.2</version>
</plugin>
<plugin>
            <groupId>org.apache.maven.plugins</groupId>
            <artifactId>maven-jar-plugin</artifactId>
            <version>3.0.1</version>
           <configuration>
                <archive>
                    <manifestEntries>
                        <Main-Class>com.example.App</Main-Class>
                    </manifestEntries>
                </archive>
            </configuration>
        </plugin>
        <plugin>
      <groupId>org.apache.maven.plugins</groupId>
      <artifactId>maven-shade-plugin</artifactId>
      <version>3.5.0</version>
      <executions>
        <execution>
          <phase>package</phase>
          <goals>
            <goal>shade</goal>
          </goals>
          <configuration>
            <transformers>
              <transformer implementation="org.apache.maven.plugins.shade.resource.ManifestResourceTransformer">
                <mainClass>com.example.App</mainClass>
              </transformer>
            </transformers>
          </configuration>
        </execution>
      </executions>
    </plugin>
</plugins>
</build>
</project>
```

Step 3: Edit the App.java

Open App.java ~/Devops/MyMavenSeleniumApp03/src/main/java/com/example Save

```java
package com.example;
import org.openqa.selenium.By;
import org.openqa.selenium.WebDriver;
import org.openqa.selenium.chrome.ChromeDriver;
public class App {
    public static void main(String[] args) throws InterruptedException {
        WebDriver driver = new ChromeDriver();
        // Open Products Page
        driver.get("https://automationexercise.com/products");
        // Maximize Browser Window
        driver.manage().window().maximize();
        // Add Product 4 to Cart
        driver.findElement(By.cssSelector("[data-product-id='4']")).click();
        Thread.sleep(2000);
        driver.findElement(By.cssSelector(".btn.btn-success.close-modal.btn-block")).click();

        // Add Product 5 to Cart
        driver.findElement(By.cssSelector("[data-product-id='5']")).click();
        Thread.sleep(2000);
        driver.findElement(By.cssSelector(".btn.btn-success.close-modal.btn-block")).click();

        // Add Product 6 to Cart
        driver.findElement(By.cssSelector("[data-product-id='6']")).click();
        Thread.sleep(2000);
        driver.findElement(By.cssSelector(".btn.btn-success.close-modal.btn-block")).click();

        // Open Cart Page
        driver.get("https://automationexercise.com/view_cart");

        // Refresh Cart Page
        driver.navigate().refresh();

        // Wait for 10 seconds
        Thread.sleep(10000);
        // Close Browser
        driver.quit();
    }
}
```

Step 4:build and run the maven application
To execute type the command **mvn exec:java -Dexec.mainClass="com.example.App"**

it opens automationexercise.com and automatically adds a product to cart

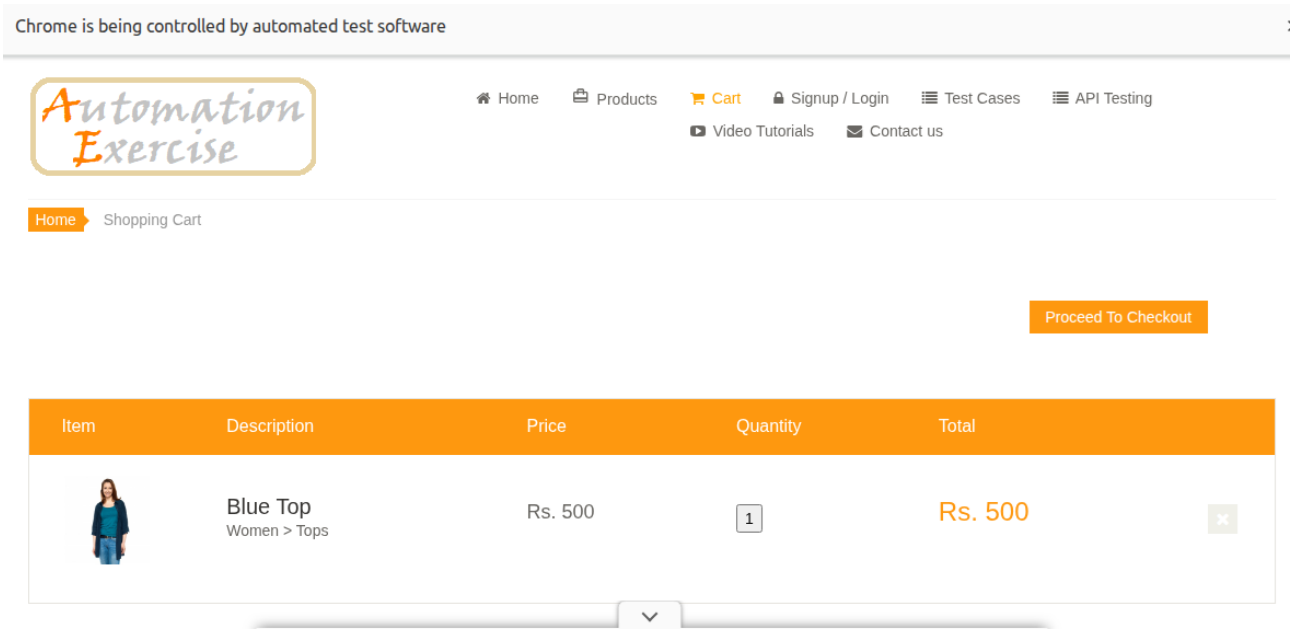

Jenkins Pipeline for MyMavenSelenium04

Step 1: Open the Jenkins Dashboard to create a new item

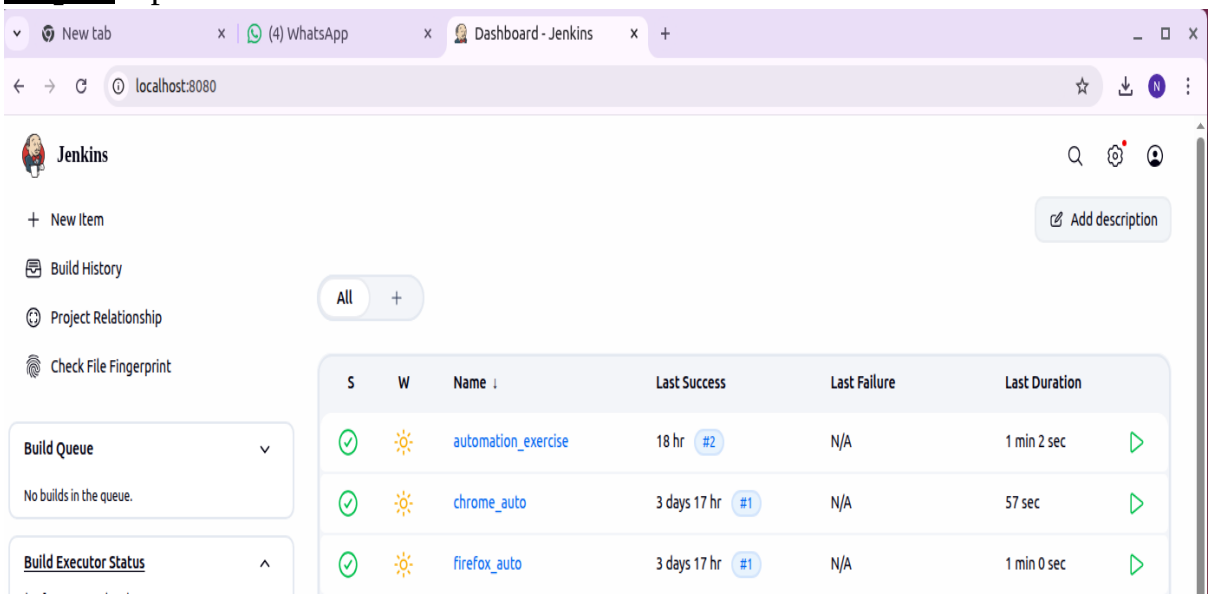

Step 2: Click on New Item to create a New Pipeline and give the name as "crome_auto" and Item type as Pipeline and click OK

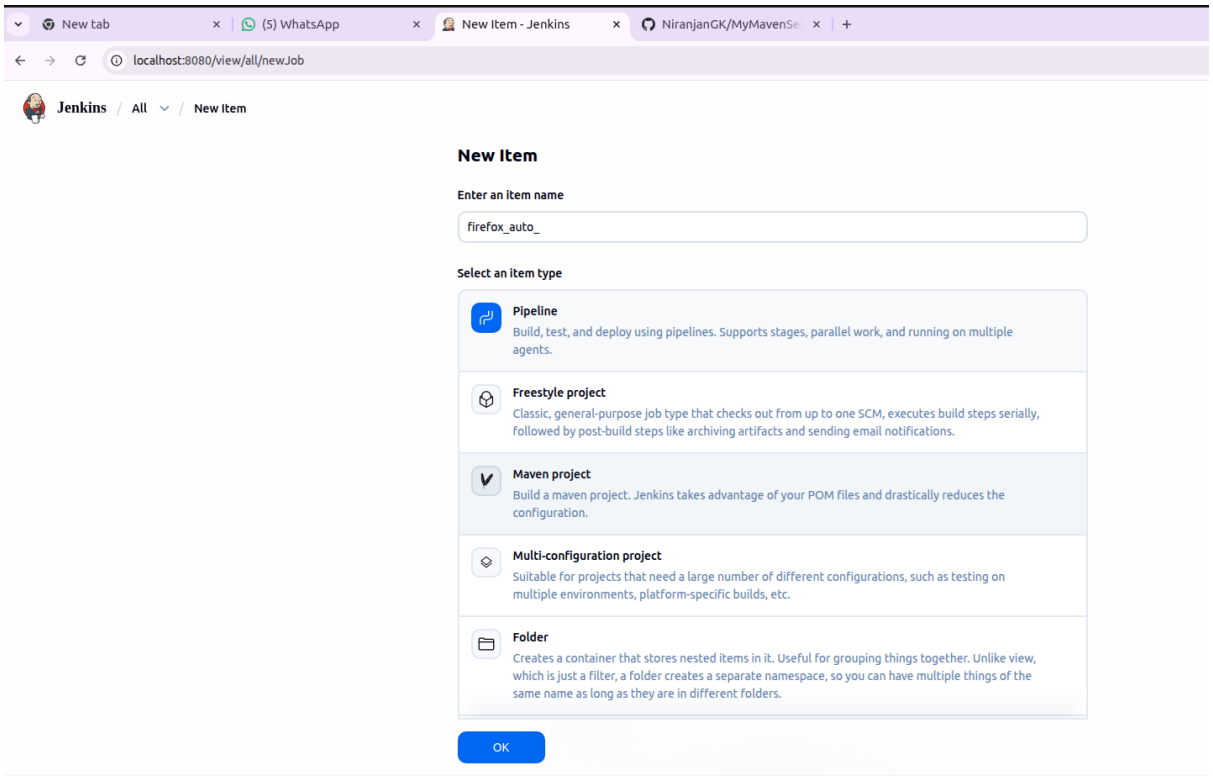

Step 3: Configure the settings by Defining the script as “Pipeline Script from SCM” and SCM as “Git”. paste the Repository URL of the project given in GitHub and choose Credentials as “GitHub Credentials” which was created earlier.

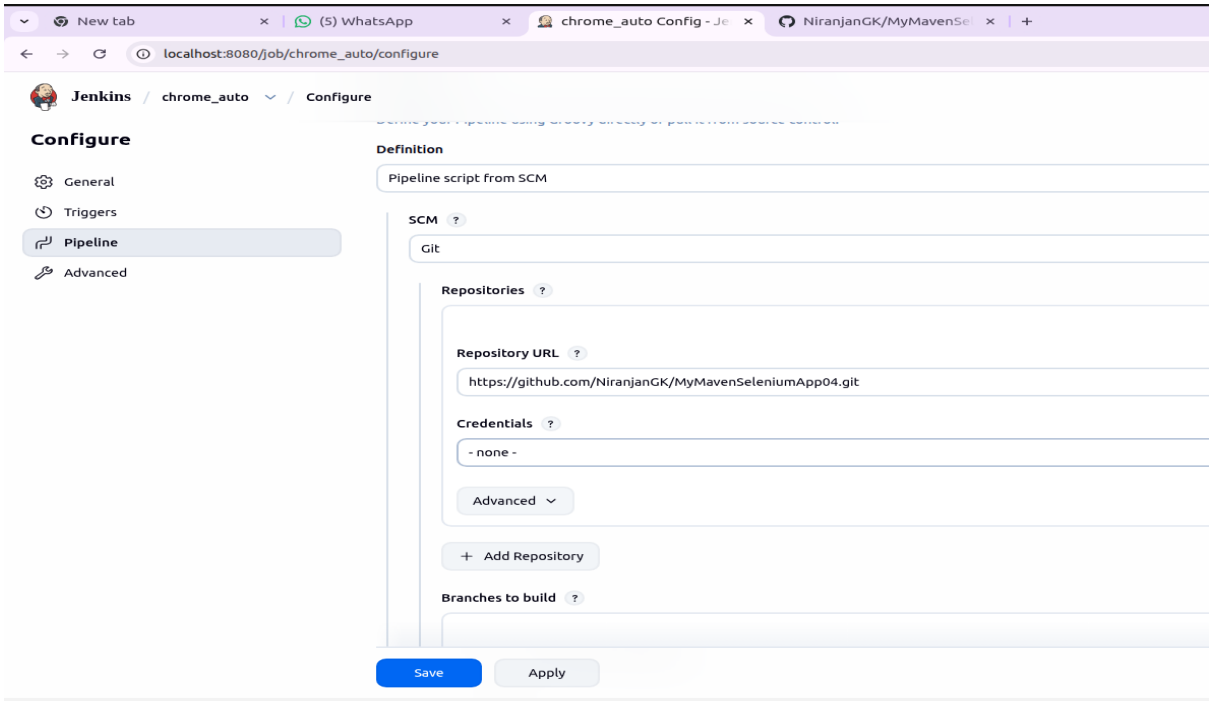

Step 4: Now in Terminal, go to directory created for MyMavenAppSelenium04 and create an new file called “Jenkinsfile”

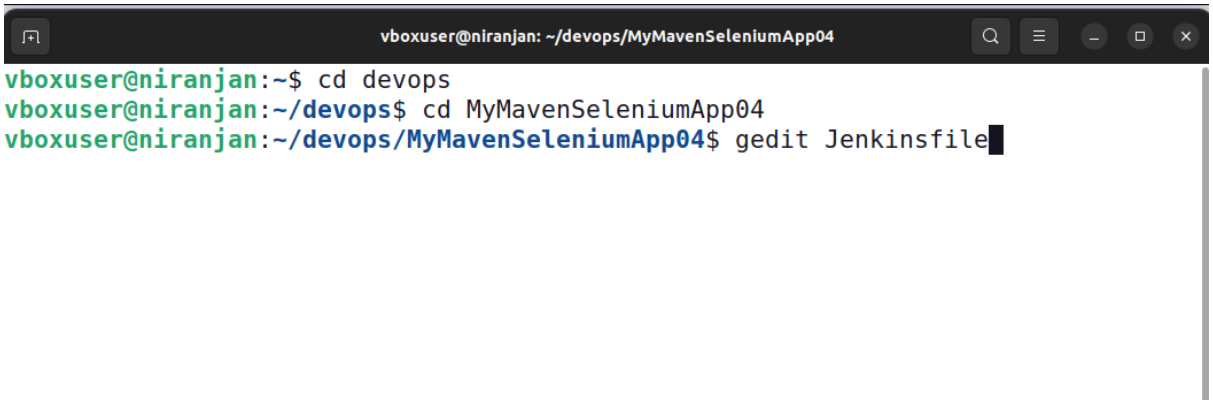

Step 5: Paste the Jenkins code inside the Jenkinsfile

```
pipeline {
    agent any   // Run on any available agent


    tools {
        maven 'Maven'   // Must match name configured in Jenkins (Global Tool
Config)
    }


    stages {


        stage('Checkout') {
            steps {
                // Recommended if repo is configured in Jenkins
                checkout scm


                // OR use this if not configured:
                // git url:
'https://github.com/NiranjanGK/MyMavenSeleniumApp04.git', branch: 'master'
            }
        }


        stage('Build') {
            steps {
                sh 'mvn clean package'
            }
        }
```

```
        stage('Test') {
            steps {
                sh 'mvn test'
            }
        }
    }

    post {
        always {
            echo 'Pipeline execution completed'
        }
        success {
            echo 'Build SUCCESS '
        }
        failure {
            echo 'Build FAILED '
        }
    }
}
```

Step 6: We need to update pom.xml also in order to change the versions of source and target from 1.7 to 1.8

```
<!-- Example: Maven Compiler Plugin to compile Java code -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-compiler-plugin</artifactId>
<version>3.8.1</version>
<configuration>
<source>1.8</source>
<target>1.8</target>
</configuration>
</plugin>
```

Step 7: Now we need to Push changes and commit by pushing the necessary "Jenkinsfile" to the respective Repo

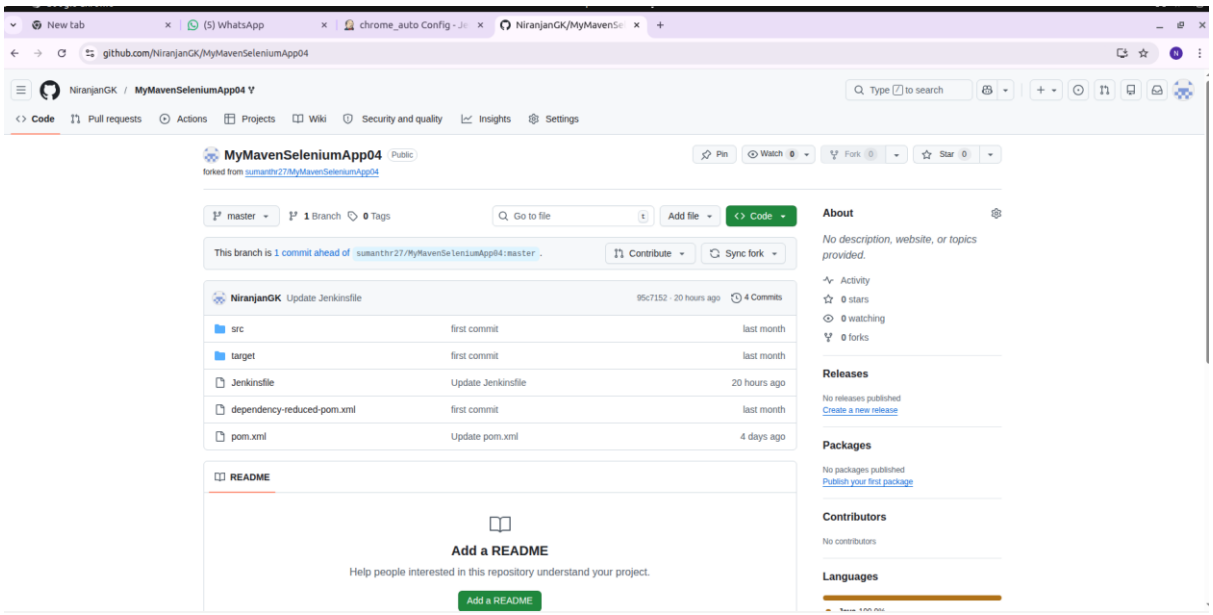
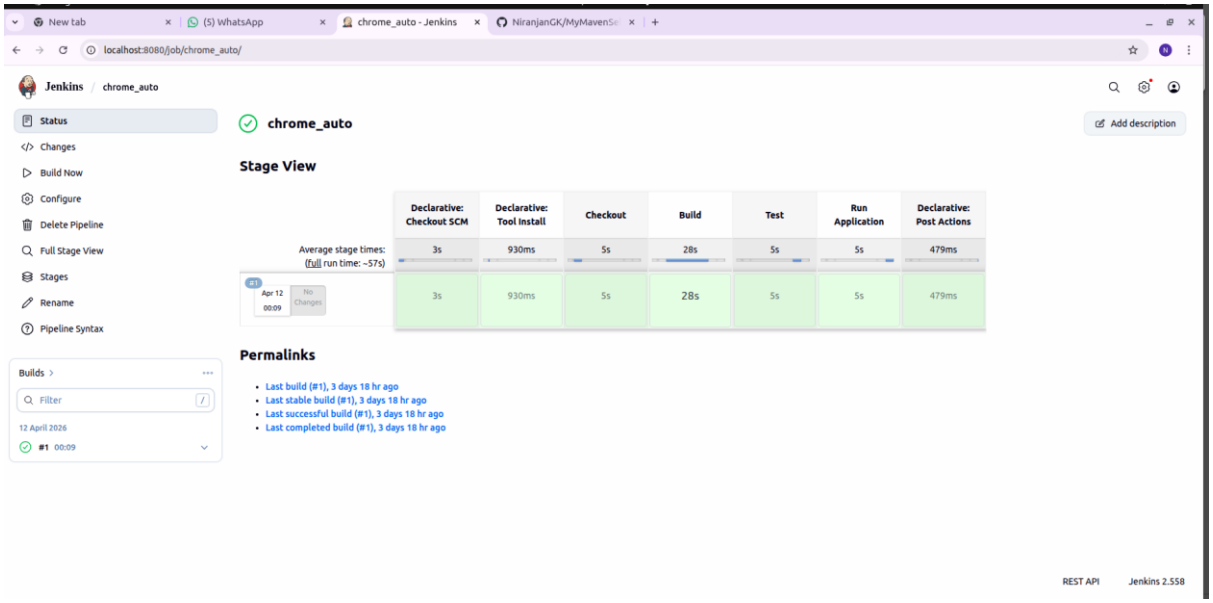
Step 8: Now go to Jenkins and Build the Pipeline and thus check the Stage view for the successful execution.