



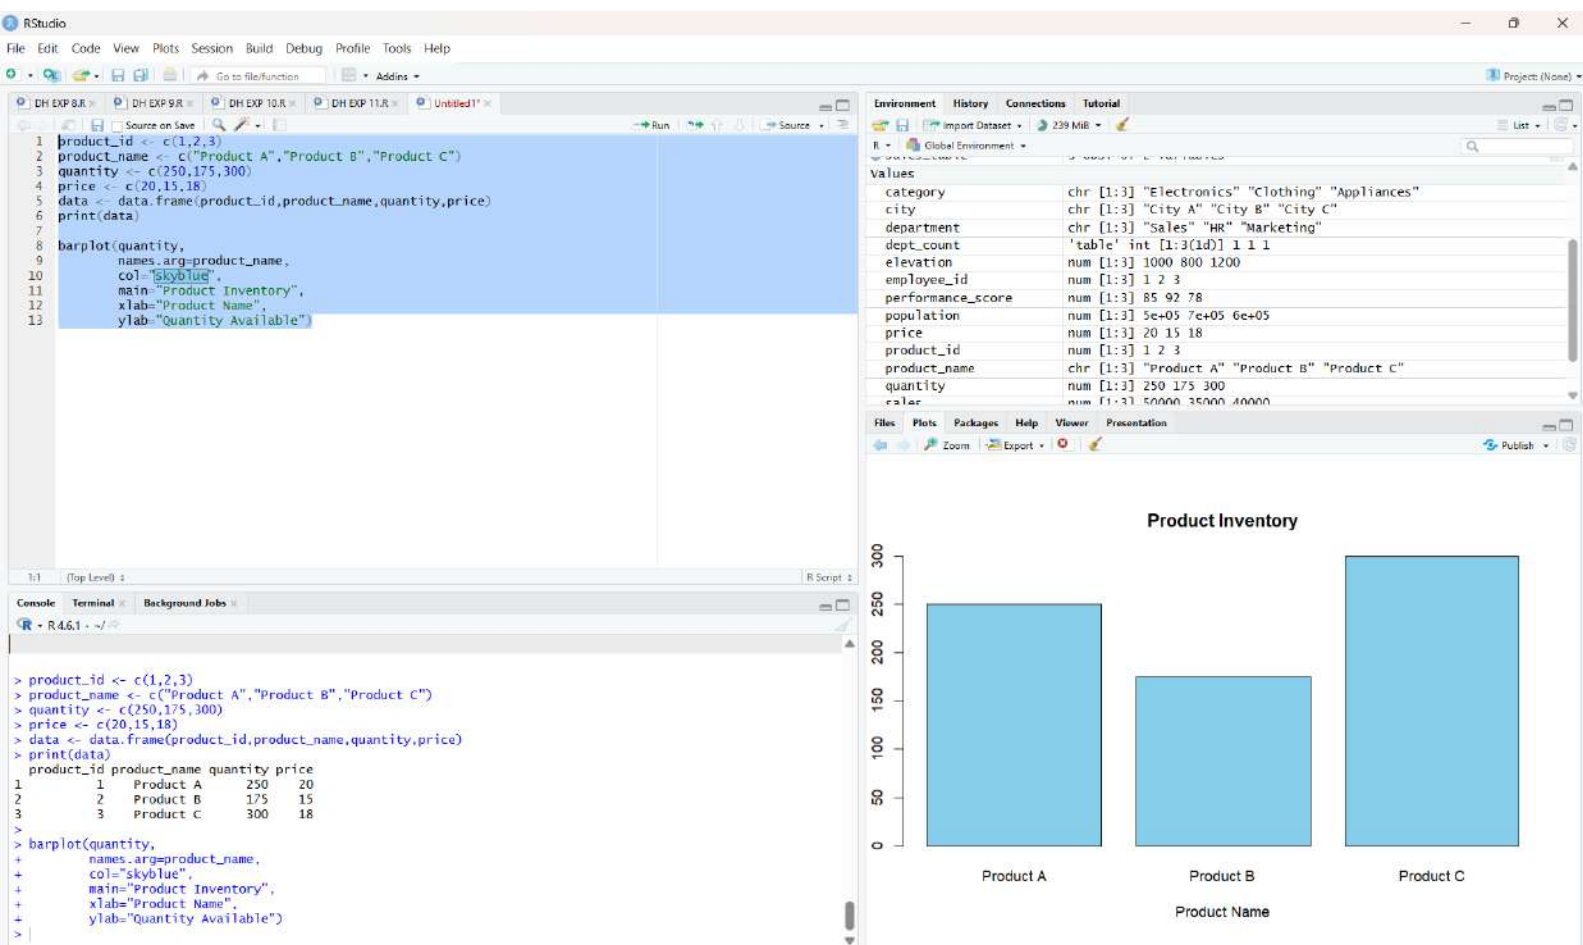

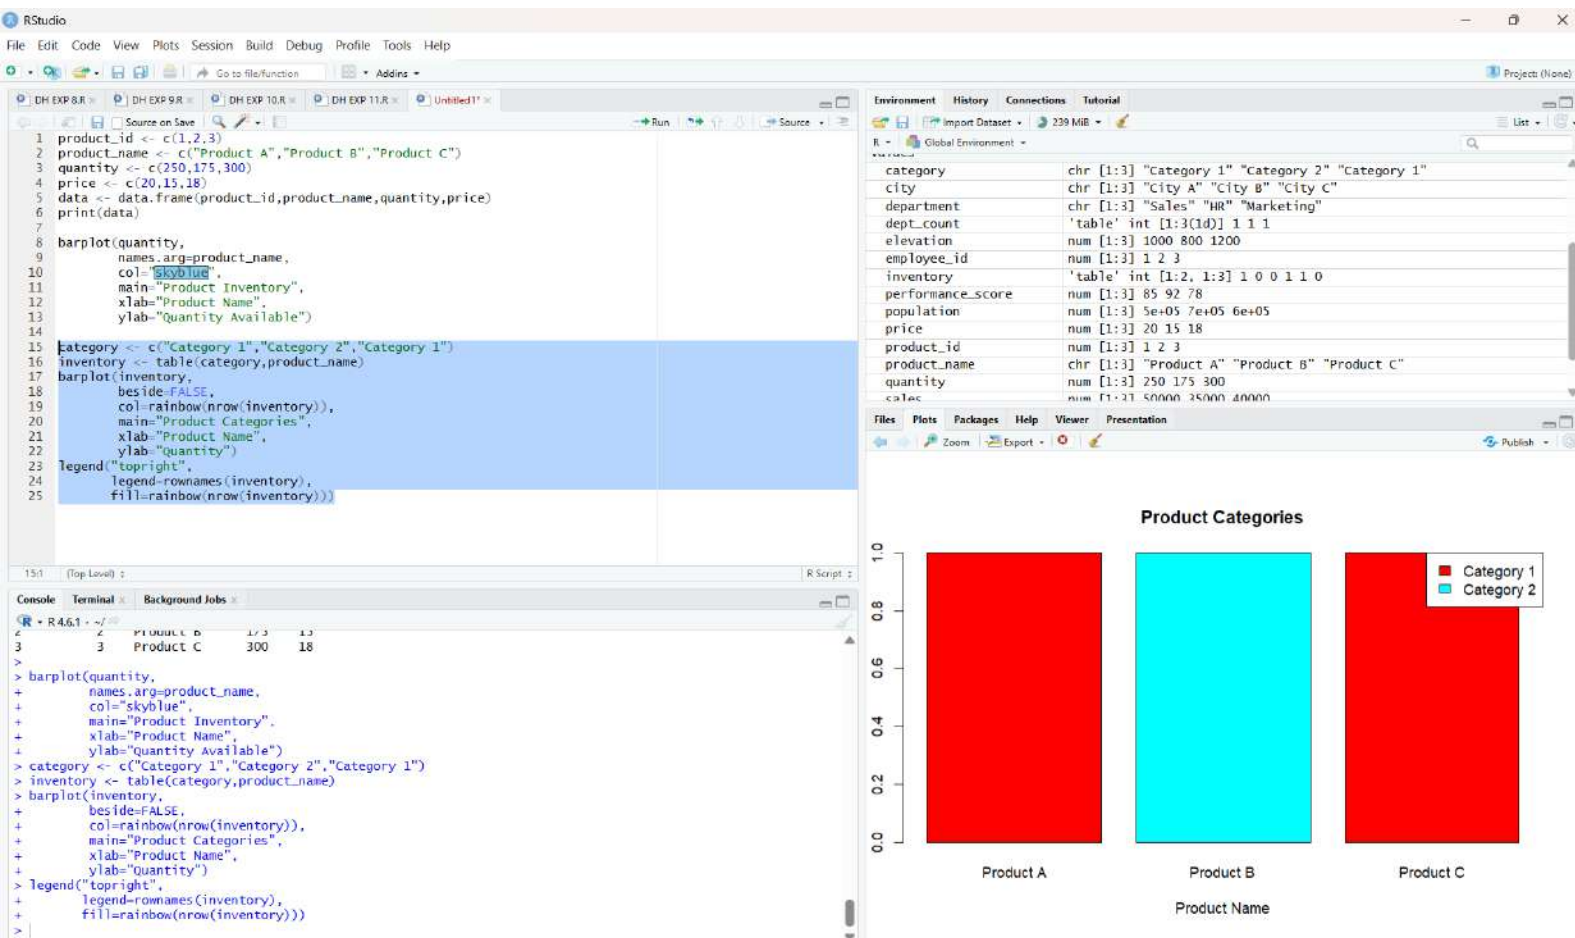

```
RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function Addins

DH EXP 8.R x DH EXP 9.R x DH EXP 10.R x DH EXP 11.R x Untitled1* x

Source on Save Run Source

5 data <- data.frame(product_id,product_name,quantity,price)
6 print(data)
7
8 barplot(quantity,
9         names.arg=product_name,
10        col="skyblue",
11        main="Product Inventory",
12        xlab="Product Name",
13        ylab="Quantity Available")
14
15 category <- c("Category 1","Category 2","Category 1")
16 inventory <- table(category,product_name)
17 barplot(inventory,
18        beside=FALSE,
19        col=rainbow(nrow(inventory)),
20        main="Product Categories",
21        xlab="Product Name",
22        ylab="Quantity")
23 legend("topright",
24        legend=rownames(inventory),
25        fill=rainbow(nrow(inventory)))
26
27 inventory_table <- data.frame(
28   Product_ID=product_id,
29   Product_Name=product_name,
30   Quantity=quantity,
31   Price=price
32 )
33 print(inventory_table)
```

```
Console Terminal Background Jobs x

R 4.6.1 ~ /
> barplot(inventory,
+         beside=FALSE,
+         col=rainbow(nrow(inventory)),
+         main="Product Categories",
+         xlab="Product Name",
+         ylab="Quantity")
> legend("topright",
+        legend=rownames(inventory),
+        fill=rainbow(nrow(inventory)))
> inventory_table <- data.frame(
+   Product_ID=product_id,
+   Product_Name=product_name,
+   Quantity=quantity,
+   Price=price
+ )
> print(inventory_table)
  Product_ID Product_Name Quantity Price
1          1   Product A      250    20
2          2   Product B      175    15
3          3   Product C      300    18
> |
```

