



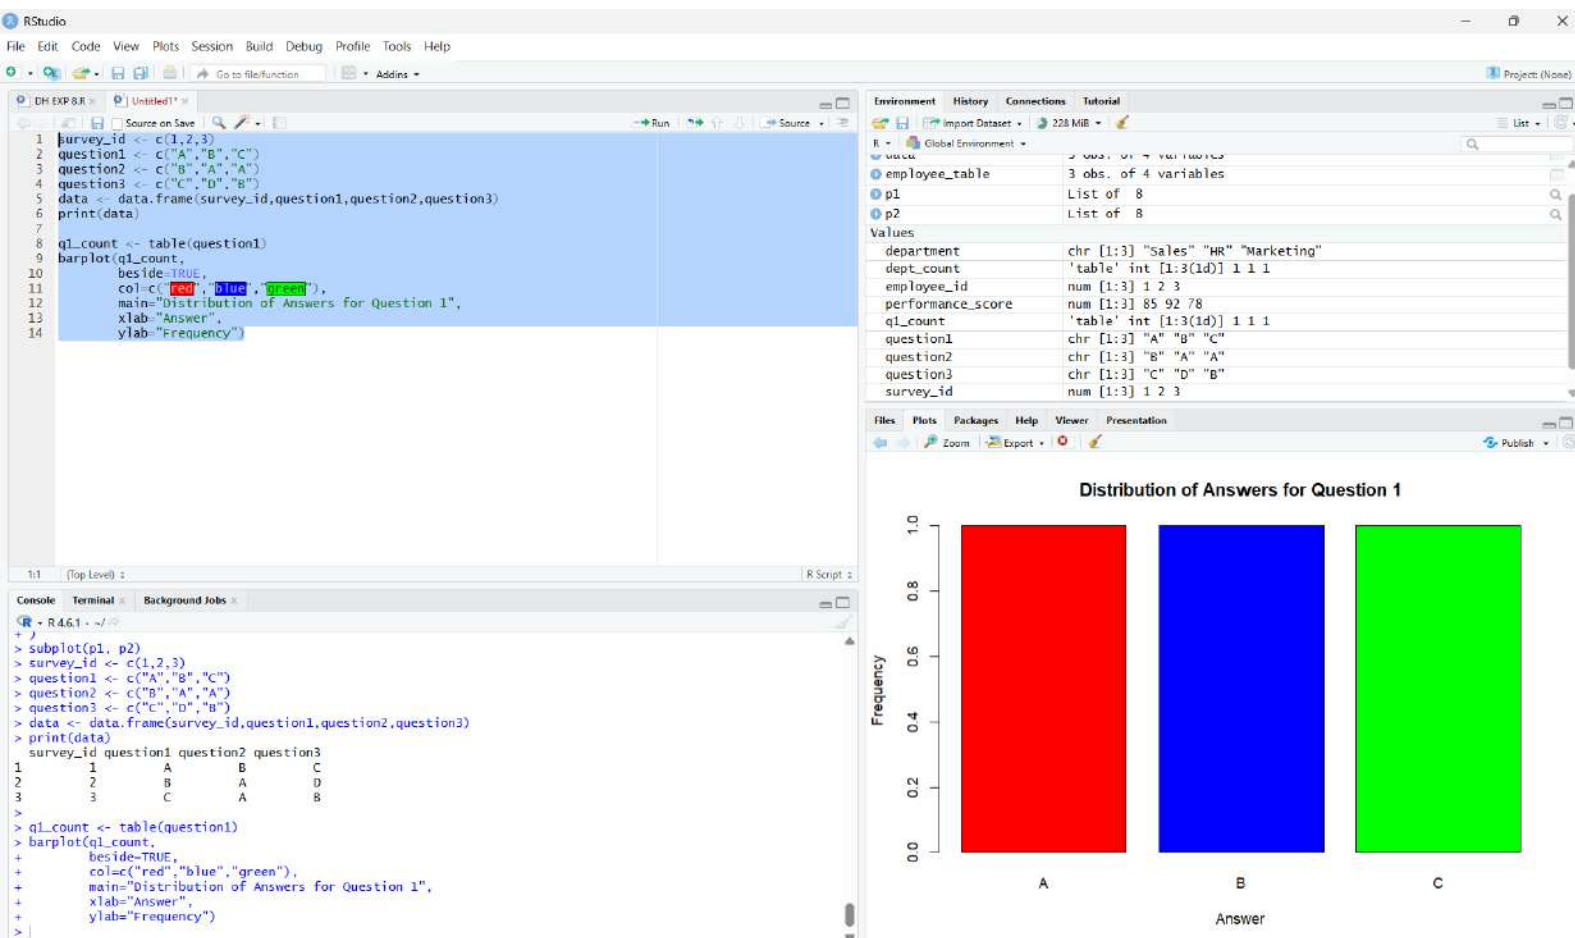

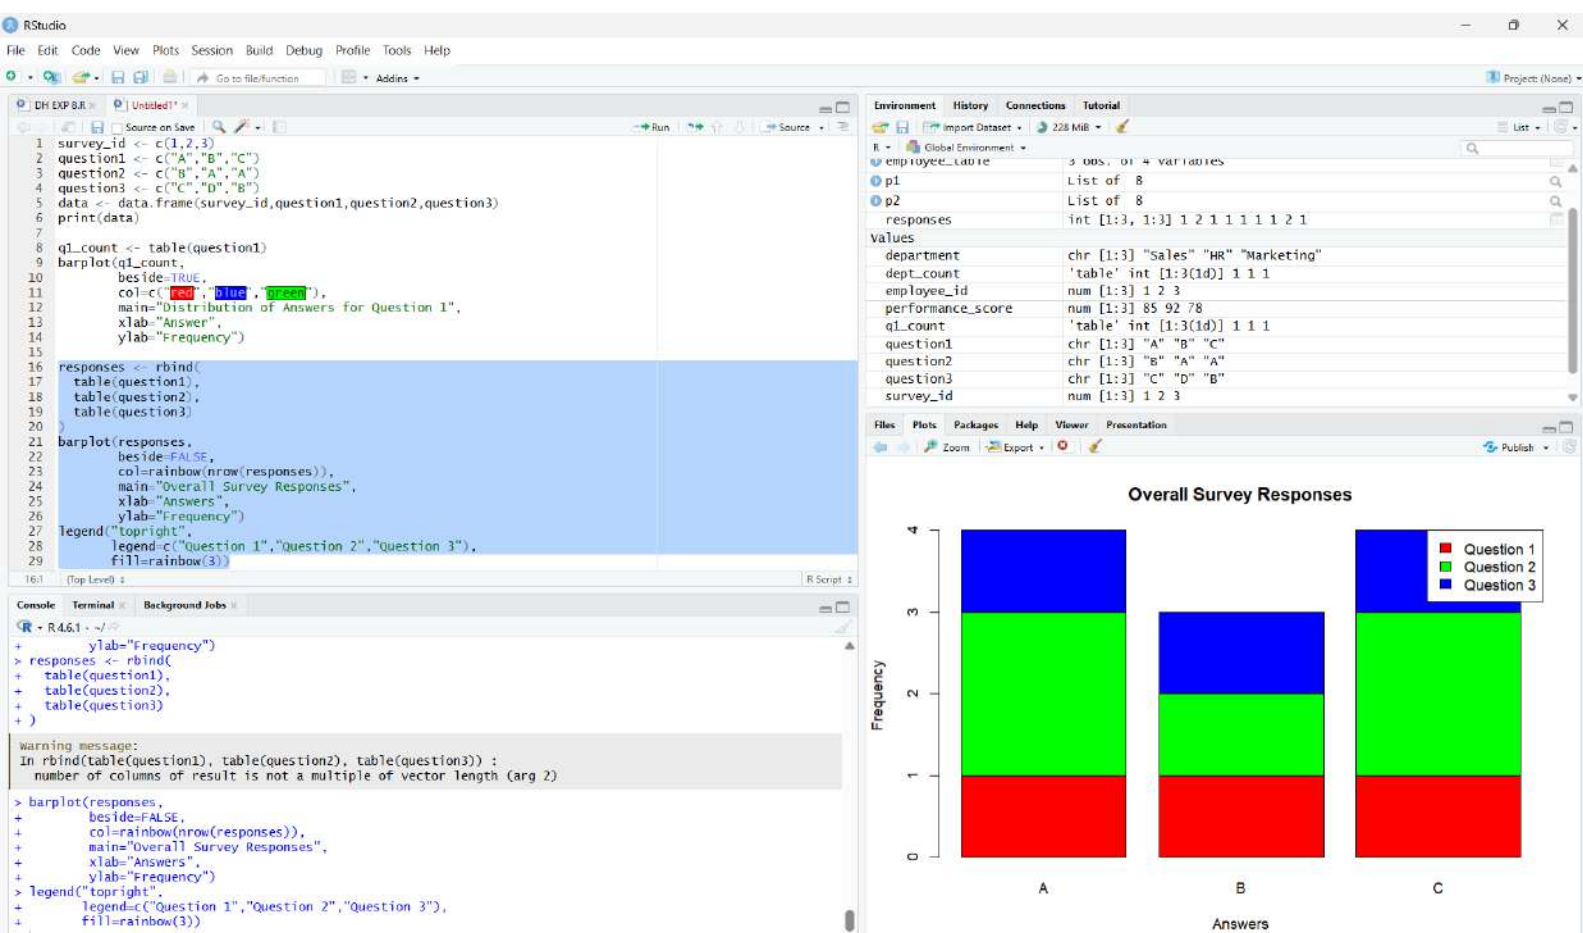

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function Addins

DH EXP 8.R x Untitled1* x

Source on Save Run Source

```
9 barplot(q1_count,
10         beside=TRUE,
11         col=c("red", "blue", "green"),
12         main="Distribution of Answers for Question 1",
13         xlab="Answer",
14         ylab="Frequency")
15
16 responses <- rbind(
17   table(question1),
18   table(question2),
19   table(question3)
20 )
21 barplot(responses,
22         beside=FALSE,
23         col=rainbow(nrow(responses)),
24         main="Overall Survey Responses",
25         xlab="Answers",
26         ylab="Frequency")
27 legend("topright",
28        legend=c("Question 1", "Question 2", "Question 3"),
29        fill=rainbow(3))
30
31 survey_table <- data.frame(
32   Survey_ID=survey_id,
33   Question1=question1,
34   Question2=question2,
35   Question3=question3
36 )
37 print(survey_table)
```

31:1 (Top Level) R Script

Console Terminal Background Jobs

R 4.6.1 ~ /

```
> barplot(responses,
+         beside=FALSE,
+         col=rainbow(nrow(responses)),
+         main="Overall Survey Responses",
+         xlab="Answers",
+         ylab="Frequency")
> legend("topright",
+        legend=c("Question 1", "Question 2", "Question 3"),
+        fill=rainbow(3))
> survey_table <- data.frame(
+   Survey_ID=survey_id,
+   Question1=question1,
+   Question2=question2,
+   Question3=question3
+ )
> print(survey_table)
  Survey_ID Question1 Question2 Question3
1         1         A         B         C
2         2         B         A         D
3         3         C         A         B
> |
```

