

Tugas Mata Kuliah Pemrograman Website
Laporan Hasil Pengerjaan Aktivitas Mandiri



Oleh :

Nisa Anjar Amelia (242410101003)


PROGRAM STUDI SISTEM INFORMASI
FAKULTAS ILMU KOMPUTER
UNIVERSITAS JEMBER

2026

AKTIVITAS MANDIRI 3


MEMBUAT LAYOUT MASTER & HALAMAN-HALAMAN

1. Membuat layout master: resources/views/layouts/app.blade.php dengan navbar, main content area (@yield('content')), dan folder

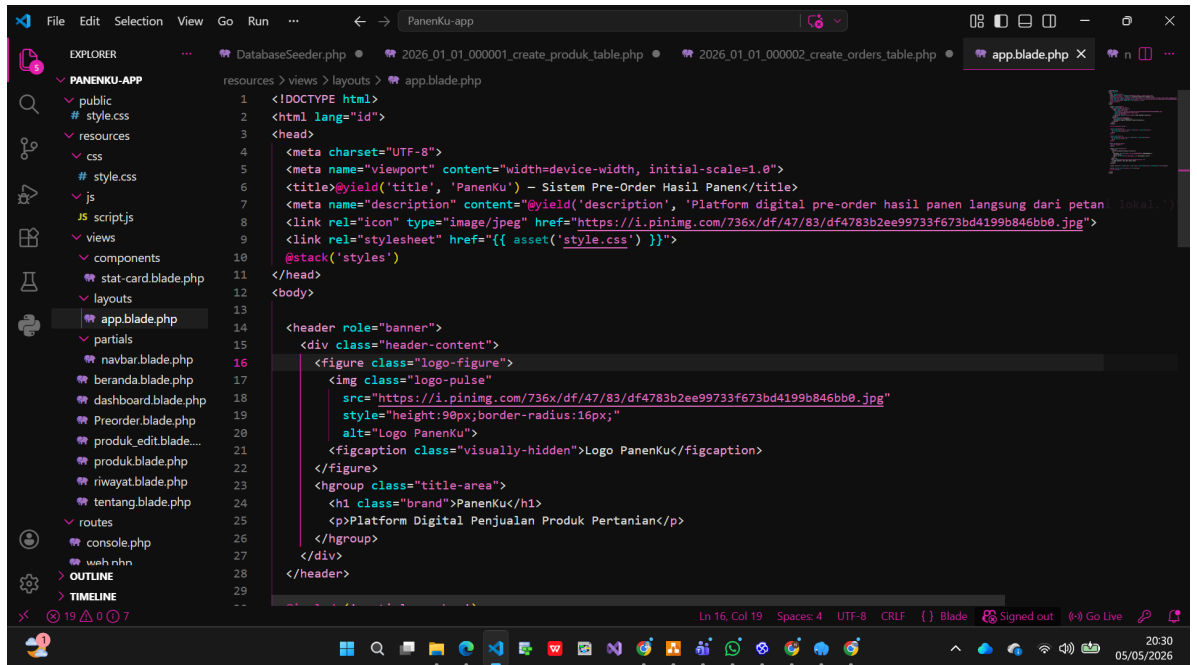


```
1 <!DOCTYPE html>
2 <html lang="id">
3 <head>
4 <meta charset="UTF-8">
5 <meta name="viewport" content="width=device-width, initial-scale=1.0">
6 <title>@yield('title', 'PanenKu') - Sistem Pre-Order Hasil Panen</title>
7 <meta name="description" content="@yield('description', 'Platform digital pre-order hasil panen langsung dari petani lokal')>
8 <link rel="icon" type="image/jpeg" href="https://i.pinimg.com/736x/df/47/83/df4783b2ee99733f673bd4199b846bb0.jpg">
9 <link rel="stylesheet" href="{{ asset('style.css') }}">
10 @stack('styles')
11 </head>
12 <body>
13
14 <header role="banner">
15 <div class="header-content">
16 <figure class="logo-figure">
17 
21 <figcaption class="visually-hidden">Logo PanenKu</figcaption>
22 </figure>
23 <hgroup class="title-area">
24 <h1 class="brand">PanenKu</h1>
25 <p>Platform Digital Penjualan Produk Pertanian</p>
26 </hgroup>
27 </div>
28 </header>
29
30 <div class="main-content">
31 @yield('content')
32 </div>
33
34 <div class="page-footer">
35 <div class="row">
36 <div class="col">
37 <div class="row">
38 <div class="col">
39 <div class="row">
40 <div class="col">
41 <div class="row">
42 <div class="col">
43 <div class="row">
44 <div class="col">
45 <div class="row">
46 <div class="col">
47 <div class="row">
48 <div class="col">
49 <div class="row">
50 <div class="col">
51 <div class="row">
52 <div class="col">
53 <div class="row">
54 <div class="col">
55 <div class="row">
56 <div class="col">
```

2. Membuat partial: resources/views/partials/navbar.blade.php dan sisipkan dengan @include di layout

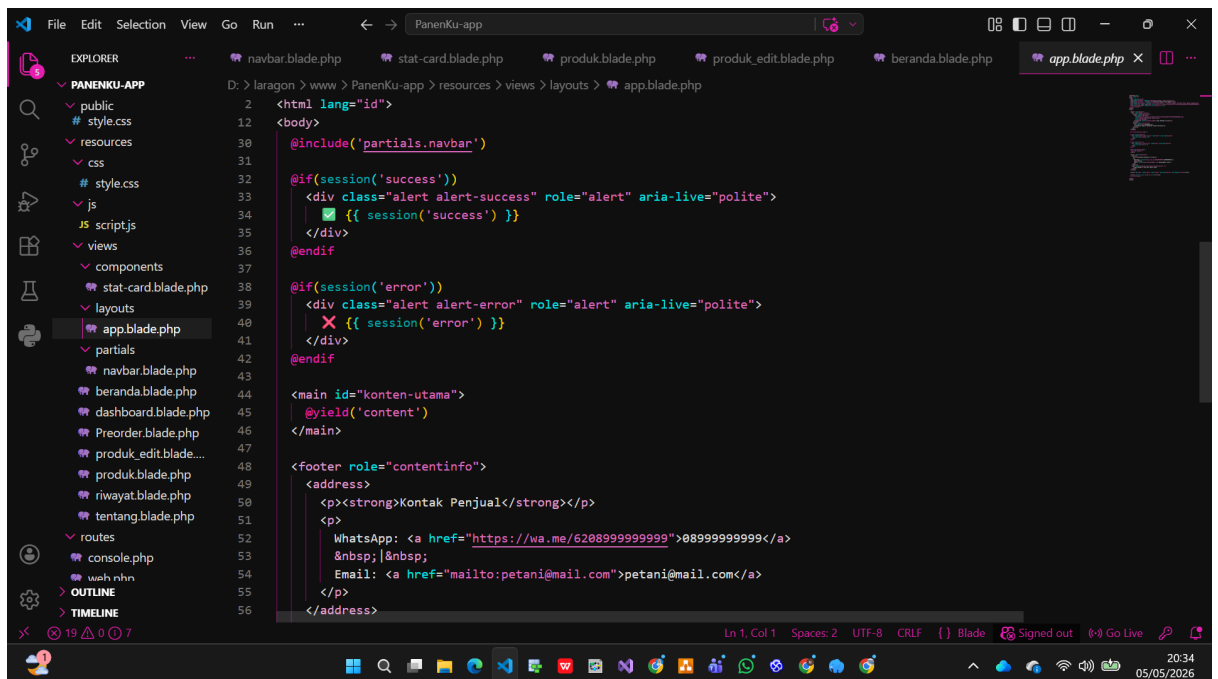


```
1 <div class="navbar">
2 <div class="row">
3 <div class="col">
4 <div class="row">
5 <div class="col">
6 <div class="row">
7 <div class="col">
8 <div class="row">
9 <div class="col">
10 <div class="row">
11 <div class="col">
12 <div class="row">
13 <div class="col">
14 <div class="row">
15 <div class="col">
16 <div class="row">
17 <div class="col">
18 <div class="row">
19 <div class="col">
20 <div class="row">
21 <div class="col">
22 <div class="row">
23 <div class="col">
24 <div class="row">
25 <div class="col">
26 <div class="row">
27 <div class="col">
28 <div class="row">
29 <div class="col">
30 <div class="row">
31 <div class="col">
32 <div class="row">
33 <div class="col">
34 <div class="row">
35 <div class="col">
36 <div class="row">
37 <div class="col">
38 <div class="row">
39 <div class="col">
40 <div class="row">
41 <div class="col">
42 <div class="row">
43 <div class="col">
44 <div class="row">
45 <div class="col">
46 <div class="row">
47 <div class="col">
48 <div class="row">
49 <div class="col">
50 <div class="row">
51 <div class="col">
52 <div class="row">
53 <div class="col">
54 <div class="row">
55 <div class="col">
56 <div class="row">
57 <div class="col">
```

3. Membuat halaman dashboard: resources/views/dashboard.blade.php yang @extends('layouts.app')


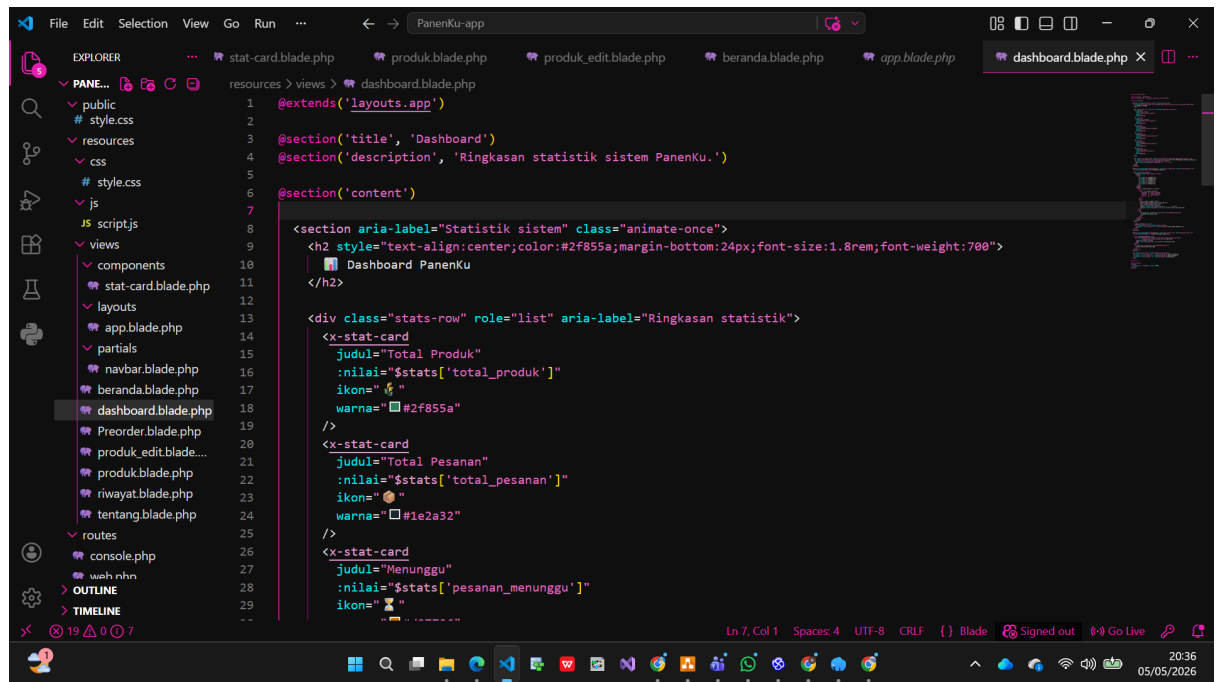


```
1 @extends('layouts.app')
2
3 @section('title', 'Dashboard')
4 @section('description', 'Ringkasan statistik sistem PanenKu.')
5
6 @section('content')
7
8 <section aria-label="Statistik sistem" class="animate-once">
9   <h2 style="text-align:center;color:#2f855a;margin-bottom:24px;font-size:1.8rem;font-weight:700">
10     Dashboard PanenKu
11   </h2>
12
13   <div class="stats-row" role="list" aria-label="Ringkasan statistik">
14     <x-stat-card
15       judul="Total Produk"
16       :nilai="$stats['total_produk']"
17       ikon="📦"
18       warna="#2f855a"
19     />
20     <x-stat-card
21       judul="Total Pesanan"
22       :nilai="$stats['total_pesanan']"
23       ikon="📦"
24       warna="#1e2a32"
25     />
26     <x-stat-card
27       judul="Menunggu"
28       :nilai="$stats['pesanan_menunggu']"
29       ikon="⌚"
30     />
31   </div>
32 </section>
```

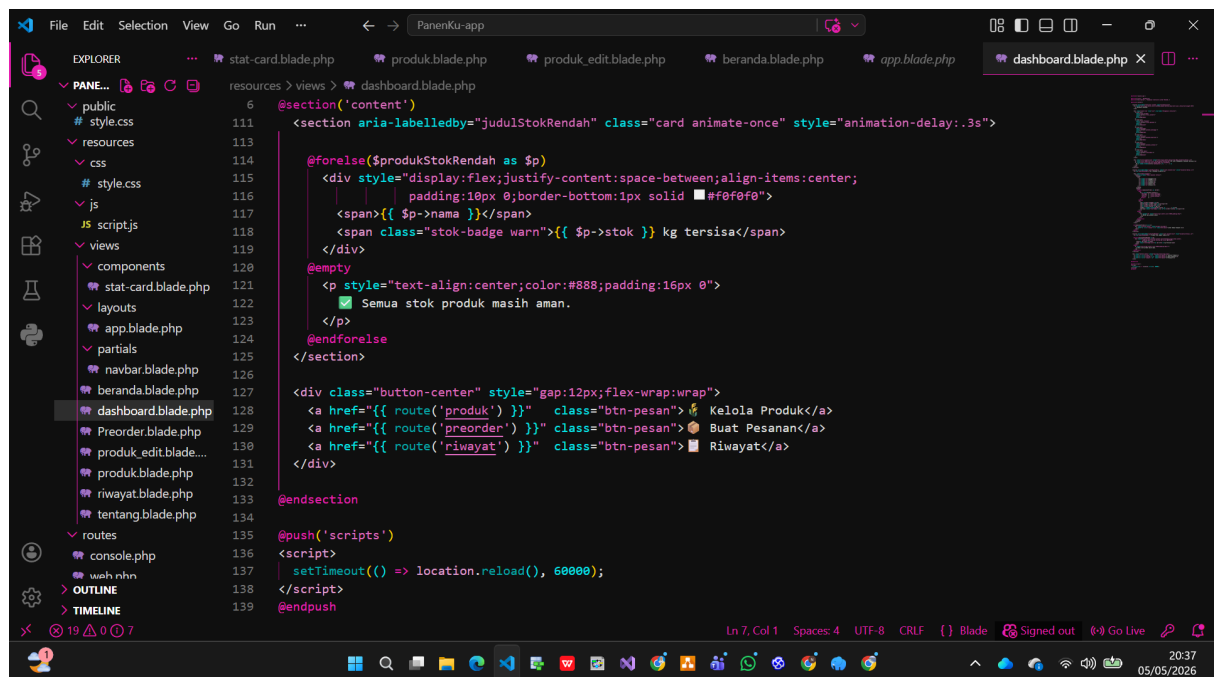

```
111 @section('content')
112 <section aria-labelledby="judulStokRendah" class="card animate-once" style="animation-delay:.3s">
113
114   @forelse($produkStokRendah as $p)
115     <div style="display:flex;justify-content:space-between;align-items:center;
116       padding:10px 0;border-bottom:1px solid #f0f0f0">
117       <span>{{ $p->nama }}</span>
118       <span class="stok-badge warn">{{ $p->stok }} kg tersisa</span>
119     </div>
120     @empty
121     <p style="text-align:center;color:#888;padding:16px 0">
122       Semua stok produk masih aman.
123     </p>
124   @endforelse
125 </section>
126
127 <div class="button-center" style="gap:12px;flex-wrap:wrap">
128   <a href="{{ route('produk') }}" class="btn-pesan">📦 Kelola Produk</a>
129   <a href="{{ route('preorder') }}" class="btn-pesan">📦 Buat Pesanan</a>
130   <a href="{{ route('riwayat') }}" class="btn-pesan">📦 Riwayat</a>
131 </div>
132
133 @endsection
134
135 @push('scripts')
136 <script>
137   setTimeout(() => location.reload(), 60000);
138 </script>
139 @endpush
```


4. Tampilkan flash session message di layout: `@if(session('success')) ... @endif`

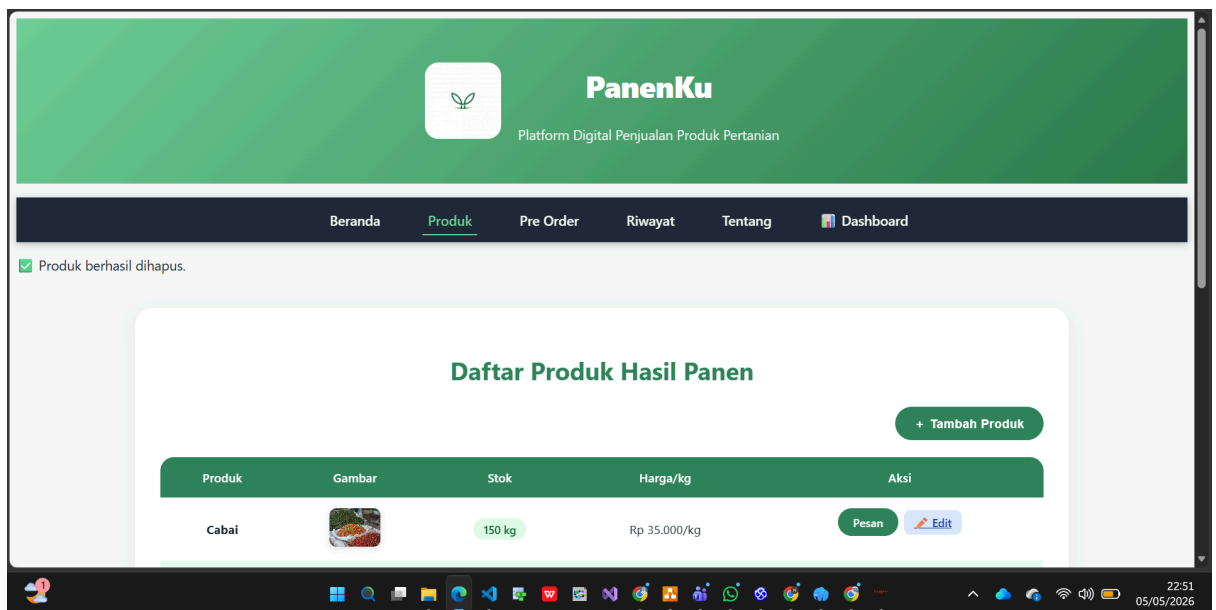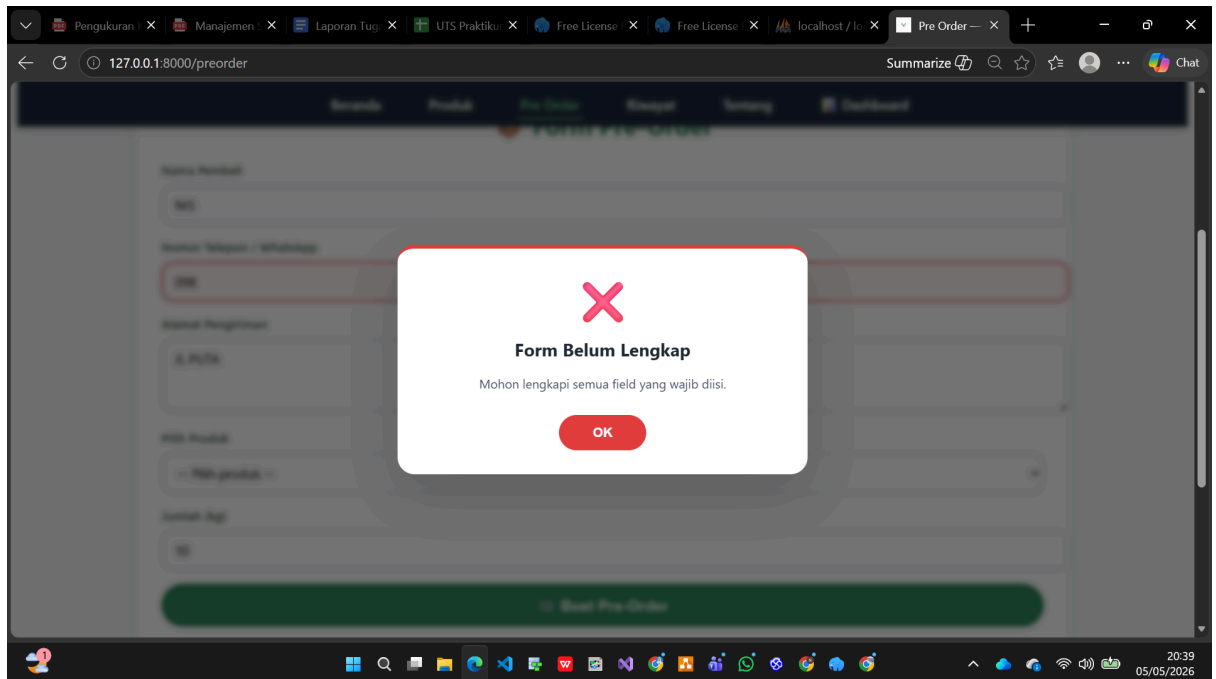

5. Membuat komponen: `resources/views/components/stat-card.blade.php` (kartu statistik dengan props: judul, nilai, ikon, warna)

```
>
PS D:\laragon\www\PanenKu-app> php artisan make:component stat-card


[INFO] Component [D:\laragon\www\PanenKu-app\app\View\Components\stat-card.php] created successfully.
```

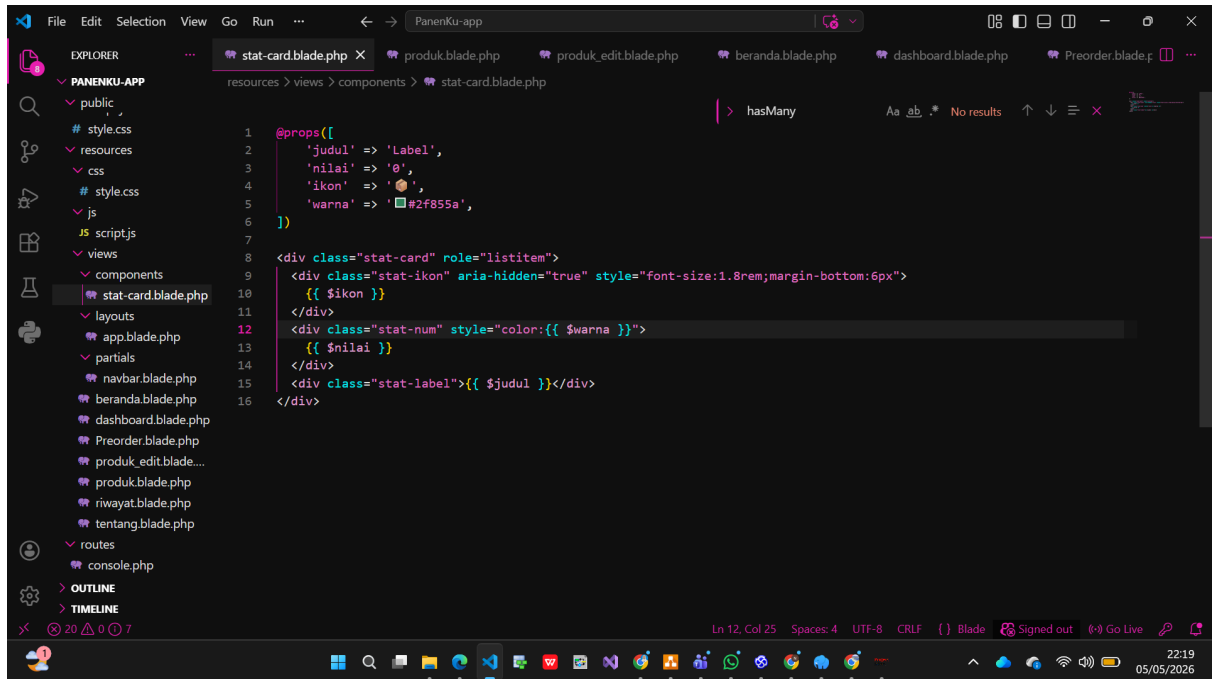


The screenshot shows the Visual Studio Code editor interface. The Explorer panel on the left displays the project structure for 'PANENKU-APP', with the 'components' folder expanded and 'stat-card.blade.php' selected. The main editor area shows the content of 'stat-card.blade.php' with the following code:

```
1  @props([
2      'judul' => 'Label',
3      'nilai' => '0',
4      'ikon'  => '🍌',
5      'warna' => '#2f855a',
6  ])
7
8  <div class="stat-card" role="listitem">
9      <div class="stat-ikon" aria-hidden="true" style="font-size:1.8rem;margin-bottom:6px">
10         {{ $ikon }}
11     </div>
12     <div class="stat-num" style="color:{{ $warna }}">
13         {{ $nilai }}
14     </div>
15     <div class="stat-label">{{ $judul }}</div>
16 </div>
```


The status bar at the bottom indicates the current position is Line 12, Column 25, with 4 spaces, UTF-8 encoding, and CRLF line endings. It also shows the file is using Blade templating, the user is signed out, and there are 20 errors and 7 warnings in the project.

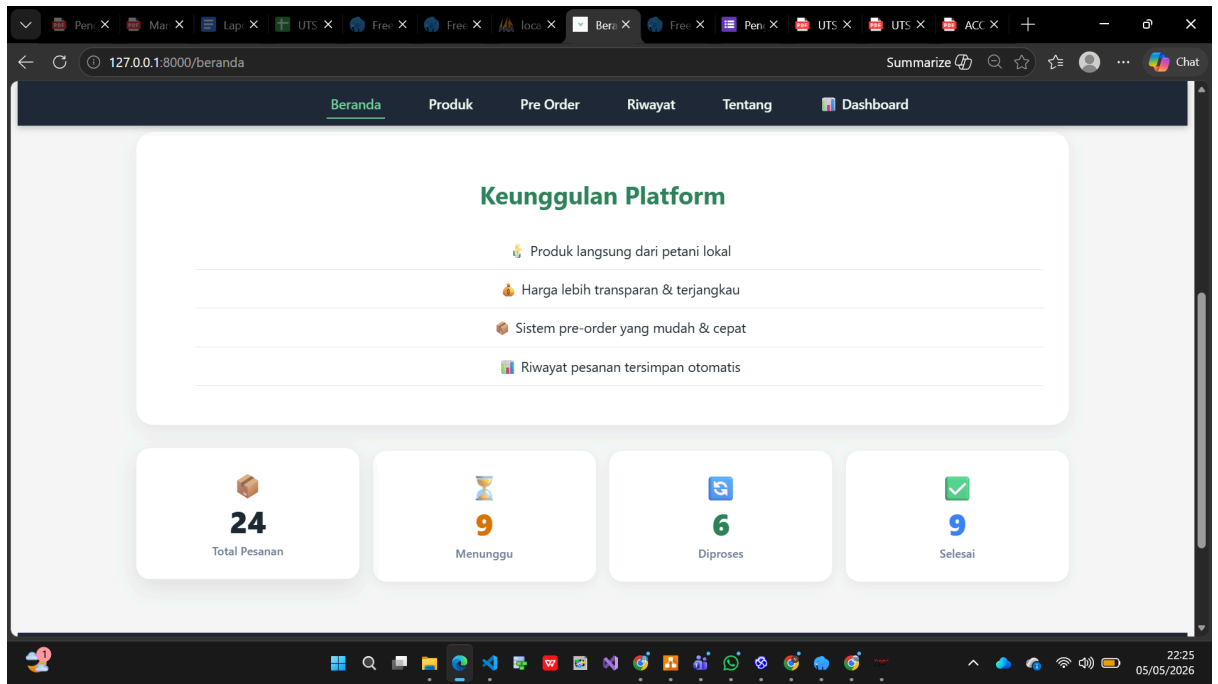


6. Gunakan `@forelse` di dashboard untuk loop array data dummy (jumlah mahasiswa, mata kuliah, dll)

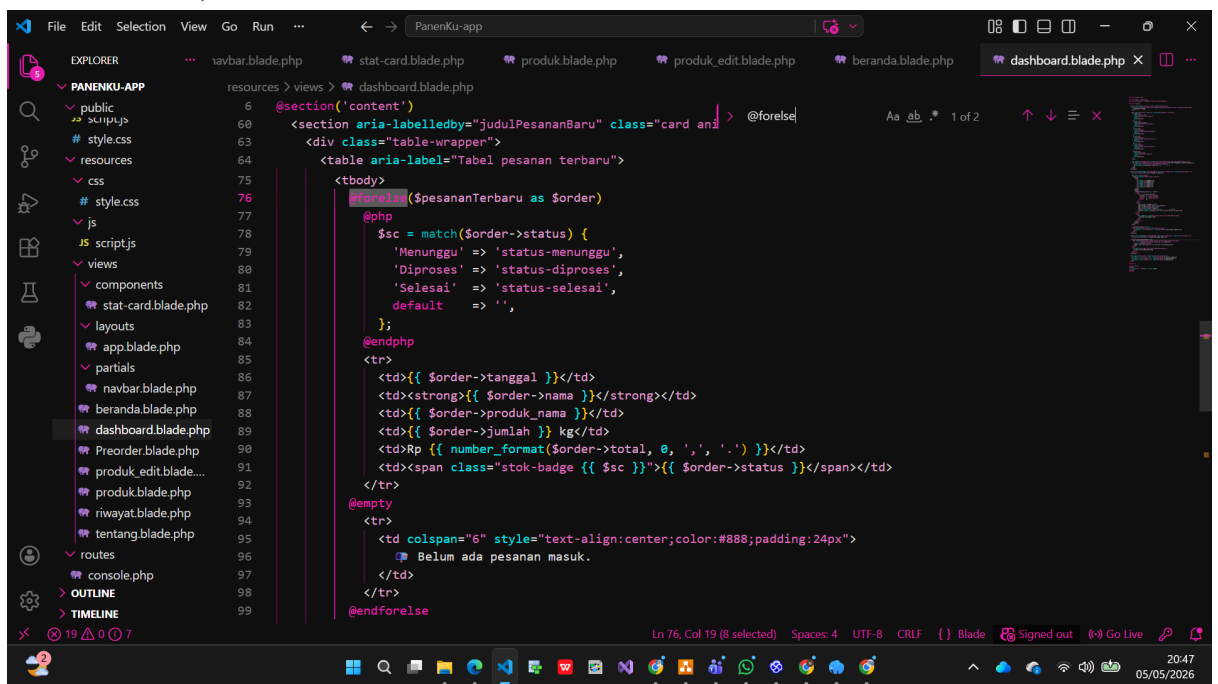


7. Membuat halaman 'Tentang' dan 'Kontak' yang @extends layout yang sama

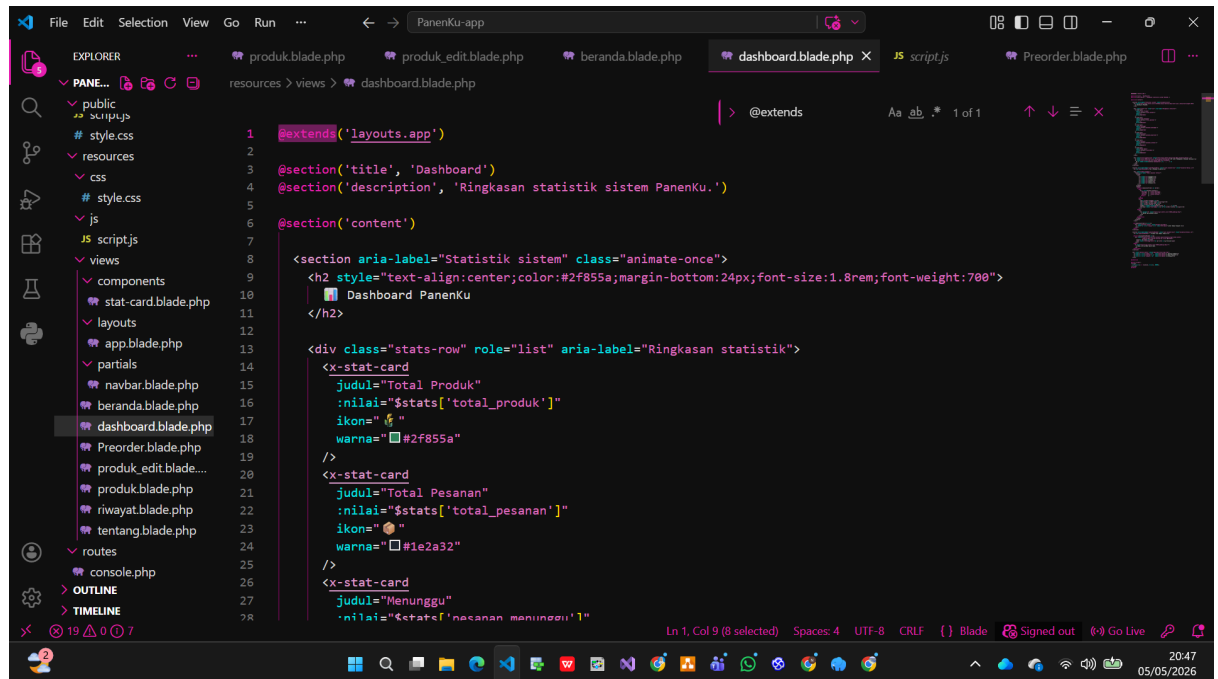


```
1 @extends('layouts.app')
2
3 @section('title', 'Dashboard')
4 @section('description', 'Ringkasan statistik sistem PanenKu.')
5
6 @section('content')
7
8 <section aria-label="Statistik sistem" class="animate-once">
9   <h2 style="text-align:center;color:#2f855a;margin-bottom:24px;font-size:1.8rem;font-weight:700">
10     Dashboard PanenKu
11   </h2>
12
13   <div class="stats-row" role="list" aria-label="Ringkasan statistik">
14     <x-stat-card
15       judul="Total Produk"
16       :nilai="$stats['total_produk']"
17       ikon="📦"
18       warna="#2f855a"
19     />
20     <x-stat-card
21       judul="Total Pesanan"
22       :nilai="$stats['total_pesanan']"
23       ikon="👤"
24       warna="#1e2a32"
25     />
26     <x-stat-card
27       judul="Menunggu"
28       :nilai="$stats['pesanan_menunggu']"
29     />
30   </div>
31 </section>
```

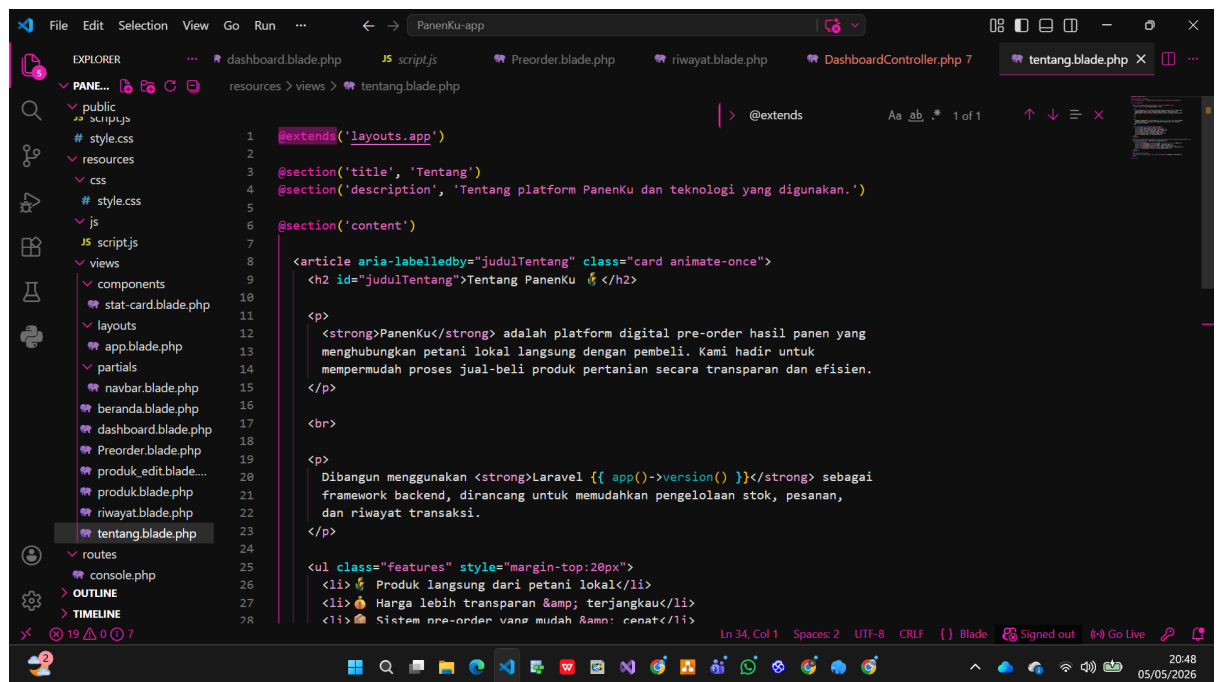

```
1 @extends('layouts.app')
2
3 @section('title', 'Tentang')
4 @section('description', 'Tentang platform PanenKu dan teknologi yang digunakan.')
5
6 @section('content')
7
8 <article aria-labelledby="judulTentang" class="card animate-once">
9   <h2 id="judulTentang">Tentang PanenKu 🌱</h2>
10
11   <p>
12     <strong>PanenKu</strong> adalah platform digital pre-order hasil panen yang
13     menghubungkan petani lokal langsung dengan pembeli. Kami hadir untuk
14     mempermudah proses jual-beli produk pertanian secara transparan dan efisien.
15   </p>
16
17   <br>
18
19   <p>
20     Dibangun menggunakan <strong>Laravel {{ app()->version() }}</strong> sebagai
21     framework backend, dirancang untuk memudahkan pengelolaan stok, pesanan,
22     dan riwayat transaksi.
23   </p>
24
25   <ul class="features" style="margin-top:20px">
26     <li>🌱 Produk langsung dari petani lokal</li>
27     <li>👤 Harga lebih transparan & terjangkau</li>
28     <li>📦 Sistem pre-order yang mudah & cepat</li>
29   </ul>
30 </article>
```

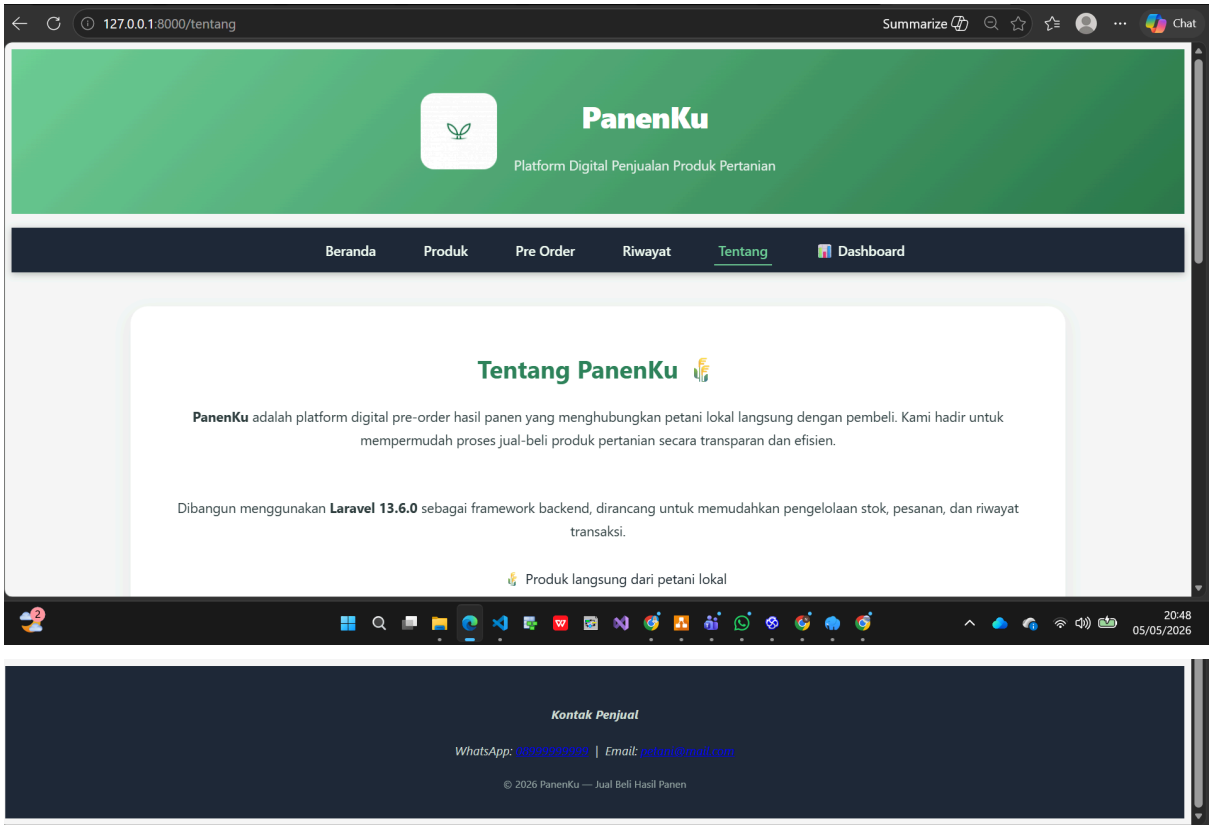


8. Menggunakan @push('scripts') dan @stack('scripts') untuk menambahkan JavaScript spesifik per halaman

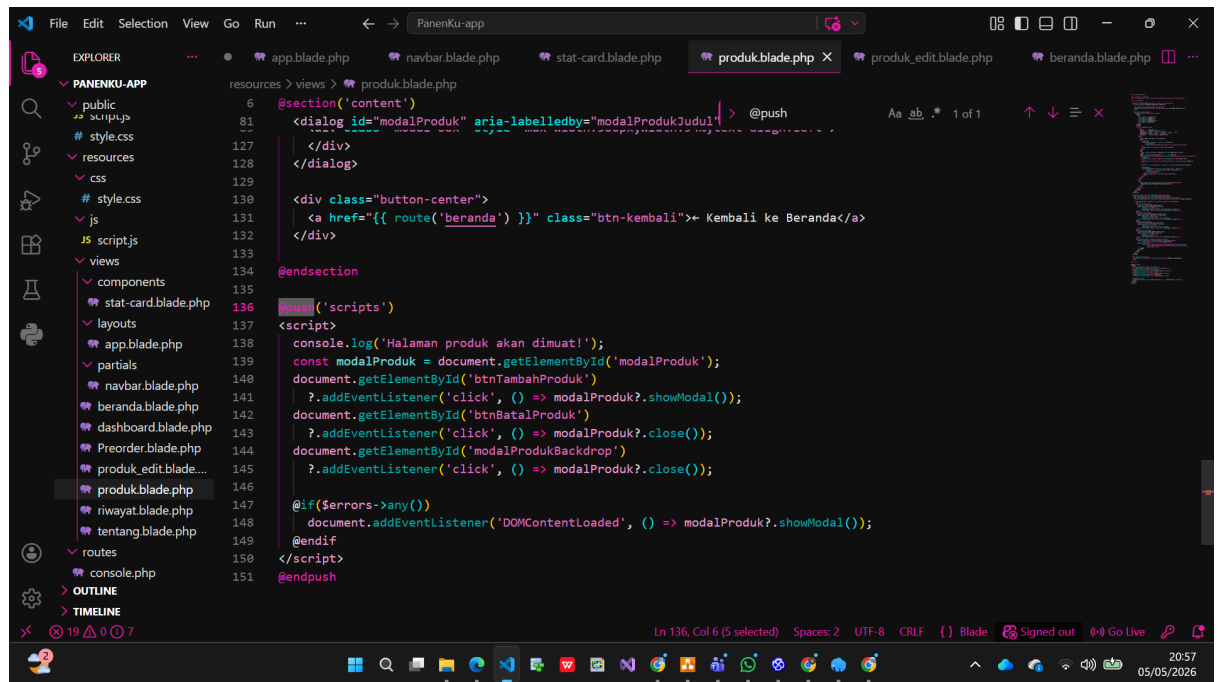


This screenshot shows the VS Code editor with the file explorer on the left displaying the project structure. The main editor window shows the `produk.blade.php` file. The code uses the `@push('scripts')` directive to add JavaScript to the page. The JavaScript code logs a message and sets up event listeners for a modal product form.

```
resources > views > produk.blade.php
136 @push('scripts')
137 <script>
138     console.log('Halaman produk akan dimuat!');
139     const modalProduk = document.getElementById('modalProduk');
140     document.getElementById('btnTambahProduk')
141     ?.addEventListener('click', () => modalProduk?.showModal());
142     document.getElementById('btnBatalProduk')
143     ?.addEventListener('click', () => modalProduk?.close());
144     document.getElementById('modalProdukBackdrop')
145     ?.addEventListener('click', () => modalProduk?.close());
146
147     @if($errors->any())
148         document.addEventListener('DOMContentLoaded', () => modalProduk?.showModal());
149     @endif
150 </script>
151 @endpush
```

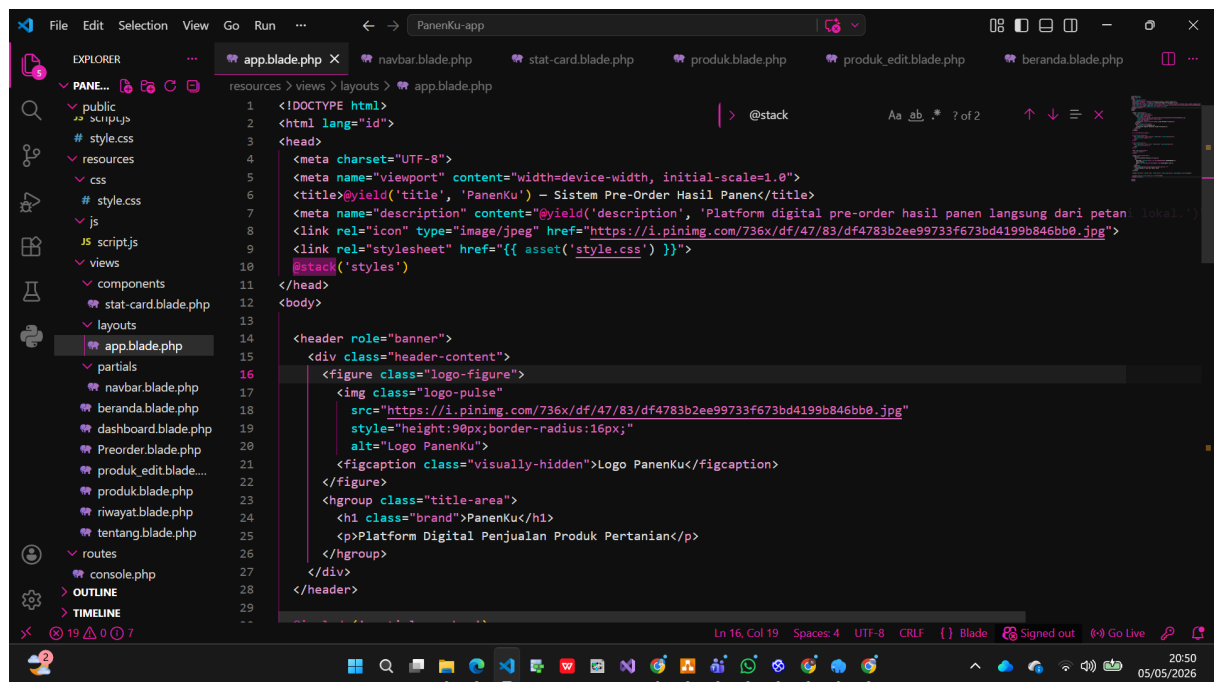

This screenshot shows the VS Code editor with the file explorer on the left displaying the project structure. The main editor window shows the `app.blade.php` file. The code uses the `@stack('scripts')` directive to include JavaScript from other pages. The code also includes the basic HTML structure for the application.


```
resources > views > layouts > app.blade.php
1 <!DOCTYPE html>
2 <html lang="id">
3 <head>
4     <meta charset="UTF-8">
5     <meta name="viewport" content="width=device-width, initial-scale=1.0">
6     <title>@yield('title', 'PanenKu') - Sistem Pre-Order Hasil Panen</title>
7     <meta name="description" content="@yield('description', 'Platform digital pre-order hasil panen langsung dari petani lokal')>
8     <link rel="icon" type="image/jpeg" href="https://i.pinimg.com/736x/df/47/83/df4783b2ee99733f673bd4199b846bb0.jpg">
9     <link rel="stylesheet" href="{{ asset('style.css') }}">
10    @stack('styles')
11 </head>
12 <body>
13
14    <header role="banner">
15        <div class="header-content">
16            <figure class="logo-figure">
17                
21                <figcaption class="visually-hidden">Logo PanenKu</figcaption>
22            </figure>
23            <hgroup class="title-area">
24                <h1 class="brand">PanenKu</h1>
25                <p>Platform Digital Penjualan Produk Pertanian</p>
26            </hgroup>
27        </div>
28    </header>
29
```

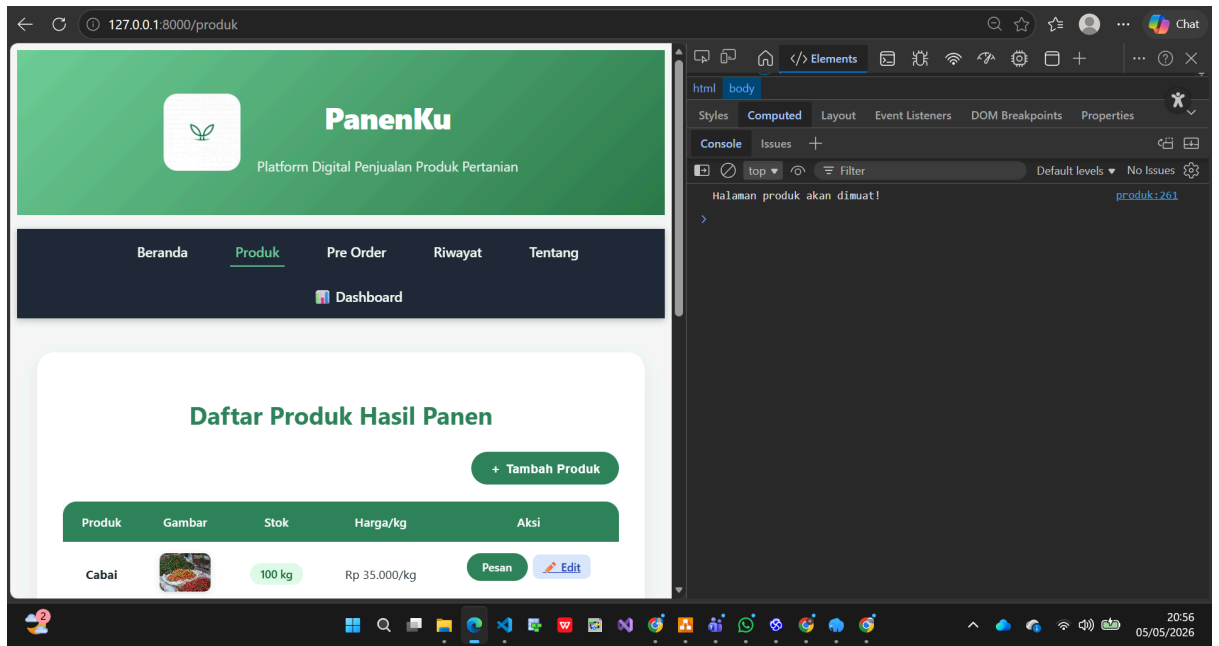

AKTIVITAS MANDIRI 4

MIGRATION, MODEL, & SEEDER


1. Buat Model dan Migration sekaligus: php artisan make:model Mahasiswa -m

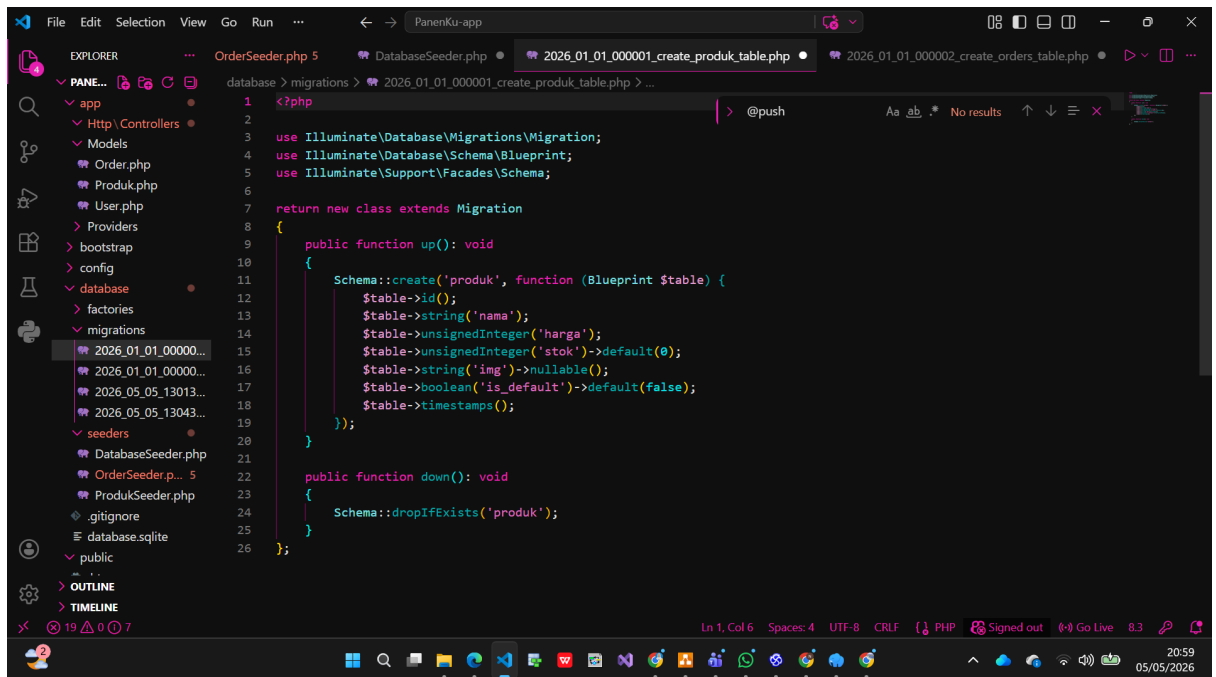

The screenshot shows the VS Code editor with the file explorer on the left. The 'migrations' folder is expanded, showing several files. The file '2026_01_01_000001_create_produk_table.php' is selected and its content is displayed in the editor. The code defines a migration class that creates a 'produk' table with columns: id, nama, harga, stok, img, is_default, and timestamps.

```
<?php
1
2
3 use Illuminate\Database\Migrations\Migration;
4 use Illuminate\Database\Schema\Blueprint;
5 use Illuminate\Support\Facades\Schema;
6
7 return new class extends Migration
8 {
9     public function up(): void
10     {
11         Schema::create('produk', function (Blueprint $table) {
12             $table->id();
13             $table->string('nama');
14             $table->unsignedInteger('harga');
15             $table->unsignedInteger('stok')->default(0);
16             $table->string('img')->nullable();
17             $table->boolean('is_default')->default(false);
18             $table->timestamps();
19         });
20     }
21
22     public function down(): void
23     {
24         Schema::dropIfExists('produk');
25     }
26 };
```


2. Edit file migration: tambahkan kolom nim, nama, email, jurusan (enum), ipk (decimal), semester, aktif (boolean), foto (nullable)

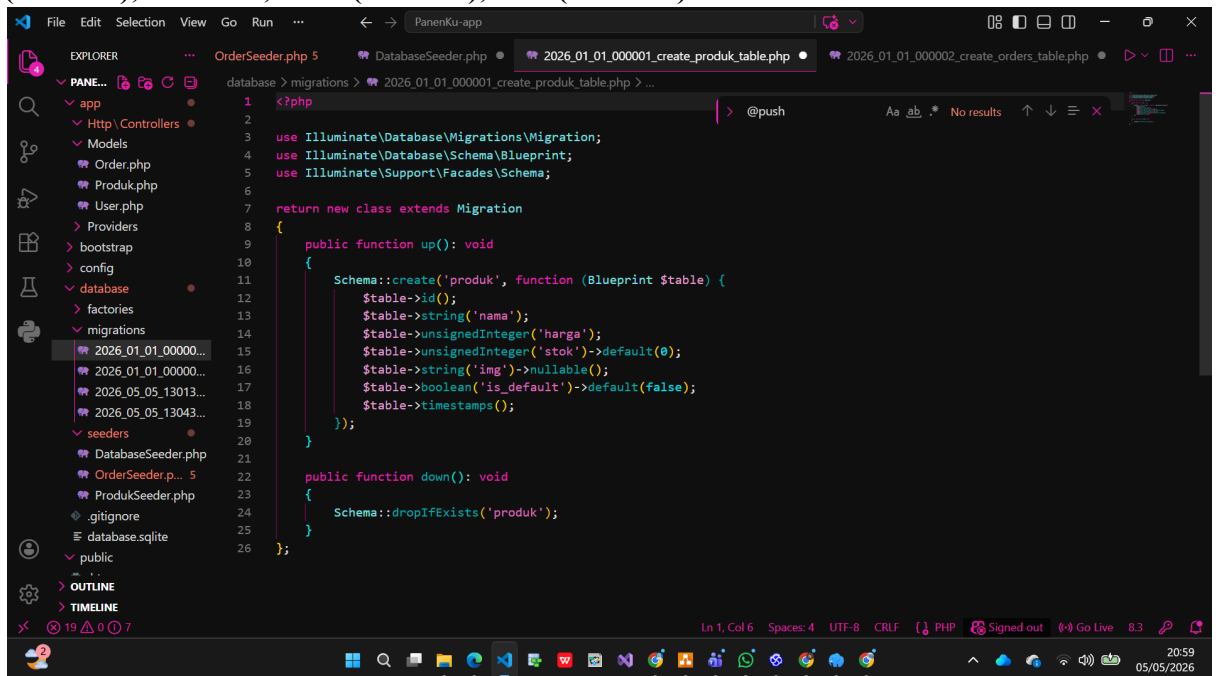


The screenshot shows the VS Code editor with the file explorer on the left. The 'migrations' folder is expanded, showing several files. The file '2026_01_01_000001_create_produk_table.php' is selected and its content is displayed in the editor. The code defines a migration class that creates a 'produk' table with columns: id, nama, harga, stok, img, is_default, and timestamps.

```
<?php
1
2
3 use Illuminate\Database\Migrations\Migration;
4 use Illuminate\Database\Schema\Blueprint;
5 use Illuminate\Support\Facades\Schema;
6
7 return new class extends Migration
8 {
9     public function up(): void
10     {
11         Schema::create('produk', function (Blueprint $table) {
12             $table->id();
13             $table->string('nama');
14             $table->unsignedInteger('harga');
15             $table->unsignedInteger('stok')->default(0);
16             $table->string('img')->nullable();
17             $table->boolean('is_default')->default(false);
18             $table->timestamps();
19         });
20     }
21
22     public function down(): void
23     {
24         Schema::dropIfExists('produk');
25     }
26 };
```


3. Jalankan migration: php artisan migrate — cek di phpMyAdmin bahwa tabel sudah terbuat

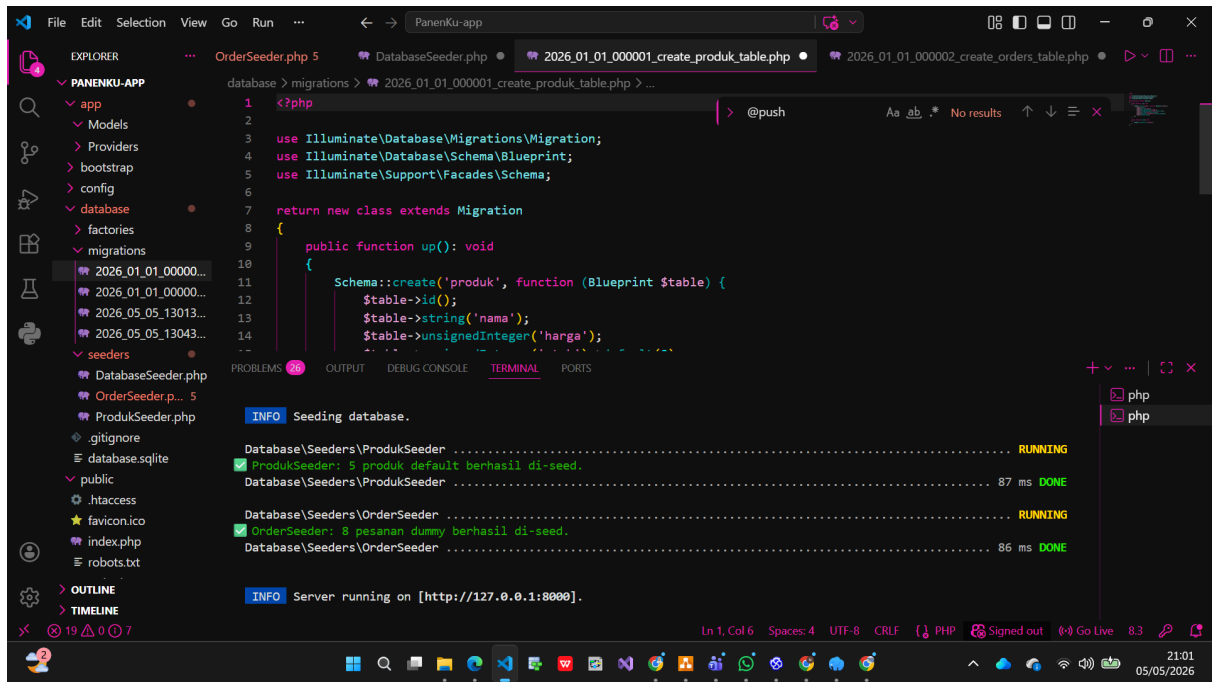

4. Edit Model Mahasiswa: isi \$fillable, tambahkan \$casts, dan buat local scope scopeAktif()

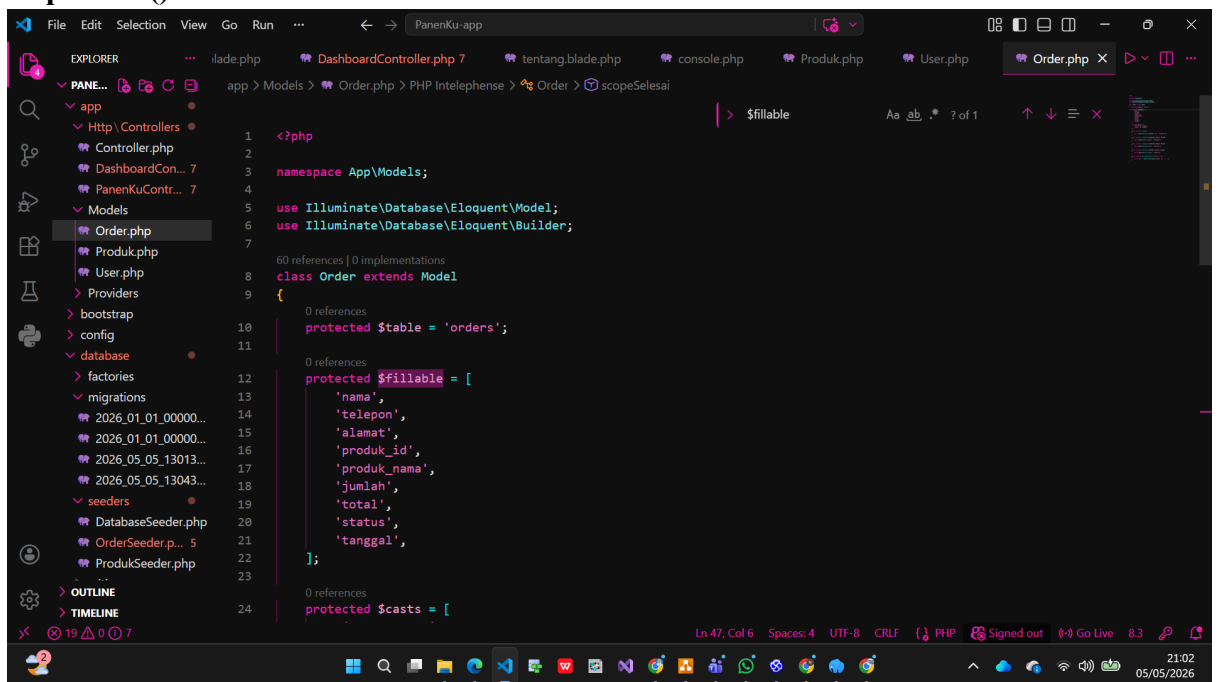

5. Buat seeder: php artisan make:seeder MahasiswaSeeder — isi dengan 5-10 data dummy

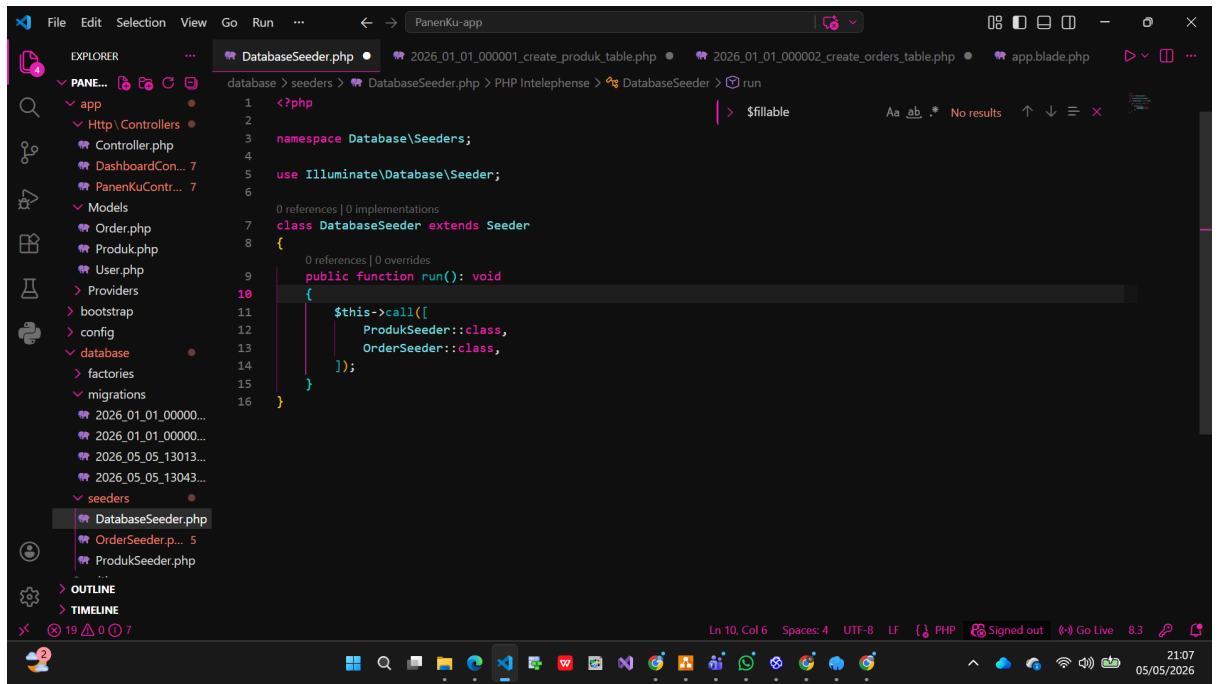


```
<?php
namespace Database\Seeders;

use Illuminate\Database\Seeder;

class DatabaseSeeder extends Seeder
{
    public function run(): void
    {
        $this->call([
            ProdukSeeder::class,
            OrderSeeder::class,
        ]);
    }
}
```

6. Daftarkan seeder di DatabaseSeeder.php dan jalankan: php artisan db:seed

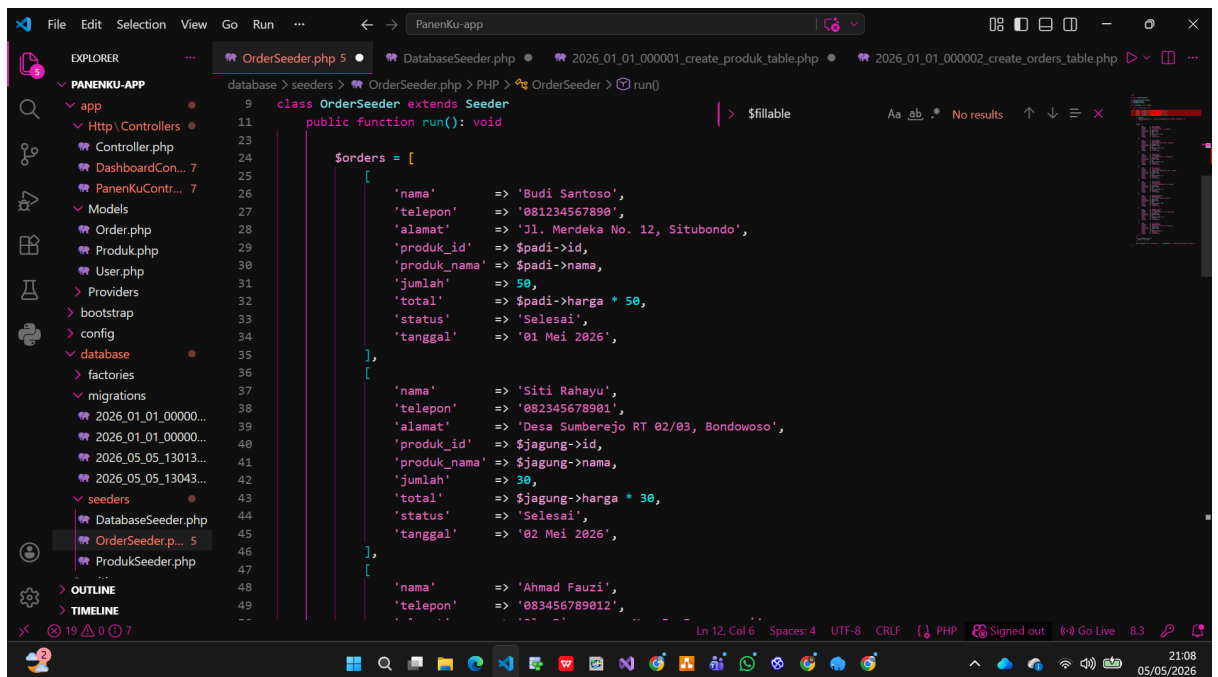

```
class OrderSeeder extends Seeder
{
    public function run()
    {
        $orders = [
            [
                'nama' => 'Budi Santoso',
                'telepon' => '081234567890',
                'alamat' => 'Jl. Merdeka No. 12, Situbondo',
                'produk_id' => $padi->id,
                'produk_nama' => $padi->nama,
                'jumlah' => 50,
                'total' => $padi->harga * 50,
                'status' => 'Selesai',
                'tanggal' => '01 Mei 2026',
            ],
            [
                'nama' => 'Siti Rahayu',
                'telepon' => '082345678901',
                'alamat' => 'Desa Sumberejo RT 02/03, Bondowoso',
                'produk_id' => $jagung->id,
                'produk_nama' => $jagung->nama,
                'jumlah' => 30,
                'total' => $jagung->harga * 30,
                'status' => 'Selesai',
                'tanggal' => '02 Mei 2026',
            ],
            [
                'nama' => 'Ahmad Fauzi',
                'telepon' => '083456789012',
            ]
        ];
    }
}
```

The screenshot shows the VS Code editor with the `OrderSeeder.php` file open. The file contains a `class OrderSeeder extends Seeder` with a `run()` method that defines an array of orders. The terminal output shows the command `php artisan db:seed` being executed, resulting in the seeding of the database. The output indicates that 5 products and 8 dummy orders were successfully seeded.

```
class OrderSeeder extends Seeder
{
    public function run(): void
    {
        $orders = [
            ['nama' => 'Budi Santoso',
            'telepon' => '081234567890',
            'alamat' => 'Jl. Merdeka No. 12, Situbondo',
            'produk_id' => $padi->id,
            'produk_nama' => $padi->nama,
```

Terminal Output:

```
PS D:\laragon\www\PanenKu-app> php artisan db:seed

INFO Seeding database.

Database\Seeders\ProdukSeeder ..... RUNNING
✓ ProdukSeeder: 5 produk default berhasil di-seed.
Database\Seeders\ProdukSeeder ..... 248 ms DONE


Database\Seeders\OrderSeeder ..... RUNNING
✓ OrderSeeder: 8 pesanan dummy berhasil di-seed.
Database\Seeders\OrderSeeder ..... 99 ms DONE

PS D:\laragon\www\PanenKu-app>
```


The screenshot shows the phpMyAdmin interface with the 'orders' table selected. The table structure and data are displayed. The table has columns: id, nama, telepon, alamat, produk_id, produk_nama, jumlah, total, status, tanggal, and created_at. The data shows 4 orders.

id	nama	telepon	alamat	produk_id	produk_nama	jumlah	total	status	tanggal	created_at
1	Budi Santoso	081234567890	Jl. Merdeka No. 12, Situbondo	1	Padi	50	300000	Selesai	01 Mei 2026	2026-05-05 13:00:00
2	Siti Rahayu	082345678901	Desa Sumberejo RT 02/03, Bondowoso	2	Jagung	30	150000	Selesai	02 Mei 2026	2026-05-05 13:00:00
3	Ahmad Fauzi	083456789012	Jl. Diponegoro No. 5, Banyuwangi	3	Tomat	20	160000	Diproses	02 Mei 2026	2026-05-05 13:00:00
4	Dewi Lestari	084567890123	Griya Indah Blok C No. 8, Jember	4	Cabai	10	350000	Diproses	03 Mei 2026	2026-05-05 13:00:00

7. Buka php artisan tinker dan coba query:
 - a. `php artisan tinker` lalu `\App\Models\Order::all();`

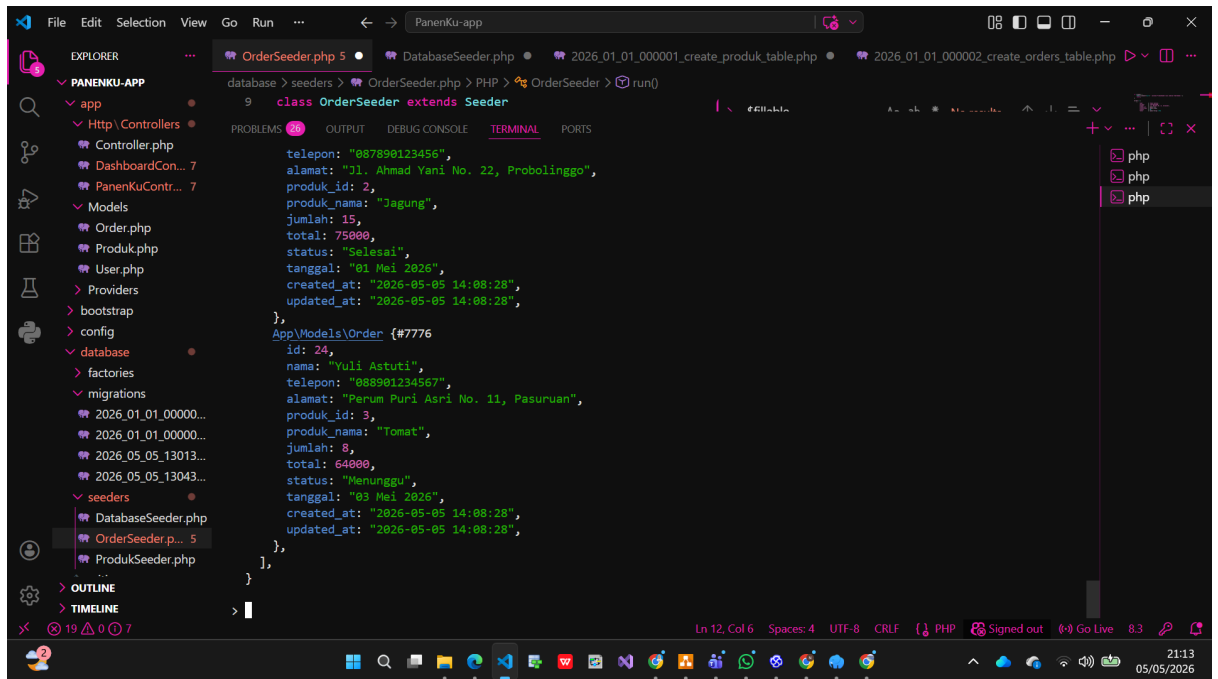

b. \App\Models\Order::where('produk_nama', 'Tomat')->get();

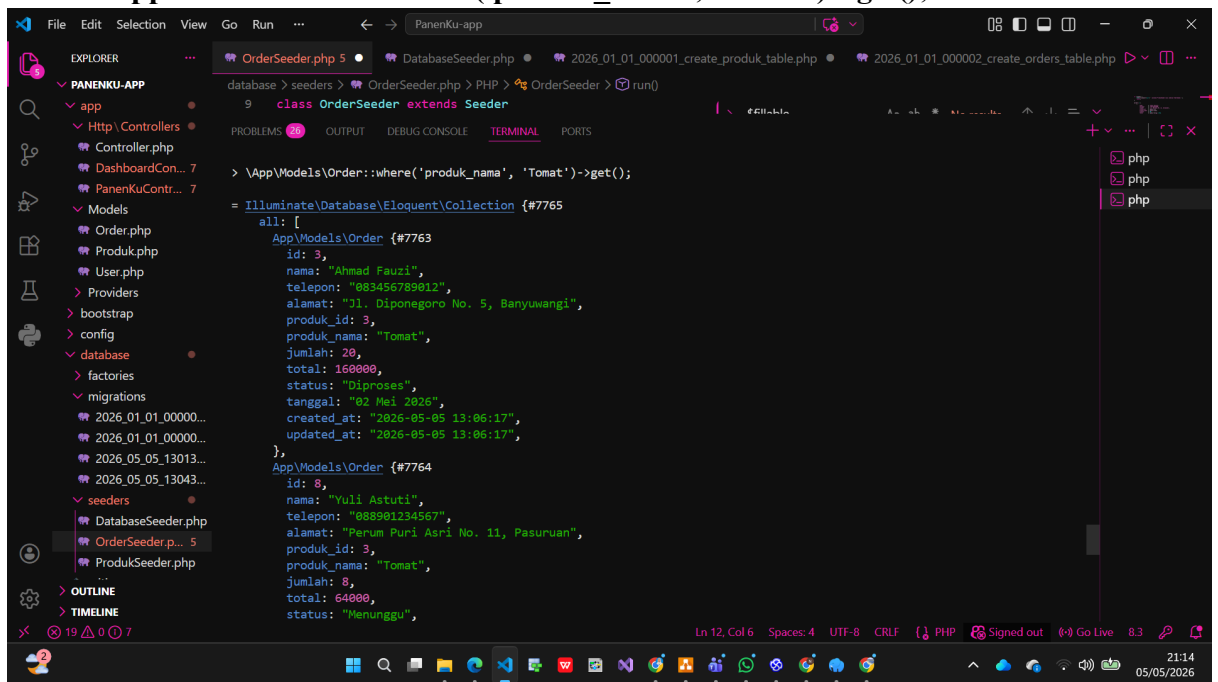


```
database > seeders > OrderSeeder.php > PHP > OrderSeeder > run()
9 class OrderSeeder extends Seeder
{
    public function run()
    {
        App\Models\Order {#7761
            id: 11,
            nama: "Ahmad Fauzi",
            telepon: "083456789012",
            alamat: "Jl. Diponegoro No. 5, Banyuwangi",
            produk_id: 3,
            produk_nama: "Tomat",
            jumlah: 20,
            total: 160000,
            status: "Diproses",
            tanggal: "02 Mei 2026",
            created_at: "2026-05-05 14:01:21",
            updated_at: "2026-05-05 14:01:21",
        },
        App\Models\Order {#7760
            id: 16,
            nama: "Yuli Astuti",
            telepon: "088901234567",
            alamat: "Perum Puri Asri No. 11, Pasuruan",
            produk_id: 3,
            produk_nama: "Tomat",
            jumlah: 8,
            total: 64000,
            status: "Menunggu",
            tanggal: "03 Mei 2026",
            created_at: "2026-05-05 14:01:21",
            updated_at: "2026-05-05 14:01:21",
        },
    }
}
```

```
database > seeders > OrderSeeder.php > PHP > OrderSeeder > run()
9 class OrderSeeder extends Seeder
{
    public function run()
    {
        App\Models\Order {#7758
            id: 24,
            nama: "Yuli Astuti",
            telepon: "088901234567",
            alamat: "Perum Puri Asri No. 11, Pasuruan",
            produk_id: 3,
            produk_nama: "Tomat",
            jumlah: 8,
            total: 64000,
            status: "Menunggu",
            tanggal: "03 Mei 2026",
            created_at: "2026-05-05 14:08:28",
            updated_at: "2026-05-05 14:08:28",
        },
        App\Models\Order {#7758
            id: 24,
            nama: "Yuli Astuti",
            telepon: "088901234567",
            alamat: "Perum Puri Asri No. 11, Pasuruan",
            produk_id: 3,
            produk_nama: "Tomat",
            jumlah: 8,
            total: 64000,
            status: "Menunggu",
            tanggal: "03 Mei 2026",
            created_at: "2026-05-05 14:08:28",
            updated_at: "2026-05-05 14:08:28",
        },
    }
}
```


c. \App\Models\Order::avg('Id');

```
PS D:\laragon\www\PanenKu-app> php artisan tinker
Psy Shell v0.12.22 (PHP 8.3.30 - cli) by Justin Hileman
New PHP manual is available (latest: 3.0.5). Update with `doc --update-manual`

> \App\Models\Order::avg('Id');

= "12.5000"
```

8. Coba buat relasi: buat tabel mata_kuliahs dan tabel pivot krs, lalu definisikan relasi belongsToMany di Model

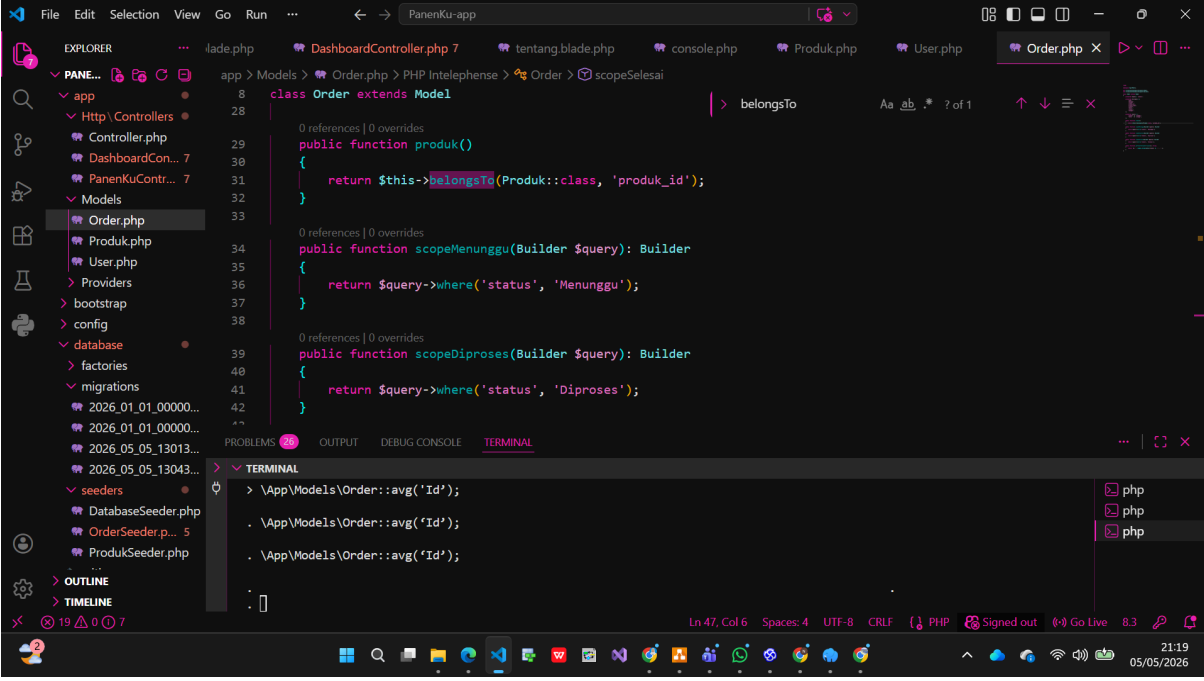

The screenshot shows the Visual Studio Code editor with the 'Order.php' file open. The file contains a PHP class 'Order' extending 'Model'. It defines three methods: 'produk()', 'scopeMenunggu()', and 'scopeDiproses()'. The 'produk()' method uses the 'belongsToMany' relationship to link 'Order' to 'Produk'. The 'scopeMenunggu()' method filters by 'status' 'Menunggu'. The 'scopeDiproses()' method filters by 'status' 'Diproses'. The Explorer sidebar shows the project structure, including 'app', 'Http', 'Models', 'Providers', 'bootstrap', 'config', 'database', 'factories', 'migrations', and 'seeder'. The Terminal window at the bottom shows the command 'php artisan migrate' being executed, with the output 'Migrating: 2026_01_01_000000...'. The status bar at the bottom indicates 'Ln 47, Col 6', 'Spaces: 4', 'UTF-8', 'CRLF', and 'PHP'.

```
class Order extends Model
{
    public function produk()
    {
        return $this->belongsToMany(Produk::class, 'produk_id');
    }

    public function scopeMenunggu(BUILDER $query): BUILDER
    {
        return $query->where('status', 'Menunggu');
    }

    public function scopeDiproses(BUILDER $query): BUILDER
    {
        return $query->where('status', 'Diproses');
    }
}
```

```
> \App\Models\Order::avg('id');
. \App\Models\Order::avg('id');
. \App\Models\Order::avg('id');
. \App\Models\Order::avg('id');
```