

## => Flowchart

start / stop → ○

Input / Output → ▭


Processing → ▭

condition → ◇

Flow direction of program ⇒

Ex) Take input of salary. If salary is greater than 10,000, add bonus of 2000, otherwise add bonus 1,000.


=>

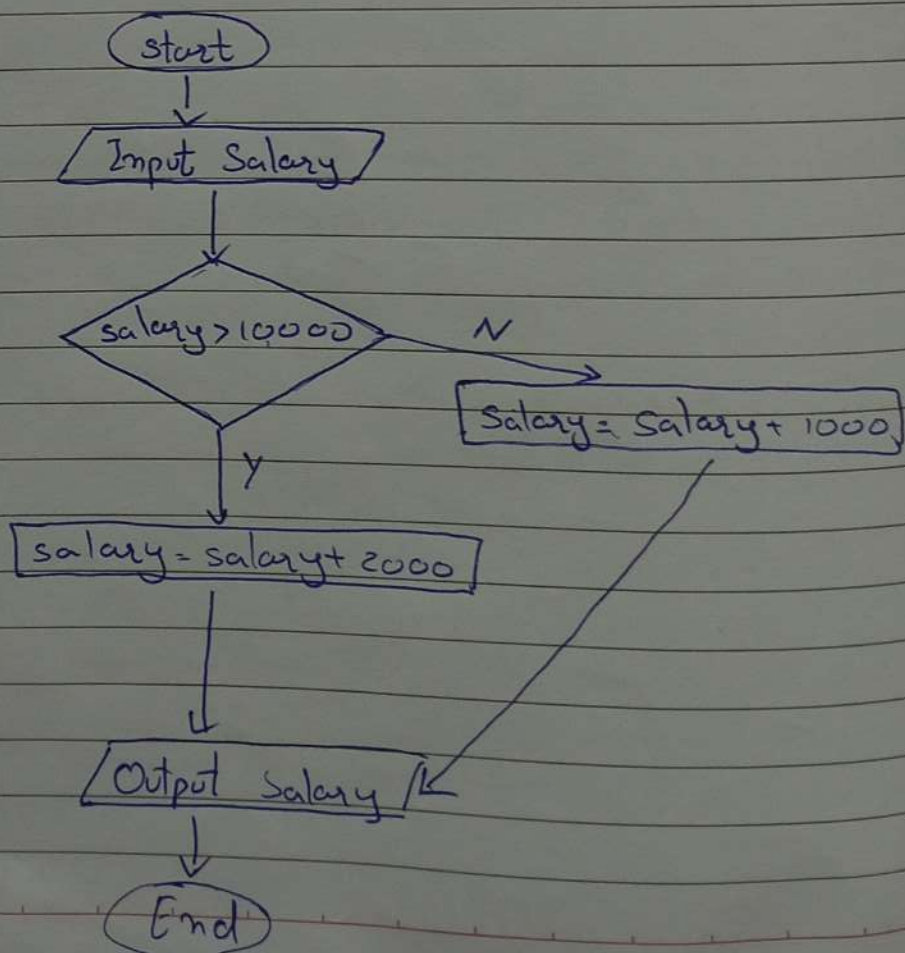

⇒ Pseudocode

q) Input a no and print whether it is prime or not.

⇒ Flowchart:-

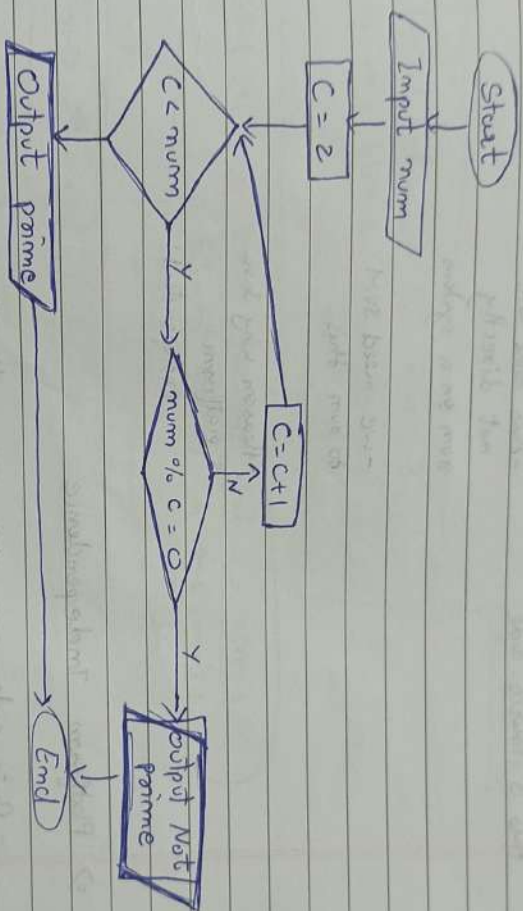


Pseudo code

- start
- input num
- C = 2
- while C < num:
  - if num % C = 0:
    - output "not prime"
    - exit
  - C = C + 1
- end while
- output "prime"
- exit / end



DATE \_\_\_\_\_  
PAGE \_\_\_\_\_

⇒ How Java code executes.

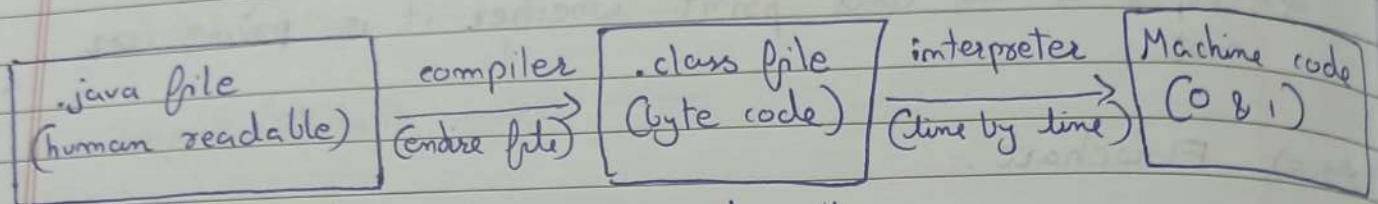

this is source code

- this code will  
not directly  
run on a system

- we need JVM  
to run this

- Reason why Java  
is platform

independent

⇒ Platform Independence

- Byte code can run on all OS.
- we need to convert source code to machine code, so computer can understand.
- compiler helps in doing this by turning it into executable code
- This executable code is a set of instructions for the computer
- After compiling C/C++ code, we get .exe file which is platform dependent.
- In Java we get bytecode, JVM converts this to machine code
- Java is platform-independent but JVM is platform dependent