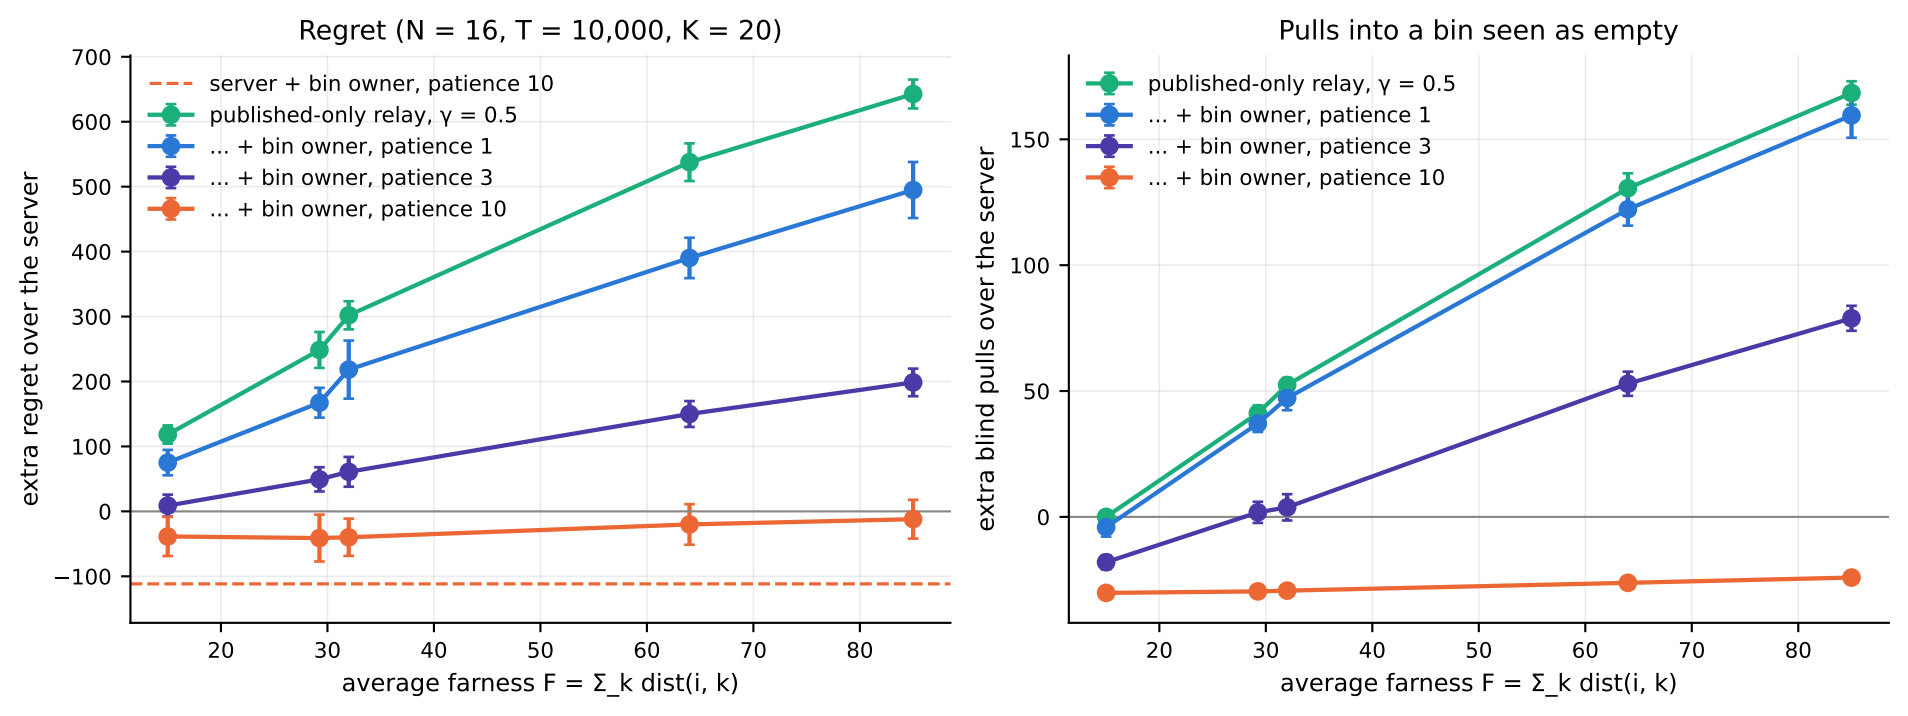
Regret (N = 16, T = 10,000, K = 20)
server + bin owner, patience 10
published-only relay, γ = 0.5
... + bin owner, patience 1
... + bin owner, patience 3
... + bin owner, patience 10
extra regret over the server
700
600
500
400
300
200
100
0
−100
20
30
40
50
60
70
80
average farness F = Σ_k dist(i, k)
Pulls into a bin seen as empty
published-only relay, γ = 0.5
... + bin owner, patience 1
... + bin owner, patience 3
... + bin owner, patience 10
extra blind pulls over the server
150
100
50
0
20
30
40
50
60
70
80
average farness F = Σ_k dist(i, k)