

RAJALAKSHMI ENGINEERING COLLEGE
RAJALAKSHMI NAGAR, THANDALAM – 602 105



RAJALAKSHMI
ENGINEERING COLLEGE
An AUTONOMOUS Institution
Affiliated to ANNA UNIVERSITY, Chennai

**CS23332 DATABASE MANAGEMENT
SYSTEMS LAB**

Laboratory Record Note Book

Name :.... NISHANTHINI.S

Year / Branch / Section : II / AIML / B

University Register No. : 211623150113

College Roll No. : 23150113

Semester : 3rd

Academic Year : 2024-25



RAJALAKSHMI
ENGINEERING COLLEGE

An AUTONOMOUS Institution
Affiliated to ANNA UNIVERSITY, Chennai

BONAFIDE CERTIFICATE

NAME NISHANTHINI S.....

ACADEMIC YEAR 2024 - 25 SEMESTER IIIrd BRANCH AIML - B

UNIVERSITY REGISTER No. 2116231501113

Certified that this is the bonafide record of work done by the above student in the

.....DATABASE.....MANAGEMENT laboratory during the year 2024 - 2025
SYSTEM

Signature of Faculty - in - Charge

**Submitted for the Practical Examination held
on.....**

INDEX PAGE

SL.NO	DATE	NAME OF THE EXPERIMENT	PAGE NO	MARKS	FACULTY'S SIGNATURE
01	26/7/24	CREATION OF BASE TABLE AND DML OPERATIONS	1	10	(R)
02	30/7/24	DATA MANIPULATIONS	5	10	(R)
03	32/7/24	WRITING BASIC SQL SELECT STATEMENT	10	10	(R)
04	06/8/24	WORKING WITH CONSTRAINTS	14	10	(R)
05	13/8/24	CREATING VIEWS	21	10	(R)
06	20/8/24	RESTRICTING AND SORTING DATA	26	10	(R)
07	27/8/24	USING SET OPERATORS	34	10	(R)
08	31/8/24	WORKING WITH MULTIPLE TABLES	38	10	(R)
09	18/9/24	SUB QUERIES	48	10	(R)
10	29/9/24	AGGREGATING DATA USING GROUP FUNCTIONS	55	10	(R)
11	24/9/24	PL SQL PROGRAMS	63	10	(R)
12	27/9/24	WORKING WITH CURSOR PROCEDURES AND FUNCTIONS	79	10	(R)
13	01/10/24	WORKING WITH TRIGGER	88	10	(R)
14	08/10/24	MONGO DB	96	10	(R)
15	13/10/24	OTHER DATABASE OBJECTS	107	10	(R)
16	25/10/24	CONTROLLING USER ACCESS	113	10	(R)

SQL Statements

1. Data Retrieval(DR)
2. Data Manipulation Language(DML)
3. Data Definition Language(DDL)
4. Data Control Language(DCL)
5. Transaction Control Language(TCL)

TYPE	STATEMENT	DESCRIPTION
DR	SELECT	Retrieves the data from the database
DML	1.INSERT 2.UPDATE 3.DELETE 4.MERGE	Enter new rows, changes existing rows, removes unwanted rows from tables in the database respectively.
DDL	1.CREATE 2.ALTER 3.DROP 4.RENAME 5.TRUNCATE	Sets up, changes and removes data structures from tables.
TCL	1.COMMIT 2.ROLLBACK 3.SAVEPOINT	Manages the changes made by DML statements. Changes to the data can be grouped together into logical transactions.
DCL	1.GRANT 2.REVOKE	Gives or removes access rights to both the oracle database and the structures within it.

DATA TYPES

1. Character Data types:

- Char – fixed length character string that can varies between 1-2000 bytes
- Varchar / Varchar2 – variable length character string, size ranges from 1-4000 bytes.it saves the disk space(only length of the entered value will be assigned as the size of column)
- Long - variable length character string, maximum size is 2 GB

2. Number Data types : Can store +ve, -ve, zero, fixed point, floating point with 38 precision.

- Number – {p=38,s=0}
- Number(p) - fixed point
- Number(p,s) –floating point (p=1 to 38,s= -84 to 127)

3. Date Time Data type: used to store date and time in the table.

- DB uses its own format of storing in fixed length of 7 bytes for century, date, month, year, hour, minutes, and seconds.
- Default data type is “dd-mon-yy”
- New Date time data types have been introduced. They are
TIMESTAMP-Date with fractional seconds
INTERVAL YEAR TO MONTH-stored as an interval of years and months

INTERVAL DAY TO SECOND-stored as an interval of days to hour's minutes and seconds

4. Raw Data type: used to store byte oriented data like binary data and byte string.

5. Other :

- CLOB – stores character object with single byte character.
- BLOB – stores large binary objects such as graphics, video, sounds.
- BFILE – stores file pointers to the LOB's.

Creating and Managing Tables

OBJECTIVE

After the completion of this exercise, students should be able to do the following:

- Create tables
- Describing the data types that can be used when specifying column definition
- Alter table definitions
- Drop, rename, and truncate tables

NAMING RULES

Table names and column names:

- Must begin with a letter
- Must be 1-30 characters long
- Must contain only A-Z, a-z, 0-9, _, \$, and #
- Must not duplicate the name of another object owned by the same user
- Must not be an oracle server reserve words
- 2 different tables should not have same name.
- Should specify a unique column name.
- Should specify proper data type along with width
- Can include “not null” condition when needed. By default it is ‘null’.

OBJECTIVE

After, the completion of this exercise the students will be able to do the following

- Describe each DML statement
- Insert rows into tables
- Update rows into table
- Delete rows from table
- Control Transactions

A DML statement is executed when you:

- Add new rows to a table
- Modify existing rows
- Removing existing rows

A transaction consists of a collection of DML statements that form a logical unit of work.

The ALTER TABLE Statement

The ALTER statement is used to

- Add a new column
- Modify an existing column
- Define a default value to the new column
- Drop a column
- To include or drop integrity constraint.

DROPPING A TABLE

- All data and structure in the table is deleted.
- Any pending transactions are committed.
- All indexes are dropped.
- Cannot roll back the drop table statement

To Add a New Row

INSERT Statement

Syntax

INSERT INTO table_name VALUES (column1 values, column2 values, ..., columnn values);

Example:

INSERT INTO department (70, 'Public relations', 100,1700);

Inserting rows with null values

Implicit Method: (Omit the column)

INSERT INTO department VALUES (30,'purchasing');

Explicit Method: (Specify NULL keyword)

```
INSERT INTO department VALUES (100,'finance', NULL, NULL);
```

Inserting Special Values

Example:

Using SYSDATE

```
INSERT INTO employees VALUES (113,'louis', 'popp', 'lpopp','5151244567',SYSDATE,  
'ac_account', 6900, NULL, 205, 100);
```

Inserting Specific Date Values

Example:

```
INSERT INTO employees VALUES ( 114,'den', 'raphealy', 'drapheal','5151274561',  
TO_DATE('feb 3,1999','mon, dd ,yyyy'),'ac_account', 11000,100,30);
```

To Insert Multiple Rows

& is the placeholder for the variable value

Example:

```
INSERT INTO department VALUES (&dept_id, &dept_name, &location);
```

Copying Rows from another table

Using Subquery

Example:

```
INSER INTO sales_reps(id, name, salary, commission_pct)  
SELECT employee_id, Last_name, salary, commission_pct  
FROM employees  
WHERE job_id LIKE '%REP');
```

CHANGING DATA IN A TABLE

UPDATE Statement

Syntax1: (to update specific rows)

```
UPDATE table_name SET column=value WHERE condition;
```

Syntax 2: (To updae all rows)

```
UPDATE table_name SET column=value;
```

Updating columns with a subquery

```
UPDATE employees  
SET job_id= (SELECT job_id  
FROM employees  
WHERE employee_id=205)  
WHERE employee_id=114;
```

REMOVING A ROW FROM A TABLE

DELETE STATEMENT

Syntax

```
DELETE FROM table_name WHERE conditions;
```

Example:

```
DELETE FROM department WHERE dept_name='finance';
```

Ex.No.: 1	
Date:	

CREATION OF BASE TABLE AND DML OPERATIONS

AIM:

ALGORITHM:

STEP-1: Start.

STEP-2: Create a base Table

Syntax:

```
CREATE TABLE <table name> (column1 type, column2 type, ...);
```

STEP-3: Describe the Table structure

Syntax:

```
DESC <table name>
```

STEP-4: Add a new row to a Table using INSERT statement.

Syntax:

- ```
INSERT INTO <table name> VALUES (value1, value2..);
```
- ```
INSERT INTO <table name> (column1, column2..)
VALUES (value1, value2..);
```
- ```
INSERT INTO <table name>VALUES (&column1,'&column');
```

**STEP-5:** Modify the existing rows in the base Table with UPDATE statement.

Syntax:

```
UPDATE <table name> SET column1=value, column2 = 'value'
WHERE (condition);
```

**STEP-6:** Remove the existing rows from the Table using DELETE statement.

Syntax:

```
DELETE FROM <table name> WHERE <condition>;
```

**STEP-7:** Perform a Query using SELECT statement.

Syntax:

```
SELECT [DISTINCT] {*,<column1,..>} FROM <table name>
WHERE <condition>;
```

**STEP-8:** The truncate command deletes all rows from the table. Only the structure of the table remains.

Syntax:

```
TRUNCATE TABLE <table name>;
```

**STEP-9:** Alter the existing table using ALTER statement.

Syntax:

Add Column:

```
ALTER TABLE <table name> ADD (column data type
[DEFAULTexpr][,column data type]);
```

Modify Column:

```
ALTER TABLE <table name> MODIFY (column data type
[DEFAULT expr], [,column data type]);
```

Drop Column:

```
ALTER TABLE <table name> DROP COLUMN <column name>;
```

**STEP-10:** To drop the entire table using DROP statement.

Syntax:

```
DROP TABLE <table name>;
```

**STEP-11:** Exit.

1. Create MY\_EMPLOYEE table with the following structure

| NAME       | NULL?    | TYPE        |
|------------|----------|-------------|
| ID         | Not null | Number(4)   |
| Last_name  |          | Varchar(25) |
| First_name |          | Varchar(25) |
| Userid     |          | Varchar(25) |
| Salary     |          | Number(9,2) |

2. Add the first and second rows data to MY\_EMPLOYEE table from the following sample data.

| ID | Last_name | First_name | Userid   | salary |
|----|-----------|------------|----------|--------|
| 1  | Patel     | Ralph      | rpatel   | 895    |
| 2  | Dancs     | Betty      | bdancs   | 860    |
| 3  | Biri      | Ben        | bbiri    | 1100   |
| 4  | Newman    | Chad       | Cnewman  | 750    |
| 5  | Ropebur   | Audrey     | aropebur | 1550   |

3. Display the table with values.

4. Populate the next two rows of data from the sample data. Concatenate the first letter of the first\_name with the first seven characters of the last\_name to produce Userid.

UPDATE MY-EMPLOYEE SET USERID =

5. Delete Betty dancs from MY\_EMPLOYEE table.

6. Empty the fourth row of the emp table.
7. Make the data additions permanent.
8. Change the last name of employee 3 to Drexler.
9. Change the salary to 1000 for all the employees with a salary less than 900.

| Evaluation Procedure | Marks awarded |
|----------------------|---------------|
| Query(5)             | 5             |
| Execution (5)        | 5             |
| Viva(5)              | 5             |
| Total (15)           | 15            |
| Faculty Signature    | K             |

1. Create table My-Employee (ID Number(4), Last-name varchar(20),  
First-name varchar(25), email varchar(25),  
salary number(9,2));

2. Begin  
Insert into My-Employee values(1, 'Patel', 'Ralph', 'R.patel', 895);  
Insert into My-Employee values(2, 'Panu', 'Betty', 'balani', 310);  
END;

3. Select \* from My-Employee;

4. Begin  
Insert into My-Employee (ID, First-Name, Last-Name, salary)  
values (3, 'BEN', 'BIRI', 1100);  
Insert into My-Employee (ID, First-Name, Last-Name, salary)  
values (4, 'CHAD', 'INEWHAN', 750);  
UPDATE My-Employee set usrid=concat (substr (First-Name, 1,  
substr (Last-name, 1, 1))

where ID = 3, or ID = 4;

END;

5. Delete from My-Employee where first-name = 'Betty' and  
Last-name = 'Panis';

6. Delete from My-Employee where ID = 3;

7. Commit.

8. update My-Employee set last-name = 'DREXLED'  
where FD = 3;

9. update My-Employee set salary = 1000 where salary < 900;



|           |  |
|-----------|--|
| Ex.No.: 2 |  |
| Date:     |  |

## DATA MANIPULATIONS

Create the following tables with the given structure.

### EMPLOYEES TABLE

| NAME           | NULL?    | TYPE        |
|----------------|----------|-------------|
| Employee_id    | Not null | Number(6)   |
| First_Name     |          | Varchar(20) |
| Last_Name      | Not null | Varchar(25) |
| Email          | Not null | Varchar(25) |
| Phone_Number   |          | Varchar(20) |
| Hire_date      | Not null | Date        |
| Job_id         | Not null | Varchar(10) |
| Salary         |          | Number(8,2) |
| Commission_pct |          | Number(2,2) |
| Manager_id     |          | Number(6)   |
| Department_id  |          | Number(4)   |

- (a) Find out the employee id, names, salaries of all the employees

Select employee\_id, First\_name, Last\_name, salary  
from employees.

- (b) List out the employees who works under manager 100

Select employee\_id, First\_name, last\_name, from Employees  
where manager\_id = '100';

- (c) Find the names of the employees who have a salary greater than or equal to 4800

Select First\_name, last\_name from Employees where  
salary >= '4800';

(d) List out the employees whose last name is 'AUSTIN'

Select First-name, employee\_id from employees where  
Last-name = 'AUSTIN';

(e) Find the names of the employees who works in departments 60,70 and 80

Select First-name, last-name from employees where  
department\_id = '60' or '70' or '80';

(f) Display the unique Manager\_Id.

Select DISTINCT MANAGER\_id from employees;

Create an Emp table with the following fields: (EmpNo, EmpName, Job, Basic, DA, HRA, PF, GrossPay, NetPay) (Calculate DA as 30% of Basic and HRA as 40% of Basic)

a) Insert into Emp (EmpNo, EmpName, job, basic, da, hra, pf, grosspay, netpay) values(110, 'NIS', 'hr', 50000, 15000, 20000, 8000, 0)

(a) Insert Five Records and calculate GrossPay and NetPay.

?

(b) Display the employees whose Basic is lowest in each department.

update emp set GrossPay = Basic + DA + HRA where GrossPay = 0;

(c) If Net Pay is less than

Select job, min(basic) from Emp group by job;

**DEPARTMENT TABLE**

| NAME        | NULL?    | TYPE        |
|-------------|----------|-------------|
| Dept_id     | Not null | Number(6)   |
| Dept_name   | Not null | Varchar(20) |
| Manager_id  |          | Number(6)   |
| Location_id |          | Number(4)   |

**JOB\_GRADE TABLE**

| NAME        | NULL? | TYPE       |
|-------------|-------|------------|
| Grade_level |       | Varchar(2) |
| Lowest_sal  |       | Number     |
| Highest_sal |       | Number     |

**LOCATION TABLE**

| NAME           | NULL?    | TYPE        |
|----------------|----------|-------------|
| Location_id    | Not null | Number(4)   |
| St_addr        |          | Varchar(40) |
| Postal_code    |          | Varchar(12) |
| City           | Not null | Varchar(30) |
| State_province |          | Varchar(25) |
| Country_id     |          | Char(2)     |

1. Create the DEPT table based on the DEPARTMENT following the table instance chart below. Confirm that the table is created.

|              |        |          |
|--------------|--------|----------|
| Column name  | ID     | NAME     |
| Key Type     |        |          |
| Nulls/Unique |        |          |
| FK table     |        |          |
| FK column    |        |          |
| Data Type    | Number | Varchar2 |
| Length       | 7      | 25       |

Query : create table Employee\_table  
 ( id number [7] -  
 name varchar [25],  
 );

2. Create the EMP table based on the following instance chart. Confirm that the table is created.

| Column name  | ID     | LAST_NAME | FIRST_NAME | DEPT_ID |
|--------------|--------|-----------|------------|---------|
| Key Type     |        |           |            |         |
| Nulls/Unique |        |           |            |         |
| FK table     |        |           |            |         |
| FK column    |        |           |            |         |
| Data Type    | Number | Varchar2  | Varchar2   | Number  |
| Length       | 7      | 25        | 25         | 7       |

- 3 Modify the EMP table to allow for longer employee last names. Confirm the modification.(Hint: Increase the size to 50)

*Alter table employee modify (last-name varchar(50));*

- 4 Create the EMPLOYEES2 table based on the structure of EMPLOYEES table. Include Only the Employee\_id, First\_name, Last\_name, Salary and Dept\_id coloumns. Name the columns Id, First\_name, Last\_name, salary and Dept\_id respectively.

*Create table employees2(Emp\_id int, First-name varchar(20),  
Last-name varchar(20), salary int, Dept-id varchar(20));*

- 5 Drop the EMP table.

*Drop table employees2;*

- 6 Rename the EMPLOYEES2 table as EMP.

*After Alter table employees2;*

*Rename to emp;*

- 7 Add a comment on DEPT and EMP tables. Confirm the modification by describing the table.

comment on table Dept is 'Table is storing department details'

comment on table Emp is 'Table is storing Employee details'

- 8 Drop the First\_name column from the EMP table and confirm it.

Alter table EMP

Drop column first-name

| Evaluation Procedure | Marks awarded |
|----------------------|---------------|
| Query(5)             | 5             |
| Execution (5)        | 5             |
| Viva(5)              | 5             |
| Total (15)           | 15            |
| Faculty Signature    | (Signature)   |

|           |  |
|-----------|--|
| Ex.No.: 3 |  |
| Date:     |  |

## WRITING BASIC SQL SELECT STATEMENTS

### OBJECTIVES

After the completion of this exercise, the students will be able to do the following:

- List the capabilities of SQL SELECT Statement
- Execute a basic SELECT statement

### Capabilities of SQL SELECT statement

A SELECT statement retrieves information from the database. Using a select statement, we can perform

- ✓ Projection: To choose the columns in a table
- ✓ Selection: To choose the rows in a table
- ✓ Joining: To bring together the data that is stored in different tables

### Basic SELECT Statement

#### Syntax

```
SELECT *|DISTINCT Column_name| alias
 FROM table_name;
```

#### NOTE:

DISTINCT—Suppress the duplicates.

Alias—gives selected columns different headings.

#### Example: 1

```
SELECT * FROM departments;
```

#### Example: 2

```
SELECT location_id, department_id FROM departments;
```

### Writing SQL Statements

- SQL statements are not case sensitive
- SQL statements can be on one or more lines.

- Keywords cannot be abbreviated or split across lines
- Clauses are usually placed on separate lines
- Indents are used to enhance readability

### Using Arithmetic Expressions

Basic Arithmetic operators like \*, /, +, - can be used

#### Example:1

```
SELECT last_name, salary, salary+300 FROM employees;
```

#### Example:2

```
SELECT last_name, salary, 12*salary+100 FROM employees;
```

The statement is not same as

```
SELECT last_name, salary, 12*(salary+100) FROM employees;
```

#### Example:3

```
SELECT last_name, job_id, salary, commission_pct FROM employees;
```

#### Example:4

```
SELECT last_name, job_id, salary, 12*salary*commission_pct FROM employees;
```

### Using Column Alias

- To rename a column heading with or without AS keyword.

#### Example:1

```
SELECT last_name AS Name
FROM employees;
```

#### Example: 2

```
SELECT last_name "Name" salary*12 "Annual Salary"
FROM employees;
```

### Concatenation Operator

- Concatenates columns or character strings to other columns
- Represented by two vertical bars (||)
- Creates a resultant column that is a character expression

#### Example:

```
SELECT last_name||job_id AS "EMPLOYEES JOB" FROM employees;
```

### Using Literal Character String

- A literal is a character, a number, or a date included in the SELECT list.
- Date and character literal values must be enclosed within single quotation marks.

#### Example:

```
SELECT last_name||'is a'||job_id AS "EMPLOYEES JOB" FROM employees;
```

### Eliminating Duplicate Rows

- Using DISTINCT keyword.

#### Example:

```
SELECT DISTINCT department_id FROM employees;
```

### Displaying Table Structure

- Using DESC keyword.

#### Syntax

```
DESC table_name;
```

#### Example:

```
DESC employees;
```

### Find the Solution for the following:

#### True OR False

1. The following statement executes successfully.

#### Identify the Errors

```
SELECT employee_id, last_name
sal*12 ANNUAL SALARY
FROM employees;
```

Select employee\_id, last-name  
sal\*12 as Annual salary from  
employees;

#### Queries

2. Show the structure of departments the table. Select all the data from it.

Desc employees;  
Select \* from employees;

3. Create a query to display the last name, job code, hire date, and employee number for each employee, with employee number appearing first.

*Create table employee (job\_code varchar(25), last\_name varchar(10),  
hire\_date date, emp\_no varchar(10));*

4. Provide an alias STARTDATE for the hire date.

*Select hire\_date as Start\_date from employees;*

5. Create a query to display unique job codes from the employee table.

*Select distinct job\_code from employees;*

6. Display the last name concatenated with the job ID , separated by a comma and space, and name the column EMPLOYEE and TITLE.

*Select concat(last\_name, ',', job\_id) as "TITLE" from employees*

7. Create a query to display all the data from the employees table. Separate each column by a comma. Name the column THE\_OUTPUT.

*Select concat(emp\_no, ',', last\_name, ',', job\_code, ',', '  
hire\_date ) as "THE\_OUTPUT" from employees*

| Evaluation Procedure | Marks awarded      |
|----------------------|--------------------|
| Query(5)             | 5                  |
| Execution (5)        | 5                  |
| Viva(5)              | 5                  |
| Total (15)           | 15                 |
| Faculty Signature    | <i>(Signature)</i> |

|           |  |
|-----------|--|
| Ex.No.: 4 |  |
| Date:     |  |

## WORKING WITH CONSTRAINTS

### OBJECTIVE

After the completion of this exercise the students should be able to do the following

- Describe the constraints
- Create and maintain the constraints

#### **What are Integrity constraints?**

- Constraints enforce rules at the table level.
- Constraints prevent the deletion of a table if there are dependencies

The following types of integrity constraints are valid

a) **Domain Integrity**

- ✓ NOT NULL
- ✓ CHECK

b) **Entity Integrity**

- ✓ UNIQUE
- ✓ PRIMARY KEY

c) **Referential Integrity**

- ✓ FOREIGN KEY

**Constraints can be created in either of two ways**

1. At the same time as the table is created
2. After the table has been created.

### Defining Constraints

Create table tablename (column\_name1 data\_type constraints, column\_name2 data\_type constraints ...);

### Example:

Create table employees ( employee\_id number(6), first\_name varchar2(20), ..job\_id varchar2(10), CONSTRAINT emp\_emp\_id\_pk PRIMARY KEY (employee\_id));

### Domain Integrity

This constraint sets a range and any violations that takes place will prevent the user from performing the manipulation that caused the breach. It includes:

### NOT NULL Constraint

While creating tables, by default the rows can have null value. The enforcement of not null constraint in a table ensure that the table contains values.

#### Principle of null values:

- o Setting null value is appropriate when the actual value is unknown, or when a value would not be meaningful.
- o A null value is not equivalent to a value of zero.
- o A null value will always evaluate to null in any expression.
- o When a column name is defined as not null, that column becomes a mandatory i.e., the user has to enter data into it.
- o Not null Integrity constraint cannot be defined using the alter table command when the table contain rows.

#### Example

```
CREATE TABLE employees (employee_id number (6), last_name varchar2(25) NOT NULL,
salary number(8,2), commission_pct number(2,2), hire_date date constraint emp_hire_date_nn
NOT NULL'....);
```

### CHECK

Check constraint can be defined to allow only a particular range of values. When the manipulation violates this constraint, the record will be rejected. Check condition cannot contain sub queries.

```
CREATE TABLE employees (employee_id number (6), last_name varchar2 (25) NOT NULL,
salary number(8,2), commission_pct number(2,2), hire_date date constraint emp_hire_date_nn
NOT NULL'...,CONSTRAINT emp_salary_mi CHECK(salary > 0));
```

### Entity Integrity

Maintains uniqueness in a record. An entity represents a table and each row of a table represents an instance of that entity. To identify each row in a table uniquely we need to use this constraint. There are 2 entity constraints:

#### a) Unique key constraint

It is used to ensure that information in the column for each record is unique, as with telephone or driver's license numbers. It prevents the duplication of value with rows of a specified column in a set of column. A column defined with the constraint can allow null value.

If unique key constraint is defined in more than one column i.e., combination of column cannot be specified. Maximum combination of columns that a composite unique key can contain is 16.

**Example:**

```
CREATE TABLE employees (employee_id number(6), last_name varchar2(25) NOT NULL,email varchar2(25), salary number(8,2), commission_pct number(2,2), hire_date date constraint emp_hire_date_nn NOT NULL' CONSTRAINT emp_email_uk UNIQUE(email));
```

**PRIMARY KEY CONSTRAINT**

A primary key avoids duplication of rows and does not allow null values. Can be defined on one or more columns in a table and is used to uniquely identify each row in a table. These values should never be changed and should never be null.

A table should have only one primary key. If a primary key constraint is assigned to more than one column or combination of column is said to be composite primary key, which can contain 16 columns.

**Example:**

```
CREATE TABLE employees (employee_id number(6) , last_name varchar2(25) NOT NULL,email varchar2(25), salary number(8,2), commission_pct number(2,2), hire_date date constraint emp_hire_date_nn NOT NULL, Constraint emp_id_pk PRIMARY KEY (employee_id),CONSTRAINT emp_email_uk UNIQUE(email));
```

**c) Referential Integrity**

It enforces relationship between tables. To establish parent-child relationship between 2 tables having a common column definition, we make use of this constraint. To implement this, we should define the column in the parent table as primary key and same column in the child table as foreign key referring to the corresponding parent entry.

**Foreign key**

A column or combination of column included in the definition of referential integrity, which would refer to a referenced key.

**Referenced key**

It is a unique or primary key upon which is defined on a column belonging to the parent table.  
Keywords:

**FOREIGN KEY:** Defines the column in the child table at the table level constraint.

**REFERENCES:** Identifies the table and column in the parent table.

**ON DELETE CASCADE:** Deletes the dependent rows in the child table when a row in the parent table is deleted.

**ON DELETE SET NULL:** converts dependent foreign key values to null when the parent value is removed.

```
CREATE TABLE employees (employee_id number(6), last_name varchar2(25) NOT NULL,email varchar2(25), salary number(8,2), commission_pct number(2,2), hire_date date constraint emp_hire_date_nn NOT NULL, Constraint emp_id pk PRIMARY KEY (employee_id), CONSTRAINT emp_email_uk UNIQUE(email), CONSTRAINT emp_dept_fk FOREIGN KEY (department_id) references deparments(dept_id));
```

### ADDING A CONSTRAINT

Use the ALTER to

- Add or Drop a constraint, but not modify the structure
- Enable or Disable the constraints
- Add a not null constraint by using the Modify clause

#### Syntax

```
ALTER TABLE table name ADD CONSTRAINT Cons_name type(column name);
```

#### Example:

```
ALTER TABLE employees ADD CONSTRAINT emp_manager_fk FOREIGN KEY (manager_id) REFERENCES employees (employee_id);
```

### DROPPING A CONSTRAINT

#### Example:

```
ALTER TABLE employees DROP CONSTRAINT emp_manager_fk;
```

### CASCADE IN DROP

- The CASCADE option of the DROP clause causes any dependent constraints also to be dropped.

#### Syntax

```
ALTER TABLE departments DROP PRIMARY KEY|UNIQUE (column)| CONSTRAINT constraint _name CASCADE;
```

## DISABLING CONSTRAINTS

- Execute the DISABLE clause of the ALTER TABLE statement to deactivate an integrity constraint
- Apply the CASCADE option to disable dependent integrity constraints.

### Example

```
ALTER TABLE employees DISABLE CONSTRAINT emp_emp_id_pk CASCADE;
```

## ENABLING CONSTRAINTS

- Activate an integrity constraint currently disabled in the table definition by using the ENABLE clause.

### Example

```
ALTER TABLE employees ENABLE CONSTRAINT emp_emp_id_pk CASCADE;
```

## CASCADING CONSTRAINTS

The CASCADE CONSTRAINTS clause is used along with the DROP column clause. It drops all referential integrity constraints that refer to the primary and unique keys defined on the dropped Columns.

This clause also drops all multicolumn constraints defined on the dropped column.

### Example:

Assume table TEST1 with the following structure

```
CREATE TABLE test1 (pk number PRIMARY KEY, fk number, col1 number,col2 number,
CONSTRAINT fk_constraint FOREIGN KEY(fk) references test1, CONSTRAINT ck1 CHECK
(pk>0 and col1>0), CONSTRAINT ck2 CHECK (col2>0));
```

An error is returned for the following statements

```
ALTER TABLE test1 DROP (pk);
```

```
ALTER TABLE test1 DROP (col1);
```

The above statement can be written with CASCADE CONSTRAINT

```
ALTER TABLE test1 DROP(pk) CASCADE CONSTRAINTS;
```

(OR)

ALTER TABLE test1 DROP(pk, fk, col1) CASCADE CONSTRAINTS;

### VIEWING CONSTRAINTS

Query the USER\_CONSTRAINTS table to view all the constraints definition and names.

#### Example:

```
SELECT constraint_name, constraint_type, search_condition FROM user_constraints
WHERE table_name='employees';
```

#### Viewing the columns associated with constraints

```
SELECT constraint_name, constraint_type, FROM user_cons_columns
WHERE table_name='employees';
```

#### Find the Solution for the following:

1. Add a table-level PRIMARY KEY constraint to the EMP table on the ID column. The constraint should be named at creation. Name the constraint my\_emp\_id\_pk.

```
create table emp (emp_id number(6), emp_name varchar(10),
hire_date date, salary number(8), CONSTRAINT
my_emp_id_pk primary key (emp_id));
```

2. Create a PRIMARY KEY constraint to the DEPT table using the ID column. The constraint should be named at creation. Name the constraint my\_dept\_id\_pk.

```
create table dept (dept_id number(6), dept_name varchar(10),
CONSTRAINT my_dept_id_pk primary key (dept_id));
```

3. Add a column DEPT\_ID to the EMP table. Add a foreign key reference on the EMP table that ensures that the employee is not assigned to nonexistent department. Name the constraint my\_emp\_dept\_id\_fk.

```
alter table emp add (dept_id number(6), constraint
my_emp_dept_id_fk foreign key (dept_id) references dept(dept_id));
```

4. Modify the EMP table. Add a COMMISSION column of NUMBER data type, precision 2, scale 2. Add a constraint to the commission column that ensures that a commission value is greater than zero.

Alter table emp add (commission number (2,2) constraint  
emp-salary CHECK (commission > 0));

| Evaluation Procedure | Marks awarded |
|----------------------|---------------|
| Query(5)             | 5             |
| Execution (5)        | 5             |
| Viva(5)              | 5             |
| Total (15)           | 15            |
| Faculty Signature    | R             |

|           |  |
|-----------|--|
| Ex.No.: 5 |  |
| Date:     |  |

## CREATING VIEWS

After the completion of this exercise, students will be able to do the following:

- Describe a view
- Create, alter the definition of, and drop a view
- Retrieve data through a view
- Insert, update, and delete data through a view
- Create and use an inline view

### View

A view is a logical table based on a table or another view. A view contains no data but is like a window through which data from tables can be viewed or changed. The tables on which a view is based are called base tables.

### Advantages of Views

- To restrict data access
- To make complex queries easy
- To provide data independence
- To present different views of the same data

### Classification of views

1. Simple view
2. Complex view

| Feature                  | Simple | Complex     |
|--------------------------|--------|-------------|
| No. of tables            | One    | One or more |
| Contains functions       | No     | Yes         |
| Contains groups of data  | No     | Yes         |
| DML operations thr' view | Yes    | Not always  |

### Creating a view

### Syntax

CREATE OR REPLACE FORCE/NOFORCE VIEW view\_name AS Subquery WITH CHECK  
OPTION CONSTRAINT constraint WITH READ ONLY CONSTRAINT constraint;

**FORCE** - Creates the view regardless of whether or not the base tables exist.

**NOFORCE** - Creates the view only if the base table exist.

WITH CHECK OPTION CONSTRAINT-specifies that only rows accessible to the view can be inserted or updated.

WITH READ ONLY CONSTRAINT-ensures that no DML operations can be performed on the view.

#### **Example: 1 (Without using Column aliases)**

Create a view EMPVU80 that contains details of employees in department80.

#### **Example 2:**

```
CREATE VIEW empvu80 AS SELECT employee_id, last_name, salary FROM employees
WHERE department_id=80;
```

#### **Example:1 (Using column aliases)**

```
CREATE VIEW salvu50
AS SELECT employee_id, id_number, last_name NAME, salary *12 ANN_SALARY
FROM employees
WHERE department_id=50;
```

#### **Retrieving data from a view**

##### **Example:**

```
SELECT * from salvu50;
```

#### **Modifying a view**

A view can be altered without dropping, re-creating.

##### **Example: (Simple view)**

Modify the EMPVU80 view by using CREATE OR REPLACE.

```
CREATE OR REPLACE VIEW empvu80 (id_number, name, sal, department_id)
AS SELECT employee_id, first_name, last_name, salary, department_id
FROM employees
WHERE department_id=80;
```

Example: (complex view)

```
CREATE VIEW dept_sum_vu (name, minsal, maxsal, avgsal)
AS SELECT d.department_name, MIN(e.salary), MAX(e.salary), AVG(e.salary)
FROM employees e, department d
WHERE e.department_id=d.department_id
GROUP BY d.department_name;
```

Rules for performing DML operations on view

- Can perform operations on simple views
- Cannot remove a row if the view contains the following:
  - Group functions
  - Group By clause
  - Distinct keyword
- Cannot modify data in a view if it contains
  - Group functions
  - Group By clause
  - Distinct keyword
  - Columns contain by expressions
- Cannot add data thr' a view if it contains
  - Group functions
  - Group By clause
  - Distinct keyword
  - Columns contain by expressions
  - NOT NULL columns in the base table that are not selected by the view

Example: (Using the WITH CHECK OPTION clause)

```
CREATE OR REPLACE VIEW empvu20
AS SELECT *
FROM employees
WHERE department_id=20
WITH CHECK OPTION CONSTRAINT empvu20_ck;
```

Note: Any attempt to change the department number for any row in the view fails because it violates the WITH CHECK OPTION constraint.

Example – (Execute this and note the error)

```
UPDATE empvu20 SET department_id=10 WHERE employee_id=201;
```

Denying DML operations

Use of WITH READ ONLY option.

Any attempt to perform a DML on any row in the view results in an oracle server error.

Try this code:

```
CREATE OR REPLACE VIEW empvu10(employee_number, employee_name, job_title)
AS SELECT employee_id, last_name, job_id
FROM employees
WHERE department_id=10
WITH READ ONLY;
```

Find the Solution for the following:

1. Create a view called EMPLOYEE\_VU based on the employee numbers, employee names and department numbers from the EMPLOYEES table. Change the heading for the employee name to EMPLOYEE.

Create view or as select employee-name, emp-num, dept-num

create or replace view or( employee, from employee-vu

2. Display the contents of the EMPLOYEES\_VU view.

employee-name, emp-num, dept-num ) as select  
select \* from employee-vu;

3. Select the view name and text from the USER\_VIEWS data dictionary views.

Select view-name text from USER-VIEWS

4. Using your EMPLOYEES\_VU view, enter a query to display all employees names and department.

Select employee, dept - from employee-vu ;

5. Create a view named DEPT50 that contains the employee number, employee last names and department numbers for all employees in department 50. Label the view columns EMPNO, EMPLOYEE and DEPTNO. Do not allow an employee to be reassigned to another department through the view.

*Create view Dept 50 as select emp-num, last-name, dept-num from employee-vu where dept = '50';*

*Create or replace view Dept 50(EMPNO, EMPLOYEE, DEPTNO) as select \* from employee-vu where dept = '50';*

6. Display the structure and contents of the DEPT50 view.

*Select \* from Dept 50*

7. Attempt to reassign Matos to department 80.

*Update dept 50 set dept-no = 80 where employee = 'matos';  
ORA-42398: can't perform DML operation on a read only view*

8. Create a view called SALARY\_VU based on the employee last names, department names, salaries, and salary grades for all employees. Use the Employees, DEPARTMENTS and JOB\_GRADE tables. Label the column Employee, Department, salary, and Grade respectively.

*Create view salary-vu as select emp-last, dept-names, salary, grades from salary.*

| Evaluation Procedure | Marks awarded |
|----------------------|---------------|
| Query(5)             | 5             |
| Execution (5)        | 5             |
| Viva(5)              | 5             |
| Total (15)           | 15            |
| Faculty Signature    | <i>R</i>      |

|           |                              |
|-----------|------------------------------|
| Ex.No.: 6 | RESTRICTING AND SORTING DATA |
| Date:     |                              |

After the completion of this exercise, the students will be able to do the following:

- Limit the rows retrieved by the queries
- Sort the rows retrieved by the queries
- 

### Limits the Rows selected

- Using WHERE clause
- Alias cannot be used in WHERE clause

#### Syntax

SELECT-----

FROM-----

WHERE condition;

#### Example:

```
SELECT employee_id, last_name, job_id, department_id FROM employees WHERE
department_id=90;
```

### Character strings and Dates

Character strings and date values are enclosed in single quotation marks.

Character values are case sensitive and date values are format sensitive.

#### Example:

```
SELECT employee_id, last_name, job_id, department_id FROM employees
WHERE last_name='WHALEN';
```

#### Comparison Conditions

All relational operators can be used. (=, >, >=, <, <=, <>, !=)

#### Example:

```
SELECT last_name, salary
```

```
FROM employees
WHERE salary<=3000;
```

#### Other comparison conditions

| Operator             | Meaning                       |
|----------------------|-------------------------------|
| BETWEEN<br>...AND... | Between two values            |
| IN                   | Match any of a list of values |
| LIKE                 | Match a character pattern     |
| IS NULL              | Is a null values              |

#### Example:1

```
SELECT last_name, salary
FROM employees
WHERE salary BETWEEN 2500 AND 3500;
```

#### Example:2

```
SELECT employee_id, last_name, salary , manager_id
FROM employees
WHERE manager_id IN (101, 100,201);
```

#### Example:3

- Use the LIKE condition to perform wildcard searches of valid string values.
- Two symbols can be used to construct the search string
- % denotes zero or more characters
- \_ denotes one character

```
SELECT first_name, salary
FROM employees
WHERE first_name LIKE '%s';
```

#### Example:4

```
SELECT last_name, salary
FROM employees
WHERE last_name LIKE '_o%';
```

### Example:5

**ESCAPE option**-To have an exact match for the actual % and \_ characters  
To search for the string that contain 'SA\_'

```
SELECT employee_id, first_name, salary, job_id
FROM employees
WHERE job_id LIKE '%sa_%'ESCAPE'\';
```

### Test for NULL

- Using IS NULL operator

### Example:

```
SELECT employee_id, last_name, salary, manager_id
FROM employees
WHERE manager_id IS NULL;
```

### Logical Conditions

All logical operators can be used.( AND,OR,NOT)

### Example:1

```
SELECT employee_id, last_name, salary, job_id
FROM employees
WHERE salary >= 10000
AND job_id LIKE '%MAN%';
```

### Example:2

```
SELECT employee_id, last_name, salary, job_id
FROM employees
WHERE salary >= 10000
OR job_id LIKE '%MAN%';
```

### Example:3

```
SELECT employee_id, last_name, salary, job_id
FROM employees
WHERE job_id NOT IN ('it_prog', 'st_clerk', 'sa_rep');
```

### Rules of Precedence

| Order Evaluated | Operator   |
|-----------------|------------|
| 1               | Arithmetic |

|   |                                  |
|---|----------------------------------|
| 2 | Concatenation                    |
| 3 | Comparison                       |
| 4 | IS [NOT] NULL, LIKE, [NOT]<br>IN |
| 5 | [NOT] BETWEEN                    |
| 6 | Logical NOT                      |
| 7 | Logical AND                      |
| 8 | Logical OR                       |

### Example:1

```
SELECT employee_id, last_name, salary ,job_id
FROM employees
WHERE job_id = 'sa_rep'
OR job_id='ad_pres'
AND salary>15000;
```

### Example:2

```
SELECT employee_id, last_name, salary ,job_id
FROM employees
WHERE (job_id = 'sa_rep'
OR job_id='ad_pres')
AND salary>15000;
```

### Sorting the rows

Using ORDER BY Clause

ASC-Ascending Order,Default

DESC-Descending order

### Example:1

```
SELECT last_name, salary ,job_id,department_id,hire_date
FROM employees
ORDER BY hire_date;
```

### Example:2

```
SELECT last_name, salary ,job_id,department_id,hire_date
FROM employees
ORDER BY hire_date DESC;
```

### Example:3

Sorting by column alias

```
SELECT last_name, salary*12 annsal , job_id,department_id,hire_date
FROM employees
ORDER BY annsal;
```

Example:4

Sorting by Multiple columns

```
SELECT last_name, salary , job_id,department_id,hire_date
FROM employees
ORDER BY department_id, salary DESC;
```

Find the Solution for the following:

1. Create a query to display the last name and salary of employees earning more than 12000.

Select Last\_Name , salary from empTable where salary > 12000;

2. Create a query to display the employee last name and department number for employee number 176.

Select Last\_Name , Department\_id from empTable where Employee\_id = 176;

3. Create a query to display the last name and salary of employees whose salary is not in the range of 5000 and 12000. (hints: not between )

Select Last\_Name , salary from empTable4 where salary  
not between 5000 and 12000;

4. Display the employee last name, job ID, and start date of employees hired between February 20,1998 and May 1,1998.order the query in ascending order by start date.(hints: between)

Select Last\_Name , Job\_id , start\_date from empTable4  
where Hire\_date between '02-20-1998' and '05-01-1998';

5. Display the last name and department number of all employees in departments 20 and 50 in alphabetical order by name.(hints: in, orderby)

Select Last-name, Department-id from empTable4 where  
Department-id in (20, 50) order by Last-name;

6. Display the last name and salary of all employees who earn between 5000 and 12000 and are in departments 20 and 50 in alphabetical order by name. Label the columns EMPLOYEE, MONTHLY SALARY respectively.(hints: between, in)

Select Last-name, Hire-date from empTable4 where Hire-date  
Like '1994-%'; Select Last-name as EMPLOYEE, salary as  
'MONTHLY SALARY' from empTable4 where salary between 5000 and 12000  
and Department-id in (20, 50) order By Last-name;

7. Display the last name and hire date of every employee who was hired in 1994.(hints: like)

Select Last-name, job-id from Hire-date from empTable4  
where Hire-date like '1994-%'.

8. Display the last name and job title of all employees who do not have a manager.(hints: is null)

Select Last-name, job-id from empTable4 where  
Manager-id is Null;

9. Display the last name, salary, and commission for all employees who earn commissions. Sort data in descending order of salary and commissions.(hints: is not null,order by)

select where commission-pct is not NULL and salary  
commission-pct when commission-pct is not null order by  
salary desc, commission-pct desc;

10. Display the last name of all employees where the third letter of the name is a.(hints:like)

select last-name from empstable4 where last-name like  
'\_ . a ';

11. Display the last name of all employees who have an a and an e in their last name.(hints: like)

select last-name from empstable4 where like '%. a %' and  
last-name like '%. e %';

12. Display the last name and job and salary for all employees whose job is sales representative or stock clerk and whose salary is not equal to 2500 ,3500 or 7000.(hints:in,not in)

select last-name, job-id, salary from empstable4 where  
(job-id = 'DEV01' or job-id = 'MKT01') and salary NOT IN (2500, 3500, 7000);

| Evaluation Procedure | Marks awarded |
|----------------------|---------------|
| Query(5)             | 5             |
| Execution (5)        | 5             |
| Viva(5)              | 5             |
| Total (15)           | 15            |
| Faculty Signature    | R             |

|           |                     |
|-----------|---------------------|
| Ex.No.: 7 | USING SET OPERATORS |
| Date:     |                     |

**Objectives**

After the completion this exercise, the students should be able to do the following:

- Describe set operators
- Use a set operator to combine multiple queries into a single query
- Control the order of rows returned

The set operators combine the results of two or more component queries into one result.

Queries containing set operators are called *compound queries*.

| Operator  | Returns                                                                                                           |
|-----------|-------------------------------------------------------------------------------------------------------------------|
| UNION     | All distinct rows selected by either query                                                                        |
| UNION ALL | All rows selected by either query, including all duplicates                                                       |
| INTERSECT | All distinct rows selected by both queries                                                                        |
| MINUS     | All distinct rows that are selected by the first SELECT statement and not selected in the second SELECT statement |

**The tables used in this lesson are:**

- EMPLOYEES: Provides details regarding all current employees
- JOB\_HISTORY: Records the details of the start date and end date of the former job, and the job identification number and department when an employee switches jobs

**UNION Operator****Guidelines**

- The number of columns and the data types of the columns being selected must be identical in all the SELECT statements used in the query. The names of the columns need not be identical.
- UNION operates over all of the columns being selected.
- NULL values are not ignored during duplicate checking.
- The IN operator has a higher precedence than the UNION operator.

- By default, the output is sorted in ascending order of the first column of the SELECT clause.

**Example:**

Display the current and previous job details of all employees. Display each employee only once.

```
SELECT employee_id, job_id FROM employees UNION SELECT employee_id, job_id
FROM job_history;
```

**Example:**

```
SELECT employee_id, job_id, department_id
FROM employees
UNION
SELECT employee_id, job_id, department_id
FROM job_history;
```

**UNION ALL Operator**

**Guidelines**

The guidelines for UNION and UNION ALL are the same, with the following two exceptions that pertain to UNION ALL:

- Unlike UNION, duplicate rows are not eliminated and the output is not sorted by default.
- The DISTINCT keyword cannot be used.

**Example:**

Display the current and previous departments of all employees.

```
SELECT employee_id, job_id, department_id
FROM employees
UNION ALL
SELECT employee_id, job_id, department_id
FROM job_history
ORDER BY employee_id;
```

**INTERSECT Operator**

**Guidelines**

- The number of columns and the data types of the columns being selected by the SELECT statements in the queries must be identical in all the SELECT statements used in the query. The names of the columns need not be identical.
- Reversing the order of the intersected tables does not alter the result.
- INTERSECT does not ignore NULL values.

**Example:**

Display the employee IDs and job IDs of those employees who currently have a job title that is the same as their job title when they were initially hired (that is, they changed jobs but have now gone back to doing their original job).

```
SELECT employee_id, job_id FROM employees
INTERSECT
SELECT employee_id, job_id
FROM job_history;
```

**Example**

```
SELECT employee_id, job_id, department_id
FROM employees
INTERSECT
SELECT employee_id, job_id, department_id
FROM job_history;
```

**MINUS Operator**

**Guidelines**

- The number of columns and the data types of the columns being selected by the SELECT statements in the queries must be identical in all the SELECT statements used in the query. The names of the columns need not be identical.
- All of the columns in the WHERE clause must be in the SELECT clause for the MINUS operator to work.

**Example:**

Display the employee IDs of those employees who have not changed their jobs even once.

```
SELECT employee_id, job_id
FROM employees
MINUS
SELECT employee_id, job_id
FROM job_history;
```

**Find the Solution for the following:**

1. The HR department needs a list of department IDs for departments that do not contain the job ID ST\_CLERK. Use set operators to create this report.

select dept-ID from emp MINUS select dept-ID from  
emp where job-id = 'ST\_CLERK'.

2. The HR department needs a list of countries that have no departments located in them. Display the country ID and the name of the countries. Use set operators to create this report.

select country-ID, Employee-name from country MINUS  
select conty-ID, country-name from country join  
departments dep on country-ID = dep.country-ID;

3. Produce a list of jobs for departments 10, 50, and 20, in that order. Display job ID and department ID using set operators.

(select job\_id, dep\_id from emp where Dep-id = '10') union  
(select job\_id, dep\_id from emp where Dep-id = '20') union  
(select job\_id, dep\_id from emp where Dep-id = '30')

4. Create a report that lists the employee IDs and job IDs of those employees who currently have a job title that is the same as their job title when they were initially hired by the company (that is, they changed jobs but have now gone back to doing their original job).

select emp\_id, job\_id from insert  
select Emp-id, original job-id from emp;

5. The HR department needs a report with the following specifications:

- Last name and department ID of all the employees from the EMPLOYEES table, regardless of whether or not they belong to a department.

- Department ID and department name of all the departments from the DEPARTMENTS table, regardless of whether or not they have employees working in them Write a compound query to accomplish this.

| Evaluation Procedure | Marks awarded |
|----------------------|---------------|
| Query(5)             | 5             |
| Execution (5)        | 5             |
| Viva(5)              | 5             |
| Total (15)           | 15            |
| Faculty Signature    | K             |

5. select emp-lastname, dept-id. Null as dept-name, name  
from emp  
Union ALL select NULL as lastname , dep-id ,  
dep-name from dept;

|           |  |
|-----------|--|
| Ex.No.: 8 |  |
| Date:     |  |

## WORKING WITH MULTIPLE TABLES

### Objective

After the completion of this exercise, the students will be able to do the following:

- Write SELECT statements to access data from more than one table using equality and nonequality joins
  - View data that generally does not meet a join condition by using outer joins
  - Join a table to itself by using a self join
- Sometimes you need to use data from more than one table.

### Cartesian Products

- A Cartesian product is formed when:
    - A join condition is omitted
    - A join condition is invalid
    - All rows in the first table are joined to all rows in the second table
  - To avoid a Cartesian product, always include a valid join condition in a WHERE clause.
- A Cartesian product tends to generate a large number of rows, and the result is rarely useful. You should always include a valid join condition in a WHERE clause, unless you have a specific need to combine all rows from all tables.
- Cartesian products are useful for some tests when you need to generate a large number of rows to simulate a reasonable amount of data.

### Example:

To displays employee last name and department name from the EMPLOYEES and DEPARTMENTS tables.

```
SELECT last_name, department_name dept_name
FROM employees, departments;
```

### Types of Joins

- Equijoin
- Non-equijoin
- Outer join
- Self join
- Cross joins
- Natural joins
- Using clause
- Full or two sided outer joins
- Arbitrary join conditions for outer joins

### Joining Tables Using Oracle Syntax

```
SELECT table1.column, table2.column
```

```
FROM table1, table2
WHERE table1.column1 = table2.column2;
```

Write the join condition in the WHERE clause.

- Prefix the column name with the table name when the same column name appears in more than one table.

### Guidelines

- When writing a SELECT statement that joins tables, precede the column name with the table name for clarity and to enhance database access.
- If the same column name appears in more than one table, the column name must be prefixed with the table name.
- To join n tables together, you need a minimum of n-1 join conditions. For example, to join four tables, a minimum of three joins is required. This rule may not apply if your table has a concatenated primary key, in which case more than one column is required to uniquely identify each row

### **What is an Equijoin?**

To determine an employee's department name, you compare the value in the DEPARTMENT\_ID column in the EMPLOYEES table with the DEPARTMENT\_ID values in the DEPARTMENTS table.

The relationship between the EMPLOYEES and DEPARTMENTS tables is an equijoin—that is, values in the DEPARTMENT\_ID column on both tables must be equal. Frequently, this type of join involves

primary and foreign key complements.

Note: Equijoins are also called simple joins or inner joins

```
SELECT employees.employee_id, employees.last_name, employees.department_id,
 departments.department_id, departments.location_id
FROM employees, departments
WHERE employees.department_id = departments.department_id;
```

### Additional Search Conditions

#### **Using the AND Operator**

#### Example:

To display employee Matos' department number and department name, you need an additional condition in the WHERE clause.

```
SELECT last_name, employees.department_id,
 department_name
FROM employees, departments
WHERE employees.department_id = departments.department_id AND last_name = 'Matos';
```

#### **Qualifying Ambiguous**

### **Column Names**

- Use table prefixes to qualify column names that are in multiple tables.
- Improve performance by using table prefixes.
- Distinguish columns that have identical names but reside in different tables by using column aliases.

### **Using Table Aliases**

- Simplify queries by using table aliases.
- Improve performance by using table prefixes

#### **Example:**

```
SELECT e.employee_id, e.last_name, e.department_id,
d.department_id, d.location_id
FROM employees e , departments d
WHERE e.department_id = d.department_id;
```

### **Joining More than Two Tables**

To join n tables together, you need a minimum of n-1 join conditions. For example, to join three tables, a minimum of two joins is required.

#### **Example:**

To display the last name, the department name, and the city for each employee, you have to join the EMPLOYEES, DEPARTMENTS, and LOCATIONS tables.

```
SELECT e.last_name, d.department_name, l.city
FROM employees e, departments d, locations l
WHERE e.department_id = d.department_id
AND d.location_id = l.location_id;
```

### **Non-Equijoins**

A non-equijoin is a join condition containing something other than an equality operator. The relationship between the EMPLOYEES table and the JOB\_GRADES table has an example of a non-equijoin. A relationship between the two tables is that the SALARY column in the EMPLOYEES table must be between the values in the LOWEST\_SALARY and HIGHEST\_SALARY columns of the JOB\_GRADES table. The relationship is obtained using an operator other than equals (=).

#### **Example:**

```
SELECT e.last_name, e.salary, j.grade_level
FROM employees e, job_grades j
WHERE e.salary
BETWEEN j.lowest_sal AND j.highest_sal;
```

### **Outer Joins**

#### **Syntax**

- You use an outer join to also see rows that do not meet the join condition.
- The Outer join operator is the plus sign (+).

```
SELECT table1.column, table2.column
FROM table1, table2
WHERE table1.column(+) = table2.column;
SELECT table1.column, table2.column
FROM table1, table2
WHERE table1.column = table2.column(+);
```

The missing rows can be returned if an outer join operator is used in the join condition. The operator is a plus sign enclosed in parentheses (+), and it is placed on the "side" of the join that is deficient in information. This operator has the effect of creating one or more null rows, to which one or more rows from the nondeficient table can be joined.

Example:

```
SELECT e.last_name, e.department_id, d.department_name
FROM employees e, departments d
WHERE e.department_id(+) = d.department_id ;
```

### Outer Join Restrictions

- The outer join operator can appear on only one side of the expression—the side that has information missing. It returns those rows from one table that have no direct match in the other table.
- A condition involving an outer join cannot use the IN operator or be linked to another condition by the OR operator

Self Join

Sometimes you need to join a table to itself.

Example:

To find the name of each employee's manager, you need to join the EMPLOYEES table to itself, or perform a self join.

```
SELECT worker.last_name || ' works for '
|| manager.last_name
FROM employees worker, employees manager
WHERE worker.manager_id = manager.employee_id ;
```

Use a join to query data from more than one table.  
SELECT table1.column, table2.column

```
FROM table1
[CROSS JOIN table2] |
[NATURAL JOIN table2] |
[JOIN table2 USING (column_name)] |
[JOIN table2
ON(table1.column_name = table2.column_name)] |
[LEFT|RIGHT|FULL OUTER JOIN table2
ON (table1.column_name = table2.column_name)];
```

In the syntax:

table1.column Denotes the table and column from which data is retrieved

CROSS JOIN Returns a Cartesian product from the two tables

NATURAL JOIN Joins two tables based on the same column name

JOIN table USING column\_name Performs an equijoin based on the column name

JOIN table ON table1.column\_name Performs an equijoin based on the condition in the ON clause  
= table2.column\_name

## LEFT/RIGHT/FULL OUTER

### **Creating Cross Joins**

- The CROSS JOIN clause produces the crossproduct of two tables.
- This is the same as a Cartesian product between the two tables.

### **Example:**

```
SELECT last_name, department_name
FROM employees
CROSS JOIN departments ;
SELECT last_name, department_name
FROM employees, departments;
```

### **Creating Natural Joins**

- The NATURAL JOIN clause is based on all columns in the two tables that have the same name.
- It selects rows from the two tables that have equal values in all matched columns.
- If the columns having the same names have different data types, an error is returned.

```
Example:
SELECT department_id, department_name,
location_id, city
FROM departments
NATURAL JOIN locations ;
```

LOCATIONS table is joined to the DEPARTMENT table by the LOCATION\_ID column, which is the only column of the same name in both tables. If other common columns were present, the join would have used them all.

Example:

```
SELECT department_id, department_name,
location_id, city
FROM departments
NATURAL JOIN locations
WHERE department_id IN (20, 50);
```

### Creating Joins with the USING Clause

- If several columns have the same names but the data types do not match, the NATURAL JOIN clause can be modified with the USING clause to specify the columns that should be used for an equijoin.
- Use the USING clause to match only one column when more than one column matches.
- Do not use a table name or alias in the referenced columns.
- The NATURAL JOIN and USING clauses are mutually exclusive.

Example:

```
SELECT l.city, d.department_name
FROM locations l JOIN departments d USING (location_id)
WHERE location_id = 1400;
EXAMPLE:
```

```
SELECT e.employee_id, e.last_name, d.location_id
FROM employees e JOIN departments d
USING (department_id);
```

### Creating Joins with the ON Clause

- The join condition for the natural join is basically an equijoin of all columns with the same name.
- To specify arbitrary conditions or specify columns to join, the ON clause is used.
- The join condition is separated from other searchconditions.
- The ON clause makes code easy to understand.

Example:

```
SELECT e.employee_id, e.last_name, e.department_id,
d.department_id, d.location_id
FROM employees e JOIN departments d
ON (e.department_id = d.department_id);
EXAMPLE:
```

```
SELECT e.last_name emp, m.last_name mgr
FROM employees e JOIN employees m
```

ON (e.manager\_id = m.employee\_id);  
INNER Versus OUTER Joins

- A join between two tables that returns the results of the inner join as well as unmatched rows left (or right) tables is a left (or right) outer join.
- A join between two tables that returns the results of an inner join as well as the results of a left and right join is a full outer join.

### LEFT OUTER JOIN

#### Example:

```
SELECT e.last_name, e.department_id, d.department_name
FROM employees e
LEFT OUTER JOIN departments d
ON (e.department_id = d.department_id);
```

Example of LEFT OUTER JOIN

This query retrieves all rows in the EMPLOYEES table, which is the left table even if there is no match in the DEPARTMENTS table.

This query was completed in earlier releases as follows:

```
SELECT e.last_name, e.department_id, d.department_name
FROM employees e, departments d
WHERE d.department_id (+) = e.department_id;
```

### RIGHT OUTER JOIN

#### Example:

```
SELECT e.last_name, e.department_id, d.department_name
FROM employees e
RIGHT OUTER JOIN departments d
ON (e.department_id = d.department_id);
```

This query retrieves all rows in the DEPARTMENTS table, which is the right table even if there is no match in the EMPLOYEES table.

This query was completed in earlier releases as follows:

```
SELECT e.last_name, e.department_id, d.department_name
FROM employees e, departments d
WHERE d.department_id = e.department_id (+);
```

### FULL OUTER JOIN

#### Example:

```
SELECT e.last_name, e.department_id, d.department_name
FROM employees e
FULL OUTER JOIN departments d
ON (e.department_id = d.department_id);
```

This query retrieves all rows in the EMPLOYEES table, even if there is no match in the DEPARTMENTS table. It also retrieves all rows in the DEPARTMENTS table, even if there is no match in the EMPLOYEES table.

#### Find the Solution for the following:

1. Write a query to display the last name, department number, and department name for all employees.

~~Select department\_id from employees, department d.  
d.department\_name from employees e, department d.  
where e.department\_id = d.department\_id;~~

2. Create a unique listing of all jobs that are in department 80. Include the location of the department in the output.

~~Select distinct job\_id, location\_id from employees, departments  
where employees.department\_id = departments.department\_id  
and employees.department\_id = 80;~~

3. Write a query to display the employee last name, department name, location ID, and city of all employees who earn a commission

~~Select e.last\_name, d.department\_name, d.location\_id,  
l.city from employees e, departments d, locations l.  
where e.department\_id = d.department\_id and  
and  
d.location\_id = l.location\_id.  
And e.commission\_pct is not null;~~

2. Display the employee last name and department name for all employees who have an a(lowercase) in their last names. P
- select e.last-name, d.department-name from employees, departments  
where employees.department-id = departments.department-id and  
last-name like '%a%';
5. Write a query to display the last name, job, department number, and department name for all employees who work in Toronto.

select e.last-name, e.job-id, e.department-id, d.department-name  
from employees e join departments d on (e.department-id  
= d.department-id)  
join location l ON (d.location-id = l.location-id)  
where lower(d.city) = 'toronto';

6. Display the employee last name and employee number along with their manager's last name and manager number. Label the columns Employee, Emp#, Manager, and Mgr#, Respectively

Select w.last-name "Employee", w.employee-id "Emp#"  
m.last-name "Manager", m.employee-id "Mgr#"  
From employees w join employees m on (w.manager-id =  
m.employee-id);

7. Modify lab4\_6.sql to display all employees including King, who has no manager. Order the results by the employee number.

Select w.last-name "Employee", w.employee-id "Emp#"  
m.last-name "Manager", m.employee-id "Mgr#"  
From employees w left outer join employees m  
ON (w.manager-id = m.employee-id);

8. Create a query that displays employee last names, department numbers, and all the employees who work in the same department as a given employee. Give each column an appropriate label

Select e.department-id "Department", e.last-name "Employee",  
c.last-name "Colleague"  
From employees e join employees c ON (e.department-id =  
c.department-id) where e.employee-id <> c.employee-id.  
order by e.department-id, e.last-name, c.last-name;

9. Show the structure of the JOB\_GRADES table. Create a query that displays the name, job, department name, salary, and grade for all employees

desc JOB\_GRADES

SELECT e.last-name, e.job-id, d.department-name, e.salary,  
j.grade-level From employees e join department d  
ON (e.department-id = d.department-id) join jobgrads  
ON (e.salary Between j.lowest-sal and j.highest-sal);

10. Create a query to display the name and hire date of any employee hired after employee Davies.

select e.last-name, e.hire-date, m.last-name from employees  
e join employees davies on (davies.last-name = 'davies')  
where davies.hire-date < e.hire-date;

11. Display the names and hire dates for all employees who were hired before their managers, along with their manager's names and hire dates. Label the columns Employee, Emp Hired, Manager, and Mgr Hired, respectively.

select w.last-name, w.hire-date, m.last-name, m.hire-date  
from employees w join employees m  
on (w.manager-id = m.employee-id).  
where w.hire-date < m.hire-date;

| Evaluation Procedure | Marks awarded |
|----------------------|---------------|
| Query(5)             | 5             |
| Execution (5)        | 5             |
| Viva(5)              | 5             |
| Total (15)           | 15            |
| Faculty Signature    | (P)           |

|           |  |
|-----------|--|
| Ex.No.: 9 |  |
| Date:     |  |

## SUB QUERIES

### Objectives

After completing this lesson, you should be able to do the following:

- Define subqueries
- Describe the types of problems that subqueries can solve
- List the types of subqueries
- Write single-row and multiple-row subqueries

### Using a Subquery to Solve a Problem

Who has a salary greater than Abel's?

#### Main query:

Which employees have salaries greater than Abel's salary?

#### Subquery:

What is Abel's salary?

### Subquery Syntax

`SELECT select_list FROM table WHERE expr operator (SELECT select_list FROM table);`

- The subquery (inner query) executes once before the main query (outer query).
- The result of the subquery is used by the main query.

A subquery is a SELECT statement that is embedded in a clause of another SELECT statement. You can build powerful statements out of simple ones by using subqueries. They can be very useful when you need to select rows from a table with a condition that depends on the data in the table itself.

You can place the subquery in a number of SQL clauses, including the following:

- WHERE clause
- HAVING clause
- FROM clause

#### In the syntax:

*operator* includes a comparison condition such as `>`, `=`, or `IN`

**Note:** Comparison conditions fall into two classes: single-row operators

( $>$ ,  $=$ ,  $\geq$ ,  $<$ ,  $\leq$ ,  $\neq$ ) and multiple-row operators (IN, ANY, ALL). statement. The subquery generally executes first, and its output is used to complete the query condition for the main (or outer) query

### Using a Subquery

```
SELECT last_name FROM employees WHERE salary > (SELECT salary FROM employees
WHERE last_name = 'Abel');
```

The inner query determines the salary of employee Abel. The outer query takes the result of the inner query and uses this result to display all the employees who earn more than this amount.

### Guidelines for Using Subqueries

- Enclose subqueries in parentheses.
- Place subqueries on the right side of the comparison condition.
- The ORDER BY clause in the subquery is not needed unless you are performing Top-N analysis.
- Use single-row operators with single-row subqueries, and use multiple-row operators with multiple-row subqueries.

### Types of Subqueries

- Single-row subqueries: Queries that return only one row from the inner SELECT statement.
- Multiple-row subqueries: Queries that return more than one row from the inner SELECT statement.

### Single-Row Subqueries

- Return only one row
- Use single-row comparison operators

### Example

Display the employees whose job ID is the same as that of employee 141:

```
SELECT last_name, job_id FROM employees WHERE job_id = (SELECT job_id FROM
employees
WHERE employee_id = 141);
```

Displays employees whose job ID is the same as that of employee 141 and whose salary is greater than that of employee 143.

```
SELECT last_name, job_id, salary FROM employees WHERE job_id = (SELECT job_id FROM employees WHERE employee_id = 141) AND salary > (SELECT salary FROM employees WHERE employee_id = 143);
```

### Using Group Functions in a Subquery

Displays the employee last name, job ID, and salary of all employees whose salary is equal to the minimum salary. The MIN group function returns a single value (2500) to the outer query.

```
SELECT last_name, job_id, salary FROM employees WHERE salary = (SELECT MIN(salary) FROM employees);
```

### The HAVING Clause with Subqueries

- The Oracle server executes subqueries first.
- The Oracle server returns results into the HAVING clause of the main query.

Displays all the departments that have a minimum salary greater than that of department 50.

```
SELECT department_id, MIN(salary)
FROM employees
GROUP BY department_id
HAVING MIN(salary) >
(SELECT MIN(salary)
FROM employees
WHERE department_id = 50);
```

### Example

Find the job with the lowest average salary.

```
SELECT job_id, AVG(salary)
FROM employees
GROUP BY job_id
HAVING AVG(salary) = (SELECT MIN(AVG(salary))
FROM employees
GROUP BY job_id);
```

### What Is Wrong in this Statements?

```
SELECT employee_id, last_name
FROM employees
```

```
WHERE salary =(SELECT MIN(salary) FROM employees GROUP BY department_id);
Will This Statement Return Rows?
SELECT last_name, job_id
FROM employees
WHERE job_id =(SELECT job_id FROM employees WHERE last_name = 'Haas');
```

### Multiple-Row Subqueries

- Return more than one row
- Use multiple-row comparison operators

### Example

Find the employees who earn the same salary as the minimum salary for each department.

```
SELECT last_name, salary, department_id FROM employees WHERE salary IN (SELECT
MIN(salary)
FROM employees GROUP BY department_id);
```

Using the ANY Operator in Multiple-Row Subqueries

```
SELECT employee_id, last_name, job_id, salary FROM employees WHERE salary < ANY
(SELECT salary FROM employees WHERE job_id = 'IT_PROG') AND job_id >> 'IT_PROG';
```

Displays employees who are not IT programmers and whose salary is less than that of any IT programmer. The maximum salary that a programmer earns is \$9,000.

< ANY means less than the maximum. >ANY means more than the minimum. =ANY is equivalent to IN.

### Using the ALL Operator in Multiple-Row Subqueries

```
SELECT employee_id, last_name, job_id, salary
FROM employees
WHERE salary < ALL (SELECT salary FROM employees WHERE job_id = 'IT_PROG')
AND job_id >> 'IT_PROG';
Displays employees whose salary is less than the salary of all employees with a job ID of
IT_PROG and whose job is not IT_PROG.
• ALL means more than the maximum, and <ALL means less than the minimum.
```

The NOT operator can be used with IN, ANY, and ALL operators.

### Null Values in a Subquery

```
SELECT emp.last_name FROM employees emp
```

```
WHERE emp.employee_id NOT IN (SELECT mgr.manager_id FROM employees mgr);
```

Notice that the null value as part of the results set of a subquery is not a problem if you use the IN operator. The IN operator is equivalent to =ANY. For example, to display the employees who have subordinates, use the following SQL statement:

```
SELECT emp.last_name
FROM employees emp
WHERE emp.employee_id IN (SELECT mgr.manager_id FROM employees mgr);
```

Display all employees who do not have any subordinates:

```
SELECT last_name FROM employees
WHERE employee_id NOT IN (SELECT manager_id FROM employees WHERE manager_id
IS NOT NULL);
```

#### Find the Solution for the following:

1. The HR department needs a query that prompts the user for an employee last name. The query then displays the last name and hire date of any employee in the same department as the employee whose name they supply (excluding that employee). For example, if the user enters Zlotkey, find all employees who work with Zlotkey (excluding Zlotkey).

Select last\_name AS 'Last-name', entry-year AS 'HireDate'  
From emp where department\_id = (Select department\_id from  
emp where.

Last-name = 'Zlotkey') AND Last-name <> 'Zlotkey';

2. Create a report that displays the employee number, last name, and salary of all employees who earn more than the average salary. Sort the results in order of ascending salary.

Select employee\_id AS 'Employee-ID', last\_name AS 'Last-name',  
salary AS 'Salary' from emp where salary > (select  
Avg(salary) from emp) order by salary;

3. Write a query that displays the employee number and last name of all employees who work in a department with any employee whose last name contains a u.

Select employee\_id, last\_name from emp where  
department\_id

IN (select department\_id from emp where last\_name  
Like '%.u.%');

4. The HR department needs a report that displays the last name, department number, and job ID of all employees whose department location ID is 1700.

Select last-name AS 'Last Name', department\_id AS 'Department Number', job\_id AS 'Job ID' FROM emp WHERE department\_id = (Select department\_id FROM emp WHERE location\_id = 1700) IN (Select department\_id FROM emp WHERE location\_id = 1700)

5. Create a report for HR that displays the last name and salary of every employee who reports to King.

Select last\_name, salary FROM emp WHERE manager\_name = 'King';

6. Create a report for HR that displays the department number, last name, and job ID for every employee in the Executive department.

Select department\_id AS 'Department Number', last-name AS 'Last Name', job\_id AS 'Job ID' FROM emp WHERE department\_id = (Select department\_id FROM emp WHERE department\_name = 'Executive');

7. Modify the query 3 to display the employee number, last name, and salary of all employees who earn more than the average salary and who work in a department with any employee whose last name contains a u.

Select employee\_id, last\_name, salary FROM emp WHERE salary > (Select AVG(salary) FROM emp) AND department\_id IN (Select distinct department\_id FROM emp WHERE last\_name like '%u%') ORDER BY salary ASC;

| Evaluation Procedure | Marks awarded |
|----------------------|---------------|
| Query(5)             | 5             |
| Execution (5)        | 5             |
| Viva(5)              | 5             |
| Total (15)           | 15            |
| Faculty Signature    | (R)           |

Ex.No.: 10

Date:

## AGGREGATING DATA USING GROUP FUNCTIONS

### Objectives

After the completion of this exercise, the students will be able to do the following:

- Identify the available group functions
- Describe the use of group functions
- Group data by using the GROUP BY clause
- Include or exclude grouped rows by using the HAVING clause

### What Are Group Functions?

Group functions operate on sets of rows to give one result per group

### Types of Group Functions

- AVG
- COUNT
- MAX
- MIN
- STDDEV
- SUM
- VARIANCE

Each of the functions accepts an argument. The following table identifies the options that you can use in the syntax:

| Function                       | Description                                                                                                                                          |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| AVG([DISTINCT ALL] n)          | Average value of <i>n</i> , ignoring null values                                                                                                     |
| COUNT({* [DISTINCT ALL] expr}) | Number of rows, where <i>expr</i> evaluates to something other than null (count all selected rows using *, including duplicates and rows with nulls) |
| MAX([DISTINCT ALL] expr)       | Maximum value of <i>expr</i> , ignoring null values                                                                                                  |
| MIN([DISTINCT ALL] expr)       | Minimum value of <i>expr</i> , ignoring null values                                                                                                  |
| STDDEV([DISTINCT ALL] x)       | Standard deviation of <i>n</i> , ignoring null values                                                                                                |
| SUM([DISTINCT ALL] n)          | Sum values of <i>n</i> , ignoring null values                                                                                                        |
| VARIANCE([DISTINCT ALL] x)     | Variance of <i>n</i> , ignoring null values                                                                                                          |

### Group Functions: Syntax

```
SELECT [column,] group_function(column), ...
FROM table
[WHERE condition]
```

[GROUP BY *column*]  
[ORDER BY *column*];

### Guidelines for Using Group Functions

- DISTINCT makes the function consider only nonduplicate values; ALL makes it consider every value, including duplicates. The default is ALL and therefore does not need to be specified.
- The data types for the functions with an expr argument may be CHAR, VARCHAR2, NUMBER, or DATE.
- All group functions ignore null values.

### Using the AVG and SUM Functions

You can use AVG and SUM for numeric data.

```
SELECT AVG(salary), MAX(salary),
MIN(salary), SUM(salary)
FROM employees
WHERE job_id LIKE '%REP%';
```

### Using the MIN and MAX Functions

You can use MIN and MAX for numeric, character, and date data types.

```
SELECT MIN(hire_date), MAX(hire_date)
FROM employees;
```

You can use the MAX and MIN functions for numeric, character, and date data types. example displays the most junior and most senior employees.

The following example displays the employee last name that is first and the employee last name that is last in an alphabetized list of all employees:

```
SELECT MIN(last_name), MAX(last_name)
FROM employees;
```

**Note:** The AVG, SUM, VARIANCE, and STDDEV functions can be used only with numeric data types. MAX and MIN cannot be used with LOB or LONG data types.

### Using the COUNT Function

COUNT(\*) returns the number of rows in a table:  
SELECT COUNT(\*)  
FROM employees

```
WHERE department_id = 50;
COUNT(expr) returns the number of rows with nonnull
values for the expr:
SELECT COUNT(commission_pct)
FROM employees
WHERE department_id = 80;
```

### Using the DISTINCT Keyword

- COUNT(DISTINCT expr) returns the number of distinct non-null values of the *expr*.
- To display the number of distinct department values in the EMPLOYEES table:

```
SELECT COUNT(DISTINCT department_id) FROM employees;
```

Use the DISTINCT keyword to suppress the counting of any duplicate values in a column.

### Group Functions and Null Values

Group functions ignore null values in the column:

```
SELECT AVG(commission_pct)
FROM employees;
```

The NVL function forces group functions to include null values:

```
SELECT AVG(NVL(commission_pct, 0))
FROM employees;
```

### Creating Groups of Data

To divide the table of information into smaller groups. This can be done by using the GROUP BY clause.

#### **GROUP BY Clause Syntax**

```
SELECT column, group_function(column)
FROM table
[WHERE condition]
[GROUP BY group_by_expression]
[ORDER BY column];
```

In the syntax:

*group\_by\_expression* specifies columns whose values determine the basis for grouping rows

### Guidelines

- If you include a group function in a SELECT clause, you cannot select individual results as well, *unless* the individual column appears in the GROUP BY clause. You receive an error message if you fail to include the column list in the GROUP BY clause.
- Using a WHERE clause, you can exclude rows before dividing them into groups.
- You must include the *columns* in the GROUP BY clause.
- You cannot use a column alias in the GROUP BY clause.

### Using the GROUP BY Clause

All columns in the SELECT list that are not in group functions must be in the GROUP BY clause.

```
SELECT department_id, AVG(salary)
FROM employees
GROUP BY department_id ;
```

The GROUP BY column does not have to be in the SELECT list.

```
SELECT AVG(salary) FROM employees GROUP BY department_id ;
```

You can use the group function in the ORDER BY clause:

```
SELECT department_id, AVG(salary) FROM employees GROUP BY department_id ORDER
BY AVG(salary);
```

### Grouping by More Than One Column

```
SELECT department_id dept_id, job_id, SUM(salary) FROM employees
GROUP BY department_id, job_id ;
```

### Illegal Queries Using Group Functions

Any column or expression in the SELECT list that is not an aggregate function must be in the GROUP

BY clause:

```
SELECT department_id, COUNT(last_name) FROM employees;
```

You can correct the error by adding the GROUP BY clause:

```
SELECT department_id, count(last_name) FROM employees GROUP BY department_id;
```

You cannot use the WHERE clause to restrict groups.

- You use the HAVING clause to restrict groups.
- You cannot use group functions in the WHERE clause.

```
SELECT department_id, AVG(salary) FROM employees WHERE AVG(salary) > 8000
GROUP BY department_id;
```

You can correct the error in the example by using the HAVING clause to restrict groups:

```
SELECT department_id, AVG(salary) FROM employees
HAVING AVG(salary) > 8000 GROUP BY department_id;
```

### Restricting Group Results

With the HAVING Clause .When you use the HAVING clause, the Oracle server restricts groups as follows:

1. Rows are grouped.
2. The group function is applied.
3. Groups matching the HAVING clause are displayed.

### Using the HAVING Clause

```
SELECT department_id, MAX(salary) FROM employees
GROUP BY department_id HAVING MAX(salary)>10000 ;
```

The following example displays the department numbers and average salaries for those departments with a maximum salary that is greater than \$10,000:

```
SELECT department_id, AVG(salary) FROM employees GROUP BY department_id
HAVING max(salary)>10000;
```

Example displays the job ID and total monthly salary for each job that has a total payroll exceeding \$13,000. The example excludes sales representatives and sorts the list by the total monthly salary.

```
SELECT job_id, SUM(salary) PAYROLL FROM employees WHERE job_id NOT LIKE
'%REP%'
GROUP BY job_id HAVING SUM(salary) > 13000 ORDER BY SUM(salary);
```

### Nesting Group Functions

Display the maximum average salary:

Group functions can be nested to a depth of two. The slide example displays the maximum average salary.

SELECT MAX(AVG(salary)) FROM employees GROUP BY department\_id;

### Summary

In this exercise, students should have learned how to:

- Use the group functions COUNT, MAX, MIN, and AVG
- Write queries that use the GROUP BY clause
- Write queries that use the HAVING clause

SELECT *column, group\_function*

FROM *table*

[WHERE *condition*]

[GROUP BY *group\_by\_expression*]

[HAVING *group\_condition*]

[ORDER BY *column*];

### Find the Solution for the following:

Determine the validity of the following three statements. Circle either True or False.

1. Group functions work across many rows to produce one result per group.  
True/False

2. Group functions include nulls in calculations.  
True/False

3. The WHERE clause restricts rows prior to inclusion in a group calculation.  
True/False

The HR department needs the following reports:

4. Find the highest, lowest, sum, and average salary of all employees. Label the columns Maximum, Minimum, Sum, and Average, respectively. Round your results to the nearest whole number

Select round(max(salary), 0) "maximum", round(min(salary), 0)  
"minimum", sum(salary) "sum", round(avg(salary), 0) "average"  
From emp;

5. Modify the above query to display the minimum, maximum, sum, and average salary for each job type.

Select round(max(salary), 0) "maximum", round(min(salary), 0)  
"minimum", sum(salary) "sum", round(avg(salary), 0) "average"  
From emp, group By job type;

6. Write a query to display the number of people with the same job. Generalize the query so that the user in the HR department is prompted for a job title.

Select job\_id, count(\*) As total\_employees from emp!  
group by job\_id order by total\_employees DESC;

7. Determine the number of managers without listing them. Label the column Number of Managers. Hint: Use the MANAGER\_ID column to determine the number of managers.

Select manager\_id, count(\*) As number\_of\_managers  
from emp! group by manager\_id;

8. Find the difference between the highest and lowest salaries. Label the column DIFFERENCE.

Select max(salary) - min(salary) Difference.  
from emp!

9. Create a report to display the manager number and the salary of the lowest-paid employee for that manager. Exclude anyone whose manager is not known. Exclude any groups where the minimum salary is \$6,000 or less. Sort the output in descending order of salary.

Select manager\_id, min(salary) As min\_salary from  
emp! where manager\_id is not NULL group by  
manager\_id Having min(salary) > 6000 ORDER BY  
min(salary) > 6000 order By min\_salary DESC;

10. Create a query to display the total number of employees and, of that total, the number of employees hired in 1995, 1996, 1997, and 1998. Create appropriate column headings.

Select count(\*) As total\_employees,  
count(IF entry\_year = 1995, 1, null)) as hired\_in\_1995,  
count(IF entry\_year = 1996, 1, null)) as hired\_in\_1996,  
count(IF entry\_year = 1997, 1, null)) as hired\_in\_1997,  
count(IF entry\_year = 1998, 1, null)) as hired\_in\_1998  
From emp!;

11. Select jobtype AS Job,  
 sum(case when department-id = 20 then salary else 0 end) AS  
 salary-dept-20,  
 sum(case when department-id = 50 then salary else 0 end) AS  
 salary-dept-50,  
 sum(case when department-id = 80 then salary else 0 end) AS  
 salary-dept-80  
 sum(salary) case when department = 90 then salary else 0 end  
 AS salary-dept-90

11. Create a matrix query to display the job, the salary for that job based on department number, and the total salary for that job, for departments 20, 50, 80, and 90, giving each column an appropriate heading.

sum(salary) AS total-salary FROM emp WHERE department-id

IN (20, 50, 80, 90) GROUP BY jobtype :

12. Write a query to display each department's name, location, number of employees, and the average salary for all the employees in that department. Label the column name-Location, Number of people, and salary respectively. Round the average salary to two decimal places.

Select department-name AS 'Department', location AS 'Location',  
 count(employee-id) AS 'Number of people', round(Avg(salary), 2)  
 AS 'salary' FROM emp GROUP BY department-name, location;

| Evaluation Procedure | Marks awarded |
|----------------------|---------------|
| Query(5)             | 5             |
| Execution (5)        | 5             |
| Viva(5)              | 5             |
| Total (15)           | 15            |
| Faculty Signature    | R             |

|            |  |
|------------|--|
| Ex.No.: 11 |  |
| Date:      |  |

## PL SQL PROGRAMS

### PROGRAMS

#### TO DISPLAY HELLO MESSAGE

```
SQL> set serveroutput on;
SQL> declare
2 a varchar2(20);
3 begin
4 a:='Hello';
5 dbms_output.put_line(a);
6 end;
7 /
Hello
```

PL/SQL procedure successfully completed.

#### TO INPUT A VALUE FROM THE USER AND DISPLAY IT

```
SQL> set serveroutput on;
SQL> declare
2 a varchar2(20);
3 begin
4 a:=&a;
5 dbms_output.put_line(a);
6 end;
7 /
Enter value for a: 5
old 4: a:=&a;
new 4: a:=5;
5
```

PL/SQL procedure successfully completed.

#### GREATEST OF TWO NUMBERS

```
SQL> set serveroutput on;
SQL> declare
2 a number(7);
```

```
3 b number(7);
4 begin
5 a:=&a;
6 b:=&b;
7 if(a>b) then
8 dbms_output.put_line (' The grerater of the two is'|| a);
9 else
10 dbms_output.put_line (' The grerater of the two is'|| b);
11 end if;
12 end;
13 /
Enter value for a: 5
old 5: a:=&a;
new 5: a:=5;
Enter value for b: 9
old 6: b:=&b;
new 6: b:=9;
The grerater of the two is9
```

PL/SQL procedure successfully completed.

### GREATEST OF THREE NUMBERS

SQL> set serveroutput on;

```
SQL> declare
2 a number(7);
3 b number(7);
4 c number(7);
5 begin
6 a:=&a;
7 b:=&b;
8 c:=&c;
9 if(a>b and a>c) then
10 dbms_output.put_line (' The greatest of the three is '|| a);
11 else if (b>c) then
12 dbms_output.put_line (' The greatest of the three is '|| b);
13 else
14 dbms_output.put_line (' The greatest of the three is '|| c);
15 end if;
16 end if;
17 end;
18 /
Enter value for a: 5
old 6: a:=&a;
new 6: a:=5;
```

```
Enter value for b: 7
old 7; b:=&b;
new 7; b:=7;
Enter value for c: 1
old 8; c:=&c;
new 8; c:=1;
The greatest of the three is 7
```

PL/SQL procedure successfully completed.

### PRINT NUMBERS FROM 1 TO 5 USING SIMPLE LOOP

```
SQL> set serveroutput on;
```

```
SQL> declare
2 a number:=1;
3 begin
4 loop
5 dbms_output.put_line (a);
6 a:=a+1;
7 exit when a>5;
8 end loop;
9 end;
10 /
```

1  
2  
3  
4  
5

PL/SQL procedure successfully completed.

### PRINT NUMBERS FROM 1 TO 4 USING WHILE LOOP

```
SQL> set serveroutput on;
```

```
SQL> declare
2 a number:=1;
3 begin
4 while(a<5)
5 loop
6 dbms_output.put_line (a);
7 a:=a+1;
8 end loop;
```

```
9 end;
10 /
```

```
1
2
3
4
```

PL/SQL procedure successfully completed.

### PRINT NUMBERS FROM 1 TO 5 USING FOR LOOP

```
SQL> set serveroutput on;
```

```
SQL> declare
2 a number:=1;
3 begin
4 for a in 1..5
5 loop
6 dbms_output.put_line (a);
7 end loop;
8 end;
9 /
```

```
1
2
3
4
5
```

PL/SQL procedure successfully completed.

### PRINT NUMBERS FROM 1 TO 5 IN REVERSE ORDER USING FOR LOOP

```
SQL> set serveroutput on;
```

```
SQL> declare
2 a number:=1;
3 begin
4 for a in reverse 1..5
5 loop
6 dbms_output.put_line (a);
7 end loop;
8 end;
9 /
```

```
5
4
3
2
1
```

PL/SQL procedure successfully completed.

### TO CALCULATE AREA OF CIRCLE

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 pi constant number(4,2):=3.14;
```

```

3 a number(20);
4 r number(20);
5 begin
6 r:=&r;
7 a:= pi* power(r,2);
8 dbms_output.put_line ('The area of circle is ' || a);
9 end;
10 /

```

Enter value for r: 2

old 6: r:=&r;

new 6: r:=2;

The area of circle is 13

PL/SQL procedure successfully completed.

### TO CREATE SACCOUNT TABLE

```
SQL> create table saccount (accno number(5), name varchar2(20), bal number(10));
```

Table created.

```
SQL> insert into saccount values (1,'mala',20000);
```

1 row created.

```
SQL> insert into saccount values (2,'kala',30000);
```

1 row created.

```
SQL> select * from saccount;
```

| ACCNO | NAME | BAL   |
|-------|------|-------|
| 1     | mala | 20000 |
| 2     | kala | 30000 |

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```

2 a_bal number(7);
3 a_no varchar2(20);
4 debit number(7):=2000;
5 minamt number(7):=500;
6 begin
7 a_no:=&a_no;
8 select bal into a_bal from saccount where accno= a_no;
9 a_bal:= a_bal-debit;
10 if (a_bal > minamt) then
11 update saccount set bal=bal-debit where accno=a_no;
12 end if;
13 end;
14
15 /

```

Enter value for a\_no: 1

old 7: a\_no:=&a\_no;

new 7: a\_no:=1;

PL/SQL procedure successfully completed.

SQL> select \* from saccount;

| ACCNO | NAME | BAL   |
|-------|------|-------|
| 1     | mala | 18000 |
| 2     | kala | 30000 |

| ACCNO | NAME | BAL   |
|-------|------|-------|
| 1     | mala | 18000 |
| 2     | kala | 30000 |

### TO CREATE TABLE SROUTES

SQL> create table sroutes ( rno number(5), origin varchar2(20), destination varchar2(20), fare

numbe

r(10), distance number(10));

Table created.

SQL> insert into sroutes values ( 2, 'chennai', 'dindugal', 400,230);

1 row created.

SQL> insert into sroutes values ( 3, 'chennai', 'madurai', 250,300);

1 row created.

SQL> insert into sroutes values ( 6, 'thanjavur', 'palani', 350,370);

1 row created.

SQL> select \* from sroutes;

| RNO | ORIGIN    | DESTINATION | FARE | DISTANCE |
|-----|-----------|-------------|------|----------|
| 2   | chennai   | dindugal    | 400  | 230      |
| 3   | chennai   | madurai     | 250  | 300      |
| 6   | thanjavur | palani      | 350  | 370      |

SQL> set serveroutput on;

SQL> declare

```
2 route sroutes.rno % type;
3 fares sroutes.fare % type;
4 dist sroutes.distance % type;
5 begin
6 route:=&route;
7 select fare, distance into fares , dist from sroutes where rno=route;
8 if (dist < 250) then
9 update sroutes set fare=300 where rno=route;
10 else if dist between 250 and 370 then
11 update sroutes set fare=400 where rno=route;
12 else if (dist > 400) then
13 dbms_output.put_line('Sorry');
14 end if;
15 end if;
16 end if;
17 end;
18 /
```

Enter value for route: 3

```
old 6: route:=&route;
new 6: route:=3;
```

PL/SQL procedure successfully completed.

```
SQL> select * from sroutes;
```

| RNO | ORIGIN    | DESTINATION | FARE | DISTANCE |
|-----|-----------|-------------|------|----------|
| 2   | chennai   | dindugal    | 400  | 230      |
| 3   | chennai   | madurai     | 400  | 300      |
| 6   | thanjavur | palani      | 350  | 370      |

### TO CREATE SCA LCULATE TABLE

```
SQL> create table scalculate (radius number(3), area number(5,2));
```

Table created.

```
SQL> desc scalculate;
```

| Name   | Null? | Type        |
|--------|-------|-------------|
| RADIUS |       | NUMBER(3)   |
| AREA   |       | NUMBER(5,2) |

```
SQL> set serveroutput on;
```

```
SQL> declare
 2 pi constant number(4,2):=3.14;
 3 area number(5,2);
 4 radius number(3);
 5 begin
 6 radius:=3;
 7 while (radius <=7)
 8 loop
 9 area:= pi* power(radius,2);
10 insert into scalculate values (radius,area);
11 radius:=radius+1;
12 end loop;
13 end;
14 /
```

PL/SQL procedure successfully completed.

```
SQL> select * from scalculate;
```

| RADIUS | AREA |
|--------|------|
|--------|------|

```
3 28.26
4 50.24
5 78.5
6 113.04
7 153.86
```

### TO CALCULATE FACTORIAL OF A GIVEN NUMBER

```
SQL> set serveroutput on;
SQL> declare
2 f number(4):=1;
3 i number(4);
4 begin
5 i:=&i;
6 while(i>=1)
7 loop
8 f:=f*i;
9 i:=i-1;
10 end loop;
11 dbms_output.put_line('The value is ' || f);
12 end;
13 /
```

Enter value for i: 5

old 5: i:=&i;  
new 5: i:=5;

The value is 120

PL/SQL procedure successfully completed.

Write a PL/SQL block to calculate the incentive of an employee.

## PROGRAM 2

Write a PL/SQL block to show an invalid case-insensitive reference to a quoted and without quoted user-defined identifier.

```
SET SERVEROUTPUT ON;

DECLARE
 employee VARCHAR(50) := 'John Doe';
 "EMPLOYEE" VARCHAR(50) := 'Jane Doe';

BEGIN
 DBMS_OUTPUT.PUT_LINE ('No - Incentive (' || employee || ')');
 DBMS_OUTPUT.PUT_LINE ('Case - sensitive (' || employee || ')');
EXCEPTION
 DBMS_OUTPUT.PUT_LINE ('Error: ' || SQLERRM);
END;
```

program 1:

Declare

```
emp-id employees.emp_id%TYPE := 110;
emp-name employees.name%TYPE;
emp-salary employees.salary%TYPE;
Incentive NUMBER(7,2);
```

Begin

```
Select name, salary
into emp-name, emp-salary
From Employees
where emp-id = 110;
incentive := emp-salary * 0.10;
```

```
DBMS-OUTPUT.PUT-LINE('Employee Name: '||emp-name);
DBMS-OUTPUT.PUT-LINE('Employee salary: '||emp-salary);
DBMS-OUTPUT.PUT-LINE('Incentive(10%): '||incentive);
```

Exception:

```
WHEN NO- DATA- FOUND THEN
```

```
DBMS-OUTPUT.PUT-LINE('Employee with ID 110 not found')
```

```
WHEN OTHERS THEN
```

```
DBMS-OUTPUT.PUT-LINE('ERROR: '||SQLERRM);
```

```
END;
```

### PROGRAM 3

Write a PL/SQL block to adjust the salary of the employee whose ID 122.  
Sample table: employees

```
SET SERVEROUTPUT ON;
BEGIN
 UPDATE employees
 SET salary = salary + (salary * 0.10)
 WHERE emp_id = 12
 RETURNING salary INTO :new_salary;
 DBMS_OUTPUT.PUT_LINE ('New salary: ' || :new_salary);
EXCEPTION
 WHEN NO_DATA_FOUND THEN
 DBMS_OUTPUT.PUT_LINE ('Employee with ID 122 not found');
 WHEN OTHERS THEN
 DBMS_OUTPUT.PUT_LINE ('Error: ' || SQLERRM);
END;
```

### PROGRAM 4

Write a PL/SQL block to create a procedure using the "IS [NOT] NULL Operator" and show AND operator returns TRUE if and only if both operands are TRUE.

```
SET SERVEROUTPUT ON;
BEGIN
 IF ('Hello' IS NOT NULL AND NULL IS NOT NULL) THEN
 DBMS_OUTPUT.PUT_LINE ('Both are not NULL');
 ELSE
 DBMS_OUTPUT.PUT_LINE ('Atleast one is NULL');
 END IF;
END;
```

O/P: Atleast one is NULL

### PROGRAM 5

Write a PL/SQL block to describe the usage of LIKE operator including wildcard characters and escape character.

```
SET SERVEROUTPUT ON;
BEGIN
 IF 'HelloWorld' LIKE 'H%W%' THEN
 DBMS_OUTPUT.PUT_LINE ('pattern 1 matched');
 END IF;
 IF 'Hello_03' LIKE 'Hello_0%' THEN
 DBMS_OUTPUT.PUT_LINE ('pattern 2 matched');
 END IF;
 IF '50% discount' LIKE '%50\%y.' ESCAPE '\' THEN
 DBMS_OUTPUT.PUT_LINE ('pattern 3 matched with escape');
 END IF;
END;
```

### PROGRAM 6

Write a PL/SQL program to arrange the number of two variable in such a way that the small number will store in num\_small variable and large number will store in num\_large variable.

```
SET SERVEROUTPUT ON;
DECLARE
 num1 NUMBER := 10;
 num2 NUMBER := 20;
 num_small NUMBER := LEAST(num1, num2);
 num_large NUMBER := GREATEST(num1, num2);
BEGIN
 DBMS_OUTPUT.PUT_LINE ('small:' || num_small || " Large " || num_large);
END;
```

O/P : small:10  
Large:20

### PROGRAM 7

Write a PL/SQL procedure to calculate the incentive on a target achieved and display the message either the record updated or not.

```
SET SERVEROUTPUT ON;
CREATE OR REPLACE PROCEDURE calc_incentive(emp_id IN NUMBER) IS
BEGIN
 UPDATE employees SET incentive = target_achieved * 0.10 WHERE emp_id = emp_id AND TARGET_ACHIEVED > 0;
 DBMS_OUTPUT.PUT_LINE('Reward' || CAST WHEN SQL '% Row Count > 0 THEN 'updated';
 ELSE 'not updated.' END);
END;
/
```

### PROGRAM 8

Write a PL/SQL procedure to calculate incentive achieved according to the specific sale limit.

```
SET SERVEROUTPUT ON;
CREATE OR REPLACE PROCEDURE calc_incentive (emp_id IN NUMBER) IS
 Sales_Limit_Number := 1000;
 incentive;
BEGIN
 SELECT CASE WHEN total_sales >= sales_limit THEN total_sales * 0.10
 UPDATE employees SET incentive = incentive - amount WHERE emp_id = emp_id;
 DBMS_OUTPUT.PUT_LINE('INCENTIVE for ID' || emp_id || ':' || incentive - amount);
 Exception
 WHEN NO_DATA_FOUND THEN DBMS_OUTPUT.PUT_LINE('Employee not found! ');
END;
/
```

### PROGRAM 9

Write a PL/SQL program to count number of employees in department 50 and check whether this department have any vacancies or not. There are 45 vacancies in this department.

```
SET SERVEROUTPUT ON;
DECLARE
 emp-count NUMBER;
BEGIN
 SELECT COUNT(*) INTO emp-count FROM employees WHERE
 department_id = 50;
 DBMS_OUTPUT.PUT-LINE('Employees in DEPT 50: ' || emp-count);
 DBMS_OUTPUT.PUT-LINE('Vacancies available: ' || 45 - emp-count);
END;
```

### PROGRAM 10

Write a PL/SQL program to count number of employees in a specific department and check whether this department have any vacancies or not. If any vacancies, how many vacancies are in that department.

```
SET SERVEROUTPUT ON;
DECLARE
 emp-count NUMBER;
 vacancies NUMBER := 45;
BEGIN
 SELECT COUNT(*) INTO emp-count FROM employees WHERE department_id =
 50;
 DBMS_OUTPUT.PUT-LINE('Employees in DEPT 50: ' || emp-count || ', vacancies: ' ||
 (vacancies - emp-count));
END;
```

### PROGRAM 11

Write a PL/SQL program to display the employee IDs, names, job titles, hire dates, and salaries of all employees.

```
SET SERVER OUTPUT ON;
BEGIN
FOR rec IN (SELECT employee_id, name, job_title, hire_date, salary
 FROM
 DBMS_OUTPUT.PUT_LINE('ID:' || rec.employee_id ||
 ', Name:' || rec.name ||
 ', Job Title:' || rec.job_title ||
 ', Hire Date:' || rec.hire_date ||
 ', Salary:' || rec.salary);
END LOOP;
END;
```

### PROGRAM 12

Write a PL/SQL program to display the employee IDs, names, and department names of all employees.

```
SET SERVER OUTPUT-ON;
BEGIN
FOR rec IN (SELECT e.employee_id, e.names, d.department_name
 FROM employees e
 JOIN departments d ON e.department_id = d.department_id
 DBMS_OUTPUT.PUT_LINE ('ID:' || rec.employee_id ||
 ', Name:' || rec.names ||
 ', Department:' || rec.department_name);
END Loop;
END;
/
```

PROGRAM 13  
Write a PL/SQL program to display the job IDs, titles, and minimum salaries of all jobs.

```
SET SERVER OUTPUT ON;
BEGIN
 FOR rec IN (SELECT job_id, job_title, min_salary FROM job) LOOP
 DBMS_OUTPUT.PUT_LINE('job_id: ' || rec.job_id ||
 ', title: ' || rec.job_title ||
 ', min_salary: ' || rec.min_salary);
 END LOOP;
END;
/
```

PROGRAM 14  
Write a PL/SQL program to display the employee IDs, names, and job history start dates of all employees.

```
SET SERVEROUTPUT ON;
BEGIN
 FOR rec IN (SELECT e.employee_id, e.name, j.start_date
 FROM employee e
 JOIN job_history j ON e.employee_id = j.employee_id)
 DBMS_OUTPUT.PUT_LINE('ID: ' || rec.employee_id ||
 ', name: ' || rec.name ||
 ', job start Date: ' || rec.start_date);
 END LOOP;
END;
/
```

**PROGRAM 15**

Write a PL/SQL program to display the employee IDs, names, and job history end dates of all employees.

```
SET SERVEROUTPUT ON;
BEGIN
 FOR rec IN (SELECT e.employee_id, e.name, j.end_date
 FROM employees e
 JOIN job_history j ON e.employee_id = j.employee_id)
 DBMS_OUTPUT.PUT_LINE ('IP:' || rec.employee_id ||
 ', Name: ' || rec.name ||
 ', Job End Date : ' || rec.end_date);
END Loop;
END;
```

/

| Evaluation Procedure  | Marks awarded |
|-----------------------|---------------|
| PL/SQL Procedure(5)   | 5             |
| Program/Execution (5) | 5             |
| Viva(5)               | 5             |
| Total (15)            | 15            |
| Faculty Signature     | R             |

Ex.No.: 12

Date:

## WORKING WITH CURSOR, PROCEDURES AND FUNCTIONS

### AIM:

Create PL/SQL Blocks to perform the Item Transaction Operations using CURSOR, FUNCTION and PROCEDURE.

### ALGORITHM:

**STEP-1:** Start.

**STEP-2:** Create two tables Item Master and Item Trans.

itemmaster(itemid , itemname, stockonhand )

itemtrans(itemid ,itemname ,dateofpurchase ,quantity)

**STEP-3:** Create a PROCEDURE with id, name and quantity as parameters which make a call to the FUNCTION by passing id, name, dop, and quantity as parameters dop is set as sysdate.

**STEP-4:** Using FUNCTION fetch each record from the table Item Master using

CURSOR inside a Loop statement,

If Item Master's ItemId is equal to the entered ID value then exit the loop otherwise fetch the next record.

loop

    fetch master into masterrec

    exit when master%notfound

    if masterrec.itemid=id then

        exit;

    end if;

end loop;

**STEP-5:** If Itemmaster's itemid = id then,

    Add the Itemmaster's stockonhand with the given quantity and update the ItemMaster table and insert the Item information into the ItemTrans table.

**STEP-6:** Else, if the inputed item is not present in the ItemMaster table then insert the

new Item in both the tables.  
STEP-7: Call the Procedure by passing the Item informations which calls the Function.  
STEP-8: Exit.

### PROCEDURES – SYNTAX

```
create or replace procedure <procedure name> (argument {in, out, inout} datatype) {is,as}
variable declaration;
constant declaration;
begin
PL/SQL subprogram body;
exception
exception PL/SQL block;
end;
```

### FUNCTIONS – SYNTAX

```
create or replace function <function name> (argument in datatype,.....) return datatype {is,as}
variable declaration;
constant declaration;
begin
PL/SQL subprogram body;
exception
exception PL/SQL block;
end;
```

### CREATING THE TABLE ‘ITITEMS’ AND DISPLAYING THE CONTENTS

```
SQL> create table ititems(itemid number(3), actualprice number(5), ordid number(4), prodid
number(4));
Table created.
```

```
SQL> insert into ititems values(101, 2000, 500, 201);
1 row created.
```

```
SQL> insert into ititems values(102, 3000, 1600, 202);
1 row created.
```

```
SQL> insert into ititems values(103, 4000, 600, 202);
1 row created.
```

```
SQL> select * from ititems;
ITEMID ACTUALPRICE ORDID PRODID
----- ----- ----- -----
101 2000 500 201
102 3000 1600 202
103 4000 600 202
```

**PROGRAM FOR GENERAL PROCEDURE – SELECTED RECORD'S PRICE IS INCREMENTED BY 500 , EXECUTING THE PROCEDURE CREATED AND DISPLAYING THE UPDATED TABLE**

```
SQL> create procedure itsum(identity number, total number) is price number;
2 null_price exception;
3 begin
4 select actualprice into price from ititems where itemid=identity;
5 if price is null then
6 raise null_price;
7 else
8 update ititems set actualprice=actualprice+total where itemid=identity;
9 end if;
10 exception
11 when null_price then
12 dbms_output.put_line('price is null');
13 end;
14 /
```

Procedure created.

```
SQL> exec itsum(101, 500);
PL/SQL procedure successfully completed.
```

```
SQL> select * from ititems;
ITEMID ACTUALPRICE ORDID PRODID
----- ----- ----- -----
101 2500 500 201
102 3000 1600 202
103 4000 600 202
```

**PROCEDURE FOR 'IN' PARAMETER – CREATION, EXECUTION**

```
SQL> set serveroutput on;
```

```
SQL> create procedure yyy (a IN number) is price number;
 2 begin
 3 select actualprice into price from ititems where itemid=a;
 4 dbms_output.put_line('Actual price is '|| price);
 5 if price is null then
 6 dbms_output.put_line('price is null');
 7 end if;
 8 end;
 9 /
Procedure created.
```

```
SQL> exec yyy(103);
Actual price is 4000
PL/SQL procedure successfully completed.
```

#### PROCEDURE FOR 'OUT' PARAMETER – CREATION, EXECUTION

```
SQL> set serveroutput on;
SQL> create procedure zzz (a in number, b out number) is identity number;
 2 begin
 3 select ordid into identity from ititems where itemid=a;
 4 if identity<1000 then
 5 b:=100;
 6 end if;
 7 end;
 8 /
Procedure created.
```

```
SQL> declare
 2 a number;
 3 b number;
 4 begin
 5 zzz(101,b);
 6 dbms_output.put_line('The value of b is '|| b);
 7 end;
 8 /
The value of b is 100
PL/SQL procedure successfully completed.
```

#### PROCEDURE FOR 'INOUT' PARAMETER – CREATION, EXECUTION

```
SQL> create procedure itit (a in out number) is
 2 begin
 3 a:=a+1;
```

```
4 end;
5 /
Procedure created.
```

```
SQL> declare
2 a number:=7;
3 begin
4 itit(a);
5 dbms_output.put_line('The updated value is '||a);
6 end;
7 /
```

The updated value is 8  
PL/SQL procedure successfully completed.

### CREATE THE TABLE 'ITTRAIN' TO BE USED FOR FUNCTIONS

```
SQL>create table ittrain (tno number(10), tfare number(10));
Table created.
```

```
SQL>insert into ittrain values (1001, 550);
1 row created.
```

```
SQL>insert into ittrain values (1002, 600);
1 row created.
```

```
SQL>select * from ittrain;
TNO TFARE

1001 550
1002 600
```

### PROGRAM FOR FUNCTION AND IT'S EXECUTION

```
SQL> create function aaa (trainnumber number) return number is
2 trainfunction ittrain.tfare % type;
3 begin
4 select tfare into trainfunction from ittrain where tno=trainnumber;
5 return(trainfunction);
6 end;
7 /
```

Function created.

```
SQL> set serveroutput on;
```

```
SQL> declare
2 total number;
3 begin
4 total:=aaa (1001);
5 dbms_output.put_line('Train fare is Rs. '||total);
6 end;
7 /
```

Train fare is Rs.550

PL/SQL procedure successfully completed.

#### FACTORIAL OF A NUMBER USING FUNCTION — PROGRAM AND EXECUTION

```
SQL> create function itfact (a number) return number is
2 fact number:=1;
3 b number;
4 begin
5 b:=a;
6 while b>0
7 loop
8 fact:=fact*b;
9 b:=b-1;
10 end loop;
11 return(fact);
12 end;
13 /
```

Function created.

```
SQL> set serveroutput on;
```

```
SQL> declare
2 a number:=7;
3 f number(10);
4 begin
5 f:=itfact(a);
6 dbms_output.put_line('The factorial of the given number is'||f);
7 end;
8 /
```

The factorial of the given number is 5040

PL/SQL procedure successfully completed.

Program 1

FACTORIAL OF A NUMBER USING FUNCTION

CREATE OR REPLACE FUNCTION Factorial (n IN number) RETURN NUMBER  
Result Number := 1;  
BEGIN  
IF n < 0 THEN  
 Return NULL;  
elsif n = 0 or n = 1 Then  
 Return 1;  
else  
 for i in 2..n loop  
 Result := Result \* i;  
 End Loop;  
 END IF;  
Return Result;  
Exception  
When others Then  
DBMS\_OUTPUT.PUT\_LINE('AN ERROR OCCURRED: || SQLERRM');  
Return NULL;  
END Factorial;  
SET SERVER OUTPUT ON;  
DECLARE  
 num NUMBER; > 5;  
 for i in number;  
END;

program 2 :

```
CREATE TABLE Books(
 book_id Number(5) PRIMARY KEY,
 title VARCHAR2(100), author VARCHAR(100),
 publication_year NUMBER(4), available_opens NUMBER(15)
);

INSERT INTO Books VALUES(1, '1984', 'Orwell', 1949, 4);
INSERT INTO Books VALUES(2, 'Mocking bird', 'Lee', 1960, 2);
INSERT INTO Books VALUES(3, 'Gatsby', 'Fitzgerald', 1925, 5);

COMMIT;

CREATE OR REPLACE PROCEDURE GetBookInfo(p_id IN
Number, p_title OUT VARCHAR2, p_author OUT VARCHAR2)
AS
BEGIN
 SELECT title, author INTO p_title, p_author
 FROM Books WHERE id = p_id;
END;

SET SERVER OUTPUT ON;

DECLARE
 v_id IN NUMBER;
 v_title OUT VARCHAR2;
 v_author OUT VARCHAR2;
BEGIN
 v_id := &id;
 v_title := &title;
 v_author := &author;
 DBMS_OUTPUT.PUT_LINE('Book ID: ' || v_id || ', Title: ' || v_title || ', Author: ' || v_author);
END;
```

Program 2

Write a PL/SQL program using Procedures IN,INOUT,OUT parameters to retrieve the corresponding book information in library

TO WRITE A PL/SQL BLOCK TO DISPLAY THE EMPLOYEE ID AND EMPLOYEE NAME WHERE DEPARTMENT NUMBER IS 11 USING EXPLICIT CURSORS

```
1 declare
2 cursor cenl is select eid,sal from ssempp where dno=11;
3 ecode ssempp.eid%type;
4 esal empp.sal%type;
5 begin
6 open cenl;
7 loop
8 fetch cenl into ecode,esal;
9 exit when cenl%notfound;
10 dbms_output.put_line(' Employee code and employee salary are' || ecode 'and'|| esal);
```

```
11 end loop;
12 close cenl;
13* end;
```

```
SQL> /
Employee code and employee salary are 1 and 39000
Employee code and employee salary are 5 and 35000
Employee code and employee salary are 6 and 23000
```

PL/SQL procedure successfully completed.

**TO WRITE A PL/SQL BLOCK TO UPDATE THE SALARY BY 5000 WHERE THE JOB IS LECTURER , TO CHECK IF UPDATES ARE MADE USING IMPLICIT CURSORS AND TO DISPLAY THE UPDATED TABLE**

```
SQL> declare
2 county number;
3 begin
4 update ssempp set sal=sal+10000 where job='lecturer';
5 county:= sql%rowcount;
6 if county > 0 then
7 dbms_output.put_line('The number of rows are'|| county);
8 end if;
9 if sql %found then
10 dbms_output.put_line('Employee record modification successful');
11 else if sql%notfound then
12 dbms_output.put_line('Employee record is not found');
13 end if;
14 end if;
15 end;
16 /
```

The number of rows are 3

Employee record modification successful

PL/SQL procedure successfully completed.

```
SQL> select * from ssempp;
```

| EID | ENAME | JOB            | SAL   | DNO |
|-----|-------|----------------|-------|-----|
| 1   | nala  | lecturer       | 44000 | 11  |
| 2   | kala  | seniorlecturer | 20000 | 12  |
| 5   | ajay  | lecturer       | 40000 | 11  |
| 6   | vijay | lecturer       | 28000 | 11  |
| 3   | nila  | professor      | 60000 | 12  |

| Evaluation Procedure  | Marks awarded |
|-----------------------|---------------|
| PL/SQL Procedure(5)   | 5             |
| Program/Execution (5) | 5             |
| Viva(5)               | 5             |
| Total (15)            | 15            |
| Faculty Signature     | (P)           |

|            |  |
|------------|--|
| Ex.No.: 13 |  |
| Date:      |  |

## **WORKING WITH TRIGGER TRIGGER**

### **DEFINITION**

A trigger is a statement that is executed automatically by the system as a side effect of a modification to the database. The parts of a trigger are,

- **Trigger statement:** Specifies the DML statements and fires the trigger body. It also specifies the table to which the trigger is associated.
- **Trigger body or trigger action:** It is a PL/SQL block that is executed when the triggering statement is used.
- **Trigger restriction:** Restrictions on the trigger can be achieved

The different uses of triggers are as follows,

- *To generate data automatically*
- *To enforce complex integrity constraints*
- *To customize complex securing authorizations*
- *To maintain the replicate table*
- *To audit data modifications*

### **TYPES OF TRIGGERS**

The various types of triggers are as follows,

- **Before:** It fires the trigger before executing the trigger statement.
- **After:** It fires the trigger after executing the trigger statement
- **For each row:** It specifies that the trigger fires once per row
- **For each statement:** This is the default trigger that is invoked. It specifies that the trigger fires once per statement.

### **VARIABLES USED IN TRIGGERS**

- :new
- :old

These two variables retain the new and old values of the column updated in the database. The values in these variables can be used in the database triggers for data manipulation

### SYNTAX

```
create or replace trigger triggername [before/after] {DML statements}
on [tablename] [for each row/statement]
begin

exception
end;
```

### USER DEFINED ERROR MESSAGE

The package "raise\_application\_error" is used to issue the user defined error messages

Syntax: raise\_application\_error(error number,'error message');

The error number can lie between -20000 and -20999.

The error message should be a character string.

### **TABLE CREATION:**

```
create table employeebonus(empno number(5)constraint emppk primary key, empname
varchar2(25)not null, experience number(2)not null, bonus number(7,2));
```

Table created.

### **TRIGGER CREATION FOR BONUS CALCULATION:**

```
SQL> set serveroutput on
SQL> create or replace trigger employeebonus_tgr
after insert on employeebonus
declare
cursor emp is select * from employeebonus;
emprec employeebonus%rowtype;
begin
```

```
open emp;
loop
fetch emp into emprec;
exit when emp%notfound;
if(emprec.experience<5) then
emprec.bonus:=5000;
elsif(emprec.experience>=5 and emprec.experience<8) then
emprec.bonus:=8000;
else
emprec.bonus:=10000;
end if;
update employeebonus set bonus=emprec.bonus where empno=emprec.empno;
end loop;
close emp;
dbms_output.put_line('Bonus calculated and Updated Successfully');
end;
/

```

Trigger created.

**TABLE DESCRIPTION:**

SQL> desc employeebonus;

Name Null? Type

---

EMPNO NOT NULL NUMBER(5)  
EMPNAME NOT NULL VARCHAR2(25)  
EXPERIENCE NOT NULL NUMBER(2)  
BONUS NUMBER(7,2)

**RECORD INSERTION:**

SQL> insert into employeebonus(empno,empname,experience)

values(&empno,'&empname',&experience);

Enter value for empno: 101

Enter value for empname: murugan

Enter value for experience: 25

old 1: insert into employeebonus(empno,empname,experience)

```
values(&empno,'&empname',&experience)
new 1: insert into employeebonus(empno,empname,experience)
values(101,'murugan',25)
Bonus calculated and Updated Sucessfully
1 row created.
```

#### **RECORD SELECTION:**

```
SQL> select * from employeebonus;
EMPNO EMPNAME EXPERIENCE BONUS

101 murugan 25 10000
102 suresh 3 5000
103 akash 7 8000
104 mahesh 2 5000
```

#### **RESULT:**

Thus, the above program was Created and Executed Successfully.

Program 1

Write a code in PL/SQL to develop a trigger that enforces referential integrity by preventing the deletion of a parent record if child records exist.

```

CREATE OR REPLACE TRIGGER prevent-parent-deletion
BEFORE DELETE ON PARENT
FOR EACH ROW
DECLARE
 child_count NUMBER;
BEGIN
 SELECT COUNT(*) INTO child_count FROM Child WHERE parent
 IF child_count > 0 THEN RAISE_APPLICATION_ERROR
 END;
 /

```

Program 2

Write a code in PL/SQL to create a trigger that checks for duplicate values in a specific column and raises an exception if found.

```

CREATE TABLE sample_table (id NUMBER(5) PRIMARY KEY,
NAME VARCHAR(50) NULL, email VARCHAR(100) UNIQUE
);
CREATE OR REPLACE TRIGGER check_duplicate_email
BEFORE INSERT OR UPDATE ON sample_table
FOR EACH ROW
DECLARE
 duplicate_count NUMBER;
BEGIN
 SELECT COUNT(*) INTO duplicate_count
 END IF;
 /
END;

```

Program 3

Write a code in PL/SQL to create a trigger that restricts the insertion of new rows if the total of a column's values exceeds a certain threshold.

```
CREATE OR REPLACE TRIGGER restrict_total_sales
BEFORE INSERT ON sales
FOR EACH ROW
BEGIN
IF (SELECT SUM(amount) FROM sales) + :New.amount > 100000
RAISE_APPLICATION_ERROR(-20002, 'Total exceeds threshold');
END IF;
END;
/
```

Program 4

Write a code in PL/SQL to design a trigger that captures changes made to specific columns and logs them in an audit table.

```
CREATE OR REPLACE TRIGGER log_salary_changes
AFTER UPDATE OF salary ON employees
FOR EACH ROW
BEGIN
INSERT INTO employee_audit VALUES (audit_seq.NEXTVAL, :OLD.emp_id, :OLD.salary, :NEW.salary, sysdate);
END;
```

### Program 5

Write a code in PL/SQL to implement a trigger that records user activity (inserts, updates, deletes) in an audit log for a given set of tables.

```
CREATE OR REPLACE TRIGGER record-user-activity
AFTER INSERT OR UPDATE OR DELETE ON employees FOR EACH ROW
BEGIN
 INSERT INTO AuditLog VALUES (audit_seq.NEXTVAL,
CASE WHEN INSERTING THEN 'INSERT' WHEN UPDATING THEN 'UPDATE'
'Employees', NVL (:OLD.emp-id, :NEW.emp-id), SYSDATE, USER);
END;
/
```

### Program 7

Write a code in PL/SQL to implement a trigger that automatically calculates and updates a running total column for a table whenever new rows are inserted.

```
CREATE TABLE sales (
 Sales-id NUMBER PRIMARY KEY,
 amount NUMBER (10, 2),
 running_total NUMBER (10, 2)
);
CREATE OR REPLACE TRIGGER update_running_total FOR EACH
ROW
BEGIN
 SELECT NVL (MAX(running-total, 0) + :NEW.amount INTO :NEW.running
END;
/
```

### Program 8

Write a code in PL/SQL to create a trigger that validates the availability of items before allowing an order to be placed, considering stock levels and pending orders.

```
CREATE OR REPLACE TRIGGER validate_stock_before_order
BEFORE INSERT ON orders
FOR EACH ROW
BEGIN
 IF :NEW.order_qty > (SELECT stock_quantity FROM items
 WHERE item_id = :NEW.item_id)
 THEN
 END IF;
 END;
```

| Evaluation Procedure  | Marks awarded |
|-----------------------|---------------|
| PL/SQL Procedure(5)   | 5             |
| Program/Execution (5) | 5             |
| Viva(5)               | 5             |
| Total (15)            | 15            |
| Faculty Signature     | (P)           |
|                       |               |

Ex.No.: 14

## MONGO DB

Date:

MongoDB is a free and open-source cross-platform document-oriented database. Classified as a NoSQL database, MongoDB avoids the traditional table-based relational database structure in favor of JSON-like documents with dynamic schemas, making the integration of data in certain types of applications easier and faster.

Create Database using mongosh

After connecting to your database using mongosh, you can see which database you are using by typing db in your terminal.

If you have used the connection string provided from the MongoDB Atlas dashboard, you should be connected to the myFirstDatabase database.

Show all databases

To see all available databases, in your terminal type show dbs.

Notice that myFirstDatabase is not listed. This is because the database is empty. An empty database is essentially non-existent.

Change or Create a Database

You can change or create a new database by typing use then the name of the database.

Create Collection using mongosh

You can create a collection using the createCollection() database method.

Insert Documents

insertOne()

db.posts.insertOne({

title: "Post Title 1",

body: "Body of post.",

category: "News",

likes: 1,

tags: ["news", "events"],

```
date: Date()
```

```
)
```

### EXERCISE 18

Structure of 'restaurants' collection:

```
{
 "address": {
 "building": "1007",
 "coord": [-73.856077, 40.848447],
 "street": "Morris Park Ave",
 "zipcode": "10462"
 },
 "borough": "Bronx",
 "cuisine": "Bakery",

 "grades": [
 { "date": { "$date": 1393804800000 }, "grade": "A", "score": 2 },
 { "date": { "$date": 1378857600000 }, "grade": "A", "score": 6 },
 { "date": { "$date": 1358985600000 }, "grade": "A", "score": 10 },
 { "date": { "$date": 1322006400000 }, "grade": "A", "score": 9 },
 { "date": { "$date": 1299715200000 }, "grade": "B", "score": 14 }
],
 "name": "Morris Park Bake Shop",
 "restaurant_id": "30075445"
}
```

1. Write a MongoDB query to find the restaurant Id, name, borough and cuisine for those restaurants which prepared dish except 'American' and 'Chinees' or restaurant's name begins with letter 'Wil'.

db. restaurants .find {

{ cuisine: { \$in: [ 'American', 'Chinees' ] } },  
 { name: / ^ Wil / i }

2. Write a MongoDB query to find the restaurant Id, name, and grades for those restaurants which achieved a grade of "A" and scored 11 on an ISODate "2014-08-11T00:00:00Z" among many of survey dates..

db. restaurants .find {

{ grades: { \$elemMatch: { grade: "A", score: 11, date: new Date("2014-08-11") } } }

},

{ restaurant\_id: 1, name: 1, grades: 1, \_id: 0 }

Y

3. Write a MongoDB query to find the restaurant Id, name and grades for those restaurants where the 2nd element of grades array contains a grade of "A" and score 9 on an ISODate "2014-08-11T00:00:00Z".

db.restaurants.find({  
  "grades": {  
    "\$elemMatch": {  
      "grade": "A",  
      "score": 9,  
      "date": new Date("2014-08-11:00:00")  
    }  
  },  
  "resturant\_id": 1,  
  "name": 1,  
  "grades": 1,  
  "-id": 1  
})

4. Write a MongoDB query to find the restaurant Id, name, address and geographical location for those restaurants where 2nd element of coord array contains a value which is more than 42 and upto 52..

db.restaurants.find({  
  "address.coord": {  
    "\$get": 42, "\$lt": 52  
  },  
  "resturant\_id": 1,  
  "name": 1,  
  "address": 1,  
  "address.coord": 1,  
  "-id": 1  
})

5. Write a MongoDB query to arrange the name of the restaurants in ascending order along with all the columns.

db.restaurants.find().sort({name: 1})

6. Write a MongoDB query to arrange the name of the restaurants in descending along with all the columns.

db.restaurants.find().sort({name: -1})

7. Write a MongoDB query to arranged the name of the cuisine in ascending order and for that same cuisine borough should be in descending order.

db.restaurants.find().sort({cuisine: 1, borough: -1})

8. Write a MongoDB query to know whether all the addresses contains the street or not.

db.restaurants.find({  
  "address.street": {\$exists: false}  
}).count() == 0

9. Write a MongoDB query which will select all documents in the restaurants collection where the coord field value is Double.

db. restaurants . find ( { "address . coord": { \$ type: "double" } }

10. Write a MongoDB query which will select the restaurant Id, name and grades for those restaurants which returns 0 as a remainder after dividing the score by 7.

db. restaurants . find ( { name: { \$ regex: /mon / } }, { \_id: 0, name: 1, borough: 1, cuisine: 1, - id: 1 } )  
{ name: 1, borough: 1, "address . coord": 1, "grades . score": 1, - id: 1 }

11. Write a MongoDB query to find the restaurant name, borough, longitude and attitude and cuisine for those restaurants which contains 'mon' as three letters somewhere in its name.

db. restaurants . find ( { name: { \$ regex: /n mod / } }, { name: 1, borough: 1, "address . coord": 1, cuisine: 1, - id: 1 } )  
{ name: 1, borough: 1, "address . coord": 1, cuisine: 1, - id: 1 }

12. Write a MongoDB query to find the restaurant name, borough, longitude and latitude and cuisine for those restaurants which contain 'Mad' as first three letters of its name.

db. restaurants . find ( { name: { \$ regex: / \* mod / } }, { name: 1, borough: 1, "address . coord": 1, cuisine: 1, - id: 1 } )  
{ name: 1, borough: 1, "address . coord": 1, cuisine: 1, - id: 1 }

13. Write a MongoDB query to find the restaurants that have at least one grade with a score of less than 5.

db. restaurants . find ( { "grades . score": { \$ lt: 5 } } )

14. Write a MongoDB query to find the restaurants that have at least one grade with a score of less than 5 and that are located in the borough of Manhattan.

db. restaurants . find ( { "grades . score": { \$ lt: 5 }, borough: "manhattan" } )

15. Write a MongoDB query to find the restaurants that have at least one grade with a score of less than 5 and that are located in the borough of Manhattan or Brooklyn.

```
db. restaurants.find({
 "grades.score": { $lt: 5 },
 "borough": { $in: ["manhattan", "Brooklyn"] } })
```

16. Write a MongoDB query to find the restaurants that have at least one grade with a score of less than 5 and that are located in the borough of Manhattan or Brooklyn, and their cuisine is not American.

```
db. restaurants.find({
 "grades.score": { $lt: 5 },
 "borough": { $in: ["manhattan", "Brooklyn"] },
 "cuisine": { $ne: "American" } })
```

17. Write a MongoDB query to find the restaurants that have at least one grade with a score of less than 5 and that are located in the borough of Manhattan or Brooklyn, and their cuisine is not American or Chinese.

```
db. restaurants.find({
 "grades.score": { $lt: 5 },
 "borough": { $in: ["manhattan", "Brooklyn"] },
 "cuisine": { $nin: ["American", "Chinese"] } })
```

18. Write a MongoDB query to find the restaurants that have a grade with a score of 2 and a grade with a score of 6.

```
db. restaurants.find({
 "grades": {
 "$all": [
 { $elemMatch: { score: 2 } },
 { $elemMatch: { score: 6 } }]
 } })
```

19. Write a MongoDB query to find the restaurants that have a grade with a score of 2 and a grade with a score of 6 and are located in the borough of Manhattan.

db. restaurants . find ( {

    borough : "manhattan",

    grades : { \$all : [ { \$elemMatch : { score : 2 } }, { \$elemMatch : { score : 6 } } ] }

})

20. Write a MongoDB query to find the restaurants that have a grade with a score of 2 and a grade with a score of 6 and are located in the borough of Manhattan or Brooklyn.

db. restaurants . find ( {

    borough : [ "manhattan", "brooklyn" ] ,

    grades : { \$all : [ { \$elemMatch : { score : 2 } }, { \$elemMatch : { score : 6 } } ] }

})

21. Write a MongoDB query to find the restaurants that have a grade with a score of 2 and a grade with a score of 6 and are located in the borough of Manhattan or Brooklyn, and their cuisine is not American.

db. restaurants . find ( {

    borough : { \$in : [ "manhattan", "brooklyn" ] } ,

    grades : { \$all : [ { \$element : { scores : 2 } }, { \$elemMatch : { score : 6 } } ] }

    cuisine : { \$ne : "American" }

})

22. Write a MongoDB query to find the restaurants that have a grade with a score of 2 and a grade with a score of 6 and are located in the borough of Manhattan or Brooklyn, and their cuisine is not American or Chinese.

```
db.restaurants.find({
 grades: { $all: [{ $elemMatch: { score: 2 } }, { $elemMatch: { score: 6 } }] },
 borough: { $in: ["Manhattan", "Brooklyn"] },
 cuisine: { $in: ["American", "Chinese"] }
})
```

23. Write a MongoDB query to find the restaurants that have a grade with a score of 2 or a grade with a score of 6.

```
db.restaurants.find({
 grades: {
 $elements:
 { $or: [
 { score: 2 },
 { score: 6 }
] }
 }
})
```

#### Sample document of 'movies' collection

```
{
 _id: ObjectId("573a1390f29313caabcd42e8"),
 plot: 'A group of bandits stage a brazen train hold-up, only to find a determined posse hot on
 their heels.',
 genres: ['Short', 'Western'],
 runtime: 11,
 cast: [
 'A.C. Abadie',
 "Gilbert M. 'Broncho Billy' Anderson",
 'George Barnes',
 'Justus D. Barnes'
],
```

poster: '[https://m.media-amazon.com/images/M/MV5BMTU3NjE5NzYtYTYYNS00MDVmLWIwYjgtMmYwYWIxZDYyNzU2XkEyXkFqcGdeQXVyNzQzNzQxNzI@.\\_V1\\_SY1000\\_SX677\\_AL\\_.jpg](https://m.media-amazon.com/images/M/MV5BMTU3NjE5NzYtYTYYNS00MDVmLWIwYjgtMmYwYWIxZDYyNzU2XkEyXkFqcGdeQXVyNzQzNzQxNzI@._V1_SY1000_SX677_AL_.jpg)',  
title: 'The Great Train Robbery',

fullplot: "Among the earliest existing films in American cinema - notable as the first film that presented a narrative story to tell - it depicts a group of cowboy outlaws who hold up a train and rob the passengers. They are then pursued by a Sheriff's posse. Several scenes have color included - all hand tinted.",

languages: [ 'English' ],  
released: ISODate("1903-12-01T00:00:00.000Z"),  
directors: [ 'Edwin S. Porter' ],  
rated: 'TV-G',  
awards: { wins: 1, nominations: 0, text: 'I win.' },  
lastupdated: '2015-08-13 00:27:59.177000000',  
year: 1903,  
imdb: { rating: 7.4, votes: 9847, id: 439 },  
countries: [ 'USA' ],  
type: 'movie',  
tomatoes: {  
viewer: { rating: 3.7, numReviews: 2559, meter: 75 },  
fresh: 6,  
critic: { rating: 7.6, numReviews: 6, meter: 100 },  
rotten: 0,  
lastUpdated: ISODate("2015-08-08T19:16:10.000Z")  
}

1. Find all movies with full information from the 'movies' collection that released in the year 1893.

```
db.movies.find(
 { year: 1893 },
 { _id: 0 }
)
```

2. Find all movies with full information from the 'movies' collection that have a runtime greater than 120 minutes.

```
db.movies.find(
 { runtime: { $gt: 120 } })
```

3. Find all movies with full information from the 'movies' collection that have "Short" genre.

```
db.movies.find()
{
 genre: "short"
}
)
```

4. Retrieve all movies from the 'movies' collection that were directed by "William K.L. Dickson" and include complete information for each movie.

```
db.movies.find()
{
 director: "william.k.l. dickson"
}
)
```

6. Retrieve all movies from the 'movies' collection that were released in the USA and include complete information for each movie.

```
db.movies.find()
{
 countries: "USA"
}
)
```

7. Retrieve all movies from the 'movies' collection that have complete information and are rated as "UNRATED".

```
db.movies.find()
{
 rated: "UNRATED"
}
)
```

8. Retrieve all movies from the 'movies' collection that have complete information and have received more than 1000 votes on IMDb.

```
db.movies.find(
 { "imdb.votes": { $gt: 1000 } }
)
```

9. Retrieve all movies from the 'movies' collection that have complete information and have an IMDb rating higher than 7.

```
db.movies.find(
 { "imdb.rating": { $gt: 7 } }
)
```

10. Retrieve all movies from the 'movies' collection that have complete information and have a viewer rating higher than 4 on Tomatoes.

```
db.movies.find(
 { "tomatoes.viewer.rating": { $gt: 4 } }
)
```

11. Retrieve all movies from the 'movies' collection that have received an award.

```
db.movies.find(
 { "award.wins": { $gt: 0 } }
)
```

12. Find all movies with title, languages, released, directors, writers, awards, year, genres, runtime, cast, countries from the 'movies' collection in MongoDB that have at least one nomination.

```
db.movies.find(
 { "award.nomination": { $gt: 0 } },
 { title: 1,
 language: 1,
```

released: 1,  
 directors: 1  
 writers: 1  
 awards: 1  
 year: 1  
 genres: 1  
 -id: 0 ""

- 3 y 13. Find all movies with title, languages, released, directors, writers, awards, year, genres, runtime, cast, countries from the 'movies' collection in MongoDB with cast including "Charles Kayser".

db.movies.find {  
 \$cast: "charles kayser", \$title: 1, language: 1, released: 1,  
 directors: 1, writers: 1, awards: 1, year: 1, genres: 1, runtime: 1, cast: 1,  
 countries: 1, -id: 0

- 4 y 14. Retrieve all movies with title, languages, released, directors, writers, countries from the 'movies' collection in MongoDB that released on May 9, 1893.

db.movies.find { \$released: ISODate("1893-05-09T00:00:00Z") }

\$title: 1, languages: 1, released: 1, directors: 1, writers: 1,  
 countries: 1, -id: 0

- 5 y 14. Retrieve all movies with title, languages, released, directors, writers, countries from the 'movies' collection in MongoDB that have a word "scene" in the title.

db.movies.find { \$title: /scene/i, \$language: 1, released: 1,  
 directors: 1, writers: 1, countries: 1, -id: 0 }

| Evaluation Procedure  | Marks awarded |
|-----------------------|---------------|
| PL/SQL Procedure(5)   | 5             |
| Program/Execution (5) | 5             |
| Viva(5)               | 5             |
| Total (15)            | 15            |
| Faculty Signature     | R             |

|            |  |
|------------|--|
| Ex.No.: 15 |  |
| Date:      |  |

## OTHER DATABASE OBJECTS

### OTHER DATABASE OBJECTS

#### Objectives

After the completion of this exercise, the students will be able to do the following:

- Create, maintain, and use sequences
- Create and maintain indexes

#### Database Objects

Many applications require the use of unique numbers as primary key values. You can either build code into the application to handle this requirement or use a sequence to generate unique numbers.

If you want to improve the performance of some queries, you should consider creating an index. You

can also use indexes to enforce uniqueness on a column or a collection of columns.

You can provide alternative names for objects by using synonyms.

#### **What Is a Sequence?**

A sequence:

- Automatically generates unique numbers
- Is a sharable object
- Is typically used to create a primary key value
- Replaces application code
- Speeds up the efficiency of accessing sequence values when cached in memory

#### **The CREATE SEQUENCE Statement Syntax**

Define a sequence to generate sequential numbers automatically:

```
CREATE SEQUENCE sequence
[INCREMENT BY n]
[START WITH n]
[{:MAXVALUE n | NOMAXVALUE}]
[{:MINVALUE n | NOMINVALUE}]
[{:CYCLE | NOCYCLE}]
[{:CACHE n | NOCACHE}];
```

In the syntax:

*sequence* is the name of the sequence generator

INCREMENT BY *n* specifies the interval between sequence numbers where *n* is an integer (If this clause is omitted, the sequence increments by 1.)

START WITH *n* specifies the first sequence number to be generated (If this clause is omitted, the sequence starts with 1.)

MAXVALUE *n* specifies the maximum value the sequence can generate  
NOMAXVALUE specifies a maximum value of  $10^{27}$  for an ascending sequence and -1 for a descending sequence (This is the default option.)

MINVALUE *n* specifies the minimum sequence value  
NOMINVALUE specifies a minimum value of 1 for an ascending sequence and  $-10^{26}$  for a descending sequence (This is the default option.)

CYCLE | NOCYCLE specifies whether the sequence continues to generate values after reaching its maximum or minimum value (NOCYCLE is the default option.)

CACHE *n* | NOCACHE specifies how many values the Oracle server preallocates and keep in memory (By default, the Oracle server caches 20 values.)

#### Creating a Sequence

- Create a sequence named DEPT\_DEPTID\_SEQ to be used for the primary key of the DEPARTMENTS table.
- Do not use the CYCLE option.

#### EXAMPLE:

```
CREATE SEQUENCE dept_deptid_seq
INCREMENT BY 10
START WITH 120
MAXVALUE 9999
NOCACHE
NOCYCLE;
```

#### Confirming Sequences

- Verify your sequence values in the USER\_SEQUENCES data dictionary table.
- The LAST\_NUMBER column displays the next available sequence number if NOCACHE is specified.

#### EXAMPLE:

```
SELECT sequence_name, min_value, max_value, increment_by, last_number
```

#### NEXTVAL and CURRVAL Pseudocolumns

- NEXTVAL returns the next available sequence value. It returns a unique value every time it is referenced, even for different users.
- CURRVAL obtains the current sequence value.
- NEXTVAL must be issued for that sequence before CURRVAL contains a value.

### Rules for Using NEXTVAL and CURRVAL

You can use NEXTVAL and CURRVAL in the following contexts:

- The SELECT list of a SELECT statement that is not part of a subquery
- The SELECT list of a subquery in an INSERT statement
- The VALUES clause of an INSERT statement
- The SET clause of an UPDATE statement

You cannot use NEXTVAL and CURRVAL in the following contexts:

- The SELECT list of a view
- A SELECT statement with the DISTINCT keyword
- A SELECT statement with GROUP BY, HAVING, or ORDER BY clauses
- A subquery in a SELECT, DELETE, or UPDATE statement
- The DEFAULT expression in a CREATE TABLE or ALTER TABLE statement

### Using a Sequence

- Insert a new department named "Support" in location ID 2500.
- View the current value for the DEPT\_DEPTID\_SEQ sequence.

### EXAMPLE:

```
INSERT INTO departments(department_id, department_name, location_id)
VALUES (dept_deptid_seq.NEXTVAL, 'Support', 2500);
```

```
SELECT dept_deptid_seq.CURRVAL FROM dual;
```

The example inserts a new department in the DEPARTMENTS table. It uses the DEPT\_DEPTID\_SEQ sequence for generating a new department number as follows:  
You can view the current value of the sequence:

```
SELECT dept_deptid_seq.CURRVAL FROM dual;
```

### Removing a Sequence

- Remove a sequence from the data dictionary by using the DROP SEQUENCE statement.
- Once removed, the sequence can no longer be referenced.

### EXAMPLE:

```
DROP SEQUENCE dept_deptid_seq;
```

### What is an Index?

An index:

- Is a schema object
- Is used by the Oracle server to speed up the retrieval of rows by using a pointer
- Can reduce disk I/O by using a rapid path access method to locate data quickly
- Is independent of the table it indexes
- Is used and maintained automatically by the Oracle server

### How Are Indexes Created?

- Automatically: A unique index is created automatically when you define a PRIMARY KEY or UNIQUE constraint in a table definition.
- Manually: Users can create nonunique indexes on columns to speed up access to the rows.

### Types of Indexes

Two types of indexes can be created. One type is a unique index: the Oracle server automatically creates this index when you define a column in a table to have a PRIMARY KEY or a UNIQUE key constraint. The name of the index is the name given to the constraint.

The other type of index is a nonunique index, which a user can create. For example, you can create a FOREIGN KEY column index for a join in a query to improve retrieval speed.

### Creating an Index

- Create an index on one or more columns.
- Improve the speed of query access to the LAST\_NAME column in the EMPLOYEES table.

```
CREATE INDEX index
ON table (column[, column]...);
```

### EXAMPLE:

```
CREATE INDEX emp_last_name_idx
ON employees(last_name);
```

### In the syntax:

*index* is the name of the index

*table* is the name of the table

*column* is the name of the column in the table to be indexed

### When to Create an Index

You should create an index if:

- A column contains a wide range of values
- A column contains a large number of null values
- One or more columns are frequently used together in a WHERE clause or a join condition
- The table is large and most queries are expected to retrieve less than 2 to 4 percent of the rows

### When Not to Create an Index

It is usually not worth creating an index if:

- The table is small
- The columns are not often used as a condition in the query
- Most queries are expected to retrieve more than 2 to 4 percent of the rows in the table
- The table is updated frequently
- The indexed columns are referenced as part of an Expression

### Confirming Indexes

- The USER\_INDEXES data dictionary view contains the name of the index and its uniqueness.
- The USER\_IND\_COLUMNS view contains the index name, the table name, and the column name.

### EXAMPLE:

```
SELECT ic.index_name, ic.column_name, ic.column_position col_pos, ix.uniqueness
FROM user_indexes ix, user_ind_columns ic
WHERE ic.index_name = ix.index_name
AND ic.table_name = 'EMPLOYEES';
```

### Removing an Index

- Remove an index from the data dictionary by using the DROP INDEX command.
- Remove the UPPER\_LAST\_NAME\_IDX index from the data dictionary.
- To drop an index, you must be the owner of the index or have the DROP ANY INDEX privilege.

```
DROP INDEX upper_last_name_idx;
```

```
DROP INDEX index;
```

### Find the Solution for the following:

1. Create a sequence to be used with the primary key column of the DEPT table. The sequence should start at 200 and have a maximum value of 1000. Have your sequence increment by ten numbers. Name the sequence DEPT\_ID\_SEQ.
2. Write a query in a script to display the following information about your sequences: sequence name, maximum value, increment size, and last number

3. Write a script to insert two rows into the DEPT table. Name your script lab12\_3.sql. Be sure to use the sequence that you created for the ID column. Add two departments named Education and Administration. Confirm your additions. Run the commands in your script.
4. Create a nonunique index on the foreign key column (DEPT\_ID) in the EMP table.
5. Display the indexes and uniqueness that exist in the data dictionary for the EMP table.

| Evaluation Procedure  | Marks awarded |
|-----------------------|---------------|
| PL/SQL Procedure(5)   | 5             |
| Program/Execution (5) | 5             |
| Viva(5)               | 5             |
| Total (15)            | 15            |
| Faculty Signature     | R             |

1. CREATE SEQUENCE DEPT-ID-SEG  
INCREMENT BY 10  
START WITH 200  
MAX VALUE 1000  
NOCACHE  
NO CYCLE;

2. SELECT

Sequence-name,  
max-value,  
increment-by,  
last-number  
FROM  
USER-Sequences  
WHERE  
Sequence-name = 'Dept-ID-SEG';

3. INSERT INTO DEPT (DEPT-ID, DEPT-NAME)  
VALUES (DEPT-ID-SEG, NEXTVAL, 'Education');

INSERT INTO DEPT (DEPT-ID, DEPT-NAME)  
VALUES (DEPT-ID-SEG, NEXTVAL, 'Health care');

4. CREATE INDEX emp-dept-id-idx  
ON EMP (DEPT-ID);

5. SELECT

Index-name,  
Uniqueness  
FROM  
USER-indexes  
WHERE  
table-name = 'EMP';

|            |  |
|------------|--|
| Ex.No.: 16 |  |
| Date:      |  |


## CONTROLLING USER ACCESS

### Objectives

After the completion of this exercise, the students will be able to do the following:

- Create users
- Create roles to ease setup and maintenance of the security model
- Use the GRANT and REVOKE statements to grant and revoke object privileges
- Create and access database links

### Controlling User Access

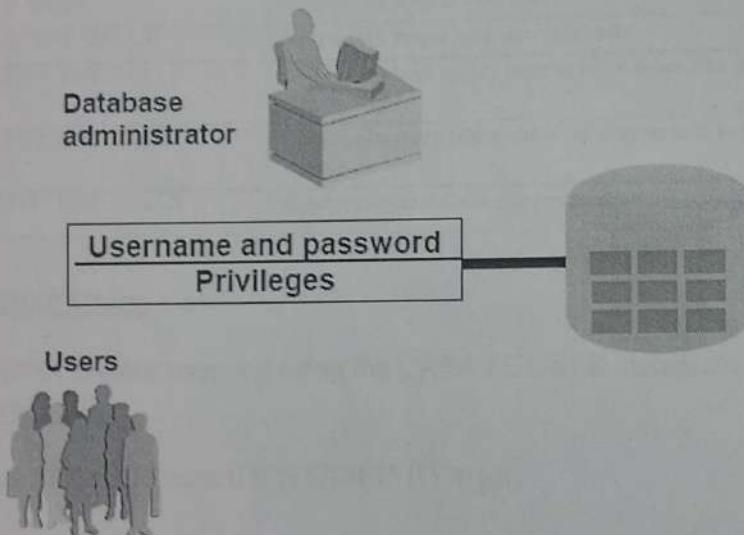

### Controlling User Access

In a multiple-user environment, you want to maintain security of the database access and use. With Oracle server database security, you can do the following:

- Control database access
- Give access to specific objects in the database
- Confirm given and received *privileges* with the Oracle data dictionary
- Create synonyms for database objects

### Privileges

- Database security:
  - System security
  - Data security

- System privileges: Gaining access to the database
- Object privileges: Manipulating the content of the database objects
- Schemas: Collections of objects, such as tables, views, and sequences

### System Privileges

- More than 100 privileges are available.
- The database administrator has high-level system privileges for tasks such as:
  - Creating new users
  - Removing users
  - Removing tables
  - Backing up tables

#### Typical DBA Privileges

| System Privilege | Operations Authorized                                                        |
|------------------|------------------------------------------------------------------------------|
| CREATE USER      | Grantee can create other Oracle users (a privilege required for a DBA role). |
| DROP USER        | Grantee can drop another user.                                               |
| DROP ANY TABLE   | Grantee can drop a table in any schema.                                      |
| BACKUP ANY TABLE | Grantee can back up any table in any schema with the export utility.         |
| SELECT ANY TABLE | Grantee can query tables, views, or snapshots in any schema.                 |
| CREATE ANY TABLE | Grantee can create tables in any schema.                                     |

### Creating Users

The DBA creates users by using the CREATE USER statement.

#### EXAMPLE:

CREATE USER scott IDENTIFIED BY tiger;

### User System Privileges

- Once a user is created, the DBA can grant specific system privileges to a user.
- An application developer, for example, may have the following system privileges:
  - CREATE SESSION
  - CREATE TABLE
  - CREATE SEQUENCE
  - CREATE VIEW
  - CREATE PROCEDURE

GRANT *privilege* [, *privilege*...]  
TO *user* [, *user|role*, PUBLIC...];

#### Typical User Privileges

| System Privilege | Operations Authorized                                                |
|------------------|----------------------------------------------------------------------|
| CREATE SESSION   | Connect to the database                                              |
| CREATE TABLE     | Create tables in the user's schema                                   |
| CREATE SEQUENCE  | Create a sequence in the user's schema                               |
| CREATE VIEW      | Create a view in the user's schema                                   |
| CREATE PROCEDURE | Create a stored procedure, function, or package in the user's schema |

### In the syntax:

*privilege* is the system privilege to be granted

*user |role|PUBLIC* is the name of the user, the name of the role, or PUBLIC designates that every user is granted the privilege

**Note:** Current system privileges can be found in the dictionary view SESSION\_PRIVS.

### Granting System Privileges

The DBA can grant a user specific system privileges.

GRANT create session, create table, create sequence, create view TO scott;

### What is a Role?

A role is a named group of related privileges that can be granted to the user. This method makes it easier to revoke and maintain privileges.

A user can have access to several roles, and several users can be assigned the same role. Roles are typically created for a database application.

### Creating and Assigning a Role

First, the DBA must create the role. Then the DBA can assign privileges to the role and users to the role.

#### Syntax

CREATE ROLE *role*;

In the syntax:

*role* is the name of the role to be created

Now that the role is created, the DBA can use the GRANT statement to assign users to the role as well as assign privileges to the role.

## Creating and Granting Privileges to a Role

CREATE ROLE manager;  
Role created.

GRANT create table, create view TO manager;  
Grant succeeded.

GRANT manager TO DEHAAN, KOCHHAR;  
Grant succeeded.

- Create a role
- Grant privileges to a role
- Grant a role to users

## Changing Your Password

- The DBA creates your user account and initializes your password.
- You can change your password by using the

ALTER USER statement.

ALTER USER scott  
IDENTIFIED BY lion;  
User altered.

## Object Privileges

| Object Privilege | Table | View | Sequence | Procedure |
|------------------|-------|------|----------|-----------|
| ALTER            | ✓     |      | ✓        |           |
| DELETE           | ✓     | ✓    |          |           |
| EXECUTE          |       |      |          | ✓         |
| INDEX            | ✓     |      |          |           |
| INSERT           | ✓     | ✓    |          |           |
| REFERENCES       | ✓     | ✓    |          |           |
| SELECT           | ✓     | ✓    | ✓        |           |
| UPDATE           | ✓     | ✓    |          |           |

## Object Privileges

- Object privileges vary from object to object.
  - An owner has all the privileges on the object.
  - An owner can give specific privileges on that owner's object.
- GRANT *object\_priv* [(*columns*)]  
ON *object*  
TO {*user|role|PUBLIC*}  
[WITH GRANT OPTION];

#### In the syntax:

*object\_priv* is an object privilege to be granted

ALL specifies all object privileges

*columns* specifies the column from a table or view on which privileges are granted

ON *object* is the object on which the privileges are granted

TO identifies to whom the privilege is granted

PUBLIC grants object privileges to all users

WITH GRANT OPTION allows the grantee to grant the object privileges to other users and roles

#### Granting Object Privileges

- Grant query privileges on the EMPLOYEES table.
- Grant privileges to update specific columns to users and roles.

GRANT select  
ON employees  
TO sue, rich;

GRANT update (department\_name, location\_id)  
ON departments  
TO scott, manager;

#### **Using the WITH GRANT OPTION and PUBLIC Keywords**

- Give a user authority to pass along privileges.
- Allow all users on the system to query data from Alice's DEPARTMENTS table.

```
GRANT select, insert
ON departments
TO scott
WITH GRANT OPTION;
```

```
GRANT select
ON alice.departments
TO PUBLIC;
```

### How to Revoke Object Privileges

- You use the REVOKE statement to revoke privileges granted to other users.

- Privileges granted to others through the WITH GRANT OPTION clause are also revoked.  
REVOKE {privilege [, privilege...]}|ALL}  
ON object  
FROM {user[, user...]}|role|PUBLIC}  
[CASCADE CONSTRAINTS];

#### In the syntax:

CASCADE is required to remove any referential integrity constraints made to the CONSTRAINTS object by means of the REFERENCES privilege

#### Revoking Object Privileges

As user Alice, revoke the SELECT and INSERT privileges given to user Scott on the DEPARTMENTS table.

```
REVOKE select, insert
ON departments
FROM scott;
```

1. System privilege: the CREATE SESSION privilege is classified as a system privilege because it allows the user to establish a connection to the database.
2. GRANT CREATE TABLE TO scott;
  - \* Grant: This command is used to provide a privilege to a user.
  - \* Create Table: This is the system privilege.
  - \* Create Table: This specifies the users to whom the privilege is being granted. You can replace scott with any valid username.
3. privileges. Granted by the owner. Granting privileges are the owner can use the WITH GRANT OPTION clause to allow the grants to further pass.

4. Create a role:

CREATE ROLE common\_privileges;

Grant privileges:

GRANT CREATE SESSION, CREATE TABLE, CREATE VIEW TO  
common\_privileges

Find the Solution for the following:

1. What privilege should a user be given to log on to the Oracle Server? Is this a system or an object privilege?

---

2. What privilege should a user be given to create tables?

---

3. If you create a table, who can pass along privileges to other users on your table?

---

4. You are the DBA. You are creating many users who require the same system privileges. What should you use to make your job easier?

---

5. What command do you use to change your password?

6. Grant another user access to your DEPARTMENTS table. Have the user grant you query access to his or her DEPARTMENTS table.

7. Query all the rows in your DEPARTMENTS table.

*SELECT \* FROM DEPARTMENTS*

8. Add a new row to your DEPARTMENTS table. Team 1 should add Education as department number 500. Team 2 should add Human Resources department number 510. Query the other team's table.

9. Query the USER\_TABLES data dictionary to see information about the tables that you own.

10. Revoke the SELECT privilege on your table from the other team.

11. Remove the row you inserted into the DEPARTMENTS table in step 8 and save the changes.

6. Step-1: Grant access to your DEPARTMENT table

Step-2: Grant Query Access to His or Her DEPARTMENTS table

Example: Commands in sequence

GRANT SELECT ON DEPARTMENT TO JOHN;

8. Step-1: Add new rows:

INSERT INTO DEPARTMENTS (DEPARTMENT\_ID, DEPARTMENT-

NAME) VALUES (500, 'education');

Step 2: Query the other team's table.

SELECT \* FROM DEPARTMENTS WHERE DEPARTMENTS-ID=500;

9. SELECT \* FROM USER\_TABLES;

10. Revoke the SELECT privilege:

REVOKE SELECT ON DEPARTMENTS FROM TEAM 2;

11. \*DELETE THE ROWS

\* COMMIT THE CHANGES

| Evaluation Procedure  | Marks awarded |
|-----------------------|---------------|
| PL/SQL Procedure(5)   | 5             |
| Program/Execution (5) | 5             |
| Viva(5)               | 5             |
| Total (15)            | 15            |
| Faculty Signature     | (V)           |