

Class 03

Database & Table Creation

Till now, we have learned the basics of postgresSQL, like creating databases and adding tables. In this class, we will start working with the actual records inside those tables and see how we can insert, update, and delete data.

- **INSERT INTO**
- **SELECT**
- **UPDATE**
- **DELETE**

INSERT INTO

- INSERT INTO is used to add new records (rows) into a table.
- You can insert values into all columns or specific columns.

Syntax (All Columns)

INSERT INTO `table_name`

VALUES (value1, value2, value3, ...);



Inserts values in the **same order** as columns in the table.

INSERT INTO

- INSERT INTO is used to add new records (rows) into a table.
- You can insert values into all columns or specific columns.

Syntax (Specific Columns)

```
INSERT INTO table_name(column1,column2, ...)  
VALUES (value1, value2, ...);
```



Useful when you don't want to insert values in all columns.

SELECT

- The **SELECT** statement is used to fetch data from a table.
- It displays the data in a result table (also called result-set).

Syntax

This query **fetches only the selected columns** from the given table.

```
SELECT column1, column2, ...  
FROM table_name;
```




SELECT

- The **SELECT** statement is used to fetch data from a table.
- It displays the data in a result table (also called result-set).

Syntax (Selecting All Columns)

So, this query will **fetch all the data (every column and every row)** from the table.

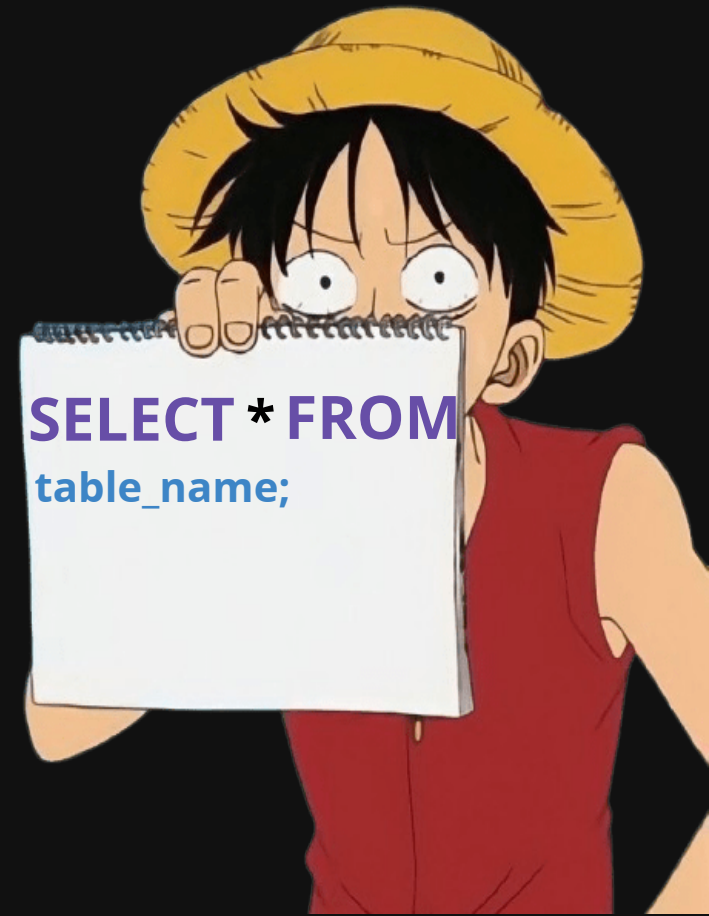

SELECT

```
SELECT column1, ...  
FROM table_name;
```

- Use **SELECT** column1, column2... when you need **only specific data**.
- Use **SELECT *** when you want the **entire table**.

```
SELECT * FROM  
table_name;
```



UPDATE

- The UPDATE command is used to **change existing records** in a table.
- You can update one or more columns at once.

- This will update the column(s) for **all rows** in the table.

UPDATE `table_name`

SET column1 = value1, column2 = value2, ...;



Since we haven't learned conditions yet,

- Every UPDATE will affect all records.
- Later, we will see how to update specific rows using conditions.

DELETE

- Till now, we have inserted, selected, and updated records in our tables.
- Now we will learn the **DELETE** command, which removes all the data from a table but keeps the table structure intact (since we haven't studied clauses yet).



DELETE FROM `table_name`;

DROP TABLE `table_name`;

This command permanently deletes the **table structure** along with all its data.