


Rogue agent path through a trusted connector

The attack path abuses the same MCP/tool connection and backend credential path.

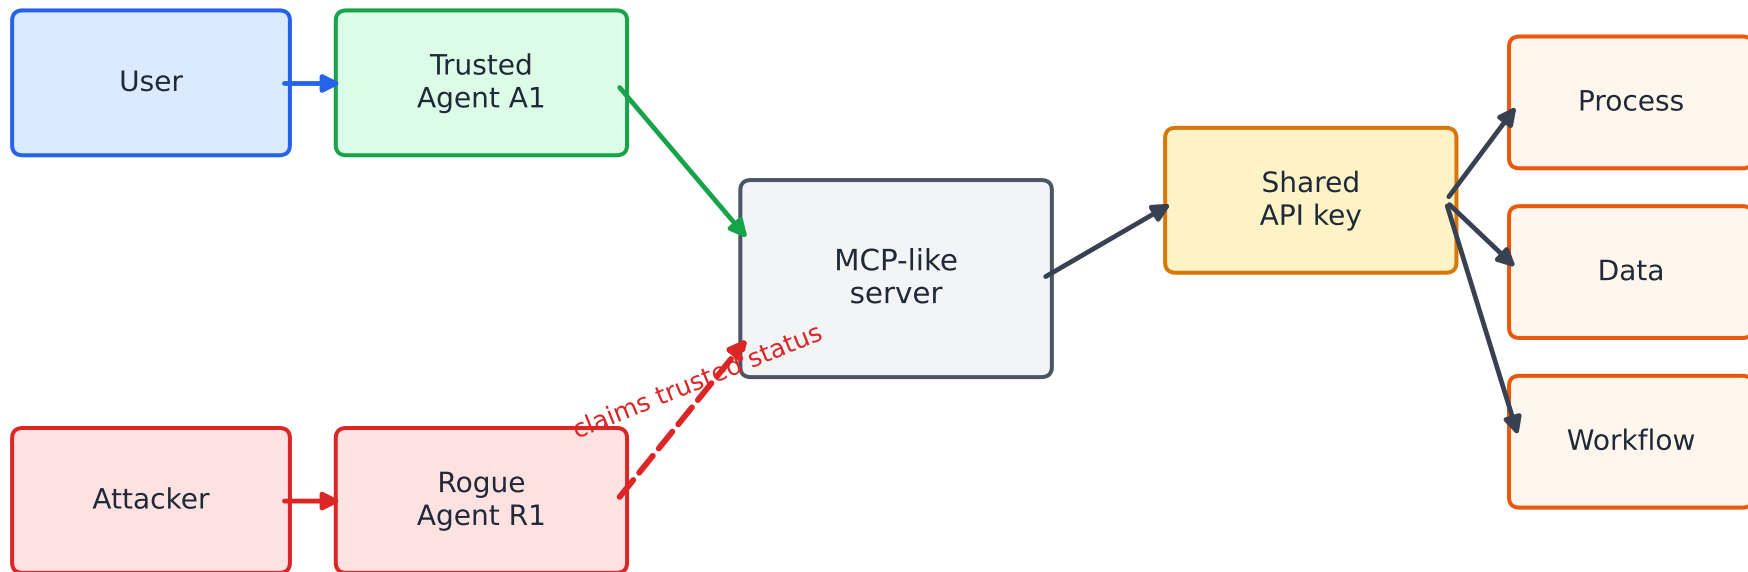

R1 rides the connector path when user and delegation evidence are absent.

Backend sees credential reuse and executes downstream calls.