


Phoenix dataset creation from failed traces

The UI turns observed failures into a fixed rerun set.

1. Select failed actionability traces and add them to a dataset

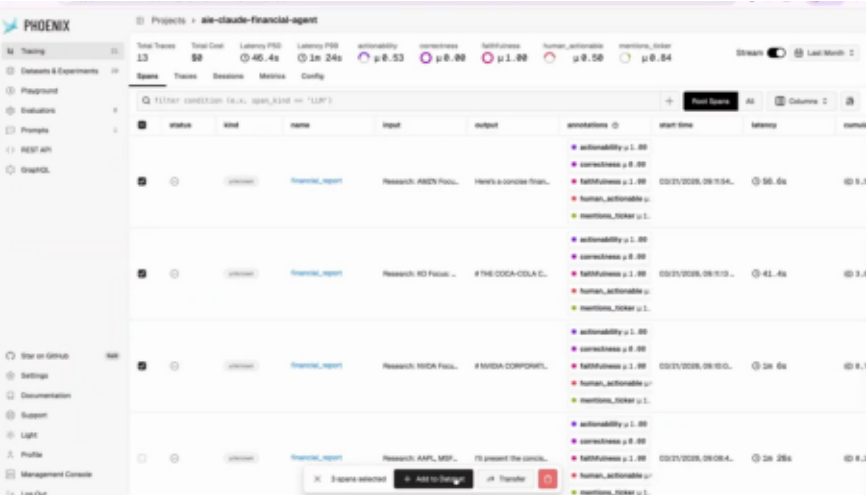

2. Reusable dataset: AIE financial agent failures (6 examples)

