

J.P. MORGAN PAYMENT CARTRIDGE FOR SALESFORCE COMMERCE CLOUD (SFRA)

Implementation Guide

DOCUMENT CONTROL

Document Title	J.P. Morgan Payment Cartridge for Salesforce Commerce Cloud (SFRA) — Implementation Guide
Document Version	1.0
Document Status	Draft
Last Updated (YYYY-MM-DD)	15-April-2026
Cartridge Version	26.1.0
Compatibility	SFRA (Storefront Reference Architecture)
Supported Cards	Visa, Mastercard, American Express, Discover
Supported Currency	USD, CAD
Supported Payment Methods	Credit Card, Google Pay, Apple Pay
Supported Locale	en_US, en_CA (Supports Multi-locale)

REVISION HISTORY

VERSION	DATE	AUTHOR	SUMMARY OF CHANGES
1.0	15-April 2026	JPMC	Initial release

TABLE OF CONTENTS

Document Control	ii
REVISION HISTORY	iii
1. Purpose and Scope	1
1.1 Purpose	1
1.2 Scope	1
2. Overview	2
2.1 Key Capabilities	2
2.2 Process Flow Credit Card (High Level)	3
2.3 Process Flow Google Pay (High Level)	3
2.4 Process Flow Apple Pay (High Level)	3
3. Solution Components	4
4. Prerequisites and Requirements	5
4.1 Inputs Required from J.P. Morgan Payments Representative ..	5
4.2 SFCC Environment Requirements	5
5. Installation	6
5.1 Create and Configure `dw.json` for Cartridge upload to the Business Manager	6
5.2 Install Dependencies in link_jpmc root folder	6
5.3 Build Client-Side Assets in link_jpmc root folder	7

5.4 Upload Cartridges	7
6. Metadata Import.....	8
6.1 Purpose.....	8
6.2 Prepare the Import Archive	8
6.3 Upload and Import in Business Manager	9
6.4 Objects and Configurations Created	9
7. Cartridge Setup (BM Configuration)	11
7.1 Update Storefront Cartridge Path	11
7.2 Update Business Manager Cartridge Path	11
7.3 Verify Services are Available	12
8. Certificates and Keys.....	13
8.1 Purpose.....	13
8.2 Upload Certificate and Private Key	13
9. Key ID (kid) Generation – One Time Activity.....	15
9.1 Purpose.....	15
9.2 Generate Thumbprint in Business Manager.....	15
9.3 Generate Thumbprint in Business Manager.....	16
10. Site Preferences Configuration	17
10.1 Open Preference Groups	17
10.2 JPMC Payment Configuration	17
10.3 JPMC Certificate & JWT Settings.....	19
10.3 JPMC Google Pay Configurations	19
10.4 JPMC Multi Merchant Settings	20
11. Multi-Merchant Configuration	21
11.1 What is Multi-Merchant Functionality?	21
11.2 When Do You Need It? A Checklist	21

11.4 Daily Management	24
11.5 Key Concepts	25
11.6 Troubleshooting Multi-Merchant Issues	25
12. Payment Methods Setup.....	27
12.1 Enable Credit Card Payment Method	27
12.2 Verify Accepted Card Types	27
12.3 Enable Apple Pay and Google Pay.....	28
12.4 Configure Apple Pay in SFCC Business Manager	28
12.5 Google Pay Configurations in SFCC Business Manager	28
13. Fraud Check Configuration (Optional)	30
13.1 Enable Fraud Check.....	30
13.2 Configure Risk Thresholds	30
14. Order Management in Business Manager (CSC)	31
14.1 Access JPMC Payments Tab	31
14.2 Available Actions.....	31
14.2.1 Capture a Payment.....	32
14.2.2 Issue a Refund	33
14.2.3 Void a Transaction.....	33
14.3 Transaction History	34
15. Testing and Validation	35
15.1 Test Card Payments	35
15.2 Test Scenarios.....	35
15.3 Verify Service Communication Logs	36
16. Go-Live Checklist	37
16.1 Credentials and Configuration	37
16.2 Services	37

16.3 Payment Methods	37
16.4 Business Manager Paths	38
16.5 Testing	38
16.6 Security.....	38
16.7 Multi-Merchant (if applicable)	38
17. Troubleshooting	39
17.1 Authorization Fails	39
17.2 PIE Encryption Not Working.....	39
17.3 Capture/Refund/Void Fails in CSC.....	40
17.5 Viewing Logs	40
18. Support and Escalation	41
 APPENDICES	 42
Appendix A. Sample 'DW. JSON'	42
Appendix B. Build and Upload Commands	42

1. PURPOSE AND SCOPE

1.1 Purpose

This guide provides step-by-step instructions to install, configure, test, and deploy the J.P. Morgan Payment Cartridge for Salesforce Commerce Cloud using SFRA.

1.2 Scope

In scope

- Card payment processing (authorize, capture, refund, void)
- PIE encryption and SafeTech tokenization configuration
- Optional fraud check configuration
- Business Manager (CSC) payment operations enablement
- Per Locale Individual Merchant Support
- Google Pay and Apple Pay Payment
- Testing and go-live readiness steps

2. OVERVIEW

The J.P. Morgan Payment Cartridge integrates J.P. Morgan's payment processing services with an SFCC SFRA storefront.

2.1 Key Capabilities

- **Securely accept all major credit cards:** Visa, Mastercard, American Express, and Discover — all processed through J.P. Morgan's secure infrastructure (authorize, capture, refund, void)
- **Page Integrated Encryption (PIE):** encrypts card data in the browser before it reaches the server, reducing PCI scope
- **SafeTech Tokenization:** replaces PAN with tokens for secure storage and reuse
- **Fraud Check (Optional):** pre-authorization risk scoring to accept, review, or block transactions
- **Business Manager Extensions (Manage orders from your admin panel):** operational actions (capture/refund/void) from the CSC order view
- **Google Pay and Apple Pay:** authorize, capture, refund, void from Google pay and Apple Pay
- **Multi Merchant Support:** Per Locale individual MID Support - all from one Salesforce site.
- **Express checkout on every page:** Optionally show Google Pay/Apple Pay buttons on product pages and the cart — not just at checkout — so customers can buy in fewer clicks.

2.2 Process Flow Credit Card (High Level)

1. Shopper enters card details at checkout.
2. PIE scripts encrypt card data in the shopper's browser.
3. Cartridge submits encrypted payment payload for authorization.
4. J.P. Morgan returns authorization outcomes and SafeTech token.
5. Capture occurs immediately or later depending on configured capture method.

*****Why does this matter? ** - Because the real card number is encrypted before it even leaves the customer's browser. This reduces the security burden and helps with PCI compliance.***

2.3 Process Flow Google Pay (High Level)

1. Shopper taps Google Pay button
2. Sends payment request to Google Pay
3. Google shows payment details. Customer uses their saved card in Google account
4. Payment request is sent using encrypted payment data received from Google to J.P. Morgan
5. Capture occurs immediately or later depending on configured capture method.

2.4 Process Flow Apple Pay (High Level)

1. Shopper taps Apple Pay button
2. Sends payment request to Apple Pay
3. Apple shows payment details. Shopper approves with Face ID or Touch ID.
4. Payment request is sent using encrypted payment data received from Apple to J.P. Morgan
5. Capture occurs immediately or later depending on configured capture method.

3. SOLUTION COMPONENTS

Think of this integration like building blocks that work together. Here is what each piece does:

****What is a cartridge? **** In Salesforce Commerce Cloud, a "cartridge" is like an app or plugin. You install it on your site to add new features.

Cartridge	Purpose
`int_jpmc_sfra`	SFRA storefront overlay (checkout UI, hooks, client-side scripts)
`int_jpmc_core`	Core payment logic (services, authentication, helpers)
`bm_jpmc`	Business Manager extensions (CSC payment actions, tools)

SFCC Business Manager — The Control Panel

****Business Manager**** is the admin area of your Salesforce Commerce Cloud site. Think of it as the "back office" where you manage products, orders, and settings.

4. PREREQUISITES AND REQUIREMENTS

4.1 Inputs Required from J.P. Morgan Payments Representative

- Merchant ID
- Client ID
- Token URI (OAuth2 token endpoint)
- Resource ID (OAuth2 resource identifier)
- PIE Merchant ID for Cards
- Google Pay Gateway Merchant ID for Google Pay
- Google Pay Gateway name for Google Pay
- Payment Processing Certificate for Apple Pay
- Kount Client ID for Fraud Detection Feature
- Certificate – (If you have followed one of the paths listed below)

** Either Merchant can generate a CSR via OpenSSL and share with J.P Morgan to receive a signed certificate or share a signed certificate obtained from one of the certificate authorities listed in the J.P Morgan documentation.

<https://developer.payments.jpmorgan.com/api/commerce/optimization-protection/oauth-authentication>

Check with J.P Morgan for any clarifications on the certificate.

4.2 SFCC Environment Requirements

- SFCC instance with **SFRA** installed
- Business Manager access (Administrator permissions recommended)
- `app\_storefront\_base` deployed
- Local workstation: Node.js and npm. Node.js** (version 24 or higher) installed on your computer.

JPMC PAYMENT CARTRIDGE SFRA

5. INSTALLATION

****Technical Notice**:** The following steps involve uploading files to your Salesforce BM and require using a ****command-line tool**** (Terminal on Mac or Command Prompt on Windows). If you are not comfortable with this, please forward this section to your ****web developer or IT support person****.

5.1 Create and Configure `dw.json` for Cartridge upload to the Business Manager

****Goal**:** - Create a small configuration file that tells your computer where your Salesforce site is located so the upload tool knows where to send the cartridges.

Configure sandbox credentials in the root of the `link\_jpmc` folder.

> See Appendix A for a standardized sample.

5.2 Install Dependencies in link_jpmc root folder

****Goal**:** Download all the helper tools the cartridge needs.

1. Open a Terminal or Command Prompt
2. Navigate to the `link\_jpmc/` folder:

```
```bash
cd path/to/link_jpmc
```
```

3. Run:

```
```bash
npm install
```
```

4. Wait for the installation to complete.

5.3 Build Client-Side Assets in link_jpmc root folder

****Goal**:** *Compile the JavaScript and CSS files that your storefront needs.*

Run:

```
```bash
 npm run build
```
```

5.4 Upload Cartridges

****Goal**:** *Send the cartridge files from your computer to your Salesforce sandbox.*

Upload the following cartridges (WebDAV / Prophet / equivalent):

- `int\_jpmc\_sfra`
- `int\_jpmc\_core`
- `bm\_jpmc`

Next step: Proceed to **6. Metadata Import**.

6. METADATA IMPORT

6.1 Purpose

Metadata import creates required services, site preferences, custom objects, and object extensions in Business Manager.

**** This section involves importing XML files into your Salesforce site. If you are not comfortable with file imports, please ask your web developer or IT support person for help.**

****Goal**:** Tell Salesforce about all the new data fields, services, and custom objects the J.P. Morgan cartridge uses.

| File | What It Does |
|-----------------------------------|---|
| system-objecttype-extensions.xml | Creates all the JPMC configuration fields in Business Manager (like "JPMC Client ID," "Capture Method," etc.) and adds payment data fields to orders. |
| custom-objecttype-definitions.xml | Creates the behind-the-scenes data storage objects — access tokens, merchant configurations. |
| Services.xml | Sets up the connection endpoints (URLs) that your store uses to communicate with J.P. Morgan's servers. |

6.2 Prepare the Import Archive

1. Create a local folder named ``jpmc_metadata``.
2. Copy from ``link_jpmc/metadata/`` into ``jpmc_metadata/`` :
 - ``services.xml``

- `system-objecttype-extensions.xml`
- `custom-objecttype-definitions.xml`

3. Zip the folder as `jpmc\_metadata.zip`.

6.3 Upload and Import in Business Manager

1. **Administration > Site Development > Site Import & Export**
2. Under **Import**, click **Upload** and select `jpmc\_metadata.zip`.
3. Select the uploaded zip and click **Import**.
4. Confirm import completes with **SUCCESS**.

[Administration](#) > [Site Development](#) > Site Import & Export

Site Import & Export

This page allows you to export the current configuration of your organization including all of its sites. To download an archive, just click its file name.

Import

Upload Archive:

☒ Local ☐ Remote

No file chosen

6.4 Objects and Configurations Created

| File | Creates |
|----------------|---|
| `services.xml` | HTTP services, credentials, service profile |

| | |
|-------------------------------------|---|
| `system-objecttype-extensions.xml` | Site preferences and groups, Order and Payment custom attributes |
| `custom-objecttype-definitions.xml` | `JPMCAccessToken` custom object for OAuth token + merchant configurations |

7. CARTRIDGE SETUP (BM CONFIGURATION)

7.1 Update Storefront Cartridge Path

1. **Administration > Sites > Manage Sites**

2. Select your storefront site.

3. **Settings** tab > **Cartridges**

4. Add `int\_jpmc\_sfra` and `int\_jpmc\_core` **before** `app\_storefront\_base` :

`int\_jpmc\_sfra:int\_jpmc\_core:app\_storefront\_base`

5. Click **Apply**.

[Administration](#) > [Sites](#) > [Manage Sites](#) > RefArch - Settings

General **Settings** Cache Site Status Page Meta Tag Rules

RefArch - Settings

Click **Apply** to save the details. Click **Reset** to revert to the last saved state.

Instance Type: Sandbox/Development ▾

Deprecated. The preferred way of configuring HTTP and HTTPS hostnames is by using new features of the site aliases configuration ("SEO > Aliases Configuration"). The HTTP/HTTPS hostname values set in t

HTTP Hostname:

HTTPS Hostname:

Instance Type: All

Cartridges:

7.2 Update Business Manager Cartridge Path

1. **Administration > Sites > Manage Sites**

2. Select **Business Manager**.

3. **Settings** tab > **Cartridges**

4. Add `bm\_jpmc` and `int\_jpmc\_core` **before** `bm\_app\_storefront\_base` :

JPMC PAYMENT CARTRIDGE SFRA

`bm\_jpmc:int\_jpmc\_core:bm\_app\_storefront\_base`

5. Click **Apply**.

[Administration](#) > [Sites](#) > [Manage Sites](#) > Business Manager - Settings

[Settings](#)
[Cache](#)
[Hostnames](#)

Business Manager - Settings

Click **Apply** to save the details. Click **Reset** to revert to the last saved state.

Instance Type: Sandbox/Development

Deprecated. Up to two instance specific hostname aliases for Business Manager can be configured here.
 ⚠ Setting a different hostname here will make some Business Manager modules unreachable. Manage additional hostnames in the 'Hostnames' tab instead.

HTTP Hostname:

HTTPS Hostname:

Instance Type: All

Cartridges: bm_jpmc:int_jpmc_core:bm_app_storefront_base

7.3 Verify Services are Available

1. **Administration** > **Operations** > **Services**

2. Confirm these services appear:

| Service ID | Purpose |
|--------------------|-------------------------|
| JPMCAccessToken | OAuth2 token generation |
| JPMCPaymentService | Payment authorization |
| JPMCPaymentCapture | Payment capture |
| JPMCPaymentRefund | Payment refund |
| JPMCPaymentVoid | Payment void |
| JPMCFraudCheck | Fraud risk check |
| JPMCVerification | Card verification |

JPMC PAYMENT CARTRIDGE SFRA

8. CERTIFICATES AND KEYS

To ensure the highest level of security, all communication between site and J.P. Morgan is ****digitally signed**** with a certificate. The certificate proves to J.P. Morgan that payment requests are really coming from you and have not been tampered with.

8.1 Purpose

The cartridge uses an X.509 certificate and private key to sign JWT tokens for API authentication.

J.P Morgan uses the certificate thumbprint (SHA-1) from the access token generated and verifies the authenticity of the merchant.

Note: Refer documentation for acceptable formats for Certificate and Private Keys:
<https://developer.salesforce.com/docs/commerce/b2c-commerce/guide/b2c-webservices.html#import-3rd-party-private-keys-and-certificates-for-an-instance>

8.2 Upload Certificate and Private Key

1. **Administration > Operations > Private Keys and Certificates**
2. Click **Import Key/Certificate**
3. Upload private key with alias: `jpmc-private-key`. Here you are supposed to enter the password that was used during key generation.
4. Upload certificate with alias: `jpmc-certificate`

Important: Alias values must match what you configure in site preferences/custom Object (Multi-Merchant Support).

Private Keys and Certificates ⓘ

| ☐ Alias | Hostnames | Type |
|---|-----------|---------------------|
| ☐ jpmc-certificate | | Trusted Certificate |
| ☐ jpmc-private-key | | Private Key |

9. KEY ID (KID) GENERATION – ONE TIME ACTIVITY

What Is a Key ID?

After you upload the certificate, you need to generate its unique "fingerprint" — called a **Thumbprint** or **Key ID (kid)**. This fingerprint proves to J.P. Morgan that requests from your store were signed with your specific certificate.

9.1 Purpose

The Key ID (`kid`) is a SHA-1 thumbprint of your certificate used in the JWT header.

9.2 Generate Thumbprint in Business Manager

To See **JPMC Tools > Certificate Thumbprint Generator** in Merchant Tools

1. **Administration > Organization > Roles & Permissions > SELECT A ROLE (Eg: Administrator) > Business Manager Modules**
2. Select Site (context)
3. Click **Certificate Thumbprint Generator**
4. Click Update

[Administration](#) > [Organization](#) > [Roles](#) > Administrator - Business Manager Modules

General Users **Business Manager Modules** Functional Permissions WebDAV Permissions Locale Permissions Price Adjustment Limits Customer Service Center Permissions

Administrator - Business Manager Modules

This list shows all Business Manager modules available in the system for which permissions can be granted. Click **Select Context** to select the context for which you would like to modify permissions. Available context options are the organization, one site, or multiple sites.

Select the checkboxes and use the **Update** button at the bottom of the page to grant permissions to certain Business Manager modules. Deselect the checkboxes and use the **Update** button to revoke permissions to specific Business Manager modules.


Read access may be granted to an increasing number of Business Manager modules. Write access includes read access. When removing read access, make sure you haven't also granted write access for the respective feature.

When multiple contexts are selected with different permissions for a feature or module, detailed information can be viewed by clicking in the "Details" column.

| Selected Context: RefArch | | Select Context | |
|--|---|--------------------------------|-------------------------------------|
| Business Manager Module | Module Description | Read | Write |
|  JPMC Tools | | ☐ | ☐ |
|  Certificate Thumbprint Generator | Generate SHA-1 thumbprint from BM Certificate Manager | ☐ | ☒ |

9.3 Generate Thumbprint in Business Manager

1. **Merchant Tools > JPMC Tools > Certificate Thumbprint Generator**
2. Enter Configuration Scope (Where do you want to save data)
3. Enter Certificate Alias (default: `jpmc-certificate`)
4. Enter Private Key Alias (default: `jpmc-private-key`)
5. Click **Generate & Save**

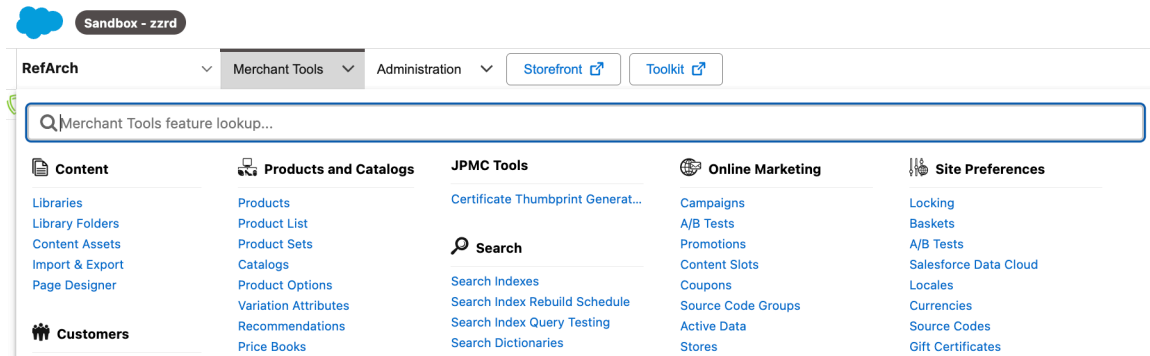

10. SITE PREFERENCES CONFIGURATION

10.1 Open Preference Groups

Merchant Tools > Site Preferences > Custom Preferences

Configure both groups:

- **JPMC Payment Configurations**
- **JPMC Certificate & JWT Settings for SFRA**
- **JPMC Google Pay Configurations**
- **JPMC Multi Merchant Settings**

10.2 JPMC Payment Configuration

| PREFERENCE | DESCRIPTION |
|-------------------------|-----------------------------|
| JPMC Client ID | OAuth2 Client ID |
| JPMC Merchant Id | Merchant identifier |
| JPMC Tokenization Type | Token type |
| JPMC Capture Method | Capture timing |
| Enable JPMC Fraud Check | Pre-auth fraud scoring |
| JPMC Resource ID | OAuth2 resource |
| JPMC Audience | JWT audience |
| JPMC Token Expiration | JWT lifetime |
| JPMC PIE Get Key URL | `getkey.js` URL with PIE ID |

JPMC PAYMENT CARTRIDGE SFRA

| | |
|--------------------------------|------------------------------|
| JPMC PIE Encryption URL | `encryption.js` URL |
| JPMC Merchant Software Company | Header value |
| JPMC Merchant Software Product | Header value |
| JPMC Merchant Software Version | Header value |
| JPMC Platform ID | Optional platform identifier |

Click **Save**.

10.2.1 Capture Method Options

| VALUE | BEHAVIOR |
|---------|---|
| MANUAL | Authorization only; capture later via CSC |
| DELAYED | Authorization with delayed auto-capture (120-minute window) |
| NOW | Immediate sale (authorize + capture in one request) |

Click **Save**.

10.3 JPMC Certificate & JWT Settings

| PREFERENCE | DESCRIPTION | DEFAULT |
|------------------------|---------------------------------|------------------|
| JPMC Certificate Alias | Uploaded certificate alias | jpmc-certificate |
| JPMC Private Key Alias | Uploaded private key alias | jpmc-private-key |
| JPMC Key ID (kid) | SHA-1 thumbprint from Section 9 | NA |

10.3 JPMC Google Pay Configurations

| PREFERENCE | DESCRIPTION | DEFAULT |
|-------------------------------------|---|---------|
| JPMC Google Pay Environment | Google Pay environment: TEST/PROD | NA |
| JPMC Google Pay Gateway Merchant ID | Gateway merchant ID provided by Chase for Google Pay tokenization | NA |
| JPMC Google Pay Merchant ID | Google Pay merchant ID from Google Pay Business Console (Required for PROD) | NA |
| JPMC Google Pay Merchant Name | Merchant name displayed to the shopper in the | NA |

| | | |
|---------------------------------------|--|----------------------------------|
| | Google Pay payment sheet | |
| JPMC Google Pay Gateway | Payment gateway identifier for Google Pay tokenization (e.g. chase) | NA |
| JPMC Google Pay Allowed Card Networks | Comma-separated list of allowed card networks for Google Pay. | VISA, MASTERCARD, AMEX, DISCOVER |
| JPMC Google Pay Allowed Auth Methods | Comma-separated list of allowed authentication methods for Google Pay. | NA |
| JPMC Google Pay Cart Enabled | Enable Google Pay button on the cart page for express checkout. | No |
| JPMC Google Pay PDP Enabled | Enable Google Pay button on product detail pages for Buy Now checkout. | No |

10.4 JPMC Multi Merchant Settings

| PREFERENCE | DESCRIPTION | DEFAULT |
|-------------------------------------|---|---------|
| Enable Multi-Merchant Configuration | Master switch for multi-merchant functionality. | No |

JPMC PAYMENT CARTRIDGE SFRA

11. MULTI-MERCHANT CONFIGURATION

11.1 What is Multi-Merchant Functionality?

By default, the cartridge uses a single JPMC merchant account for all transactions. The multi-Merchant feature allows you to override this and assign a **unique set of JPMC gateway credentials** to each **locale** (e.g., your Canadian English site, your US site, etc.).

This means each locale can have its own independent:

- Merchant ID (MID)
- Fraud and AVS rules
- Currency processing rules
- Security certificates and keys
- Google Pay and Apple Pay settings

Example:

If a shopper uses this locale... | ...their payment is processed by this account:

en_CA (English Canada) | Canada (CAD) account

en_US (English US) | US (USD) account

11.2 When Do You Need It? A Checklist

You may use this feature if **any** of the following apply to your business:

- You operate in multiple countries and have separate merchant accounts for each.
- You process payments in multiple currencies, and your acquirer requires a different MID per currency.
- You need to apply different fraud rules (e.g., AVS requirements) for specific regions.

- You need to use distinct Apple Pay or Google Pay merchant identifiers for different countries.
- If you operate in a single country with a single currency, you do not need this feature.

11.3 Setup Process

Part 1: The Setup Process (5 Steps)

Follow these five steps to configure a locale with its own merchant account.

Step 1: Gather Your Credentials

Before you begin, ensure you have the following information from JPMC for **each locale** you plan to configure:

- **Merchant ID (MID)**
- **OAuth Credentials:** Client ID, Resource ID, Audience, Token URI
- **Certificate Details:** The names (aliases) of the certificate and private key you've uploaded to SFCC Business Manager.

Step 2: Enable the Feature

First, you must activate the functionality for your site.

1. Navigate to: **Merchant Tools** → **Site Preferences** → **Custom Preferences**.
2. Select the JPMC Multi Merchant group.
3. Find **Enable Multi-Merchant** and set it to **Yes**.
4. Click **Save**.

This setting can be turned off at any time to revert to using a single, site-wide merchant account without losing your saved configurations.

Step 3: Create a New Locale Configuration

To See **JPMC Tools > Multi-Merchant Configuration** in Merchant Tools

1. **Administration > Organization > Roles & Permissions > SELECT A ROLE (Eg: Administrator) > Business Manager Modules**

2. Select Site (context)

3. Click **Multi-Merchant Configuration**

4. Click Update

| Business Manager Module | Module Description | ☐ | ☐ |
|--|---|--------------------------|-------------------------------------|
|  JPMC Tools | | ☐ | ☒ |
|  Certificate Thumbprint Generator | Generate SHA-1 thumbprint from BM Certificate Manager | ☐ | ☒ |
|  Multi-Merchant Configuration | Create and Manage per-locale JPMC merchant configurations | ☐ | ☒ |

Next, you will create the configuration for a specific locale.

1. Navigate to: **JPMC Tools → Multi-Merchant Configuration.**
2. Click the **+ Create / Edit Configuration** button.
3. From the **Select Locale** dropdown, choose the locale you want to configure (e.g., en_US,en_CA)

Merchant Configurations

About Merchant Configuration

This tool allows you to manage locale-specific payment gateway configurations for your JPMC integration. Each locale (e.g., en_US, en_CA) can have its own merchant settings, including client credentials, tokenization preferences, Google Pay and Apple Pay configurations, and fraud detection settings.

Default locale settings are managed separately through Site Preferences.

| + Create / Edit Configuration Refresh All Cache | | 2 Configuration(s) found |
|---|-------------|---|
| Locale | Merchant ID | Actions |
| en_CA | ██████████ | Edit Configuration Delete Configuration |
| en_US | ██████████ | Edit Configuration Delete Configuration |

Step 4: Fill in the Configuration Details

Now, enter the specific credentials for the selected locale.

- **Key Principle:** You only need to fill in fields that are **different** from your site's default settings. Any field you leave blank will automatically use the value from your main Site Preferences.
- **Required Field:** Merchant ID is the only mandatory field.
- **Recommended Fields:** For a new locale, you should typically fill in the **Payment Gateway**, **OAuth / Token**, and **Certificate / Key** sections.
- **Security Note:** Sensitive fields will be masked (*****) after saving for security. If you don't change them, the existing saved value is preserved.

Step 5: Save and Verify Your Setup

1. Click **Save Configuration**. Your new settings are now active.
2. **To verify**, place a test order on your storefront using the newly configured locale. Confirm the payment is processed successfully and check the order details in Business Manager to ensure the correct Merchant ID was used.

11.4 Daily Management

Part 2: Daily Management

The **JPMC Tools** → **Multi-Merchant Configuration** page is your central hub for managing all setups.

| Action | How to Do It |
|-------------------------------|---|
| Edit a Configuration | Click Edit Configuration next to the locale you wish to update. Changes are live immediately after you save. |
| Temporarily Disable | Edit the configuration and set the Enabled toggle to No . The locale will temporarily use the site's default account. |
| Delete a Configuration | Click Delete Configuration . The locale will permanently revert to using the site's default account. |
| Force a Cache Update | Click Refresh All Cache on the main list page to ensure all storefront servers have the latest settings. |

Understanding Key Operational Impacts

- **Customer Service:** When a customer has an issue, your team can see which merchant account was used by checking the custom attributes on the order in Business Manager. This helps in tracking down the transaction.

11.5 Key Concepts

Part 3: Key Concepts Explained

How "Fallback" Simplifies Your Work

You do not need to fill in every single field for every locale. The system uses a smart "fallback" logic:

1. It first looks for a setting in your **Locale-specific Configuration**.
2. If the field is blank there, it falls back to the value in your main **Site Preferences**.
3. If it's blank there too, it uses the built-in system default.

This saves time and reduces duplication. You only need to define what's different.

The Importance of Order-Level Tracking

When an order is placed, the system saves the Merchant ID that was used directly on the order itself. This is critical because it means **changes to your configurations do not affect past orders**. If you need to capture or refund an old order, the system will always use the correct credentials that were active when the order was first placed.

11.6 Troubleshooting Multi-Merchant Issues


Part 4: Troubleshooting Common Issues

| If you see this problem... | ...try this solution: |
|--|--|
| A locale is using the wrong account. | Go to its configuration and ensure the Enabled toggle is set to Yes . Then, click the Refresh All Cache button on the main configuration page. |
| The "Create / Edit" page shows "Disabled". | The main feature is turned off. Follow the instructions in Part 1, Step 2 to enable it in Site Preferences. |
| I deleted a configuration by mistake. | Don't worry, this does not affect past orders. New orders on that locale will now use the site's default credentials. You can recreate the configuration at any time. |
| The "Select Locale" dropdown is empty. | Your site has no locales configured other than default. You must first add locales to your site in Merchant Tools → Site → Site Settings → Locales . |

12. PAYMENT METHODS SETUP

12.1 Enable Credit Card Payment Method

1. **Merchant Tools > Ordering > Payment Methods**
2. Locate `CREDIT\_CARD` (Has to be enabled)
3. Ensure **Enabled**
4. Set **Payment Processor** to `JPMC\_Payment`
5. Apply changes

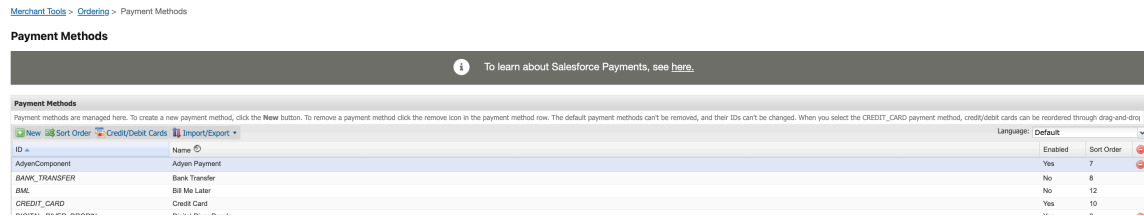

12.2 Verify Accepted Card Types

| CARD TYPE | CARD BRAND |
|------------|------------------|
| Visa | Visa |
| Mastercard | Mastercard |
| Amex | American Express |
| Discover | Discover |

12.3 Enable Apple Pay and Google Pay

1. **Merchant Tools > Ordering > Payment Methods**
2. Locate `DW\_APPLE\_PAY` and `JPMC\_GOOGLE\_PAY` (Has to be enabled)
3. Ensure **Enabled**
4. Set **Payment Processor** to `JPMC\_Payment`
5. Apply changes

Payment Methods

Payment methods are managed here. To create a new payment method, click the **New** button. To remove a payment method click the remove icon in the payment method row. The default payment methods can't be removed, and their IDs can't be changed. When you select the CREDIT_CARD payment method, credit/debit cards can be reordered through drag-and-drop.

[New](#)
[Sort Order](#)
[Credit/Debit Cards](#)
[Import/Export](#)

Language: **Default**

| ID | Name | Enabled | Sort Order | |
|------------------|------------------|---------|------------|--|
| BANK_TRANSFER | Bank Transfer | No | 3 | |
| BML | Bill Me Later | No | 7 | |
| CREDIT_CARD | Credit Card | Yes | 5 | |
| DW_ANDROID_PAY | Android Pay | No | 2 | |
| DW_APPLE_PAY | Apple Pay | Yes | 1 | |
| GIFT_CERTIFICATE | Gift Certificate | No | 4 | |
| JPMC_GOOGLE_PAY | Google Pay | Yes | 8 | |

12.4 Configure Apple Pay in SFCC Business Manager

1. Go to **Merchant Tools > Site Preferences > Apple Pay**
2. Configure the built-in Apple Pay settings:
Required Details:

- *Ensure Apple Pay is Enabled? * - MUST*
- *Apple Merchant ID*: Enter the merchant ID you created.*
- *Apple Merchant Name*: Name of the Merchant*
- *Country Code*: US/CA*
- *Merchant Capabilities*: 3DS must be enabled (without this Apple Pay won't work)*
- *Supported Networks*: Supported card Types*

12.5 Google Pay Configurations in SFCC Business Manager

1. Go to **Merchant Tools > Site Preferences > Custom Preferences > JPMC Google Pay Configuration**
2. **Google Pay Configurations:**

JPMC PAYMENT CARTRIDGE SFRA

- a) **JPMC Google Pay Environment** - Choose `Test` while you're setting up and testing. Switch to `Production` only when you're ready for real customer payments.
- b) **JPMC Google Pay Gateway Merchant ID** - This is the merchant ID that J.P. Morgan (Chase) provided to you for Google Pay.
- c) **JPMC Google Pay Merchant ID** - Your Merchant ID from the Google Pay Business Console. For `Test` mode: leave this blank. For `Production`: this is required.
- d) **JPMC Google Pay Merchant Name**: The name your customers see in the Google Pay pop-up.
- e) **JPMC Google Pay Gateway**: The payment gateway name, typically `chase`. Your J.P. Morgan representative will confirm.
- f) **JPMC Google Pay Allowed Card Networks**: A comma-separated list of card types you accept. Enter: ``VISA,MASTERCARD,AMEX,DISCOVER`` (use exactly this format, all capitals, no spaces after commas)
- g) **JPMC Google Pay Allowed Auth Methods**: A comma-separated list of how cards can be authenticated. Enter: ``PAN_ONLY,CRYPTOGRAM_3DS`` (use exactly this format).
- h) **JPMC Google Pay Cart Enabled**: Check this to also show a Google Pay button on the shopping cart page. This lets customers skip the checkout flow entirely. Default: Off.
- i) **JPMC Google Pay PDP Enabled**: Check this to show a Google Pay button on product detail page (the page where you view a single product). This lets customers buy a product in one click. Default: Off.

13. FRAUD CHECK CONFIGURATION (OPTIONAL)

13.1 Enable Fraud Check

1. **Merchant Tools > Site Preferences > Custom Preferences**
2. Open **JPMC Payment Configuration**
3. Set **Enable JPMC Fraud Check** = `true`
4. Click **Save**

13.2 Configure Risk Thresholds

Set **JPMC Fraud Risk Thresholds** with your risk ranges.

| ACTION | BEHAVIOR |
|--------|----------------------------------|
| A | Accept. Proceed to authorization |
| E, R | Proceed; flag for manual review |
| D | Decline before authorization |

14. ORDER MANAGEMENT IN BUSINESS MANAGER (CSC)

14.1 Access JPMC Payments Tab

1. **Merchant Tools > Ordering > Orders**
2. Open an order
3. Select **JPMC Payments** tab

| | | | | |
|------------------------|---|--|--|--|
| Order No.:
00008201 | Creation Date:
3/3/2026 11:51 pm
Source Code: | Order Status:
Status: OPEN
Confirmation Status: NOTCONFIRMED
Export Status: NOTEXPORTED
Shipping Status: NOTSHIPPED
Payment Status: NOTPAID
Is A Gift: ☐ | Billing Address:
env vars test
env vars test
United States 77056
Houston TX
env-vars@test.com | Payment Method:
CREDIT_CARD Visa More >
Details... (1)
JPMC Payments |
|------------------------|---|--|--|--|

| NAME | AVAILABILITY | QUANTITY | PRICE | TAX | TOTAL |
|---|----------------|----------|----------|---------|----------|
| Robert Ludlum's: The Bourne Conspiracy (for X-Box 360)
sierra-the-bourne-conspiracy-xbox360M | Available (89) | 1 | \$ 59.99 | \$ 3.00 | \$ 59.99 |

SHIPMENT 1
Ship To:
env vars test
env vars test
United States 77056
Houston TX

Shipping Method: Ground
Tax: \$ 0.30

ITEMS TOTAL: **\$ 59.99**
SHIPPING TOTAL: \$ 5.99
TAX TOTAL: \$ 3.30
ORDER TOTAL: **\$ 69.28**

14.2 Available Actions

| ACTION | DESCRIPTION | WHEN AVAILABLE |
|---------|--|--------------------------------------|
| Capture | Capture authorized funds (full amount) | After authorization (MANUAL/DELAYED) |
| Refund | Refund captured payment (full/partial) | After capture |
| Void | Cancel authorization before capture | After authorization, before capture |

Note: If capture method is `NOW`, capture occurs at authorization and **Capture** is not shown.

JPMC Payments

JPMC Payment Management

| | | | |
|----------------|--------------------------------------|----------------|--------------------------|
| Order Number | 00005401 | Payment Method | Credit Card |
| Order Total | CAD 866.72 | Payment Status | Authorized |
| Transaction ID | a5e3bc83-020e-4006-8290-c90cf80fd7af | | |
| Capture Method | MANUAL | Auth Timestamp | 2026-04-15T10:56:49.778Z |

| Authorized | Available for Capture | Available for Refund |
|------------|-----------------------|----------------------|
| CAD 866.72 | CAD 866.72 | CAD 0.00 |

Payment Actions

Capture

Capture Amount:

☐ Capture Full Amount

☐ Mark as final capture (no more captures after this)

[Capture](#)

Void Authorization

Amount to void: **CAD 866.72**

[Void Authorization](#)

[Close](#)

14.2.1 Capture a Payment

When to use: If your capture method is `MANUAL`, the payment was only **authorized** (funds reserved) at checkout. You now need to **capture** (charge) the customer — typically when you ship the product.

JPMC PAYMENT CARTRIDGE SFRA

- Open the order in Business Manager.
- Navigate to the **JPMC Payments** section.
- You'll see the **authorized amount** and the **available for capture** amount.
- Enter the amount to capture (the full amount, or a partial amount for partial shipments).
- Click **Capture**.
- The payment status updates. You can capture multiple times until the full authorized amount is used.

| Payment Status | What It Means |
|------------------------------|---|
| A (Authorized) | Payment approved, funds reserved, nothing charged yet. |
| AC (Auth & Captured) | Payment was charged immediately at checkout (using `NOW` mode). |
| C (Captured) | Full authorized amount has been captured. |
| PC (Partial Captured) | Some of the authorized amount has been captured; more remains. |

14.2.2 Issue a Refund

- When to use: A customer wants their money back — either for a return, a complaint, or an error.
- Open the order.
- In the JPMC Payments section, you'll see the captured amount and the available for refund amount.
- Enter the amount to refund (full or partial).
- Click **Refund**.
- The refund is processed through J.P. Morgan, and the money is returned to the customer's card.

| Payment Status | What It Means |
|-------------------------------|--|
| RF (Refunded) | The full captured amount has been refunded. |
| PRF (Partial Refunded) | Some of the captured amount has been refunded; more remains. |

14.2.3 Void a Transaction

When to use: You want to cancel an authorized payment before any funds have been captured (e.g., the customer calls to cancel before you ship).

- Open the order.

JPMC PAYMENT CARTRIDGE SFRA

- *In the JPMC Payments section, click Void*
- *The authorization is cancelled. No funds are captured.*

*****Important: ** You can only void a payment that has ****not yet been captured****. Once funds are captured, you must issue a refund instead.***

14.3 Transaction History

Every action (capture, refund, void) is logged in the order's JPMC transaction history. You can view:

- *Transaction ID*
- *Amount*
- *Timestamp*
- *Status*
- *Who performed the action*

This provides a complete audit trail for your records.

15. TESTING AND VALIDATION

15.1 Test Card Payments

Use J.P. Morgan sandbox test cards per J.P. Morgan developer documentation.

<https://developer.payments.jpmorgan.com/docs/commerce/online-payments/testing>

15.2 Test Scenarios

| SCENARIO | EXPECTED RESULT |
|--------------------------|----------------------------------|
| Successful authorization | Order placed; payment authorized |
| Capture (MANUAL) | Funds captured via CSC |
| Refund after capture | Refund processed via CSC |
| Void before capture | Authorization voided via CSC |
| Declined card | Order not placed; error shown |
| Fraud check — ACCEPT | Proceeds normally |
| Fraud check — REVIEW | Proceeds; flagged in logs |
| Fraud check — BLOCK | Declined pre-authorization |

15.3 Verify Service Communication Logs

1. **Administration > Operations > Services**
2. Select a JPMC service
3. Confirm **Communication Log Enabled** = `true`
4. **Administration > Site Development > Development Setup > Log Files**
5. Review logs prefixed `service-jpmc-`

16. GO-LIVE CHECKLIST

16.1 Credentials and Configuration

- Obtain production credentials (Client ID, Merchant ID, Token URI, Resource ID)
- Obtain production PIE URLs
- Upload production certificate and private key
- Generate production `kid` thumbprint
- Update site preferences with production values

16.2 Services

- Update credential URLs from sandbox to production endpoints
- **Administration > Operations > Services > Credentials** tab
- Update each JPMC credential URL per J.P. Morgan production details

16.3 Payment Methods

- Confirm `CREDIT\_CARD` enabled with `JPMC\_Payment` processor
- Confirm accepted card types align to target market
- If using Google Pay: Is `JPMC\_GOOGLE\_PAY` payment method enabled with `JPMC\_Payment` processor
- If using Apple Pay: Is Apple Pay enabled in both the built-in SFCC settings, and the payment method enabled with `JPMC\_Payment` processor

16.4 Business Manager Paths

- Storefront cartridge path: `int\_jpmc\_sfra:int\_jpmc\_core:app\_storefront\_base`
- BM cartridge path: `bm\_jpmc:int\_jpmc\_core:bm\_app\_storefront\_base`

16.5 Testing

- Complete production end-to-end payment for all payment Methods
- Validate capture/refund/void in CSC
- Validate fraud thresholds (if enabled)
- Review communication logs

16.6 Security

- Confirm PIE encryption (no plaintext card data)
- Confirm CSRF protection on checkout forms

16.7 Multi-Merchant (if applicable)

- Is the ****Enable Multi-Merchant**** preference turned on?
- Are locale-specific configurations created and ****enabled**** for each required locale?

17. TROUBLESHOOTING

17.1 Authorization Fails

| POSSIBLE CAUSE | RESOLUTION |
|------------------------------------|--|
| Invalid/expired OAuth2 credentials | Validate Client ID, Token URI, Resource ID, Audience in site preferences |
| Certificate mismatch | Re-upload cert/key; regenerate `kid` |
| Incorrect service URLs | Verify in **Services > Credentials** |
| Service disabled | Ensure JPMC services are enabled |

17.2 PIE Encryption Not Working

| POSSIBLE CAUSE | RESOLUTION |
|--------------------|---|
| Incorrect PIE URLs | Validate Get Key URL and Encryption URL in site preferences |
| JavaScript errors | Check browser console for PIE errors |

17.3 Capture/Refund/Void Fails in CSC

| POSSIBLE CAUSE | RESOLUTION |
|-------------------------------------|---|
| Missing BM cartridge path | Confirm
`bm_jpmc:int_jpmc_core` is present |
| Transaction already captured/voided | Check payment transaction state |
| Service timeout | Review **Services > Profiles**
(default 30,000 ms) |

17.5 Viewing Logs

| LOG TYPE | BUSINESS MANAGER LOCATION |
|----------------------------|---|
| Custom error logs | Log Files: `customerror-*` |
| Service communication logs | Log Files: `service-jpmc-*` |
| Custom info/warn logs | Log Files: `custominfo-*` /
`customwarn-*` |

18. SUPPORT AND ESCALATION

- J.P. Morgan API issues: contact your J.P. Morgan technical account representative.
- Cartridge installation / SFCC platform issues: contact your SFCC system integrator.

APPENDICES

APPENDIX A. SAMPLE 'DW. JSON'

```
{  
  "hostname": "your-sandbox.demandware.net",  
  "username": "your-bm-username",  
  "password": "your-bm-password",  
  "code-version": "version1"  
}
```

APPENDIX B. BUILD AND UPLOAD COMMANDS

```
```bash
```

npm install
npm run build

```
```
```

Document Version: 1.0 | Cartridge Version: 26.1.0