

J.P. MORGAN PAYMENT CARTRIDGE FOR SALESFORCE COMMERCE CLOUD (SFRA)

Implementation Guide

Document Control

Document Title	J.P. Morgan Payment Cartridge for Salesforce Commerce Cloud (SFRA) — Implementation Guide
Document Version	1.0
Document Status	Draft
Last Updated (YYYY-MM-DD)	10-JUN -2026
Cartridge Version	26.1.0
Compatibility	SFRA (Storefront Reference Architecture) (Built on v7.1.0)
Supported Cards	Visa, Mastercard, American Express, Discover
Supported Currency	USD, CAD
Supported Payment Methods	Credit Card, Google Pay, Apple Pay
Supported Locale	en_US, en_CA (Supports Multi-locale)

Revision History

Version	Date	Author	Summary of Changes
1.0	10-JUN 2026	JPMC	Initial release

TABLE OF CONTENTS

Revision History	ii
1. Purpose and Scope	1
1.1 Purpose	1
1.2 Scope	1
2. Overview	2
2.1 Key Capabilities	2
2.2 Process Flow Credit Card (High Level)	3
2.3 Process Flow Google Pay (High Level)	3
2.4 Process Flow Apple Pay (High Level)	4
3. Solution Components	5
4. Prerequisites and Requirements	6
4.1 Inputs Required from J.P. Morgan Payments Representative ..	6
4.2 SFCC Environment Requirements	7
Ensure your Salesforce Commerce Cloud (SFCC) platform and local development environments meet the following prerequisites before proceeding:	7
Platform Prerequisites	7
5. Installation	8
5.1 Before you install the JPMC cartridge, make sure that you:	8

Local Development Prerequisites	8
• Node.js: Version 24.x or higher is recommended for local compilation and script tasks.	8
• Package Manager: npm (included with Node.js) installed on your local workstation to manage project dependencies.	8
5.2 Create and Configure `dw.json` for Cartridge upload to the Business Manager	8
5.3 Install Dependencies in link_jpmc root folder	9
5.3 Build Client-Side Assets in link_jpmc root folder	9
5.4 Upload Cartridges	10
6. Metadata Import	11
6.1 Purpose	11
6.2 Prepare the Import Archive	12
6.3 Upload and Import in Business Manager.....	13
6.4 Objects and Configurations Created.....	13
7. Cartridge Setup (BM Configuration)	15
7.1 Update Storefront Cartridge Path	15
7.2 Update Business Manager Cartridge Path	15
7.3 Verify Services are Available.....	16
8. Certificates and Keys	19
8.1 Purpose	19
8.2 Upload Certificate and Private Key.....	19
9. Key ID (kid) Generation – One Time Activity	21
9.1 Purpose	21
9.2 Generate Thumbprint in Business Manager	21
9.3 Generate Thumbprint in Business Manager	22
10. Organization Preference Configuration.....	23

10.1 Open Preference Groups	23
11. Site Preferences Configuration	25
11.1 Open Preference Groups	25
11.2 Configuration Groups.....	25
12. Multi-Merchant Support.....	30
12.1 What is Multi-Merchant Functionality?	30
12.2 When Do You Need It? A Checklist.....	30
12.4 Management	34
12.5 Key Concepts	34
12.6 Troubleshooting Multi-Merchant Issues	35
13. Payment Methods Setup.....	37
Please verify the following configurations to ensure that checkout transactions are routed correctly to the J.P. Morgan gateway. ...	37
13.1 Ensure Credit Card is enabled in Payment Method	37
13.2 Verify Accepted Card Types	37
13.3 Ensure Apple Pay and Google Pay are enabled in Payment Method	38
13.4 Configure Apple Pay in SFCC Business Manager.....	38
14. Fraud Check Configuration (Optional).....	40
14.1 Overview	40
14.2 Enable Fraud Check.....	40
14.3 Multi-Merchant Configuration for Fraud Check	40
14.4 Fraud Rule Action.....	40
15. 3DS Configuration	41
15.1 Enable 3DS	41
16. Order Management in Business Manager (CSC)	42
16.1 Enable this feature	42

16.2	Access Customer Service Center	42
16.3	Available Actions.....	43
16.3.1	Capture a Payment.....	44
16.3.2	Issue a Refund.....	44
16.3.3	Void a Transaction.....	45
16.4	Transaction History	45
17.	JPMC Account Updater	46
17.1	Overview	46
	The JPMC integration supports two flows:	46
17.2	Supported Operating Modes.....	46
17.3	Service Configuration	47
18.	Testing and Validation.....	54
18.1	Test Card Payments	54
18.2	Test Scenarios	54
18.3	Verify Service Communication Logs	54
19.	Go-Live Checklist	56
19.1	Credentials and Configuration	56
19.2	Services.....	56
19.3	Payment Methods.....	56
19.4	Business Manager Paths.....	57
19.5	Testing	57
19.6	Security	57
19.7	Multi-Merchant (if applicable).....	57
20.	Troubleshooting	58
20.1	Authorization Fails.....	58

20.2 PIE Encryption Not Working	58
20.3 Capture/Refund/Void Fails in CSC.....	58
20.4 Viewing Logs	59
21. Support and Escalation.....	60
Appendices	61
Appendix A. Sample 'DW. JSON'	61
Appendix B. Build and Upload Commands	61

1. PURPOSE AND SCOPE

1.1 Purpose

This guide provides step-by-step instructions to install, configure, test, and deploy the J.P. Morgan Payment Cartridge for Salesforce Commerce Cloud using SFRA.

1.2 Scope

In scope

- Card payment processing in storefront
- PIE encryption and SafeTech tokenization
- Account Updater (Real Time and Asynchronous via Notifications)
- Optional fraud check configuration
- Business Manager (CSC) payment operations (capture, refund, void)
- Per Locale Individual Merchant Support
- Google Pay and Apple Pay Payment
- Testing and go-live readiness steps

2. OVERVIEW

The J.P. Morgan Payment Cartridge integrates J.P. Morgan's payment processing services with an SFCC SFRA storefront.

2.1 Key Capabilities

- Securely accept all major credit cards: Visa, Mastercard, American Express, and Discover — all processed through J.P. Morgan's secure infrastructure
- Page Integrated Encryption (PIE): encrypts card data in the browser before it reaches the server, reducing PCI scope
- SafeTech Tokenization: replaces PAN with tokens for secure storage and reuse
- Account Updater: refreshes customers saved credit card information (tokens and expiration dates) whenever card networks issue replacements or renewals
- Fraud Check (Optional): pre-authorization risk scoring to accept, review, or block transactions
- Business Manager Extensions (Manage orders from your admin panel): operational actions (capture/refund/void) from the CSC order view
- Google Pay and Apple Pay: Payments through Google pay and Apple Pay
- Multi Merchant Support: Per Locale individual MID Support - all from one Salesforce site.

- Express checkout on cart and PDP: Optionally show Google Pay/Apple Pay buttons on product pages and the cart — not just at checkout — so customers can buy in fewer clicks.

2.2 Process Flow Credit Card (High Level)

1. Shopper enters card details at checkout.
2. PIE scripts encrypt card data in the shopper's browser.
3. Cartridge submits encrypted payment payload for authorization.
4. J.P. Morgan returns authorization outcomes and SafeTech token.
5. Capture occurs immediately or later depending on configured capture method.

****Why does this matter? **** - Because the real card number is encrypted before it even leaves the customer's browser. This reduces the security burden and helps with PCI compliance.

2.3 Process Flow Google Pay (High Level)

1. Shopper taps Google Pay button
2. Sends payment request to Google Pay
3. Google shows payment details. Customer uses their saved card in Google account
4. Payment request is sent using encrypted payment data received from Google to J.P. Morgan
5. Capture occurs immediately or later depending on configured capture method.

2.4 Process Flow Apple Pay (High Level)

1. Shopper taps Apple Pay button
2. Sends payment request to Apple Pay
3. Apple shows payment details. Shopper approves with Face ID or Touch ID.
4. Payment request is sent using encrypted payment data received from Apple to J.P. Morgan
5. Capture occurs immediately or later depending on configured capture method.

3. SOLUTION COMPONENTS

Think of this integration like building blocks that work together. Here is what each piece does:

*****What is a cartridge? *****

In Salesforce Commerce Cloud, a "cartridge" is like an app or plugin. You install it on your site to add new features.

Cartridge	Purpose
`int_jpmc_sfra`	SFRA storefront overlay (checkout UI, hooks, client-side scripts)
`int_jpmc_core`	Core payment logic (services, authentication, helpers)
`bm_jpmc`	Business Manager extensions (CSC payment actions, tools)

SFCC Business Manager — The Control Panel

*****Business Manager***** is the admin area of your Salesforce Commerce Cloud site. Think of it as the "back office" where you manage products, orders, and settings.

4. PREREQUISITES AND REQUIREMENTS

4.1 Inputs Required from J.P. Morgan Payments Representative

Core Credentials

- Merchant ID: Your unique J.P. Morgan merchant identifier.
- Client ID: The OAuth2 client identifier.
- PIE Key: The Page Integrated Encryption (PE) Key ID used for secure frontend data transmission.

Digital Wallets & Fraud

- Google Pay Gateway Merchant ID: Required exclusively for Production environments to route Google Pay transactions.
- Apple Pay MID: Apple Pay Merchant ID created in Apple Developer portal.
- Apple Pay Payment Processing Certificate: A mandatory prerequisite for Apple Pay integration. This certificate must be obtained and uploaded directly to your Apple Developer Portal.
- SafeTech Client ID: Required only if you are utilizing the integrated SafeTech fraud detection capabilities.

** Either Merchant can generate a CSR via OpenSSL and share with J.P Morgan to receive a signed certificate or share a signed certificate obtained from one of the certificate authorities listed in the J.P Morgan documentation.

Documentation Reference:

For detailed certificate specifications and clarifications, refer to

[oauth-authentication](#)

JPMC PAYMENT CARTRIDGE SFRA

Check with J.P Morgan for any clarifications on the certificate.

4.2 SFCC Environment Requirements

Ensure your Salesforce Commerce Cloud (SFCC) platform and local development environments meet the following prerequisites before proceeding:

Platform Prerequisites

- SFCC Instance: Access to a working SFCC environment (Sandbox, Development, or Staging).
- Business Manager Access: Right Privileges to configure Site Preferences, Services, Custom Objects, Customer Service Centre Settings, Business Manager Modules Settings, and Certificates.

5. INSTALLATION

****Technical Notice****: The following steps involve uploading files to your Salesforce BM and require using a ****command-line tool**** (Terminal on Mac or Command Prompt on Windows).

5.1 Before you install the JPMC cartridge, make sure that you:

- *Have access to the Salesforce Sandbox.*
- *Installed the [Storefront Reference Architecture \(SFRA\) repository on GitHub](#). You need developer access to access the repository on GitHub.*
- *Downloaded the JPMC cartridge from our [GitHub repository](#).
[TODO: THIS NEEDS TO BE CHANGED TO RIGHT URL]*

Local Development Prerequisites

- Node.js: Version 24.x or higher is recommended for local compilation and script tasks.
- Package Manager: npm (included with Node.js) installed on your local workstation to manage project dependencies.

5.2 Create and Configure `dw.json` for Cartridge upload to the Business Manager

**** Goal****: Create a small configuration file that tells your computer where your Salesforce site is located so the upload tool knows where to send the cartridges.

Configure sandbox credentials in the root of the `link\_jpmc` folder.

> See Appendix A for a standardized sample.

5.3 Install Dependencies in link_jpmc root folder

****Goal**:** Download all the helper tools the cartridge needs.

1. Open a Terminal or Command Prompt
2. Navigate to the `link\_jpmc/` folder:

```
```bash
 cd path/to/link_jpmc
```
```

3. Run:

```
```bash
 npm install
```
```

4. Wait for the installation to complete.

5.3 Build Client-Side Assets in link_jpmc root folder

****Goal**:** Compile the JavaScript and CSS files that your storefront needs.

Run:

```
```bash
 npm run build
```
```

5.4 Upload Cartridges

****Goal**:** Send the cartridge files from your computer to your Salesforce sandbox.

Upload the following cartridges (WebDAV / Prophet / equivalent):

- `int\_jpmc\_sfra`
- `int\_jpmc\_core`
- `bm\_jpmc`

Next step: Proceed to 6. Metadata Import.

6. METADATA IMPORT

6.1 Purpose

Metadata import creates required services, site preferences, custom objects, and object extensions in Business Manager.

**** This section involves importing XML files into your Salesforce site.**
If you are not comfortable with file imports, please ask your web developer or IT support person for help.

****Goal**:** Tell the SFCC BM, about all the new data fields, services, jobs, payment-methods, custom processor and custom objects the J.P. Morgan cartridge uses.

| File | What It Does |
|-----------------------------------|---|
| system-objecttype-extensions.xml | Creates all the JPMC configuration fields in Business Manager (like "JPMC Client ID," "Capture Method," etc.) and adds payment data fields to orders. |
| custom-objecttype-definitions.xml | Creates the behind-the-scenes data storage objects — access tokens, merchant configurations. |
| services.xml | Sets up the connection endpoints (URLs) that your store uses to communicate with J.P. Morgan's servers. |
| payment-methods.xml | Defines the available payment options (e.g., Credit Card, Google Pay Payments) visible at checkout and maps them to the appropriate custom processor. |

| | |
|------------------------|--|
| payment-processors.xml | Registers the custom payment processors and maps them to the specific cartridge scripts responsible for handling payment hooks and transaction states. |
| jobs.xml | Configures the Job Framework, defining the background tasks and schedules used for automated operations. |

6.2 Prepare the Import Archive

To prepare the JPMC integration metadata for your specific environment, follow the steps below within the `link_jpmc/metadata` directory of the codebase.

Step 1: Configure the Site Directory

- *Navigate to the following path: `link_jpmc/metadata/site_import/sites/`.*
- *Locate the folder named `RefArch` (the default reference architecture ID).*
- *Rename the `RefArch` folder to match your Target Site ID exactly as it is configured in Business Manager (e.g., `YourBrandID`).*

Step 2: Update Job Metadata

- *Navigate to `link_jpmc/metadata/site_import/` and open the `jobs.xml` file.*
- *Locate any instances of the `site-id` attribute or element.*
- *Replace the placeholder value with your specific Target Site ID. This ensures that the scheduled jobs are correctly mapped to your storefront during the import process.*

Step 3: Package for Site Import

- *Return to the `link_jpmc/metadata/` directory.*

JPMC PAYMENT CARTRIDGE SFRA

- Compress the `site_import` folder into a `.zip` archive.
****Important****: Ensure the archive structure is correct for SFCC Site Import. The root of the zip should contain the `sites/`, `jobs.xml`, `meta`, `services` components.

For a reference on the required structure, you can inspect the existing sample at: `link_jpmc/metadata/site_import.zip`.

6.3 Upload and Import in Business Manager

- Administration > Site Development > Site Import & Export
- Under Import, click Upload and select ``site_import.zip.zip``.
- Select the uploaded zip and click Import.
- Confirm import completes with SUCCESS.

[Administration](#) > [Site Development](#) > Site Import & Export

Site Import & Export

This page allows you to export the current configuration of your organization including all of its sites. To download an archive, just click its file name.

Import

Upload Archive:

☒ Local ☐ Remote

No file chosen

6.4 Objects and Configurations Created

| File | Creates |
|-----------------------------|---|
| <code>`services.xml`</code> | HTTP services, credentials, service profile |

| | |
|-------------------------------------|--|
| `system-objecttype-extensions.xml` | Site preferences and groups, Order and Payment custom attributes |
| `custom-objecttype-definitions.xml` | `JPMCAccessToken` custom object for OAuth token + merchant configurations + Notifications Queue |
| payment-methods.xml | JPMC Payment methods |
| payment-processors.xml | Custom processor JPMC_Payment |
| jobs.xml | Scheduled Jobs scheduled jobs, steps, and flows responsible for automated background processes within the integration. |

7. CARTRIDGE SETUP (BM CONFIGURATION)

7.1 Update Storefront Cartridge Path

- *Administration > Sites > Manage Sites*
- *Select your storefront site.*
- *Settings tab > Cartridges*
- *Add `int\_jpmc\_sfra` and `int\_jpmc\_core` before `app\_storefront\_base`:*

```
`int_jpmc_sfra:int_jpmc_core:app_storefront_base`
```

- *Click Apply.*

[Administration](#) > [Sites](#) > [Manage Sites](#) > RefArch - Settings

General **Settings** Cache Site Status Page Meta Tag Rules

RefArch - Settings

Click **Apply** to save the details. Click **Reset** to revert to the last saved state.

| | |
|---|---|
| Instance Type: | Sandbox/Development ▾ |
| <small>Deprecated. The preferred way of configuring HTTP and HTTPS hostnames is by using new features of the site aliases configuration ("SEO > Aliases Configuration"). The HTTP/HTTPS hostname values set in t</small> | |
| HTTP Hostname: | <input type="text"/> |
| HTTPS Hostname: | <input type="text"/> |
| Instance Type: All | |
| Cartridges: | int_jpmc_sfra:int_jpmc_core:app_storefront_base |

7.2 Update Business Manager Cartridge Path

- *Administration > Sites > Manage Sites*
- *Select Business Manager.*
- *Settings tab > Cartridges*
- *Add `bm\_jpmc` and `int\_jpmc\_core` before `bm\_app\_storefront\_base`:*

JPMC PAYMENT CARTRIDGE SFRA

``bm_jpmc:int_jpmc_core:bm_app_storefront_base``

- 5. Click Apply.

[Administration](#) > [Sites](#) > [Manage Sites](#) > Business Manager - Settings

[Settings](#)
[Cache](#)
[Hostnames](#)

Business Manager - Settings

Click **Apply** to save the details. Click **Reset** to revert to the last saved state.

Instance Type: Sandbox/Development ▾

Deprecated. Up to two instance specific hostname aliases for Business Manager can be configured here.
 ⚠ Setting a different hostname here will make some Business Manager modules unreachable. Manage additional hostnames in the 'Hostnames' tab instead.

HTTP Hostname:

HTTPS Hostname:

Instance Type: All

Cartridges: bm_jpmc:int_jpmc_core:bm_app_storefront_base

7.3 Verify Services are Available

1. Administration > Operations > Services

2. Confirm these services appear:

1. Authentication & Security

- Service: JPMCAccessToken
 - Purpose: Handles OAuth 2.0 authentication and bearer token generation.
 - Credential ID: JPMCAccessTokenCredentials

2. Core Payment Lifecycle

- Service: JPMCPaymentService
 - Purpose: Processes initial payment authorizations.
 - Credential ID: JPMCPaymentServiceCredentials
- Service: JPMCPaymentCapture

JPMC PAYMENT CARTRIDGE SFRA

- Purpose: Executes capture requests for authorized payments.
- Credential ID: JPMCPaymentCaptureCredentials
- Service: JPMCPaymentRefund
 - Purpose: Manages transaction refunds for processed orders.
 - Credential ID: JPMCPaymentRefundCredentials
- Service: JPMCPaymentVoid
 - Purpose: Voids authorized payments prior to capture.
 - Credential ID: JPMCPaymentVoidCredentials

3. Risk & Verification

- Service: JPMCFraudCheck
 - Purpose: Interfaces with JPMC fraud tools to assess transaction risk.
 - Credential ID: JPMCFraudCheckCredentials
- Service: JPMCVerification
 - Purpose: Performs account validations (e.g., zero-dollar auth).
 - Credential ID: JPMCVerificationCredentials

4. Account Maintenance

- Service: JPMCAccountUpdater
 - Purpose: Registers a card for account Updates updates
 - Credential ID: JPMCAccountUpdaterCredentials
- Service: JPMCAccountUpdatesNotificationSubscription

- Purpose: manages notification subscriptions.
- Credential
ID: JPMCAccountUpdatesNotificationSubscriptionCredentials
-

⚠ Important: Ensure CAT or Production URLs are configured in each credential. Current configurations have Mock URLs.

8. CERTIFICATES AND KEYS

To ensure the highest level of security, all communication between site and J.P. Morgan is ****digitally signed**** with a certificate. The certificate proves to J.P. Morgan that payment requests are really coming from you and have not been tampered with.

8.1 Purpose

The cartridge uses an X.509 certificate and private key to sign JWT tokens for API authentication.

J.P Morgan uses the certificate thumbprint (SHA-1) from the access token generated and verifies the authenticity of the merchant.

Note: Refer documentation for acceptable formats for Certificate and Private Keys:

[Import-3rd-party-private-keys-and-certificates-for-an-instance](#)

8.2 Upload Certificate and Private Key

1. Administration > Operations > Private Keys and Certificates
2. Click Import Key/Certificate
3. Upload private key with alias: `jpmc-private-key`. Here you are supposed to enter the password that was used during key generation.
4. Upload certificate with alias: `jpmc-certificate`

Important: Alias values must match what you configure in site preferences/custom Object (Multi-Merchant Support).

Private Keys and Certificates ⓘ



Delete

| ☐ Alias | Hostnames | Type |
|---|-----------|---------------------|
| ☐ jpmc-certificate | | Trusted Certificate |
| ☐ jpmc-private-key | | Private Key |

9. KEY ID (KID) GENERATION – ONE TIME ACTIVITY

What Is a Key ID?

After you upload the certificate, you need to generate its unique "fingerprint" — called a ****Thumbprint**** or ****Key ID (kid)****. This fingerprint proves to J.P. Morgan that requests from your store were signed with your specific certificate.

9.1 Purpose

The Key ID (`kid`) is a SHA-1 thumbprint of your certificate used in the JWT header.

9.2 Generate Thumbprint in Business Manager

To See **JPMC Tools > Certificate Thumbprint Generator** in Merchant Tools

- **Administration > Organization > Roles & Permissions**
 > *SELECT A ROLE (Eg: Administrator) > Business Manager Modules*
- *Select Site (context)*
- *Click Certificate Thumbprint Generator*
- *Click Update*

[Administration](#) > [Organization](#) > [Roles](#) > Administrator - Business Manager Modules

General Users **Business Manager Modules** Functional Permissions WebDAV Permissions Locale Permissions Price Adjustment Limits Customer Service Center Permissions

Administrator - Business Manager Modules

This list shows all Business Manager modules available in the system for which permissions can be granted. Click **Select Context** to select the context for which you would like to modify permissions. Available context options are the organization, one site, or multiple sites. Select the checkboxes and use the **Update** button at the bottom of the page to grant permissions to certain Business Manager modules. Deselect the checkboxes and use the **Update** button to revoke permissions to specific Business Manager modules.


Read access may be granted to an increasing number of Business Manager modules. Write access includes read access. When removing read access, make sure you haven't also granted write access for the respective feature.

When multiple contexts are selected with different permissions for a feature or module, detailed information can be viewed by clicking in the "Details" column.

| Selected Context: RefArch | | | |
|----------------------------------|---|--------------------------|-------------------------------------|
| Select Context | | | |
| Business Manager Module | Module Description | Read | Write |
| JPMC Tools | | ☐ | ☒ |
| Certificate Thumbprint Generator | Generate SHA-1 thumbprint from BM Certificate Manager | ☐ | ☒ |

9.3 Generate Thumbprint in Business Manager

- *Merchant Tools > JPMC Tools > Certificate Thumbprint Generator*
- *Enter Configuration Scope (Where do you want to save data)*
- *Enter Certificate Alias (default: `jpmc-certificate`)*
- *Enter Private Key Alias (default: `jpmc-private-key`)*
- *Click Generate & Save*

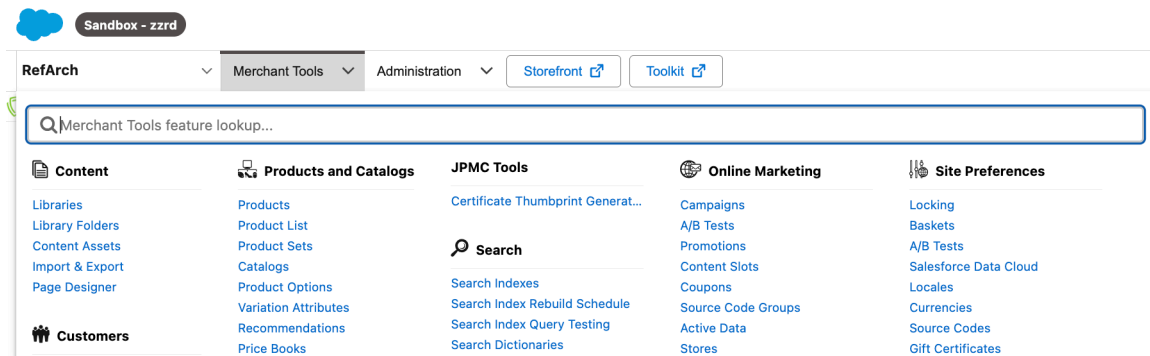

10. ORGANIZATION PREFERENCE CONFIGURATION

10.1 Open Preference Groups

Configure the mandatory Realm ID (JPMC) under

Administration > Global Preferences > Global Custom Preferences > **JPMC Global Configurations > JPMC Realm ID**

[Administration](#) > [Global Preferences](#) > [Global Custom Preferences](#) > JPMC Global Configuration

Global Custom Preferences

This page allows you to define the global custom preferences of group 'JPMC Global Configuration'. For each instance type,)


| Instance Type: <input type="text" value="Sandbox/Development"/> | |
|---|----------------------|
| Preference Name | Value |
| SFCC Instance Realm ID:* | <input type="text"/> |

How to obtain Realm ID?

1. Login to your Account Manager.

<https://account.demandware.com/dw/oidc/authorization/openAm>

2. Click on Organization on left pane.

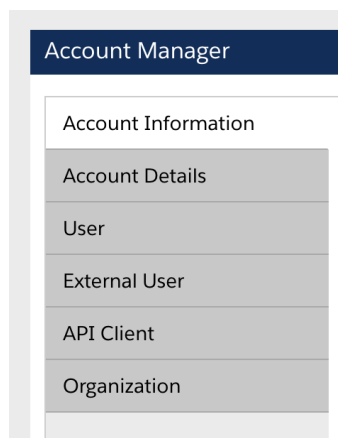

3. Click on your Organization from the list.



The screenshot shows the 'Account Manager' interface. On the left is a sidebar with menu items: 'Account Information', 'Account Details', 'User', 'External User', 'API Client', and 'Organization'. The 'Organization' item is selected. The main content area is titled 'Organizations' and contains the text 'Edit your organizations.' Below this is a table with one row. The table has a header 'Organization Name ▲▼' and a single entry 'JPMorgan Chase & Co' with a blue link icon to its right.

| Organization Name ▲▼ |
|----------------------|
| JPMorgan Chase & Co |

4. Scroll down to Assigned Realms section.

Assigned Realms

| ID | Description |
|---------------|-------------|
| z[REDACTED]ix | |

5. Copy the 4 lettered Realm ID associated to the organization.

11. SITE PREFERENCES CONFIGURATION

11.1 Open Preference Groups

Configure the J.P. Morgan Commerce (JPMC) payment integration through Merchant Tools > Site Preferences > Custom Preferences.

This section outlines all configuration groups.

1. **JPMC Payment Configuration** (15 preferences including fraud, tokenization, PIE URLs)
2. **JPMC Certificate & JWT Settings for SFRA** (2 preferences for certificate/key)
3. **JPMC Google Pay Configuration** (9 preferences)
4. **JPMC Multi Merchant Settings** (1 master toggle)
5. **JPMC 3DS Settings** (1 master toggle)

11.2 Configuration Groups

11.2.1 JPMC Payment Configuration

Navigate to:

Merchant Tools > Site Preferences > Custom Preferences > JPMC Payment Configuration

Core Credentials & Tokens

1. **JPMC Client ID:** OAuth2 Client ID from JPMorgan. (String/Password)
2. **JPMC Merchant Id:** Merchant ID from JPMorgan (e.g., *YOUR_merchantId*). (String)
3. **JPMC Merchant Category Code:** Merchant Category Code from JPMorgan (4 Digited number)

JPMC PAYMENT CARTRIDGE SFRA

4. **JPMC Tokenization Type:** Default tokenization type for transactions

(Enum: SAFETECH_TOKEN, NETWORK_TOKEN).

Default: SAFETECH_TOKEN.

5. **JPMC Capture Method:**

- **MANUAL:** Authorization only; capture performed later via Commerce Cloud CSC.
- **DELAYED:** Authorization with delayed auto-capture (120-minute window).
- **NOW:** Immediate sale (authorize + capture in one request).

Default: MANUAL.

Fraud & Verification

6. **Enable JPMC Fraud Check (Handle):** Validates fraud during payment verification (basket stage). Declines block the transaction. (Boolean)

Default: NO

7. **Enable JPMC Fraud Check (Authorize):** Validates fraud before payment authorization (order stage). (Boolean)

Default: NO

8. **Safetech Fraud Client ID:** Safetech Fraud Web Client SDK Client ID (6-digit ID). Required if fraud check is enabled. (String)

9. **Safetech Fraud Environment:** Enum: TEST or PROD.

Default: TEST

10. **Enable Address Verification Service (AVS):** Includes billing address in Verify Payment and Authorization payloads. (Boolean)

Default: NO

URLs & Encryption (PIE)

11. **JPMC Resource ID: OAuth2 resource ID.** (Enum: Test/CAT, Production)

Default: TEST

12. **JPMC PIE Encryption Library URL:** URL for JPMC Page Integrated Encryption (PIE) script.
Default: TEST
13. **JPMC PIE Get Key Base URL:** Base URL for JPMC PIE getkey.js script.
Default: TEST
14. **JPMC PIE Key: Page Encryption (PE) Key ID:** PE ID - Appended to construct the full URL. (String)

Software & Platform Identifiers

15. **JPMC Platform ID:** Optional platform identifier. (String)

11.2.2 JPMC Certificate & JWT Settings for SFRA

Navigate to: **Merchant Tools > Site Preferences > Custom Preferences > JPMC Certificate & JWT Settings for SFRA**

16. **JPMC Certificate Alias:** Alias of the X.509 certificate in BM Certificate Manager.
17. **JPMC Private Key Alias:** Alias of the private key in BM Certificate Manager.

11.2.3 JPMC Google Pay Configuration

Navigate to: **Merchant Tools > Site Preferences > Custom Preferences > JPMC Google Pay Configuration**

18. **Google Pay Environment:** *TEST or PRODUCTION.*
Default: TEST
Choose `Test` while you're setting up and testing. Switch to `Production` only when you're ready for real customer payments.
19. **Google Pay Gateway Merchant ID:** *this is the merchant ID that J.P. Morgan (Chase) provided to you for Google Pay.*
20. **Google Pay Merchant ID:** *Your Merchant ID from the Google Pay Business Console. For `Test` mode: leave this blank. For `Production`: this is required.*
21. **Google Pay Merchant Name:** *The name your customers see in the Google Pay pop-up.*
22. **Google Pay Gateway:** *The payment gateway name, typically `chase`. Your J.P. Morgan representative will confirm.*
23. **Google Pay Allowed Card Networks:** *A comma-separated list of card types you accept. Enter: `VISA,MASTERCARD,AMEX,DISCOVER` (use exactly this format, all capitals, no spaces after commas)*
24. **Google Pay Allowed Auth Methods:** *A comma-separated list of how cards can be authenticated. Enter: `PAN\_ONLY,CRYPTOGRAM\_3DS` (use exactly this format).*
25. **Google Pay Cart / PDP Enabled:** *Toggles to enable Express Checkout buttons on Cart or Product Detail Pages. (Boolean)*
JPMC Google Pay Cart Enabled - Default: NO
JPMC Google Pay PDP Enabled - Default: NO

11.2.4 JPMC Multi Merchant Settings

Navigate to: **Merchant Tools > Site Preferences > Custom Preferences > JPMC Multi Merchant Settings**

26. Enable Multi-Merchant Configuration (Boolean):

DISABLED (False): Entire site uses single merchant config from Site Preferences.

ENABLED (True): Uses per-locale/per-merchant configurations from custom objects (JPMCMerchantConfig) and cache. Site Preferences act as a fallback.

11.2.5 JPMC 3DS Settings

Navigate to: **Merchant Tools > Site Preferences > Custom Preferences > JPMC 3D Secure**

27. Enable JPMC 3D Secure (Boolean):

DISABLED (False): Disables 3DS Feature.

ENABLED (True): Enables 3DS Feature.

11.2.6 JPMC Account Updater

28. Account Updater Mode: Controls active flows: NONE, NOTIFICATIONS (async webhook), REAL_TIME (RTAU on auth), BOTH.

29. Account Updater Webhook Username: Username (client ID) used in the Authorization

30. Account Updater Webhook Secret: Password used in the Authorization: Basic header for authenticating incoming webhook requests from the JPMC Account Updater provider. Combined with the webhook username as `base64(username:secret)`

12. MULTI-MERCHANT SUPPORT

12.1 What is Multi-Merchant Functionality?

By default, the cartridge uses a single JPMC merchant account for all transactions. The multi-Merchant feature allows you to override this and assign a unique set of JPMC gateway credentials to each locale (e.g., your Canadian English site, your US site, etc.).

This means each locale can have its own independent:

- *Merchant ID (MID)*
- *Fraud and AVS rules*
- *Currency processing rules*
- *Security certificates and keys*
- *Google Pay settings*

Example:

If a shopper uses this locale... | ...their payment is processed by this account:

en_CA (English Canada) | Canada (CAD) account

en_US (English US) | US (USD) account

12.2 When Do You Need It? A Checklist

You may use this feature if any of the following apply to your business:

- *You operate in multiple countries and have separate merchant accounts for each.*
- *You process payments in multiple currencies, and your acquirer requires a different MID per currency.*

- *You need to apply different fraud rules (e.g., AVS requirements) for specific regions.*
- *You need to use distinct Google Pay merchant identifiers for different countries.*
- *If you operate in a single country with a single currency, you do not need this feature.*

12.3 Setup Process

Part 1: The Setup Process (5 Steps)

Follow these five steps to configure a locale with its own merchant account.

Step 1: Gather Your Credentials

Before you begin, ensure you have the following information from JPMC for each locale you plan to configure:

- *Merchant ID (MID)*
- *Client ID*
- *PIE KEY*
- *Certificate Details: The names (aliases) of the certificate and private key you've uploaded to SFCC Business Manager.*

Step 2: Enable the Feature

First, you must activate the functionality for your site.

- *Navigate to: **Merchant Tools** → **Site Preferences** → **Custom Preferences**.*
- *Select the JPMC Multi Merchant group.*
- *Find Enable Multi-Merchant and set it to Yes.*
- *Click Save.*

This setting can be turned off at any time to revert to using a single, site-wide merchant account without losing your saved configurations.

Step 3: Create a New Locale Configuration

To See **JPMC Tools > Multi-Merchant Configuration in Merchant Tools**

- **Administration > Organization > Roles & Permissions > SELECT A ROLE (Eg: Administrator) > Business Manager Modules**
- *Select Site (context)*
- *Click Multi-Merchant Configuration*
- *Click Update*

| Business Manager Module | Module Description | ☒ | ☒ |
|--|---|-------------------------------------|-------------------------------------|
|  JPMC Tools | | ☐ | ☒ |
|  Certificate Thumbprint Generator | Generate SHA-1 thumbprint from BM Certificate Manager | ☐ | ☒ |
|  Multi-Merchant Configuration | Create and Manage per-locale JPMC merchant configurations | ☐ | ☒ |

Next, you will create the configuration for a specific locale.

- *Navigate to: JPMC Tools → Multi-Merchant Configuration.*
- *Click the + Create / Edit Configuration button.*
- *From the Select Locale dropdown, choose the locale you want to configure (e.g., en_US,en_CA)*

Merchant Configurations

About Merchant Configuration

This tool allows you to manage locale-specific payment gateway configurations for your JPMC integration. Each locale (e.g., en_US, en_CA) can have its own merchant settings, including client credentials, tokenization preferences, Google Pay and Apple Pay configurations, and fraud detection settings.

Default locale settings are managed separately through Site Preferences.

| + Create / Edit Configuration Refresh All Cache | | 2 Configuration(s) found |
|---|-------------|---|
| Locale | Merchant ID | Actions |
| en_CA | ██████████ | Edit Configuration Delete Configuration |
| en_US | ██████████ | Edit Configuration Delete Configuration |

Step 4: Fill in the Configuration Details

Now, enter the specific credentials for the selected locale.

- *Key Principle: You only need to fill in fields that are different from your site's default settings. Any field you leave blank will automatically use the value from your main Site Preferences.*
- *Required Field: Merchant ID is the only mandatory field.*
- *Security Note: Sensitive fields will be masked (*****) after saving for security. If you don't change them, the existing saved value is preserved.*

Step 5: Save and Verify Your Setup

- *Click Save Configuration. Your new settings are now active.*
- *To verify, place a test order on your storefront using the newly configured locale. Confirm the payment is processed successfully and check the order details in Business Manager to ensure the correct Merchant ID was used.*

12.4 Management

Part 2: Management

The **JPMC Tools** → **Multi-Merchant Configuration** page is your central hub for managing all setups.

| Action | How to Do It |
|------------------------|--|
| Edit a Configuration | Click Edit Configuration next to the locale you wish to update. Changes are live immediately after you save. |
| Temporarily Disable | Edit the configuration and set the Enabled toggle to No. The locale will temporarily use the site's default account. |
| Delete a Configuration | Click Delete Configuration. The locale will permanently revert to using the site's default account. |
| Force a Cache Update | Click Refresh All Cache on the main list page to ensure all storefront servers have the latest settings. |

12.5 Key Concepts

Part 3: Key Concepts Explained

How "Fallback" Simplifies Your Work

You do not need to fill in every single field for every locale. The system uses a smart "fallback" logic:

- *It first looks for a setting in your Locale-specific Configuration.*
- *If the field is blank there, it falls back to the value in your main Site Preferences.*

- *If it's blank there too, it uses the built-in system default.*

This saves time and reduces duplication. You only need to define what's different.

The Importance of Order-Level Tracking

When an order is placed, the system saves the Merchant ID that was used directly on the order itself. This is critical because it means changes to your configurations do not affect past orders. If you need to capture or refund an old order, the system will always use the correct credentials that were active when the order was first placed.

12.6 Troubleshooting Multi-Merchant Issues

Part 4: Troubleshooting Common Issues

| If you see this problem... | ...try this solution: |
|--|---|
| <i>A locale is using the wrong account.</i> | Go to its configuration and ensure the Enabled toggle is set to Yes. Then, click the Refresh All Cache button on the main configuration page. |
| <i>The "Create / Edit" page shows "Disabled".</i> | The main feature is turned off. Follow the instructions in Part 1, Step 2 to enable it in Site Preferences. |
| <i>I deleted a configuration by mistake.</i> | Don't worry, this does not affect past orders. New orders on that locale will now use the site's default credentials. You can recreate the configuration at any time. |

The "Select Locale" dropdown is empty.

Your site has no locales configured other than default. You must first add locales to your site in Merchant Tools → Site → Site Settings → Locales.

13. PAYMENT METHODS SETUP

Prerequisite: This section assumes you have successfully completed the Site Import process outlined in the Metadata Import section. The payment processors and methods must be imported.

Please verify the following configurations to ensure that checkout transactions are routed correctly to the J.P. Morgan gateway.

13.1 Ensure Credit Card is enabled in Payment Method

- *Merchant Tools > Ordering > Payment Methods*
- *Locate `CREDIT\_CARD` (Has to be enabled)*
- *Ensure Enabled*
- *Verify/Set Payment Processor to `JPMC\_Payment`*
- *Apply changes*

[Merchant Tools > Ordering > Payment Methods](#)

Payment Methods

| To learn about Salesforce Payments, see here . | | | |
|---|---------------|---------|------------|
| Payment Methods | | | |
| Payment methods are managed here. To create a new payment method, click the New button. To remove a payment method click the remove icon in the payment method row. The default payment methods can't be removed, and their IDs can't be changed. When you select the CREDIT_CARD payment method, credit/debit cards can be reordered through drag-and-drop. | | | |
| New Sort Order Credit/Debit Cards Import/Export | | | |
| ID | Name | Enabled | Sort Order |
| AdyenComponent | Adyen Payment | Yes | 7 |
| BANK_TRANSFER | Bank Transfer | No | 8 |
| BMC | Bill Me Later | No | 12 |
| CREDIT_CARD | Credit Card | Yes | 10 |

13.2 Verify Accepted Card Types

| Card Type | Card Brand |
|------------|------------------|
| Visa | Visa |
| Mastercard | Mastercard |
| Amex | American Express |

| | |
|-------------|-------------|
| Diners Club | Diners Club |
| Discover | Discover |
| JCB | JCB |

13.3 Ensure Apple Pay and Google Pay are enabled in Payment Method

- *Merchant Tools > Ordering > Payment Methods*
- *Locate `DW\_APPLE\_PAY` and JPMC_GOOGLE_PAY` (Has to be enabled)*
- *Ensure Enabled*
- *Verify/ Set Payment Processor to `JPMC\_Payment`*
- *Apply changes*

Payment Methods

Payment methods are managed here. To create a new payment method, click the **New** button. To remove a payment method click the remove icon in the payment method row. The default payment methods can't be removed, and their IDs can't be changed. When you select the CREDIT_CARD payment method, credit/debit cards can be reordered through drag-and-drop.

| ID | Name | Enabled | Sort Order |
|------------------|------------------|---------|------------|
| BANK_TRANSFER | Bank Transfer | No | 3 |
| BML | Bill Me Later | No | 7 |
| CREDIT_CARD | Credit Card | Yes | 5 |
| DW_ANDROID_PAY | Android Pay | No | 2 |
| DW_APPLE_PAY | Apple Pay | Yes | 1 |
| GIFT_CERTIFICATE | Gift Certificate | No | 4 |
| JPMC_GOOGLE_PAY | Google Pay | Yes | 8 |

13.4 Configure Apple Pay in SFCC Business Manager

This configuration is mandatory for enabling Apple Pay within the SFRA storefront. Proper setup is required to ensure the Apple Pay payment sheet initializes and submits correctly.

- *Go to **Merchant Tools > Site Preferences > Apple Pay***
- *Configure the built-in Apple Pay settings:*
- *Required Details:*
 - *Ensure Apple Pay is Enabled? * - MUST*

- *Apple Merchant ID*: Enter the exact Merchant ID registered within your Apple Developer Portal.*
- *Apple Merchant Name*: Enter the display name of your store/brand as it should appear to the customer.*
- *Country Code*: US*
- *Merchant Capabilities*: You must select 3DS. (Note: Although marked as optional in interface, 3DS capability is strictly required for the Apple Pay sheet to submit successfully via this integration).*
- *Supported Networks*: Supported card Types*

Note: Apple Pay is supported for the default locale only. Multi MID support is not available for Apple Pay.

14. FRAUD CHECK CONFIGURATION (OPTIONAL)

14.1 Overview

The library integrates with Kount for device fingerprinting. When enabled:

1. Kount SDK loads automatically when `JPMCCheckoutProvider` mounts
2. Device data is collected under a session ID.
3. Session ID is sent in the Fraud Check request.
4. JPMC evaluates fraud risk and returns action (Accept/Review/Decline)

14.2 Enable Fraud Check

- **Merchant Tools > Site Preferences > Custom Preferences**
- *Open JPMC Payment Configuration*
- *Set Enable JPMC Fraud Check (Handle) = `true`*
- *Click Save*
- *Optionally Set Enable JPMC Fraud Check (Authorize) = `true`*

14.3 Multi-Merchant Configuration for Fraud Check

- *If your storefront operates in multi-merchant mode, you should enable Fraud Check flags independently for each merchant locale.*
- *Default Value: False*

14.4 Fraud Rule Action

| Action | Behavior |
|--------|----------------------------------|
| A | Accept. Proceed to authorization |
| E, R | Proceed; flag for manual review |
| D | Decline before authorization |

15. 3DS CONFIGURATION

15.1 Enable 3DS

- **Merchant Tools > Site Preferences > Custom Preferences**
- *Open JPMC 3D Secure Configuration*
- *Set Enable JPMC 3D Secure = `true`*
- *Click Save*

15.2 Multi-Merchant Configuration for 3DS

- *If your storefront operates in multi-merchant mode, you should enable 3DS flag independently for each merchant locale.*
- *Default Value: False*

****See the Multi Merchant section for reference.**

16. ORDER MANAGEMENT IN BUSINESS MANAGER (CSC)

16.1 Enable this feature

- Go to **Administration > Organization > Roles & Permissions > SELECT A ROLE (Eg: Administrator) > Customer Service Center Permissions**
- *Select Site (context)*
- *Click JPMC Payments*
- *Click Update*

16.2 Access Customer Service Center

- *Navigate to Merchant Tools > Ordering > Customer Service Center.*
- *Use the Find Order search functionality to locate and open the desired customer order.*
- *In the upper-right action menu, click on More... and select JPMC Payments from the dropdown list to access the transaction management view.*

| | | | | |
|------------------------|---|--|--|--|
| Order No.:
00008201 | Creation Date:
3/3/2026 11:51 pm
Source Code: | Order Status:
Status: OPEN
Confirmation Status: NOTCONFIRMED
Export Status: NOTEXPORTED
Shipping Status: NOTSHIPPED
Payment Status: NOTPAID
Is A Gift: ☺ | Billing Address:
env vars test
env vars test
United States 77056
Houston TX
env-vars@test.com | Payment Method:
CREDIT_CARD Visa More...
Details... (1) JPMC Payments |
|------------------------|---|--|--|--|

| NAME | AVAILABILITY | QUANTITY | PRICE | TAX | TOTAL |
|---|----------------|----------|----------|---------|----------|
| Robert Ludlum's: The Bourne Conspiracy (for X-Box 360)
<small>sierra-the-bourne-conspiracy-xbox360M</small> | Available (89) | 1 | \$ 59.99 | \$ 3.00 | \$ 59.99 |

SHIPMENT 1
Ship To:
env vars test
env vars test
United States 77056
Houston TX

Shipping Method: Ground
Tax: \$ 0.30

[Add Note](#)

| | |
|---------------------|-----------------|
| ITEMS TOTAL: | \$ 59.99 |
| SHIPPING TOTAL: | \$ 5.99 |
| TAX TOTAL: | \$ 3.30 |
| ORDER TOTAL: | \$ 69.28 |

16.3 Available Actions

| Action | Description | When Available |
|---------|--|--------------------------------------|
| Capture | Capture authorized funds (full amount) | After authorization (MANUAL/DELAYED) |
| Refund | Refund captured payment (full/partial) | After capture |
| Void | Cancel authorization before capture | After authorization, before capture |

Note: If capture method is `NOW`, capture occurs at authorization and Capture is not shown.

JPMC Payments

JPMC Payment Management

| | | | |
|----------------|--------------------------------------|----------------------|--------------------------|
| Order Number | 00005401 | Payment Method | Credit Card |
| Order Total | CAD 866.72 | Payment Status | Authorized |
| Transaction ID | a5e3bc83-020e-4006-8290-c90cf80fd7af | | |
| Capture Method | MANUAL | Auth Timestamp | 2026-04-15T10:56:49.778Z |
| Authorized | Available for Capture | Available for Refund | |
| CAD 866.72 | CAD 866.72 | CAD 0.00 | |

Payment Actions

Capture

Capture Amount:

☐ Capture Full Amount

☐ Mark as final capture (no more captures after this)

Capture

Void Authorization

Amount to void: CAD 866.72

Void Authorization

Close

16.3.1 Capture a Payment

When to use:

If your capture method is `MANUAL`, the payment was only **authorized** (funds reserved) at checkout. You now need to **capture** (charge) the customer — typically when you ship the product.

- *Open the order in Business Manager.*
- *Navigate to the ****JPMC Payments**** section.*
- *You'll see the ****authorized amount**** and the ****available for capture**** amount.*
- *Enter the amount to capture (the full amount, or a partial amount for partial shipments).*
- *Click ****Capture****.*
- *The payment status updates. You can capture multiple times until the full authorized amount is used.*

| Payment Status | What It Means |
|----------------------------------|---|
| **A** (Authorized) | Payment approved, funds reserved, nothing charged yet. |
| **AC** (Auth & Captured) | Payment was charged immediately at checkout (using `NOW` mode). |
| **C** (Captured) | Full authorized amount has been captured. |
| **PC** (Partial Captured) | Some of the authorized amount has been captured; more remains. |

16.3.2 Issue a Refund

- *When to use: A customer wants their money back — either for a return, a complaint, or an error.*
- *Open the order.*
- *In the JPMC Payments section, you'll see the captured amount and the available for refund amount.*
- *Enter the amount to refund (full or partial).*
- *Click ****Refund****.*

JPMC PAYMENT CARTRIDGE SFRA

- *The refund is processed through J.P. Morgan, and the money is returned to the customer's card.*

| <i>Payment Status</i> | <i>What It Means</i> |
|--|--|
| **RF** (<i>Refunded</i>) | The full captured amount has been refunded. |
| **PRF** (<i>Partial Refunded</i>) | Some of the captured amount has been refunded; more remains. |

16.3.3 Void a Transaction

When to use: You want to cancel an authorized payment before any funds have been captured (e.g., the customer calls to cancel before you ship).

- *Open the order.*
- *In the JPMC Payments section, click Void*
- *The authorization is cancelled. No funds are captured.*

****Important:** ** You can only void a payment that has ****not yet been captured****. Once funds are captured, you must issue a refund instead.

16.4 Transaction History

Every action (capture, refund, void) is logged in the order's JPMC transaction history. You can view:

- *Transaction ID*
- *Amount*
- *Timestamp*
- *Status*
- *Who performed the action*

This provides a complete audit trail for your records.

17. JPMC ACCOUNT UPDATER

17.1 Overview

The Account Updater feature automatically refreshes your customers saved credit card information (tokens and expiration dates) whenever card networks issue replacements or renewals. This seamless process prevents transaction failures due to outdated card details, ensuring a frictionless checkout experience without requiring the customer to manually re-enter their payment information.

The JPMC integration supports two flows:

| Flow Type | Description |
|--------------------------------------|--|
| Asynchronous Webhook (Notifications) | JPMC actively pushes card-update notifications to your storefront. These updates are stored in a secure queue and processed automatically by a background scheduled job. |
| Real-Time Account Updater (RTAU) | When a customer attempts to check out with a saved card, the JPMC gateway checks for updates in real-time. If new card data is available, it is returned in line with the payment response and applied to the order immediately. |

17.2 Supported Operating Modes

You can control how the feature operates using the Account Updater Mode setting. This can be configured globally at the site level or customized on a per-merchant basis.

JPMC PAYMENT CARTRIDGE SFRA

| Mode | System Behavior |
|---------------|---|
| NONE | The Account Updater feature is completely disabled (Default). |
| NOTIFICATIONS | Only the asynchronous webhook flow is active. |
| REAL_TIME | Only the Real-Time update during payment authorization is active. |
| BOTH | Both Notification webhooks and Real-Time updates are active. |

Fallback Logic: In a multi-merchant environment, the per-merchant configuration takes highest priority. If a merchant-specific setting is left blank, the system falls back to the global site preference. If neither is configured, the system defaults to NONE.

17.3 Service Configuration

The Site import done in previous steps creates two specific services for this feature.

A. JPMCAccountUpdater (Card Registration)

- *Service ID: JPMCAccountUpdater*
- *Credential ID: JPMCAccountUpdaterCredentials*
- *URL: Service URL*

* **Purpose:** Registers and unregisters saved customer cards with the JPMC Account Updater program.

B. JPMCAccountUpdaterSubscription (Webhook Management)

- *Service ID: JPMCAccountUpdaterSubscription*
- *Credential ID: JPMCAccountUpdaterSubscriptionCredentials*
- *Default URL: Service URL*

* **Purpose:** Creates and manages your storefront's webhook subscription with JPMC.

Configuring Credential URLs

- *Navigate to Administration → Operations → Services → Credentials.*
- *Locate and edit both `JPMCAccountUpdaterCredentials` and `JPMCAccountUpdaterSubscriptionCredentials`.*

*** Update the URL field to the appropriate JPMC endpoint (Production or Sandbox) provided by your JPMC representative.**

17.4 Site Preferences Configuration for Account Updater

To configure the global settings for your storefront, navigate to Merchant Tools → Site Preferences → Custom Preferences → JPMC Account Updater.

| Preference Name | Internal ID | Description |
|----------------------|-------------------------------|--|
| Account Updater Mode | jpmcAccountUpdaterMode | Select NOTIFICATIONS, REAL_TIME, or BOTH. Defaults to NONE. |
| Webhook Username | jpmcAccountUpdaterWebhookUser | The username JPMC will use to authenticate its incoming webhook requests to your storefront. |

| | | |
|----------------|---------------------------------|---|
| Webhook Secret | jpmcAccountUpdaterWebhookSecret | The password paired with the Webhook Username. This is stored securely as an encrypted field. |
|----------------|---------------------------------|---|

17.5 Multi-Merchant Configuration for Account Updater

If your storefront operates in multi-merchant mode, you can configure Account Updater settings independently for each merchant locale.

*****See the Multi Merchant section for reference.***

Within the Account Updater section of the record, you can configure the following overrides:

| Attribute | Description |
|----------------------|---|
| Account Updater Mode | Select NONE, NOTIFICATIONS, REAL_TIME, or BOTH. If left blank, the site-level preference is used. |
| Webhook Username | The unique webhook username for this specific merchant. |
| Webhook Secret | The unique webhook secret for this merchant (stored encrypted). |

17.6 Webhook Management (Business Manager Interface)

Instead of running backend jobs, you can easily manage your webhook subscriptions directly within a custom Business Manager dashboard.

A. How to Enable the Webhook Management Module

Before you can access the dashboard, you must ensure the module is added to your Business Manager cartridge path and that your user role has permission to view it.

- **Verify Cartridge Path:** *Navigate to Administration → Sites → Manage Sites → Business Manager → Settings. Ensure the JPMC Business Manager extension cartridge (e.g., int_jpmc_bm) is included in the Cartridges path.*
- **Assign Permissions:** *Navigate to Administration → Organization → Roles & Permissions.*
- *Click on the Role you want to grant access to (e.g., Administrator).*
- *Click on the Business Manager Modules tab.*
- *Scroll through the list to find **JPMC Webhook Management**.*
- *Check the box next to it to grant access and click Apply.*
- *Refresh your Business Manager window. The new module will now appear in the Merchant Tools menu.*

B. Using the Webhook Dashboard

- *Navigate to Merchant Tools → JPMC Webhook Management.*
- *You will see a dashboard listing the subscription status for all your configured locales/merchants.*
- **Available Actions:**
 - **Subscribe:** *Registers the storefront/locale to receive webhooks from JPMC. The Subscription ID is automatically saved to your Site Preferences or Merchant Config.*
 - **Update:** *If you change your Webhook Username/Secret, click Update to delete the old subscription and register a new one with the updated credentials.*
 - **Delete:** *Instantly unregisters the webhook connection with JPMC and clears the stored ID from your configuration.*

17.7 Custom Objects Data Structure

Account Updater Notification Queue

To ensure no data is lost during temporary outages, incoming webhook notifications are stored in a durable Custom Object queue (AccountUpdater_Notification_Queue) before being processed by a scheduled job.

Queue Attributes:

- *notificationID*: The unique identifier for the notification (Primary Key).
- *notificationPayload*: The raw JSON data sent by JPMC.
- *status*: The current state of the record (NEW, PROCESSING, or ERROR).
- *receivedTimestamp*: The exact time the notification was received.
- *lastError*: Details of any processing failures.

Saved Card Attributes

The following internal attributes are added to saved customer payment instruments:

- * **jpmcMerchantRecordIdentifier**: A stable ID used to match incoming webhooks back to the correct saved card in SFCC. Auto populated; do not edit.
- * **jpmcMerchantId**: Identifies which merchant the card was saved under, ensuring proper data siloing in multi-merchant setups.

17.8 Scheduled Jobs

Navigate to **Administration** → **Operations** → **Jobs** to manage the queue processor.

Process Account Updater Queue (ProcessUpdateQueue_Job)

- *Purpose: Processes pending webhook notifications and applies the updates to saved customer cards.*
- *Function: It retrieves records marked as NEW, matches them to the correct saved card using the Merchant Record Identifier, updates the token/expiry, and deletes the queue record.*
- *Recommended Schedule: Run automatically depending on your storefront's transaction volume.*

17.9 Workflow Diagrams

Asynchronous Notification Flow (Webhooks)

- *JPMC detects a card update and sends a webhook notification.*
- *Storefront receives the request, authenticates the Basic Auth credentials, stores the payload in the Custom Object queue (Status: NEW), and responds with an HTTP 200 Success.*
- *Scheduled Job runs on its interval, picks up the NEW record, and locates the matching saved card.*
- *Storefront applies the new token or expiry date and deletes the queue record upon success.*

Real-Time Flow (RTAU)

- *Customer attempts to check out using an existing saved card.*
- *Storefront sends the standard authorization request to JPMC.*
- *JPMC processes the authorization and includes updated card data in line with the response (if an update exists).*

- *Storefront immediately applies the new token and/or expiry date to the saved card profile, and the checkout proceeds without interruption.*

17.10 Security & Compliance

- * **Webhook Authentication:** All incoming webhook requests are strictly validated using HTTP Basic Authentication utilizing timing-safe credential comparisons.
- * **Encrypted Storage:** Webhook secrets are stored as encrypted password attributes within Business Manager and are never exposed in plain text.
- * **Data Privacy:** Customer Personal Identifiable Information (PII) and raw card data are never written to log files or queue error messages.
- * **Tokenized Data:** The storefront only exchanges secure payment tokens with JPMC. Raw Primary Account Numbers (PANs) are never stored or transmitted by SFCC.
- * **Atomic Database Updates:** Card updates are executed within strict database transactions, guaranteeing that partial or corrupted data saves cannot occur.

18. TESTING AND VALIDATION

18.1 Test Card Payments

Use J.P. Morgan sandbox test cards per J.P. Morgan developer [documentation](#).

18.2 Test Scenarios

| Scenario | Expected Result |
|--------------------------|----------------------------------|
| Successful authorization | Order placed; payment authorized |
| Capture (MANUAL) | Funds captured via CSC |
| Refund after capture | Refund processed via CSC |
| Void before capture | Authorization voided via CSC |
| Declined card | Order not placed; error shown |
| Fraud check — ACCEPT | Proceeds normally |
| Fraud check — REVIEW | Proceeds; flagged in logs |
| Fraud check — BLOCK | Declined pre-authorization |

18.3 Verify Service Communication Logs

- *Administration > Operations > Services*

JPMC PAYMENT CARTRIDGE SFRA

- *Select a JPMC service*
- *Confirm Communication Log Enabled = `true`*
- *Administration > Site Development > Development Setup > Log Files*
- *Review logs prefixed `service-jpmc-`*

19. GO-LIVE CHECKLIST

19.1 Credentials and Configuration

- *Obtain production credentials (Client ID, Merchant ID, etc)*
- *Obtain production PIE ID*
- *Upload production certificate and private key*
- *Generate production `kid` thumbprint*
- *Update site preferences with production values*

19.2 Services

- *Update credential URLs from sandbox to production endpoints*
- *Administration > Operations > Services > Credentials tab*
- *Update each JPMC credential URL per J.P. Morgan production details*

19.3 Payment Methods

- *Confirm `CREDIT\_CARD` enabled with `JPMC\_Payment` processor*
- *Confirm accepted card types align to target market*
- *If using Google Pay: Is `JPMC\_GOOGLE\_PAY` payment method enabled with `JPMC\_Payment` processor*
 - *If using Apple Pay: Is Apple Pay enabled in both the built-in SFCC settings, and the payment method enabled with `JPMC\_Payment` processor*

19.4 Business Manager Paths

- *Storefront cartridge path:*
``int_jpmc_sfra:int_jpmc_core:app_storefront_base``
- *BM cartridge path:*
``bm_jpmc:int_jpmc_core:bm_app_storefront_base``

19.5 Testing

- *Complete production end-to-end payment for all payment Methods*
- *Validate capture/refund/void in CSC*
- *Validate fraud thresholds (if enabled)*
- *Review communication logs*

19.6 Security

- *Confirm PIE encryption (no plaintext card data)*
- *Confirm CSRF protection on checkout forms*

19.7 Multi-Merchant (if applicable)

- *Is the ****Enable Multi-Merchant**** preference turned on?*
- *Are locale-specific configurations created and ****enabled**** for each required locale?*

20. TROUBLESHOOTING

20.1 Authorization Fails

| Possible Cause | Resolution |
|------------------------------------|--|
| Invalid/expired OAuth2 credentials | Validate Client ID, Resource ID, etc in site preferences |
| Certificate mismatch | Re-upload cert/key; regenerate `kid` |
| Incorrect service URLs | Verify in **Services > Credentials** |
| Service disabled | Ensure JPMC services are enabled |

20.2 PIE Encryption Not Working

| Possible Cause | Resolution |
|-------------------------------|---|
| Incorrect PIE URLs and PE key | Validate Get Key URL, Encryption URL and PE Key in site preferences |
| JavaScript errors | Check browser console for PIE errors |

20.3 Capture/Refund/Void Fails in CSC

| Possible Cause | Resolution |
|-------------------------------------|---|
| Missing BM cartridge path | Confirm
`bm_jpmc:int_jpmc_core` is present |
| Transaction already captured/voided | Check payment transaction state |

20.4 Viewing Logs

| Log Type | Business Manager Location |
|----------------------------|---|
| Custom error logs | Log Files: `customerror-*` |
| Service communication logs | Log Files: `service-jpmc-*` |
| Custom info/warn logs | Log Files: `custominfo-*` /
`customwarn-*` |

21. SUPPORT AND ESCALATION

- *J.P. Morgan API issues: contact your J.P. Morgan technical account representative.*
- *Cartridge installation / SFCC platform issues: contact your SFCC system integrator.*

APPENDICES

APPENDIX A. SAMPLE 'DW. JSON'

```
{  
  "hostname": "your-sandbox.demandware.net",  
  "username": "your-bm-username",  
  "password": "your-bm-password",  
  "code-version": "version1"  
}
```

APPENDIX B. BUILD AND UPLOAD COMMANDS

```
```bash
```

npm install
-------------

npm run build
---------------

```
```
```

Document Version: 1.0 | Cartridge Version: 26.1.0