# RAJALAKSHMI ENGINEERING COLLEGE RAJALAKSHMI NAGAR, THANDALAM – 602 105



# CS23331 DESIGN AND ANALYSIS OF ALGORITHM LAB

**Laboratory Observation Notebook** 

Name : Nithesh kumar S
Year / Branch / Section : 2 <sup>nd</sup> Year / AIML / B
Register No.:231501114
Semester : 3 <sup>rd</sup> Semester
Academic Year : 2024-2025

# WEEK 05 DYNAMIC PROGRAMMING

#### 1) Playing with Numbers:

Ram and Sita are playing with numbers by giving puzzles to each other. Now it was Ram term, so he gave Sita a positive integer 'n' and two numbers 1 and 3. He asked her to find the possible ways by which the number n can be represented using 1 and 3. Write any efficient algorithm to find the possible ways.

#### Example 1:

Input: 6

Output:6

Explanation: There are 6 ways to 6 represent number with 1 and 3

1+1+1+1+1+1

3+3

1+1+1+3

1+1+3+1

1+3+1+1

3+1+1+1

**Input Format** 

First Line contains the number n

#### **Output Format**

Print: The number of possible ways 'n' can be represented using 1 and 3


#### **Sample Input**

6

### **Sample Output**

6

```
int main() { int n; scanf("%d", &n);
  long long ways = countWays(n);
  printf("%lld\n", ways); return 0;
}
```

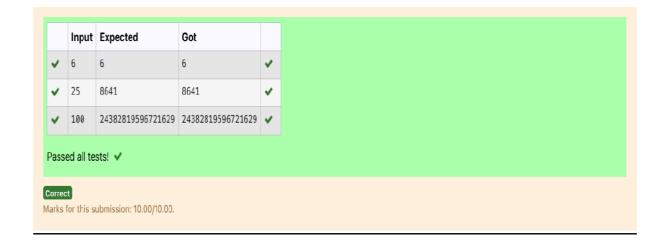

Ram is given with an n\*n chessboard with each cell with a monetary value. Ram stands at the (0,0), that the position of the top left white rook. He is been given a task to reach the bottom right black rook position (n-1, n-1) constrained that he needs to reach the position by traveling the maximum monetary path under the condition that he can only travel one step right or one step down the board. Help ram to achieve it by providing an efficient DP algorithm.

#### **Example:**

Input

3

124

234

871

**Output:** 

19

#### **Explanation:**

Totally there will be 6 paths among that the optimal is

**Optimal path value:1+2+8+7+1=19** 

**Input Format** 

First Line contains the integer n

The next n lines contain the n\*n chessboard values


**Output Format** 

Print Maximum monetary value of the path

```
#include
           <stdio.h>
#include <stdlib.h> int
max(int a, int b) {
  return (a > b) ? a : b;
}
int findMaxPath(int n, int **board) {
  int **dp = (int **)malloc(n * sizeof(int *)); for
  (int i = 0; i < n; i++) {
    dp[i] = (int *)malloc(n * sizeof(int));
  }
  dp[0][0] = board[0][0];
  for (int j = 1; j < n; j++) {
    dp[0][j] = dp[0][j-1] + board[0][j];
  }
```

```
for (int i = 1; i < n; i++) {
     dp[i][0] = dp[i-1][0] + board[i][0];
  }
  for (int i = 1; i < n; i++) {
     for (int j = 1; j < n; j++) {
       dp[i][j] = max(dp[i-1][j], dp[i][j-1]) + board[i][j];
     }
  }
  int result = dp[n-1][n-1]; for
  (int i = 0; i < n; i++) {
  free(dp[i]);
  }
  free(dp); return
  result;
}
int main() {
  int n;
  scanf("%d", &n);
  int **board = (int **)malloc(n * sizeof(int *));
  for (int i = 0; i < n; i++) { board[i] = (int
```

```
*)malloc(n * sizeof(int)); for (int j = 0; j < n;
  j++) {
       scanf("%d", &board[i][j]);
    }
  }
  int maxPath = findMaxPath(n, board);
  printf("%d\n", maxPath);
  // Free the board array for
  (int i = 0; i < n; i++) {
    free(board[i]);
  free(board); return
  0;
}
```

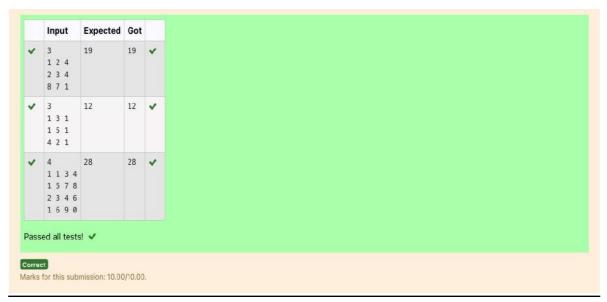

3) Given two strings find the length of the common longest subsequence(need not be contiguous) between the two.

#### **Example:**

s1: ggtabe

s2: tgatasb

s1 a g g t a b

s2 g x t x a y b

#### The length is 4

Solving it using Dynamic Programming For example:

Input Result


```
aab 2
azb
```

```
#include
                   <stdio.h>
#include <string.h> int
lcs(char *s1, char *s2) {
  int m = strlen(s1);
  int n = strlen(s2); int
  dp[m+1][n+1];
  for (int i = 0; i \le m; i++) { for (int j = 0; j \le n; j++) { if (i == 0 \mid j
    j == 0) { dp[i][j] = 0; // LCS of any string with an empty string
    is 0
       }
       else if (s1[i-1] == s2[j-1]) \{ dp[i][j] = dp[i-1][j-1] \}
          + 1; // Characters match
       }
       else { dp[i][j] = (dp[i-1][j] > dp[i][j-1]) ? dp[i-1][j] :
          dp[i][j-1
     }
```

```
return dp[m][n];

return dp[m][n];

int main() {
   char s1[100], s2[100];
   scanf("%s %s", s1, s2);
   int result = lcs(s1, s2);
   printf("%d\n", result);
   return 0;
}
```

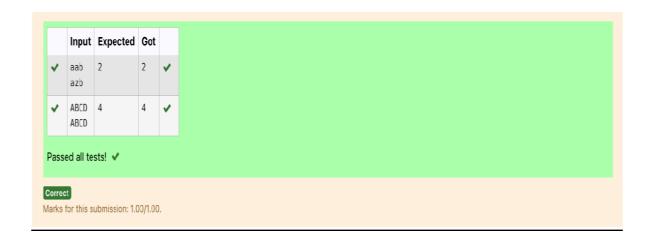

#### 4) Problem statement:

Find the length of the Longest Non-decreasing Subsequence in a given Sequence.

Eg:

```
Input:9
```

Sequence:[-1,3,4,5,2,2,2,2,3] the

subsequence is [-1,2,2,2,2,3]

Output:6

```
#include<stdio.h>
int main()
{
    int n,i,j;
    scanf("%d",&n); int
    a[n];
    for(i=0;i<n;i++)
        scanf("%d",&a[i]);
    int b[n]; for(i=0;i<n;i++)
        b[i]=1;
    int max=1;
    for (i = 1; i < n; i++) {
        for (j = 0; j < i; j++) {</pre>
```

```
if (a[j] <= a[i]) {
    b[i] = b[i] > (b[j] + 1) ? b[i] : (b[j] + 1);
}

if(b[i]>max) max=b[i];
}

printf("%d",max);
}
```

