

Join , Sub queries and set
operators

Obtaining Data from Multiple Tables

EMPLOYEES

	EMPLOYEE_ID	LAST_NAME	DEPARTMENT_ID
1	100	King	90
2	101	Kochhar	90
3	102	De Haan	90
...			
18	202	Fay	20
19	205	Higgins	110
20	206	Gietz	110

DEPARTMENTS

	DEPARTMENT_ID	DEPARTMENT_NAME	LOCATION_ID
1	10	Administration	1700
2	20	Marketing	1800
3	50	Shipping	1500
4	60	IT	1400
5	80	Sales	2500
6	90	Executive	1700
7	110	Accounting	1700
8	190	Contracting	1700

	EMPLOYEE_ID	DEPARTMENT_ID	DEPARTMENT_NAME
1	200	10	Administration
2	201	20	Marketing
3	202	20	Marketing
4	124	50	Shipping
5	144	50	Shipping
...			
18	205	110	Accounting
19	206	110	Accounting

Cartesian Products

- A Cartesian product is formed when:
 - A join condition is omitted
 - A join condition is invalid
 - All rows in the first table are joined to all rows in the second table
- To avoid a Cartesian product, always include a valid join condition in a WHERE clause.

Generating a Cartesian Product

EMPLOYEES (20 rows)

R2	EMPLOYEE_ID	R2	LAST_NAME	R2	DEPARTMENT_ID
1	100	King		90	
2	101	Kochhar		90	
3	102	De Haan		90	
4	103	Hunold		60	


...

19	205	Higgins		110	
20	206	Gietz		110	

DEPARTMENTS (8 rows)

R2	DEPARTMENT_ID	R2	DEPARTMENT_NAME	R2	LOCATION_ID
1	10	Administration		1700	
2	20	Marketing		1800	
3	50	Shipping		1500	
4	60	IT		1400	
5	80	Sales		2500	
6	90	Executive		1700	
7	110	Accounting		1700	
8	190	Contracting		1700	

Cartesian
product:
 $20 \times 8 = 160$
rows



R2	EMPLOYEE_ID	R2	DEPARTMENT_ID	R2	LOCATION_ID
1	100		90		1700
2	101		90		1700
3	102		90		1700
4	103		60		1700

...

159	205		110		1700
160	206		110		1700

Types of Oracle-Proprietary Joins

- Equijoin
- Nonequijoin
- Outer join
- Self-join

Joining Tables Using Oracle Syntax

- Use a join to query data from more than one table:

```
SELECT    table1.column, table2.column
FROM      table1, table2
WHERE     table1.column1 = table2.column2;
```

- Write the join condition in the WHERE clause.
- Prefix the column name with the table name when the same column name appears in more than one table.

Qualifying Ambiguous Column Names

- Use table prefixes to qualify column names that are in multiple tables.
- Use table prefixes to improve performance.
- Instead of full table name prefixes, use table aliases.
- Table aliases give a table a shorter name.
 - Keeps SQL code smaller, uses less memory
- Use column aliases to distinguish columns that have identical names, but reside in different tables.

Equijoins

EMPLOYEES

EMPLOYEE_ID	DEPARTMENT_ID
100	90
101	90
102	90
103	60
104	60
107	60
124	50
141	50
142	50
143	50
144	50
149	80
174	80
176	80


...

DEPARTMENTS

DEPARTMENT_ID	DEPARTMENT_NAME
1	10 Administration
2	20 Marketing
3	50 Shipping
4	60 IT
5	80 Sales
6	90 Executive
7	110 Accounting
8	190 Contracting

Primary key

Foreign key

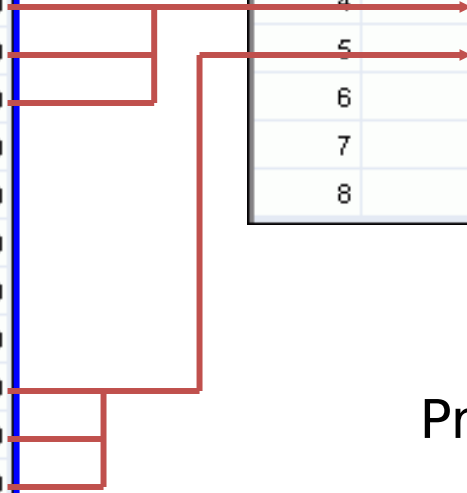

Retrieving Records with Equijoins





```
SELECT e.employee_id, e.last_name, e.department_id,  
       d.department_id, d.location_id  
FROM   employees e, departments d  
WHERE  e.department_id = d.department_id;
```

	EMPLOYEE_ID	LAST_NAME	DEPARTMENT_ID	DEPARTMENT_ID_1	LOCATION_ID
1	200	Whalen	10	10	1700
2	201	Hartstein	20	20	1800
3	202	Fay	20	20	1800
4	124	Mourgos	50	50	1500
5	144	Vargas	50	50	1500
6	143	Matos	50	50	1500
7	142	Davies	50	50	1500
8	141	Rajs	50	50	1500
9	107	Lorentz	60	60	1400
10	104	Ernst	60	60	1400

...

Retrieving Records with Equijoins: Example

```
SELECT d.department_id, d.department_name,  
       d.location_id, l.city  
FROM   departments d, locations l  
WHERE  d.location_id = l.location_id;
```

	 DEPARTMENT_ID	 DEPARTMENT_NAME	 LOCATION_ID	 CITY
1	60	IT	1400	Southlake
2	50	Shipping	1500	South San Francisco
3	10	Administration	1700	Seattle
4	90	Executive	1700	Seattle
5	110	Accounting	1700	Seattle
6	190	Contracting	1700	Seattle
7	20	Marketing	1800	Toronto
8	80	Sales	2500	Oxford

Additional Search Conditions Using the AND Operator

```
SELECT  d.department_id, d.department_name, l.city
FROM    departments d, locations l
WHERE   d.location_id = l.location_id
AND d.department_id IN (20, 50);
```

	DEPARTMENT_ID	DEPARTMENT_NAME	CITY
1	20	Marketing	Toronto
2	50	Shipping	South San Francisco

Joining More than Two Tables

EMPLOYEES

R2	LAST_NAME	R2	DEPARTMENT_ID
1	King		90
2	Kochhar		90
3	De Haan		90
4	Hunold		60
5	Ernst		60
6	Lorentz		60
7	Mourgos		50
8	Rajs		50
9	Davies		50
10	Matos		50

...

DEPARTMENTS

R2	DEPARTMENT_ID	R2	LOCATION_ID
	10		1700
	20		1800
	50		1500
	60		1400
	80		2500
	90		1700
	110		1700
	190		1700

LOCATIONS

R2	LOCATION_ID	R2	CITY
	1400		Southlake
	1500		South San Francisco
	1700		Seattle
	1800		Toronto
	2500		Oxford

- To join n tables together, you need a minimum of $n-1$
- join conditions. For example, to join three tables, a
- minimum of two joins is required.

Nonequijoins

EMPLOYEES

	LAST_NAME	SALARY
1	King	24000
2	Kochhar	17000
3	De Haan	17000
4	Hunold	9000
5	Ernst	6000
6	Lorentz	4200
7	Mourgos	5800
8	Rajs	3500
9	Davies	3100
10	Matos	2600
...		
19	Higgins	12000
20	Gietz	8300




JOB_GRADES

	GRADE_LEVEL	LOWEST_SAL	HIGHEST_SAL
1	A	1000	2999
2	B	3000	5999
3	C	6000	9999
4	D	10000	14999
5	E	15000	24999
6	F	25000	40000

JOB_GRADES table defines LOWEST_SAL and HIGHEST_SAL range of values for each GRADE_LEVEL. Hence, the GRADE_LEVEL column can be used to assign grades to each employee.

Retrieving Records with Nonequijoins

```
SELECT e.last_name, e.salary, j.grade_level
FROM   employees e, job_grades j
WHERE  e.salary
      BETWEEN j.lowest_sal AND j.highest_sal;
```

	 LAST_NAME	 SALARY	 GRADE_LEVEL
1	Vargas	2500	A
2	Matos	2600	A
3	Davies	3100	B
4	Rajs	3500	B
5	Lorentz	4200	B
6	Whalen	4400	B
7	Mourgos	5800	B
8	Ernst	6000	C
9	Fay	6000	C
10	Grant	7000	C

...

Returning Records with No Direct Match with Outer Joins

DEPARTMENTS

DEPARTMENT_NAME	DEPARTMENT_ID
Administration	10
Marketing	20
Shipping	50
IT	60
Sales	80
Executive	90
Accounting	110
Contracting	190

EMPLOYEES

	DEPARTMENT_ID	LAST_NAME
1	90	King
2	90	Kochhar
3	90	De Haan
4	60	Hunold
5	60	Ernst
6	60	Lorentz
7	50	Mourgos
8	50	Rajs
9	50	Davies
10	50	Matos
...		
19	110	Higgins
20	110	Gietz

There are no employees in department 190.

Outer Joins: Syntax

- You use an outer join to see rows that do not meet the join condition.
- The outer join operator is the plus sign (+).

```
SELECT table1.column, table2.column  
FROM   table1, table2  
WHERE  table1.column(+) = table2.column;
```

```
SELECT table1.column, table2.column  
FROM   table1, table2  
WHERE  table1.column = table2.column(+);
```


Using Outer Joins

```
SELECT e.last_name, e.department_id, d.department_name
FROM   employees e, departments d
WHERE  e.department_id(+) = d.department_id ;
```

	LAST_NAME	DEPARTMENT_ID	DEPARTMENT_NAME
1	Whalen	10	Administration
2	Hartstein	20	Marketing
3	Fay	20	Marketing
4	Davies	50	Shipping
5	Vargas	50	Shipping
6	Rajs	50	Shipping
7	Mourgos	50	Shipping
8	Matos	50	Shipping
9	Hunold	60	IT
10	Ernst	60	IT

...

19	Gietz	110	Accounting
20	(null)	(null)	Contracting

Outer Join: Another Example

```
SELECT e.last_name, e.department_id, d.department_name
FROM   employees e, departments d
WHERE  e.department_id = d.department_id(+);
```

	LAST_NAME	DEPARTMENT_ID	DEPARTMENT_NAME
1	Whalen	10	Administration
2	Fay	20	Marketing
3	Hartstein	20	Marketing
4	Vargas	50	Shipping
5	Matos	50	Shipping

...

17	King	90	Executive
18	Gietz	110	Accounting
19	Higgins	110	Accounting
20	Grant	(null)	(null)

Joining a Table to Itself

EMPLOYEES (WORKER)

	<small>A Z</small> EMPLOYEE_ID	<small>A Z</small> LAST_NAME	<small>A Z</small> MANAGER_ID
1	100	King	(null)
2	101	Kochhar	100
3	102	De Haan	100
4	103	Hunold	102
5	104	Ernst	103
6	107	Lorentz	103
7	124	Mourgos	100
8	141	Rajs	124
9	142	Davies	124
10	143	Matos	124

...

EMPLOYEES (MANAGER)

<small>A Z</small> EMPLOYEE_ID	<small>A Z</small> LAST_NAME
100	King
101	Kochhar
102	De Haan
103	Hunold
104	Ernst
107	Lorentz
124	Mourgos
141	Rajs
142	Davies
143	Matos

...



MANAGER_ID in the WORKER table is equal to
EMPLOYEE_ID in the MANAGER table.

Self-Join: Example

```
SELECT worker.last_name || ' works for '
       || manager.last_name
FROM   employees worker, employees manager
WHERE  worker.manager_id = manager.employee_id ;
```

	WORKER.LAST_NAME 'WORKSFOR' MANAGER.LAST_NAME
1	Hunold works for De Haan
2	Fay works for Hartstein
3	Gietz works for Higgins
4	Lorentz works for Hunold
5	Ernst works for Hunold
6	Zlotkey works for King
7	Mourgos works for King
8	Kochhar works for King
9	Hartstein works for King
10	De Haan works for King

...


Obtaining Data from Multiple Tables

EMPLOYEES

	EMPLOYEE_ID	LAST_NAME	DEPARTMENT_ID
1	100	King	90
2	101	Kochhar	90
3	102	De Haan	90
...			
18	202	Fay	20
19	205	Higgins	110
20	206	Gietz	110

DEPARTMENTS

	DEPARTMENT_ID	DEPARTMENT_NAME	LOCATION_ID
1	10	Administration	1700
2	20	Marketing	1800
3	50	Shipping	1500
4	60	IT	1400
5	80	Sales	2500
6	90	Executive	1700
7	110	Accounting	1700
8	190	Contracting	1700




	EMPLOYEE_ID	DEPARTMENT_ID	DEPARTMENT_NAME
1	200	10	Administration
2	201	20	Marketing
3	202	20	Marketing
4	124	50	Shipping
5	144	50	Shipping
...			
18	205	110	Accounting
19	206	110	Accounting


Creating Joins with the ON Clause

- The join condition for the natural join is basically an equijoin of all columns with the same name.
- Use the ON clause to specify arbitrary conditions or specify columns to join.
- The join condition is separated from other search conditions.
- The ON clause makes code easy to understand.


SQL JOINS

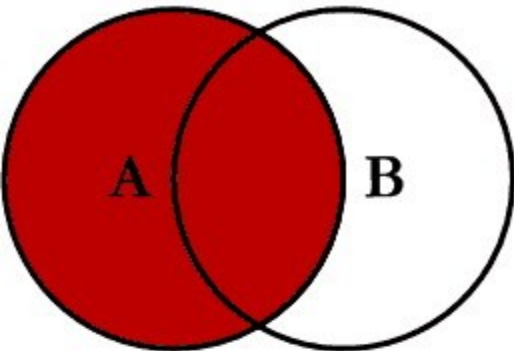


```
SELECT <select_list>  
FROM TableA A  
LEFT JOIN TableB B  
ON A.Key = B.Key
```

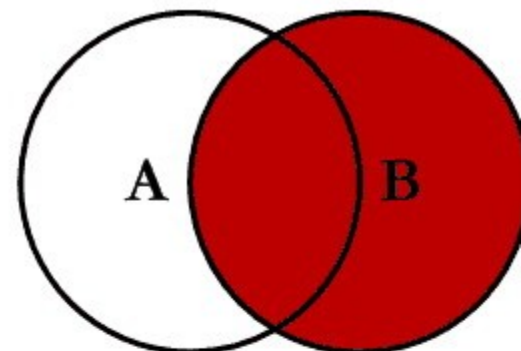


```
SELECT <select_list>  
FROM TableA A  
RIGHT JOIN TableB B  
ON A.Key = B.Key
```

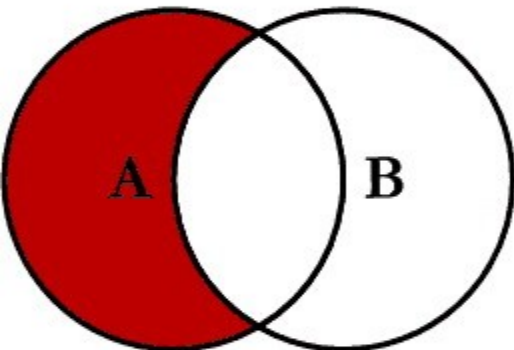


```
SELECT <select_list>  
FROM TableA A  
LEFT JOIN TableB B  
ON A.Key = B.Key  
WHERE B.Key IS NULL
```

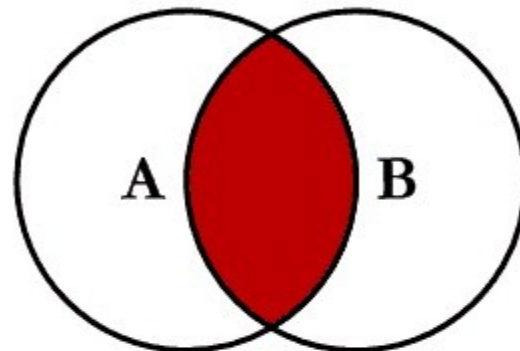


```
SELECT <select_list>  
FROM TableA A  
INNER JOIN TableB B  
ON A.Key = B.Key
```

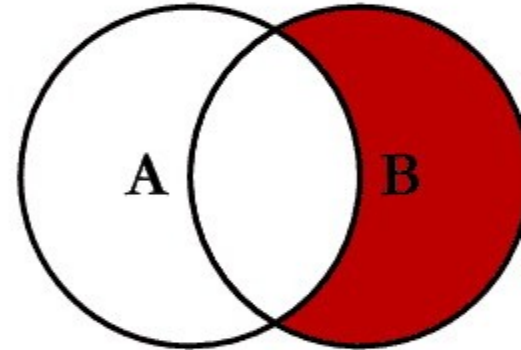

```
SELECT <select_list>  
FROM TableA A  
RIGHT JOIN TableB B  
ON A.Key = B.Key  
WHERE A.Key IS NULL
```

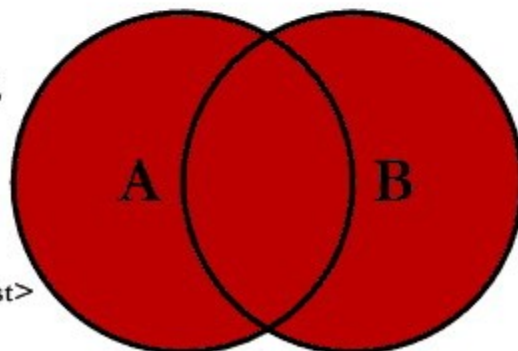

```
SELECT <select_list>  
FROM TableA A  
FULL OUTER JOIN TableB B
```

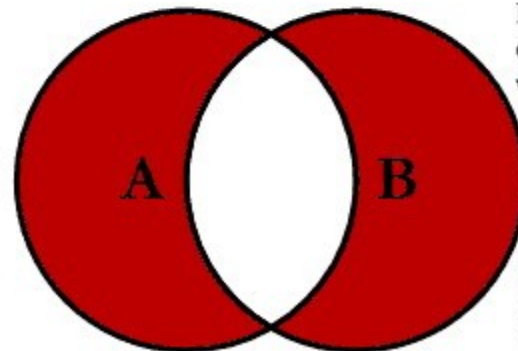

```
ON A.Key = B.Key
```

Retrieving Records with the ON Clause



```
SELECT e.employee_id, e.last_name, e.department_id,  
       d.department_id, d.location_id  
FROM   employees e JOIN departments d  
ON     (e.department_id = d.department_id);
```

	EMPLOYEE_ID	LAST_NAME	DEPARTMENT_ID	DEPARTMENT_ID_1	LOCATION_ID
1	200	Whalen	10	10	1700
2	201	Hartstein	20	20	1800
3	202	Fay	20	20	1800
4	124	Mourgos	50	50	1500
5	144	Vargas	50	50	1500
6	143	Matos	50	50	1500
7	142	Davies	50	50	1500
8	141	Rajs	50	50	1500
9	107	Lorentz	60	60	1400
10	104	Ernst	60	60	1400

...

Creating Three-Way Joins with the ON Clause

```
SELECT employee_id, city, department_name
FROM   employees e
JOIN   departments d
ON     d.department_id = e.department_id
JOIN   locations l
ON     d.location_id = l.location_id;
```

	 EMPLOYEE_ID	 CITY	 DEPARTMENT_NAME
1	100	Seattle	Executive
2	101	Seattle	Executive
3	102	Seattle	Executive
4	103	Southlake	IT
5	104	Southlake	IT
6	107	Southlake	IT
7	124	South San Francisco	Shipping
8	141	South San Francisco	Shipping

...

Applying Additional Conditions to a Join

- Use the AND clause or the WHERE clause to apply additional conditions:

```
SELECT e.employee_id, e.last_name, e.department_id,  
       d.department_id, d.location_id  
FROM   employees e JOIN departments d  
ON     (e.department_id = d.department_id)  
AND    e.manager_id = 149 ;
```

Or

```
SELECT e.employee_id, e.last_name, e.department_id,  
       d.department_id, d.location_id  
FROM   employees e JOIN departments d  
ON     (e.department_id = d.department_id)  
WHERE  e.manager_id = 149 ;
```

Joining a Table to Itself

EMPLOYEES (WORKER)

	EMPLOYEE_ID	LAST_NAME	MANAGER_ID
1	100	King	(null)
2	101	Kochhar	100
3	102	De Haan	100
4	103	Hunold	102
5	104	Ernst	103
6	107	Lorentz	103
7	124	Mourgos	100
8	141	Rajs	124
9	142	Davies	124
10	143	Matos	124

...

EMPLOYEES (MANAGER)

EMPLOYEE_ID	LAST_NAME
100	King
101	Kochhar
102	De Haan
103	Hunold
104	Ernst
107	Lorentz
124	Mourgos
141	Rajs
142	Davies
143	Matos

...

MANAGER_ID in the WORKER table is equal to
EMPLOYEE_ID in the MANAGER table.

Self-Joins Using the ON Clause

```
SELECT worker.last_name emp, manager.last_name mgr
FROM   employees worker JOIN employees manager
ON     (worker.manager_id = manager.employee_id);
```

	EMP	MGR
1	Hunold	De Haan
2	Fay	Hartstein
3	Gietz	Higgins
4	Lorentz	Hunold
5	Ernst	Hunold
6	Zlotkey	King
7	Mourgos	King
8	Kochhar	King
9	Hartstein	King
10	De Haan	King

...

Returning Records with No Direct Match with Outer Joins

DEPARTMENTS

DEPARTMENT_NAME	DEPARTMENT_ID
Administration	10
Marketing	20
Shipping	50
IT	60
Sales	80
Executive	90
Accounting	110
Contracting	190

EMPLOYEES

	DEPARTMENT_ID	LAST_NAME
1	90	King
2	90	Kochhar
3	90	De Haan
4	60	Hunold
5	60	Ernst
6	60	Lorentz
7	50	Mourgos
8	50	Rajs
9	50	Davies
10	50	Matos
...		
19	110	Higgins
20	110	Gietz

There are no employees in department 190.

LEFT OUTER JOIN

```
SELECT e.last_name, e.department_id, d.department_name
FROM   employees e LEFT OUTER JOIN departments d
ON     (e.department_id = d.department_id) ;
```

	LAST_NAME	DEPARTMENT_ID	DEPARTMENT_NAME
1	Whalen	10	Administration
2	Fay	20	Marketing
3	Hartstein	20	Marketing
4	Vargas	50	Shipping
5	Matos	50	Shipping

...

17	King	90	Executive
18	Gietz	110	Accounting
19	Higgins	110	Accounting
20	Grant	(null)	(null)

RIGHT OUTER JOIN

```
SELECT e.last_name, e.department_id, d.department_name
FROM   employees e RIGHT OUTER JOIN departments d
ON     (e.department_id = d.department_id) ;
```

	LAST_NAME	DEPARTMENT_ID	DEPARTMENT_NAME
1	Whalen	10	Administration
2	Hartstein	20	Marketing
3	Fay	20	Marketing
4	Higgins	110	Accounting

...

19	Taylor	80	Sales
20	Grant	(null)	(null)
21	(null)	190	Contracting

FULL OUTER JOIN

```
SELECT e.last_name, d.department_id, d.department_name
FROM   employees e FULL OUTER JOIN departments d
ON     (e.department_id = d.department_id) ;
```

	LAST_NAME	DEPARTMENT_ID	DEPARTMENT_NAME
1	Whalen	10	Administration
2	Hartstein	20	Marketing
3	Fay	20	Marketing
4	Higgins	110	Accounting

...

19	Taylor	80	Sales
20	Grant	(null)	(null)
21	(null)	190	Contracting

Using a Subquery to Solve a Problem

- Who has a salary greater than Abel's?

Main query:



Which employees have salaries greater than Abel's salary?

Subquery:



What is Abel's salary?




Subquery Syntax

```
SELECT  select_list
FROM    table
WHERE   expr operator
        (SELECT  select_list
         FROM     table);
```

- The subquery (inner query) executes *before* the main query (outer query).
- The result of the subquery is used by the main query.

Using a Subquery

```
SELECT last_name, salary
FROM employees
WHERE salary >
    (SELECT salary
     FROM employees
     WHERE last_name = 'Abel');
```



A red line originates from the value 11000, which is written in red above the word 'salary' in the WHERE clause. The line extends horizontally to the right and then turns vertically downwards to point at the subquery's result.


	R 2	LAST_NAME	R 2	SALARY
1	King			24000
2	Kochhar			17000
3	De Haan			17000
4	Hartstein			13000
5	Higgins			12000

Guidelines for Using Subqueries


- Enclose subqueries in parentheses.
- Place subqueries on the right side of the comparison condition for readability (However, the subquery can appear on either side of the comparison operator.).
- Use single-row operators with single-row subqueries and multiple-row operators with multiple-row subqueries.

Types of Subqueries

- Single-row subquery

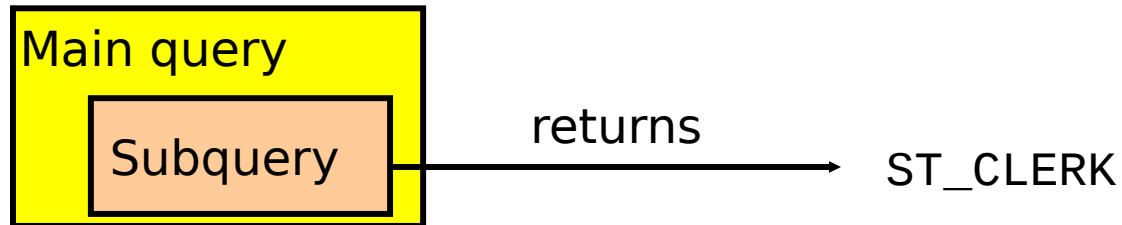

- Multiple-row subquery

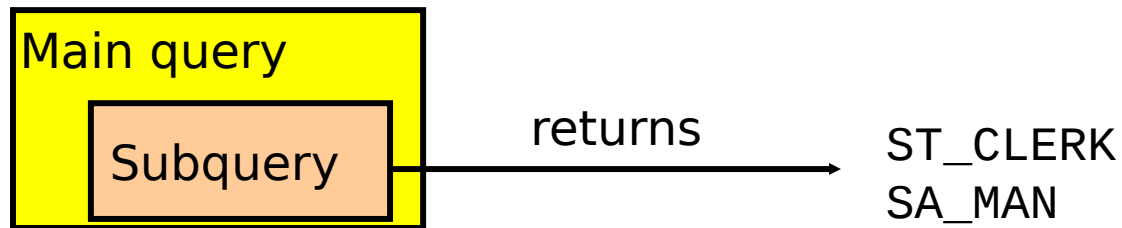






Single-Row Subqueries

- Return only one row
- Use single-row comparison operators

Operator	Meaning
=	Equal to
>	Greater than
>=	Greater than or equal
<	Less than
<=	Less than or equal to
<>	Not equal to


Executing Single-Row Subqueries

```
SELECT last_name, job_id, salary
FROM employees
WHERE job_id =  SA_REP
AND salary >  8600
  (SELECT job_id
   FROM employees
   WHERE last_name = 'Taylor')
  (SELECT salary
   FROM employees
   WHERE last name = 'Taylor');
```

	 LAST_NAME	 JOB_ID	 SALARY
1	Abel	SA_REP	11000

Using Group Functions in a Subquery

```
SELECT last_name, job_id, salary
FROM   employees
WHERE  salary = (SELECT MIN(salary)
                 FROM   employees);
```



	LAST_NAME	JOB_ID	SALARY
1	Vargas	ST_CLERK	2500

The HAVING Clause with Subqueries

- The Oracle server executes the subqueries first.
- The Oracle server returns results into the HAVING clause of the main query.

```
SELECT    department_id, MIN(salary)
FROM      employees
GROUP BY  department_id
HAVING    MIN(salary) > 2500
          (SELECT MIN(salary)
           FROM      employees
           WHERE     department_id = 50);
```

	DEPARTMENT_ID	MIN(SALARY)
1	(null)	7000
2	90	17000
3	20	6000
...		
7	10	4400

What Is Wrong with This Statement?

```
SELECT employee_id, last_name
FROM   employees
WHERE  salary =
      (SELECT MIN(salary)
       FROM   employees
       GROUP BY department_id);
```

ORA-01427: single-row subquery returns more than one ...



An error was encountered performing the requested operation:

ORA-01427: single-row subquery returns more than one row
01427. 00000 - "single-row subquery returns more than one row"

*Cause:

*Action:

Error at Line:1

Single-row operator
with multiple-row
subquery

No Rows Returned by the Inner Query

```
SELECT last_name, job_id
FROM employees
WHERE job_id =
    (SELECT job_id
     FROM employees
     WHERE last_name = 'Haas');
```

0 rows selected

Subquery returns no rows because there is no employee named "Haas."

Multiple-Row Subqueries

- Return more than one row
- Use multiple-row comparison operators

Operator	Meaning
IN	Equal to any member in the list
ANY	Must be preceded by =, !=, >, <, <=, >=. Compares a value to each value in a list or returned by a query. Evaluates to FALSE if the query returns no rows.
ALL	Must be preceded by =, !=, >, <, <=, >=. Compares a value to every value in a list or returned by a query. Evaluates to TRUE if the query returns no rows.

Using the ANY Operator in Multiple-Row Subqueries

```
SELECT employee_id, last_name, job_id, salary
FROM   employees
WHERE  salary < ANY
      (SELECT salary
       FROM   employees
       WHERE  job_id = 'IT_PROG')
AND    job_id <> 'IT_PROG';
```

	EMPLOYEE_ID	LAST_NAME	JOB_ID	SALARY
1	144	Vargas	ST_CLERK	2500
2	143	Matos	ST_CLERK	2600
3	142	Davies	ST_CLERK	3100
4	141	Rajs	ST_CLERK	3500
5	200	Whalen	AD_ASST	4400

...

9	206	Gietz	AC_ACCOUNT	8300
10	176	Taylor	SA_REP	8600

Using the ALL Operator in Multiple-Row Subqueries

```
SELECT employee_id, last_name, job_id, salary
FROM   employees          9000, 6000, 4200
WHERE  salary < ALL
      (SELECT salary
       FROM   employees
       WHERE  job_id = 'IT_PROG')
AND    job_id <> 'IT_PROG';
```



	EMPLOYEE_ID	LAST_NAME	JOB_ID	SALARY
1	141	Rajs	ST_CLERK	3500
2	142	Davies	ST_CLERK	3100
3	143	Matos	ST_CLERK	2600
4	144	Vargas	ST_CLERK	2500

Null Values in a Subquery


```
SELECT emp.last_name  
FROM   employees emp  
WHERE  emp.employee_id NOT IN  
      (SELECT mgr.manager_id  
       FROM   employees mgr);
```

0 rows selected


Set Operators

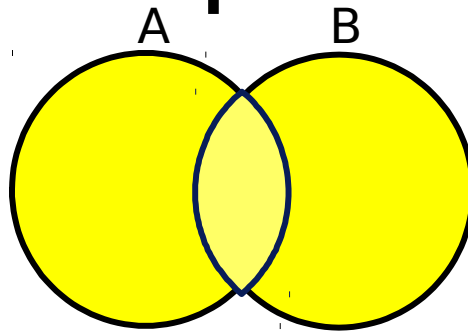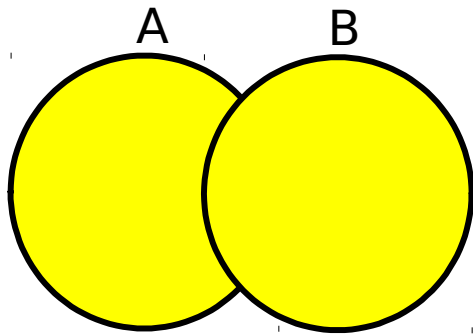

UNION/UNION ALL

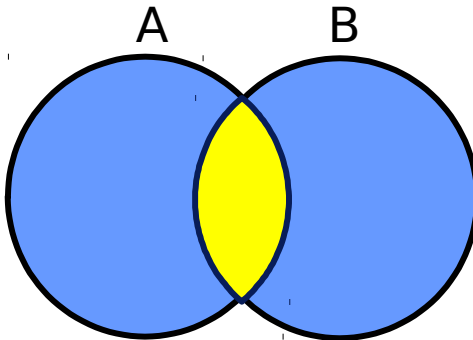

INTERSECT

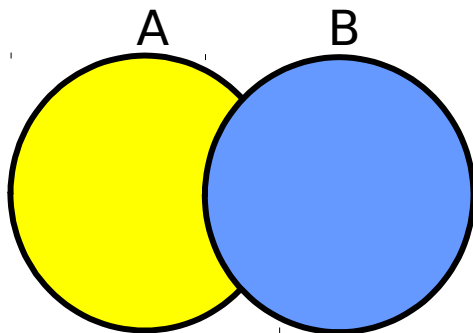

MINUS


Set Operator Guidelines

- The expressions in the SELECT lists must match in number.
- The data type of each column in the second query must match the data type of its corresponding column in the first query.
- Parentheses can be used to alter the sequence of execution.
- ORDER BY clause can appear only at the very end of the statement.

The Oracle Server and Set Operators

- Duplicate rows are automatically eliminated except in UNION ALL.
- Column names from the first query appear in the result.
- The output is sorted in ascending order by default except in UNION ALL.

UNION Operator

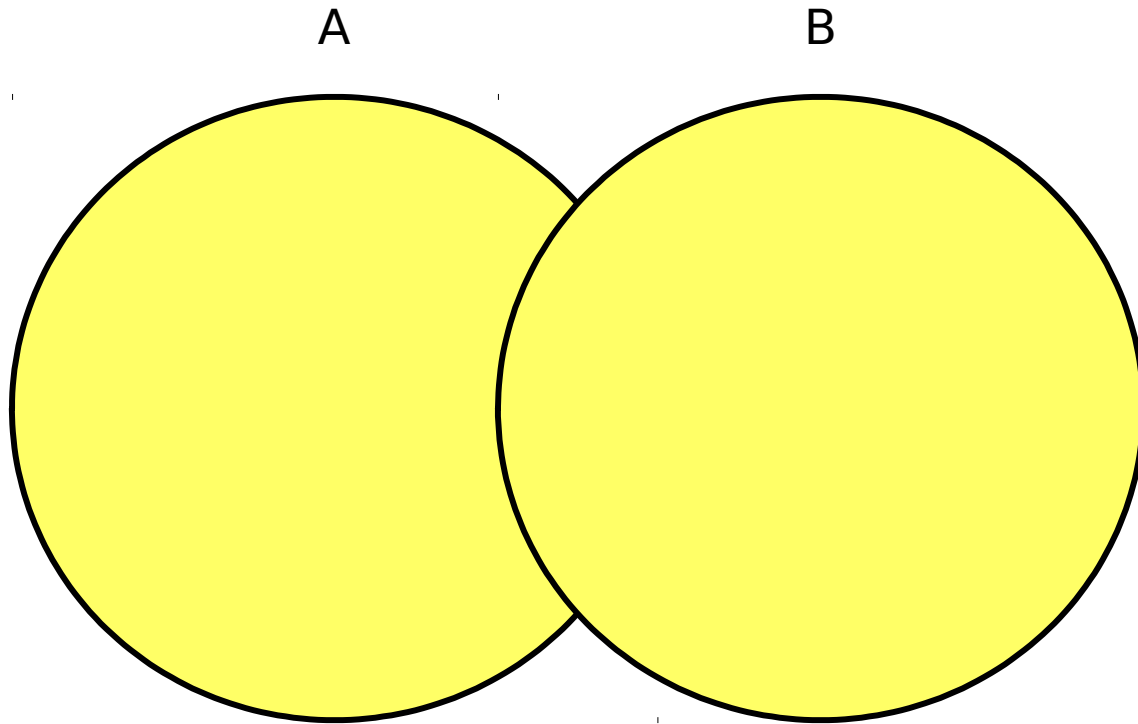

The UNION operator returns rows from both queries after eliminating duplications.

Using the UNION Operator

- Display the current and previous job details of all employees. Display each employee only once.

```
SELECT employee_id, job_id
FROM   employees
UNION
SELECT employee_id, job_id
FROM   job_history;
```


	EMPLOYEE_ID	JOB_ID
1	100	AD_PRES
2	101	AC_ACCOUNT

...

22	200	AC_ACCOUNT
23	200	AD_ASST
24	201	MK_MAN

...

UNION ALL Operator

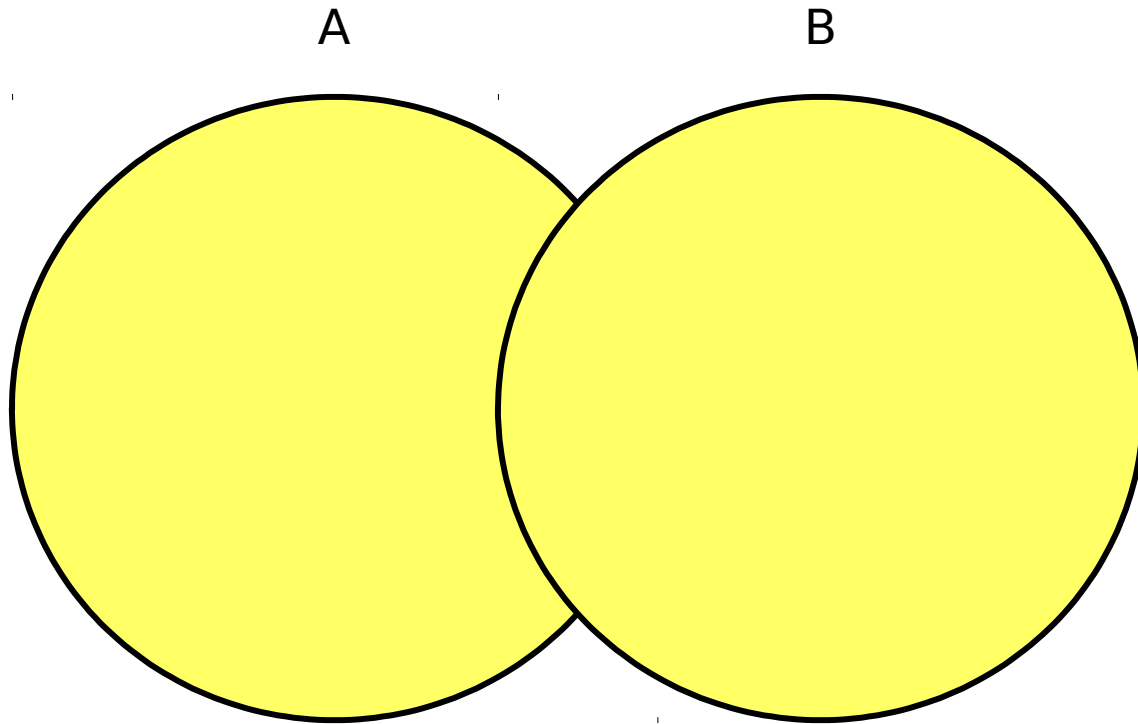

The UNION ALL operator returns rows from both queries, including all duplications.


Using the UNION ALL Operator

- Display the current and previous departments of all employees.

```
SELECT employee_id, job_id, department_id
FROM   employees
UNION ALL
SELECT employee_id, job_id, department_id
FROM   job_history
ORDER BY employee_id;
```

	EMPLOYEE_ID	JOB_ID	DEPARTMENT_ID
1	100	AD_PRES	90
...			
16	144	ST_CLERK	50
17	149	SA_MAN	80
18	174	SA_REP	80
19	176	SA_REP	80
20	176	SA_MAN	80
21	176	SA_REP	80
22	178	SA_REP	(null)
...			
30	206	AC_ACCOUNT	110

INTERSECT Operator

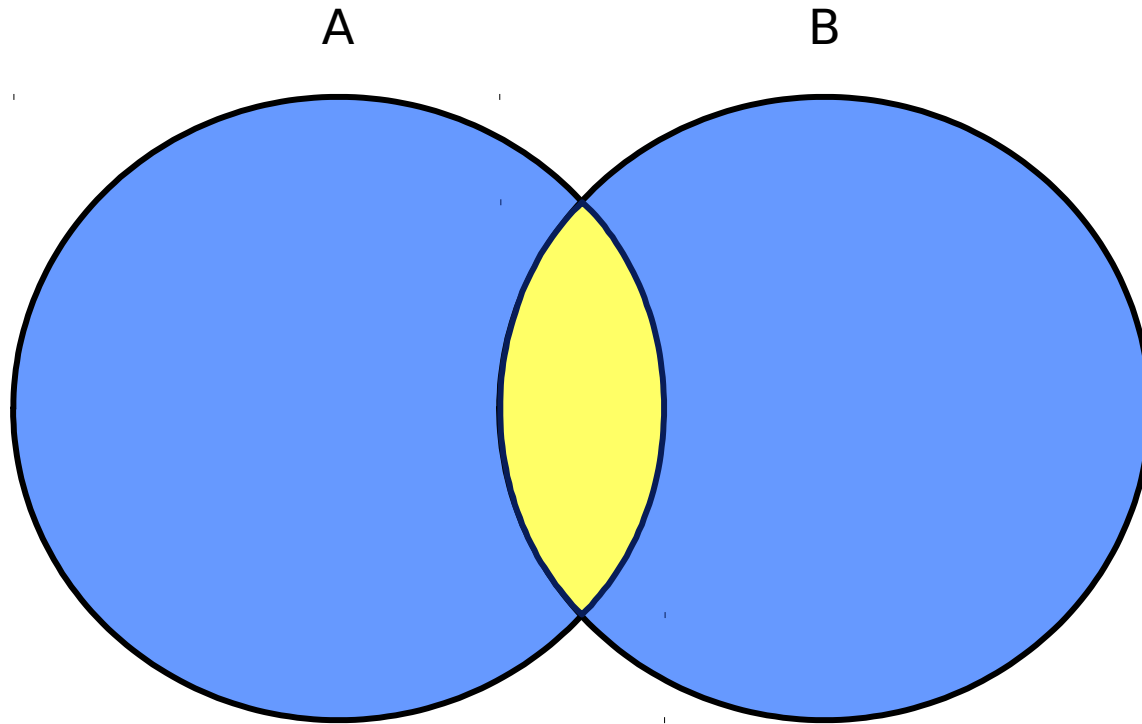

The INTERSECT operator returns rows that are common to both queries.


Using the INTERSECT Operator

- Display the employee IDs and job IDs of those employees who currently have a job title that is the same as their previous one (that is, they changed jobs but have now gone back to doing the same job they did previously).

```
SELECT employee_id, job_id
FROM   employees
INTERSECT
SELECT employee_id, job_id
FROM   job_history;
```

	 EMPLOYEE_ID	 JOB_ID
1	176	SA_REP
2	200	AD_ASST

MINUS Operator

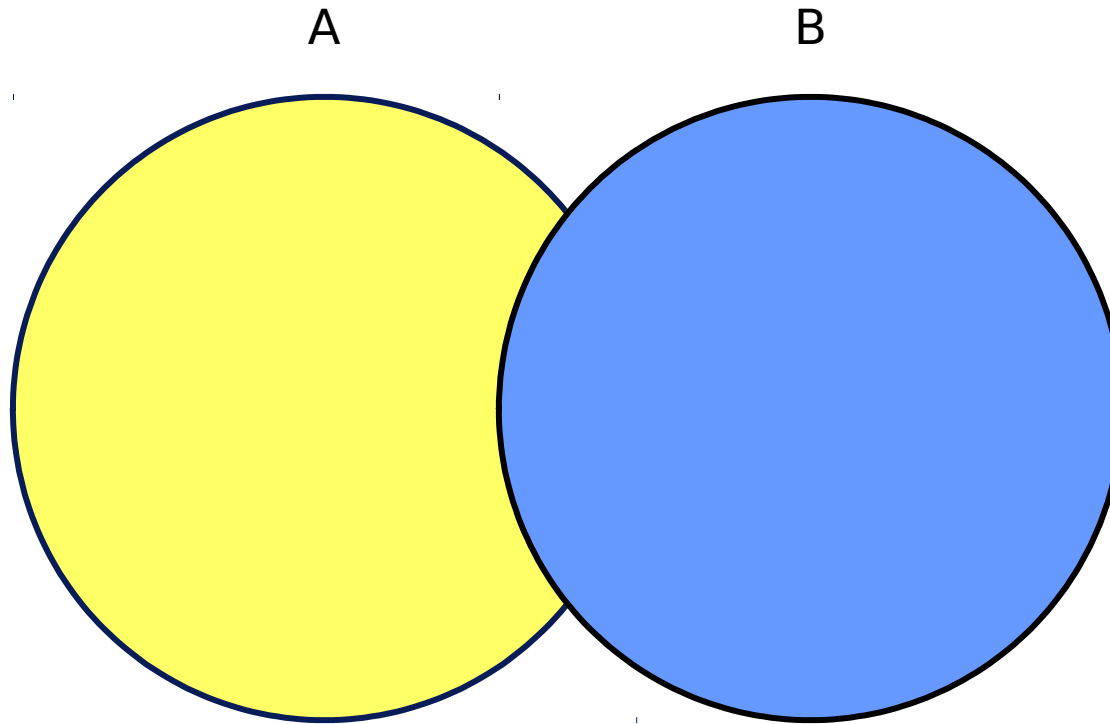

The MINUS operator returns all the distinct rows selected by the first query, but not present in the second query result set.

Using the MINUS Operator

- Display the employee IDs of those employees who have not changed their jobs even once.

```
SELECT employee_id  
FROM   employees  
MINUS  
SELECT employee_id  
FROM   job_history;
```

	EMPLOYEE_ID
1	100
2	103
3	104
4	107
5	124

...

14	205
15	206

Matching the SELECT Statement: Example

- Using the UNION operator, display the employee ID, job ID, and salary of all employees.

```
SELECT employee_id, job_id, salary
FROM   employees
UNION
SELECT employee_id, job_id, 0
FROM   job_history;
```

	EMPLOYEE_ID	JOB_ID	SALARY
1	100	AD_PRES	24000
2	101	AC_ACCOUNT	0
3	101	AC_MGR	0
4	101	AD_VP	17000
5	102	AD_VP	17000
...			
29	205	AC_MGR	12000
30	206	AC_ACCOUNT	8300

Using the ORDER BY Clause in Set Operations

- The ORDER BY clause can appear only once at the end of the compound query.
- Component queries cannot have individual ORDER BY clauses.
- ORDER BY clause recognizes only the columns of the first SELECT query.
- By default, the first column of the first SELECT query is used to sort the output in an ascending order.