

```
!pip install pandas numpy scikit-learn openpyxl seaborn matplotlib surprise
```

```

Requirement already satisfied: pandas in /usr/local/lib/python3.11/dist-packages (2.2.2)
Requirement already satisfied: numpy in /usr/local/lib/python3.11/dist-packages (2.0.2)
Requirement already satisfied: scikit-learn in /usr/local/lib/python3.11/dist-packages (1.6.1)
Requirement already satisfied: openpyxl in /usr/local/lib/python3.11/dist-packages (3.1.5)
Requirement already satisfied: seaborn in /usr/local/lib/python3.11/dist-packages (0.13.2)
Requirement already satisfied: matplotlib in /usr/local/lib/python3.11/dist-packages (3.10.0)
Collecting surprise
  Downloading surprise-0.1-py2.py3-none-any.whl.metadata (327 bytes)
Requirement already satisfied: python-dateutil>=2.8.2 in /usr/local/lib/python3.11/dist-packages (from pandas) (2.9.0.post0)
Requirement already satisfied: pytz>=2020.1 in /usr/local/lib/python3.11/dist-packages (from pandas) (2025.2)
Requirement already satisfied: tzdata>=2022.7 in /usr/local/lib/python3.11/dist-packages (from pandas) (2025.2)
Requirement already satisfied: scipy>=1.6.0 in /usr/local/lib/python3.11/dist-packages (from scikit-learn) (1.15.2)
Requirement already satisfied: joblib>=1.2.0 in /usr/local/lib/python3.11/dist-packages (from scikit-learn) (1.4.2)
Requirement already satisfied: threadpoolctl>=3.1.0 in /usr/local/lib/python3.11/dist-packages (from scikit-learn) (3.6.0)
Requirement already satisfied: et-xmlfile in /usr/local/lib/python3.11/dist-packages (from openpyxl) (2.0.0)
Requirement already satisfied: contourpy>=1.0.1 in /usr/local/lib/python3.11/dist-packages (from matplotlib) (1.3.2)
Requirement already satisfied: cycler>=0.10 in /usr/local/lib/python3.11/dist-packages (from matplotlib) (0.12.1)
Requirement already satisfied: fonttools>=4.22.0 in /usr/local/lib/python3.11/dist-packages (from matplotlib) (4.57.0)
Requirement already satisfied: kiwisolver>=1.3.1 in /usr/local/lib/python3.11/dist-packages (from matplotlib) (1.4.8)
Requirement already satisfied: packaging>=20.0 in /usr/local/lib/python3.11/dist-packages (from matplotlib) (24.2)
Requirement already satisfied: pillow>=8 in /usr/local/lib/python3.11/dist-packages (from matplotlib) (11.2.1)
Requirement already satisfied: pyparsing>=2.3.1 in /usr/local/lib/python3.11/dist-packages (from matplotlib) (3.2.3)
Collecting scikit-surprise (from surprise)
  Downloading scikit_surprise-1.1.4.tar.gz (154 kB)
    154.4/154.4 kB 2.9 MB/s eta 0:00:00
  Installing build dependencies ... done
  Getting requirements to build wheel ... done
  Preparing metadata (pyproject.toml) ... done
Requirement already satisfied: six>=1.5 in /usr/local/lib/python3.11/dist-packages (from python-dateutil>=2.8.2->pandas) (1.17.0)
Downloading surprise-0.1-py2.py3-none-any.whl (1.8 kB)
Building wheels for collected packages: scikit-surprise
  Building wheel for scikit-surprise (pyproject.toml) ... done
  Created wheel for scikit-surprise: filename=scikit_surprise-1.1.4-cp311-cp311-linux_x86_64.whl size=2461561 sha256=a872516bcb2d747
  Stored in directory: /root/.cache/pip/wheels/2a/8f/6e/7e2899163e2d85d8266daab4aa1cdabec7a6c56f83c015b5af
Successfully built scikit-surprise
Installing collected packages: scikit-surprise, surprise
Successfully installed scikit-surprise-1.1.4 surprise-0.1

```

```
!pip install numpy==1.24.4
```

```
Requirement already satisfied: numpy==1.24.4 in /usr/local/lib/python3.11/dist-packages (1.24.4)
```

```

from google.colab import files
import pandas as pd
# Upload your Excel file
uploaded = files.upload()
# Read the file
file_path = next(iter(uploaded))
df = pd.read_excel(file_path)
# Preview
df.head()

```



Choose Files NM DATASET .xlsx

- **NM DATASET .xlsx**(application/vnd.openxmlformats-officedocument.spreadsheetml.sheet) - 29528 bytes, last modified: 5/9/2025 - 100% done


Saving NM DATASET .xlsx to NM DATASET (1).xlsx

1 to 5 of 5 entries


index	User_ID	Item_ID	Category	Rating	Timestamp	Price	Platform	Location
0	User_913	Item_52	Movies	2.0	5/15/2023	369.55	Web	Africa
1	User_3457	Item_66	Electronics	1.4	8/19/2023	255.15	Web	Africa
2	User_1629	Item_1467	Sports	2.7	3/27/2024	296.69	Web	Europe
3	User_3463	Item_697	Movies	1.6	2023-03-12 00:00:00	55.59	Tablet	North America
4	User_2941	Item_1736	Games	3.4	2023-06-02 00:00:00	366.22	Web	South America

Show per pageLike what you see? Visit the [data table notebook](#) to learn more about interactive tables.


Distributions

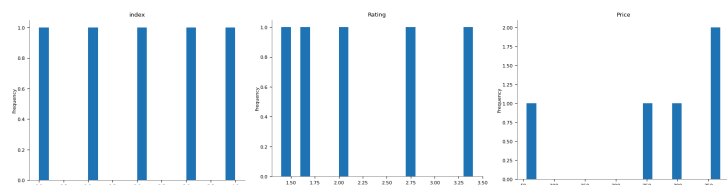

Categorical distributions

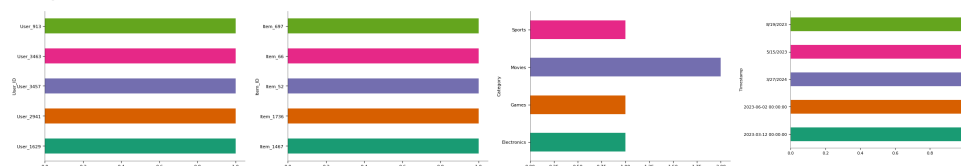


2-d distributions

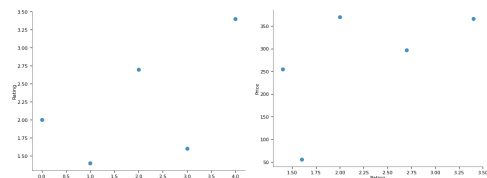


Time series




Values



2-d categorical distributions

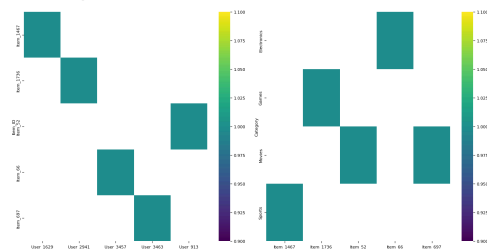


<string>:6: FutureWarning: The behavior of value_counts with object-dtype is deprecated. In a future version, this will *not* perfor

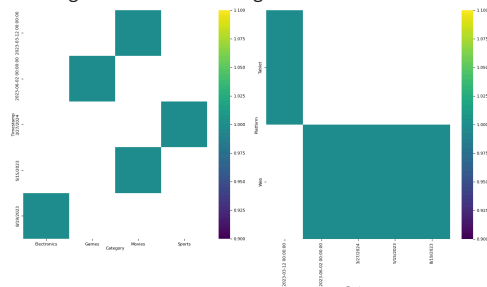


Faceted distributions

<string>:5: FutureWarning:

Passing `palette` without assigning `hue` is deprecated and will be removed in v0.14.0. Assign the `y` variable to `hue` and set `le




Passing `palette` without assigning `hue` is deprecated and will be removed in v0.14.0. Assign the `y` variable to `hue` and set `le`



Passing `palette` without assigning `hue` is deprecated and will be removed in v0.14.0. Assign the `y` variable to `hue` and set `le`



Passing `palette` without assigning `hue` is deprecated and will be removed in v0.14.0. Assign the `y` variable to `hue` and set `le`



Next steps:

[Generate code with df](#)

[View recommended plots](#)

[New interactive sheet](#)

```
from sklearn.feature_extraction.text import TfidfVectorizer
from sklearn.metrics.pairwise import cosine_similarity

# Combine content features
df['combined_features'] = df['Category'].astype(str) + ' ' + df['Item_ID'].astype(str)

# TF-IDF vectorizer
tfidf = TfidfVectorizer(stop_words='english')
tfidf_matrix = tfidf.fit_transform(df['combined_features'])

# Cosine similarity matrix
cosine_sim = cosine_similarity(tfidf_matrix, tfidf_matrix)

# Index map for items
indices = pd.Series(df.index, index=df['Item_ID']).drop_duplicates()

# Function to get content-based recommendations
def content_based_recommend(item_id, num_recommendations=10):
    if item_id not in indices:
        return f"Item_ID '{item_id}' not found."
    idx = indices[item_id]
    sim_scores = list(enumerate(cosine_sim[idx]))
    sim_scores = sorted(sim_scores, key=lambda x: x[1], reverse=True)
    sim_scores = sim_scores[1:num_recommendations+1]
    item_indices = [i[0] for i in sim_scores]
    return df[['Item_ID', 'Category']].iloc[item_indices]

from surprise import SVD, Dataset, Reader
from surprise.model_selection import train_test_split
from surprise.accuracy import rmse

# Use Surprise to prepare dataset
reader = Reader(rating_scale=(0.5, 5.0))
data = Dataset.load_from_df(df[['User_ID', 'Item_ID', 'Rating']], reader)

# Split into training and testing
trainset, testset = train_test_split(data, test_size=0.25, random_state=42)

# Train SVD model
model = SVD()
model.fit(trainset)

# Test RMSE
predictions = model.test(testset)
rmse(predictions)

# Predict function
def predict_rating(user_id, item_id):
    return model.predict(user_id, item_id).est
```

↗ RMSF: 1.1374

```
def hybrid_recommend(user_id, item_id, top_n=10, weight_cb=0.5, weight_cf=0.5):
    if item_id not in indices:
        return f"Item_ID '{item_id}' not found."

    idx = indices[item_id]
    sim_scores = list(enumerate(cosine_sim[idx]))
    sim_scores = sorted(sim_scores, key=lambda x: x[1], reverse=True)
    sim_scores = sim_scores[1:top_n*2+1]

    hybrid_scores = []
    for i, score in sim_scores:
        candidate_id = df['Item_ID'].iloc[i]
        cb_score = score
        cf_score = predict_rating(user_id, candidate_id)
        final_score = (weight_cb * cb_score) + (weight_cf * (cf_score / 5))
        hybrid_scores.append((candidate_id, final_score))

    top_recommendations = sorted(hybrid_scores, key=lambda x: x[1], reverse=True)[:top_n]
    return pd.DataFrame(top_recommendations, columns=['Recommended Item_ID', 'Score'])

# Content-based
print("Content-Based Recommendations:")
print(content_based_recommend('Item_52'))

# Predict individual rating
print("Collaborative Prediction for User_913 & Item_52:")
print(predict_rating('User_913', 'Item_52'))

# Hybrid
print("Hybrid Recommendations:")
print(hybrid_recommend('User_913', 'Item_52'))
```

↗ Content-Based Recommendations:

	Item_ID	Category
5	Item_1131	Movies
279	Item_1620	Movies
7	Item_779	Movies
99	Item_1662	Movies
107	Item_1411	Movies
134	Item_1414	Movies
144	Item_1378	Movies
187	Item_906	Movies
225	Item_672	Movies
237	Item_135	Movies

Collaborative Prediction for User_913 & Item_52:
2.6212247068651764

Hybrid Recommendations:

	Recommended Item_ID	Score
0	Item_1411	0.414434
1	Item_778	0.405549
2	Item_1131	0.385180
3	Item_1620	0.385113