

Trabajando con fuentes

ESTILOS POR DEFECTO EN LOS NAVEGADORES

Welcome to Explore California!

- [Tours](#)
- [Mission](#)
- [Contact](#)
- [Resources](#)
- [Explorers](#)

[Find a tour!](#)

Explore our world your way

At Explore California, we want you to do just that, explore our wild and wonderful state any way you please. Our tour packages are as diverse as California itself and are designed to let you experience our beautiful state in a whole new way. Whether you want to take guided tours through stunning wine country, or set your own agenda as you bike along miles of breathtaking Pacific coastline, we have something for everyone. *Come explore.*



Tour Spotlight

This month's spotlight package is Cycle California. Whether you are looking for some serious downhill thrills to a relaxing ride along the coast, you'll find something to love in Cycle California. [Tour Details](#)

OPCIONES DE FUENTES PARA CSS

Fuentes del sistema

- Amplio soporte
- Opciones limitadas

Fuentes Web

- Más opciones
- Falta de soporte en navegadores antiguos

FUENTES DEL SISTEMA

Serif

Times

Times New Roman

Georgia

Sans-Serif

Arial

Helvetica

Verdana

Geneva

Monospace

Courier

Courier New


Monaco

Cursive

Comic Sans

FUENTES DEL SISTEMA

Fuentes llamadas en el CSS tienen que ser instaladas en la máquina del cliente

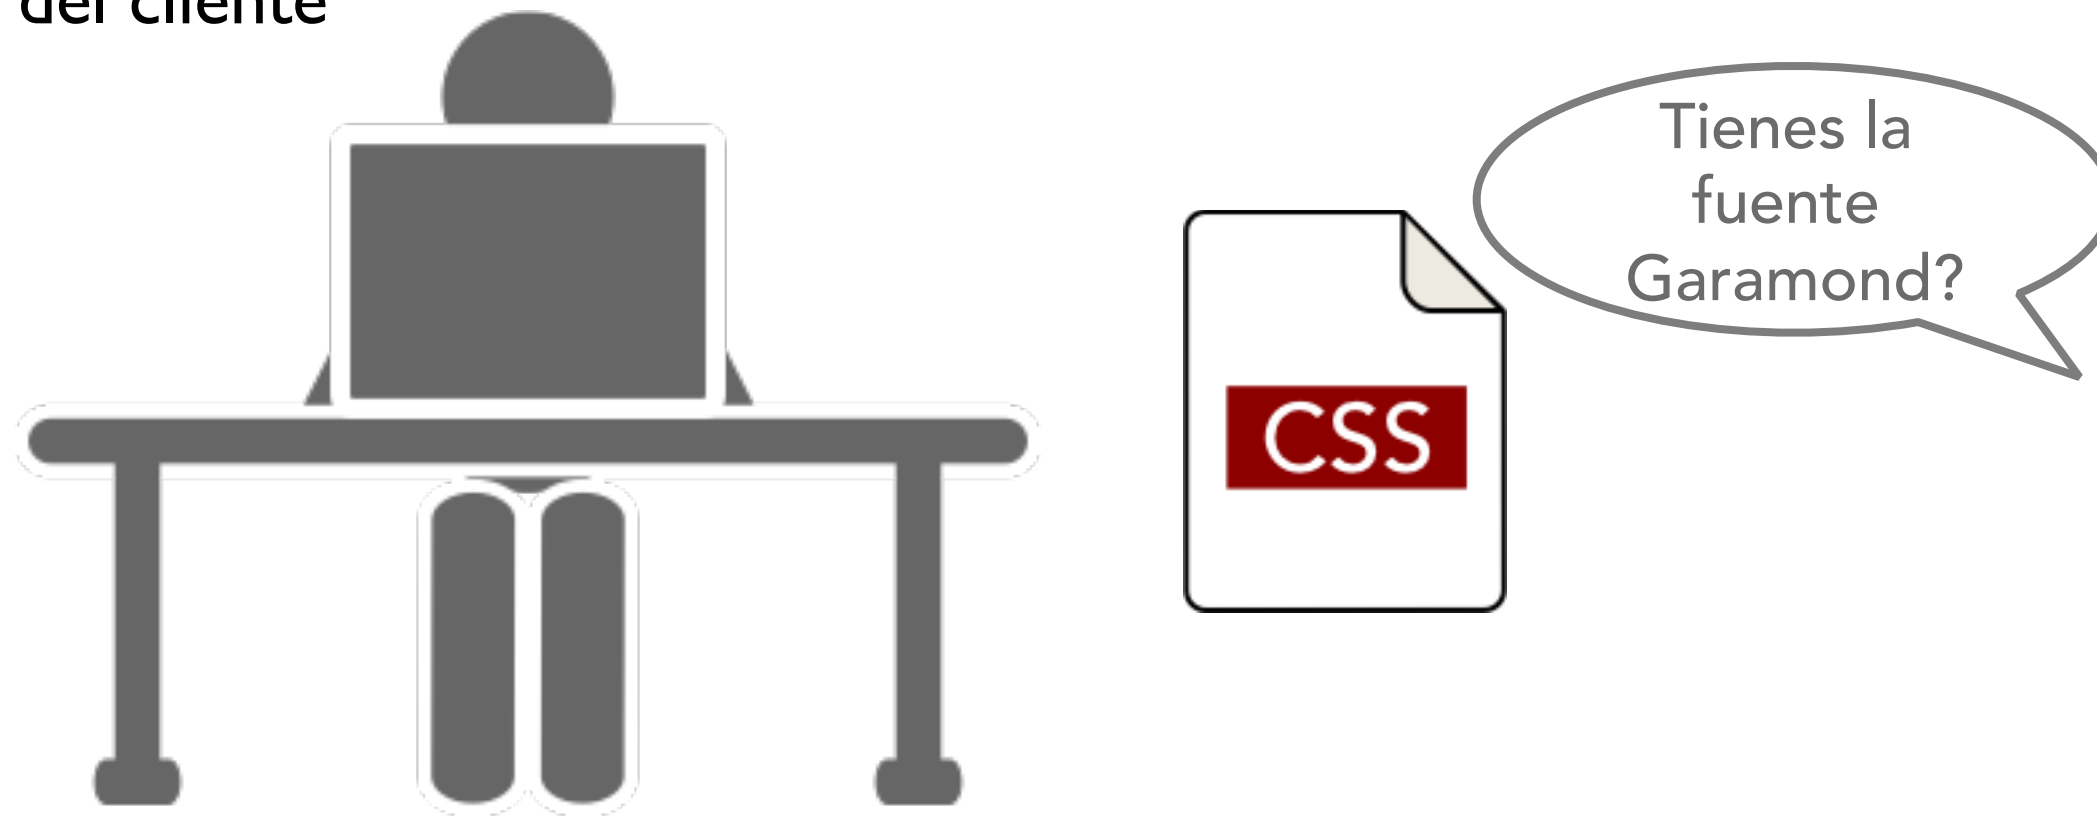

REQUESTING FONTS

p {



font-family: Arial, Helvetica, Verdana, sans-serif;

}

FUENTES WEB

Las Fuentes Web funcionan haciendo que el navegador descargue e instale las fuentes que son solicitadas en los estilos de la página mediante la sintaxis @font-face

SINTAXIS @FONT-FACE

```
@font-face {  
  
    font-family: 'fontName';  
  
    src: url('fontName.eot');  
  
    src: url('fontName.eot?#iefix') format('embedded-opentype'),  
        url('fontName.woff') format('woff'),  
        url('fontName.ttf') format('truetype'),  
        url('fontName.svg#svgFontName') format('svg');  
  
}
```


OPCIONES CSS PARA FUENTES CSS FONT OPTIONS

- Permitir al navegador mostrar su fuente por defecto
- Especificar una fuente del sistema y proporcionar opciones de respaldo
- Usar @font-face para apuntar a una fuente en un servidor
- Usar diversos servicios de fuentes