

1. DATABASE DESIGN


1.1. ORDER TABLE

Attribute	Description
Order_ID (PK)	Unique order ID
Customer_ID (FK)	Customer who placed the order
Order_Date	Date of order
Total_Amount	Total order amount
Order_Status	Current order status

BookswagonOrder_Details

Attribute	Description
Order_Detail_ID (PK)	Unique order detail ID
Order_ID (FK)	Related order
Product_ID (FK)	Ordered product
Quantity	Quantity ordered
Unit_Price	Price of one product
Total_Amount	Quantity × Unit Price

2.RELATIONSHIP

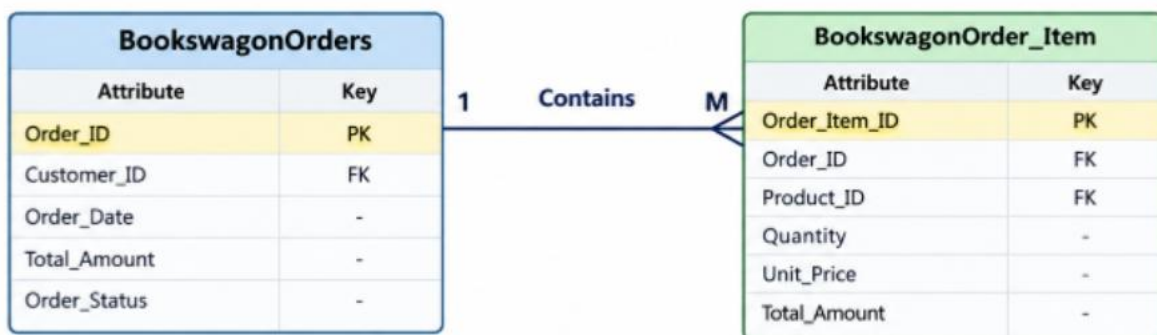

3.TABLE CREATION

3.1.ORDER TABLE

```
SQL> CREATE TABLE BookswagonOrders (  
2 Order_ID NUMBER PRIMARY KEY,  
3 Customer_ID NUMBER,  
4 Order_Date DATE NOT NULL,  
5 Total_Amount NUMBER(10,2),  
6 Order_Status VARCHAR2(30)  
7 );
```

Table created.

3.2.ORDER_ITEM TABLE

```
SQL> CREATE TABLE BookswagonOrder_Item (  
2 Order_Item_ID NUMBER PRIMARY KEY,  
3 Order_ID NUMBER,  
4 Product_ID NUMBER,  
5 Quantity NUMBER,  
6 Unit_Price NUMBER(10,2),  
7 Total_Amount NUMBER(10,2),  
8 CONSTRAINT fk_order_item_order  
9 FOREIGN KEY (Order_ID)  
10 REFERENCES BookswagonOrders(Order_ID),  
11 CONSTRAINT fk_order_item_product  
12 FOREIGN KEY (Product_ID)  
13 REFERENCES BookswagonProduct(Product_ID)  
14 );
```

Table created.

4.ORDER TABLE DATA INSERTION

```
CUSTOMER_ID  ORDER_ID ORDER_DAT
-----
PRODUCT_NAME
-----
-----
  QUANTITY UNIT_PRICE TOTAL_AMOUNT ORDER_STATUS
-----
      1      5001 18-SEP-26
Atomic Habits
      1      499      499 Delivered

      1      5001 18-SEP-26
The Alchemist
      1      450      450 Delivered
```

```
CUSTOMER_ID  ORDER_ID ORDER_DAT
-----
PRODUCT_NAME
-----
-----
  QUANTITY UNIT_PRICE TOTAL_AMOUNT ORDER_STATUS
-----
      2      5002 19-SEP-26
The Psychology of Money
      1      350      350 Shipped

      2      5002 19-SEP-26
Rich Dad Poor Dad
```

CUSTOMER_ID	ORDER_ID	ORDER_DAT
-------------	----------	-----------

PRODUCT_NAME

QUANTITY	UNIT_PRICE	TOTAL_AMOUNT	ORDER_STATUS
----------	------------	--------------	--------------

	1	399	399 Shipped
	3	5003	20-SEP-26
Ikigai	1	299	299 Processing
	3	5003	20-SEP-26

CUSTOMER_ID	ORDER_ID	ORDER_DAT
-------------	----------	-----------

PRODUCT_NAME

QUANTITY	UNIT_PRICE	TOTAL_AMOUNT	ORDER_STATUS
----------	------------	--------------	--------------

Think and Grow Rich	1	250	250 Processing
	3	5003	20-SEP-26
Wings of Fire	1	299	299 Processing

```

CUSTOMER_ID  ORDER_ID ORDER_DAT
-----
PRODUCT_NAME
-----
-----
      QUANTITY UNIT_PRICE TOTAL_AMOUNT ORDER_STATUS
-----
          4      5004 21-SEP-26
Pride and Prejudice
          1      325      325 Delivered

          4      5004 21-SEP-26
Harry Potter and the Philosopher Stone
          1      450      450 Delivered

```

```

CUSTOMER_ID  ORDER_ID ORDER_DAT
-----
PRODUCT_NAME
-----
-----
      QUANTITY UNIT_PRICE TOTAL_AMOUNT ORDER_STATUS
-----

          5      5005 22-SEP-26
Think and Grow Rich
          1      250      250 Confirmed

          5      5005 22-SEP-26
The Psychology of Money

```

4.1.DISPLAY ORDER TABLE DATA

```
SQL> SELECT * FROM BookswagonOrders;
```

```

ORDER_ID CUSTOMER_ID ORDER_DAT TOTAL_AMOUNT ORDER_STATUS
-----
-
      5001          1 18-SEP-26      949 Delivered
      5002          2 19-SEP-26      749 Shipped
      5003          3 20-SEP-26      649 Processing
      5004          4 21-SEP-26      775 Delivered
      5005          5 22-SEP-26      698 Confirmed

```

5.ORDER_ITEM TABLE DATA INSERTION

```
SQL> INSERT INTO BookswagonOrder_Item VALUES (6001, 5001, 101, 1, 450.00, 450.00);
```

```
1 row created.
```

```
SQL> INSERT INTO BookswagonOrder_Item VALUES (6002, 5001, 102, 1, 499.00, 499.00);
```

```
1 row created.
```

```
SQL> INSERT INTO BookswagonOrder_Item VALUES (6003, 5002, 103, 1, 350.00, 350.00);
```

```
1 row created.
```

```
SQL> INSERT INTO BookswagonOrder_Item VALUES (6004, 5002, 106, 1, 399.00, 399.00);
```

```
1 row created.
```

```
SQL> INSERT INTO BookswagonOrder_Item VALUES (6005, 5003, 104, 1, 299.00, 299.00);
```

```
1 row created.
```

```
SQL> INSERT INTO BookswagonOrder_Item VALUES (6006, 5003, 108, 1, 250.00, 250.00);
```

```
1 row created.
```

```
SQL>
SQL> INSERT INTO BookswagonOrder_Item VALUES
      2 (6007, 5003, 107, 1, 299.00, 299.00);
```

```
1 row created.
```

```
SQL>
SQL> INSERT INTO BookswagonOrder_Item VALUES
      2 (6008, 5004, 105, 1, 450.00, 450.00);
```

```
1 row created.
```

```
SQL>
SQL> INSERT INTO BookswagonOrder_Item VALUES
      2 (6009, 5004, 110, 1, 325.00, 325.00);
```

```
1 row created.
```

```
SQL>
SQL> INSERT INTO BookswagonOrder_Item VALUES
      2 (6010, 5005, 107, 1, 299.00, 299.00);
```

```
1 row created.
```

```
SQL>
SQL> INSERT INTO BookswagonOrder_Item VALUES
      2 (6011, 5005, 108, 1, 250.00, 250.00);
```

```
1 row created.
```

5.1.DISPLAY ORDER_ITEM TABLE DATA

```
SQL> SELECT * FROM BookswagonOrder_Item;
```

ORDER_ITEM_ID	ORDER_ID	PRODUCT_ID	QUANTITY	UNIT_PRICE	TOTAL_AMOUNT
6001	5001	101	1	450	450
6002	5001	102	1	499	499
6003	5002	103	1	350	350
6004	5002	106	1	399	399
6005	5003	104	1	299	299
6006	5003	108	1	250	250
6007	5003	107	1	299	299
6008	5004	105	1	450	450
6009	5004	110	1	325	325
6010	5005	107	1	299	299
6011	5005	108	1	250	250
6012	5005	103	1	350	350

```
12 rows selected.
```

6.ORDER MODIFICATION OPERATIONS

6.1.MODIFY ORDER AMOUNT

```
SQL> UPDATE BookswagonOrders
  2  SET Order_Status = 'Shipped'
  3  WHERE Order_ID = 5003;
```

```
1 row updated.
```

```
SQL>
SQL> COMMIT;
```

```
Commit complete.
```

```
SQL> SELECT * FROM BookswagonOrders
  2  WHERE Order_ID = 5003;
```

ORDER_ID	CUSTOMER_ID	ORDER_DAT	TOTAL_AMOUNT	ORDER_STATUS
5003	3	20-SEP-26	649	Shipped

6.2.MODIFY ORDER DATE

```
SQL> UPDATE BookswagonOrders
  2 SET Order_Date = TO_DATE('23-09-2026', 'DD-MM-YYYY')
  3 WHERE Order_ID = 5001;
```

1 row updated.

```
SQL>
SQL> COMMIT;
```

Commit complete.

```
SQL> SELECT Order_ID, Order_Date
  2 FROM BookswagonOrders
  3 WHERE Order_ID = 5001;
```

ORDER_ID	ORDER_DAT
5001	23-SEP-26

7.ORDER ITEM MODIFICATION

```
SQL> UPDATE BookswagonOrder_Item
  2 SET Quantity = 2,
  3     Total_Amount = 900.00
  4 WHERE Order_Item_ID = 6001;
```

1 row updated.

```
SQL>
SQL> COMMIT;
```

Commit complete.

```
SQL> SELECT *
  2 FROM BookswagonOrder_Item
  3 WHERE Order_Item_ID = 6001;
```

ORDER_ITEM_ID	ORDER_ID	PRODUCT_ID	QUANTITY	UNIT_PRICE	TOTAL_AMOUNT
6001	5001	101	2	450	900

```
SQL> UPDATE BookswagonOrder_Item
  2 SET Quantity = 2
  3 WHERE Order_Item_ID = 6001;

1 row updated.
```

8. CUSTOMER ORDER HISTORY REPORT

```
SQL> SELECT
  2     C.Customer_ID,
  3     C.Customer_Name,
  4     O.Order_ID,
  5     TO_CHAR(O.Order_Date, 'DD-MON-YY') AS Order_Date,
  6     P.Product_ID,
  7     P.Product_Name,
  8     OI.Quantity,
  9     OI.Unit_Price AS Price,
 10     OI.Total_Amount
 11 FROM BookswagonCustomer C
 12 JOIN BookswagonOrders O
 13     ON C.Customer_ID = O.Customer_ID
 14 JOIN BookswagonOrder_Item OI
 15     ON O.Order_ID = OI.Order_ID
 16 JOIN BookswagonProduct P
 17     ON OI.Product_ID = P.Product_ID
 18 ORDER BY C.Customer_ID, O.Order_Date, OI.Order_Item_ID;
```

CUSTOMER_ID	CUSTOMER_NAME	ORDER_ID	ORDER_DATE	PRODUCT_ID	PRODUCT_NAME	QUANTITY
PRICE	TOTAL_AMOUNT					
-----	-----	-----	-----	-----	-----	-----
	1 Nandhini Sri	5001	23-SEP-26	101	The Alchemist	2
450.00	900.00					
	1 Nandhini Sri	5001	23-SEP-26	102	Atomic Habits	1
499.00	499.00					
	2 Priya Kumar	5002	19-SEP-26	103	The Psychology of Money	1
350.00	350.00					
	2 Priya Kumar	5002	19-SEP-26	106	Rich Dad Poor Dad	1
399.00	399.00					
	3 Arun Kumar	5003	20-SEP-26	104	Wings of Fire	1
299.00	299.00					
	3 Arun Kumar	5003	20-SEP-26	108	Think and Grow Rich	1
250.00	250.00					
	3 Arun Kumar	5003	20-SEP-26	107	Ikigai	1
299.00	299.00					
	4 Divya Raj	5004	21-SEP-26	105	Harry Potter and the Philosopher Stone	1
450.00	450.00					
	4 Divya Raj	5004	21-SEP-26	110	Pride and Prejudice	1
325.00	325.00					
	5 Karthik S	5005	22-SEP-26	107	Ikigai	1
299.00	299.00					
	5 Karthik S	5005	22-SEP-26	108	Think and Grow Rich	1
250.00	250.00					
	5 Karthik S	5005	22-SEP-26	103	The Psychology of Money	1
350.00	350.00					

12 rows selected.

9.CUSTOMER-WISE ORDER SUMMARY

```
SQL> SELECT
  2     C.Customer_ID,
  3     C.Customer_Name,
  4     COUNT(O.Order_ID) AS Total_Orders,
  5     SUM(O.Total_Amount) AS Total_Amount
  6 FROM BookswagonCustomer C
  7 JOIN BookswagonOrders O
  8     ON C.Customer_ID = O.Customer_ID
  9 GROUP BY C.Customer_ID, C.Customer_Name
 10 ORDER BY C.Customer_ID;
```

CUSTOMER_ID	CUSTOMER_NAME	TOTAL_ORDERS	TOTAL_AMOUNT
-----	-----	-----	-----
	1 Nandhini Sri	1	999.00
	2 Priya Kumar	1	799.00
	3 Arun Kumar	1	899.00
	4 Divya Raj	1	775.00
	5 Karthik S	1	698.00

