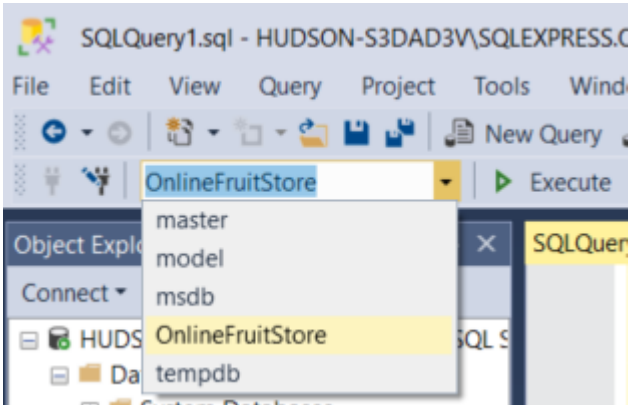


Sample Demonstration (SQL Server)

| Column | FruitID | FruitName | Price | Quantity | Supplier |
|--------|---------|-----------|-------|----------|----------|
| Row | F01 | Apple | 1.50 | 50 | ABC |
| Row | F02 | Orange | 1.50 | 50 | HJK |
| Row | F03 | Banana | 4.50 | 60 | ABC |
| Row | F04 | Kiwi | 4.00 | 30 | XYZ |

- **Database Name:** OnlineFruitStore
- **Table Name:** Fruit
- **Table Column & (Data Type):** FruitID (nvarchar 50), FruitName (nvarchar 50), Price (decimal 5,2), Quantity (integer), Supplier (nvarchar 50)

| | |
|--|---|
| <p>Make sure to execute the query in the right Database</p>  | <p>-- To Create A Database</p> <pre>CREATE DATABASE OnlineFruitStore</pre> |
| <p>-- To Create A Table</p> <pre>CREATE TABLE Fruit(FruitID nvarchar(50), FruitName nvarchar(50), Price decimal(5,2), Quantity integer, Supplier varchar(50))</pre> | <p>-- Display The Table</p> <pre>SELECT * FROM Fruit</pre> |

| | |
|--|---|
| <p>-- Insert Value Into The Table</p> <p>-- Enclose " Quotation When It Is Not A Number</p> <p>INSERT INTO Fruit (FruitID, FruitName, Price, Quantity, Supplier) VALUES ('F01', 'Apple', 1.50, 50, 'ABC')</p> | <p>-- Display The Table</p> <p>-- Double Check the value insert is that correct?</p> <p>SELECT * FROM Fruit</p> |
| <p>-- Insert Other Value Into The Table</p> <p>INSERT INTO Fruit (FruitID, FruitName, Price, Quantity, Supplier) VALUES ('F02', 'Orange', 1.50, 50, 'HJK'), ('F03', 'Banana', 4.50, 60, 'ABC'), ('F04', 'Kiwi', 4.00, 30, 'XYZ')</p> | <p>-- Display The Table</p> <p>-- Double Check the value insert is that correct?</p> <p>SELECT * FROM Fruit</p> |
| <p>-- Remove All Data From the Fruit Table but the Fruit Table still presents</p> <p>DELETE FROM Fruit</p> | |

Exercise

Question 1:

- **Database Name:** Lab1
- **Table Name:** Student
- **Table Column & (Data Type):** StudentID (nvarchar 50), Name (nvarchar 50), Gender (nvarchar 50), DOB (Date), Address (nvarchar 50)

| Column | StudentID | Name | Gender | DOB | Address |
|--------|-----------|----------|--------|-------------|--------------|
| Row | S01 | Ali | Male | 2 Feb 1996 | Kuala Lumpur |
| Row | S02 | Nancy | Female | 16 May 1997 | Bukit Jalil |
| Row | S03 | Melvin | Male | 20 Nov 1998 | Null |
| Row | S04 | Angeline | Female | 30 Dec 1995 | Sri Petaling |

Note:

- Always remember to select the database that you want to work on
- You can issue SQL commands in single/multiple lines
- You can insert one row at a time or multiple rows at once
- You can insert data in a particular column or all columns
- It's a good practice to put a semicolon at the end of the SQL statement
- Always remember to refresh the database after executing a command

Answer:

| | |
|--|--|
| CREATE DATABASE Lab1 | CREATE TABLE Student(StudentID nvarchar(50), Name nvarchar(50), Gender nvarchar(50), DOB Date, Address nvarchar(50)) |
| INSERT INTO Student (StudentID, Name, Gender, DOB, Address) VALUES ('S01', 'Ali', 'Male', '2 Feb 1996', 'Kuala Lumpur'), ('S02', 'Nancy', 'Female', '16 May 1997', 'Bukit Jalil'), ('S03', 'Melvin', 'Male', '2 Nov 1998', 'NULL'), ('S04', 'Angeline', 'Female', '30 Dec 1995', 'Sri Petaling') | SELECT * FROM Student |

Question 2:

- Based on Question 1 insert value for (StudentID = S05), (Name = Alex), (Gender = Male)

Answer:

| | |
|---|-----------------------|
| INSERT INTO Student (StudentID, Name, Gender) VALUES ('S05','Alex','Male') | SELECT * FROM Student |
|---|-----------------------|

Output:

| StudentID | Name | Gender | DOB | Address |
|-----------|----------|--------|-------------|--------------|
| S01 | Ali | Male | 2 Feb 1996 | Kuala Lumpur |
| S02 | Nancy | Female | 16 May 1997 | Bukit Jalil |
| S03 | Melvin | Male | 20 Nov 1998 | NULL |
| S04 | Angeline | Female | 30 Dec 1995 | Sri Petaling |
| S05 | Alex | Male | NULL | NULL |

Question 3:

- Based on Question 2 insert value for (StudentID = S06), (Name = David), (Gender = Male), (DOB = 1 Jan 2020), (Address = Bukit Jalil)
- By using INSERT SQL Statement the order must not be the same as Questions 1 & 2.

Answer:

| | |
|---|-----------------------|
| INSERT INTO Student (Name, Address, StudentID, DOB, Gender) VALUES ('David','Bukit Jalil','S06','1 Jan 2020','Male') | SELECT * FROM Student |
|---|-----------------------|

Output:

| StudentID | Name | Gender | DOB | Address |
|-----------|----------|--------|-------------|--------------|
| S01 | Ali | Male | 2 Feb 1996 | Kuala Lumpur |
| S02 | Nancy | Female | 16 May 1997 | Bukit Jalil |
| S03 | Melvin | Male | 20 Nov 1998 | NULL |
| S04 | Angeline | Female | 30 Dec 1995 | Sri Petaling |
| S05 | Alex | Male | NULL | NULL |
| S06 | David | Male | 1 Jan 2020 | Bukit Jalil |