

# Layer Sweep Analysis

Prompt: "I was trained by Google using"

Clean prediction: " a" (p=99.5%)

Component: Mlp Output | Intervention: Zero

Layers tested: 34 | Prediction flipped in 4/34 layers

Peak effect: Layer 1 (KL = 24.2761)


Config hash: 24ad8085c7c982ac

## What Is This Report?

This report shows the results of a layer sweep - a systematic test where we disable one component of the AI model at a time and measure how much the output changes. Each layer in the model processes text sequentially, like floors in a factory. By disabling each floor one at a time, we can figure out which floors are essential for producing the correct answer.

The key metric is KL Divergence - a number measuring how much the model's entire prediction changed. KL = 0 means nothing changed. KL > 1 means a meaningful effect. KL > 10 means a major disruption. When the bar is highlighted (amber), the model's #1 prediction actually flipped to a different word.

## KL Divergence Across Layers

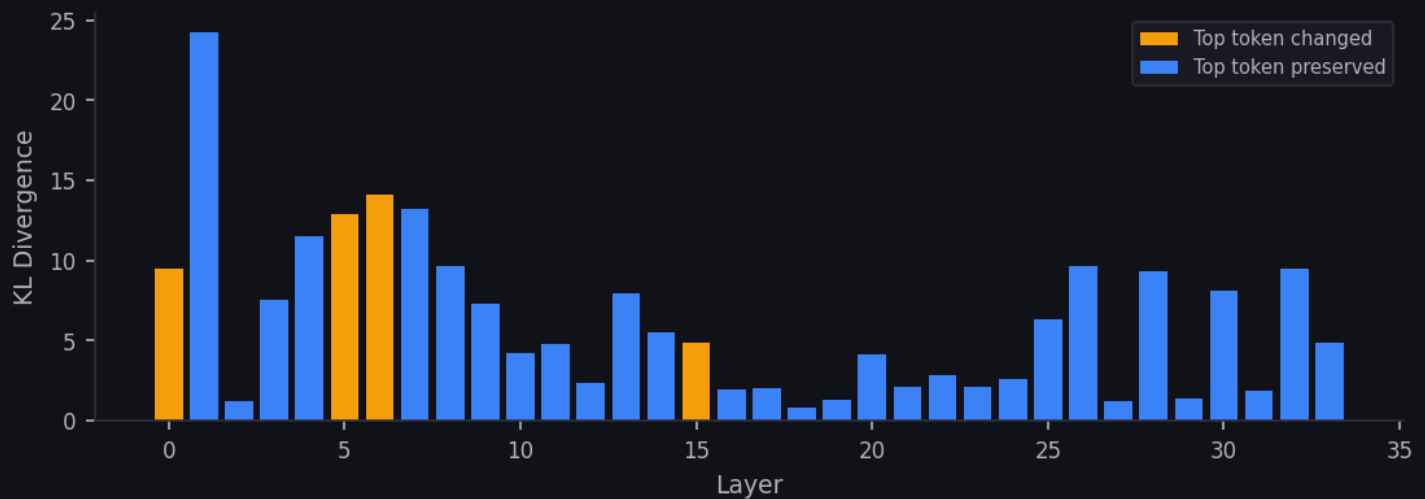

## Key Findings

- [IMPORTANT]

Layer 1 has the strongest causal effect

With KL divergence of 24.28, layer 1's MLP has the largest individual impact on the output. This is the most causally important layer for this input.
- [NOTABLE]

4/34 layers flip the prediction

Ablating the MLP at 4 different layers caused the model to change its top prediction entirely. These layers are individually critical ? the prediction depends on each of them.
- [INFO]

Early layers dominate

The first third of layers (avg KL: 10.49) have much more impact than the middle (3.43) or late layers (5.43). The model makes its key decisions about this input early in processing.

Per-Layer Results

Each row shows the effect of disabling the component at that layer. 'Clean Token' is the model's normal prediction. 'Intervention Token' is what the model predicted after the component was disabled.

Layer	KL Div	Changed	Effect	Clean Token	Interv. Token	Duration
0	9.5007	YES	High	"a"	"the"	8.3s
1	24.2761	no	Critical	"a"	"a"	8.1s
2	1.1966	no	Moderate	"a"	"a"	8.4s
3	7.5470	no	High	"a"	"a"	8.2s
4	11.4865	no	Critical	"a"	"a"	8.2s
5	12.9198	YES	Critical	"a"	"their"	8.3s
6	14.1026	YES	Critical	"a"	"Google"	8.5s
7	13.2553	no	Critical	"a"	"a"	8.2s
8	9.6203	no	High	"a"	"a"	8.5s
9	7.2913	no	High	"a"	"a"	8.5s
10	4.2002	no	Moderate	"a"	"a"	8.3s
11	4.7526	no	Moderate	"a"	"a"	8.4s
12	2.3903	no	Moderate	"a"	"a"	8.5s
13	7.9682	no	High	"a"	"a"	7.6s
14	5.5099	no	High	"a"	"a"	7.5s
15	4.8582	YES	Moderate	"a"	"their"	7.6s
16	1.9441	no	Moderate	"a"	"a"	7.6s
17	1.9991	no	Moderate	"a"	"a"	7.5s
18	0.8031	no	Low	"a"	"a"	7.4s
19	1.2981	no	Moderate	"a"	"a"	7.5s
20	4.1074	no	Moderate	"a"	"a"	7.6s
21	2.1052	no	Moderate	"a"	"a"	7.5s
22	2.8307	no	Moderate	"a"	"a"	7.4s
23	2.0918	no	Moderate	"a"	"a"	7.5s
24	2.6126	no	Moderate	"a"	"a"	7.5s
25	6.2988	no	High	"a"	"a"	7.3s
26	9.6516	no	High	"a"	"a"	7.2s
27	1.2451	no	Moderate	"a"	"a"	7.2s
28	9.2963	no	High	"a"	"a"	7.2s
29	1.3707	no	Moderate	"a"	"a"	7.2s
30	8.1137	no	High	"a"	"a"	7.2s
31	1.9120	no	Moderate	"a"	"a"	7.2s
32	9.4569	no	High	"a"	"a"	7.2s
33	4.8532	no	Moderate	"a"	"a"	7.2s

# Glossary

Key terms used in this report, written for people who may not have a machine learning background.

## Layer

One processing step in the model's pipeline. Text is processed through all layers sequentially - like floors in a factory where each floor adds more refinement.

## MLP (Multi-Layer Perceptron)

The 'knowledge storage' component in each layer. Research shows that factual knowledge (like 'Eiffel Tower -> Paris') is often stored in MLP layers.

## Attention

The component that decides which words in the input to focus on. When you read 'The cat sat on the \_\_\_\_', attention helps the model look back at 'cat' and 'sat' to predict 'mat'.

## Zero Ablation

Completely removing a component's output by setting it to zero. Like unplugging one wire in a circuit - if the lights go out, that wire was important.

## KL Divergence

A number measuring how different two probability distributions are.  $KL = 0$  means the intervention had no effect.  $KL > 1$  is meaningful.  $KL > 10$  is a major disruption. Higher = the component matters more.

## Top Token

The word the model considers most likely to come next. When the 'top token changed', the model's #1 prediction flipped to a completely different word.

## Logit

The raw score the model assigns to each possible next word. Higher logit = the model thinks that word is more likely. Logits are converted to probabilities using the softmax function.

## Probability

The model's confidence that a particular word is the right next word, expressed as a percentage (0-100%). A probability of 95% means the model is very confident.

## Config Hash

A unique fingerprint of your experiment setup. If someone runs the same experiment and gets the same hash, the results should be identical. This guarantees reproducibility.

## Activation Patching

A technique where you run the model on two different inputs, then swap the internal values from one into the other at a specific point. If the output changes, that point carries the information that distinguishes the two inputs.

## Residual Stream

The main 'highway' of information flowing through the model. Each layer reads from and writes to this stream. It's called 'residual' because each layer adds its contribution on top of what came before.

---

Generated by NeuronScope - an open-source mechanistic interpretability tool for causal intervention on LLM internals. Understanding is measured by controllability.