用户注册

接口地址: /user/regist

请求方式: POST

请求参数:

```
POST
                 http://localhost:8080/user/regist
Params
         Authorization
                       Headers (9)
                                     Body •
                                              Pre-request Script
                                                                        Settings
                                                                Tests
none
        form-data x-www-form-urlencoded raw binary GraphQL
          "username": "wfwt",
           "password":"123",
           "phoneNumber":"110",
           "idCard":"350121",
           "email": "123@qq.com",
           "sex":"1"
```


返回正确json示例:

用户登录


接口地址: /user/login

请求方式: POST

请求参数:

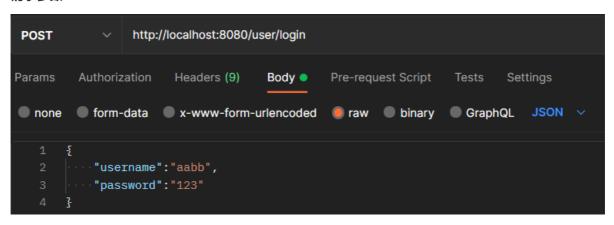

返回错误json示例:

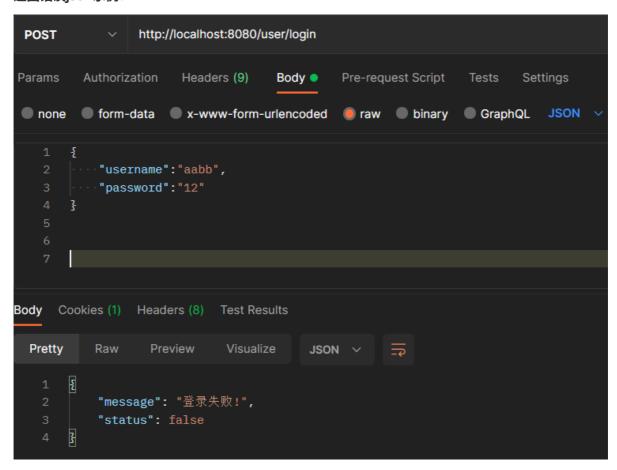

用户完善信息

接口地址: /user/update

请求方式: POST

请求参数:

```
POST
                 http://localhost:8080/user/update
         Authorization
                       Headers (8)
                                              Pre-request Script
Params
                                     Body •
                                                                Tests
                                                                        Settings
        form-data x-www-form-urlencoded raw binary
                                                                GraphQL
                                                                            JSON ~
           "userId": "3d817ab092c64930bb877538902a7cb6",
           "newPassword":"123456",
           · "phoneNumber": "119",
           "idCard":"350121",
           "email":"110@163.com",
           "sex":"1"
```

返回正确json示例:



生成公证机构

接口地址: /organizationGen

请求方式: POST

请求参数:

公证员注册

接口地址: /notar/regist

请求方式: POST

请求参数:

```
POST
                http://localhost:8080/notar/regist...
Params
         Authorization Headers (8)
                                    Body •
                                             Pre-request Script
                                                               Tests
                                                                      Settings
none form-data x-www-form-urlencoded raw binary GraphQL
                                                                          JSON ~
          "notaryName": "PDD",
           "password":"123",
           "phoneNumber":"110",
           "idCard":"350121",
           "email": "110@qq.com",
          "sex":"1",
           "organizationId": "69c2be6d629a4148a4517f7bf4d7112b",
           "notarizationType":"1",
           "jobNumber":"123"
```

返回正确json示例:

公证员登录

接口地址: /notar/login

请求方式: POST

请求参数:

```
Post 

http://localhost:8080/notar/login


Params Authorization Headers (8) Body Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON 

1 {
2 | · · · · "notaryName": "aabb",
3 | · · · · "password": "123"
4 }
```

返回正确json示例:

返回错误json示例:

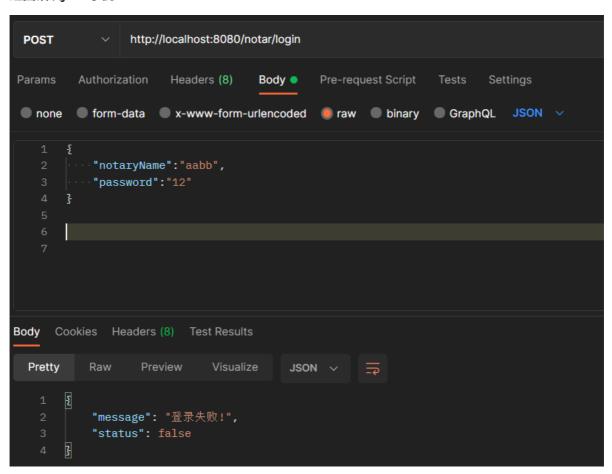


公证员完善信息

接口地址: /notar/update

请求方式: POST

请求参数:

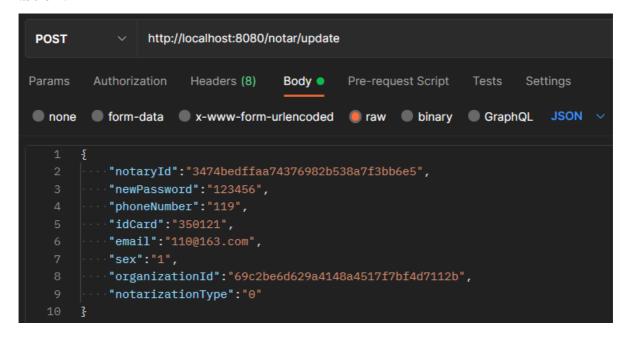

返回正确json示例:




公证申请

接口地址: /user/notarReq

请求方式: POST

请求参数:

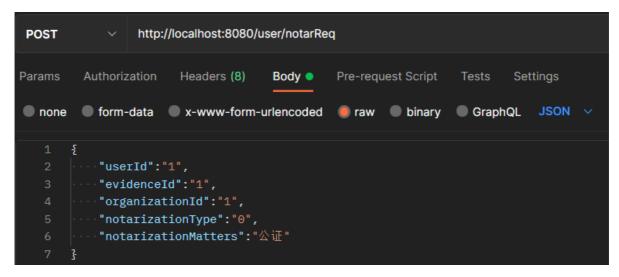


```
Body
     Cookies
              Headers (8) Test Results
  Pretty
           Raw
                   Preview
                              Visualize
                                         JSON V
           "notarizationMoney": "100",
           "notarizationStartTime": "2021-08-11T22:31:46.000+00:00",
           "transactionStatus": "0",
           "message": "申请公证成功",
           "notarizationStatus": "1",
           "transactionId": "7fb2acc72a044f47b4c9febe8e481e4d",
           "status": true
       3
```


公证缴费

接口地址: /user/notarPay

请求方式: POST

请求参数:

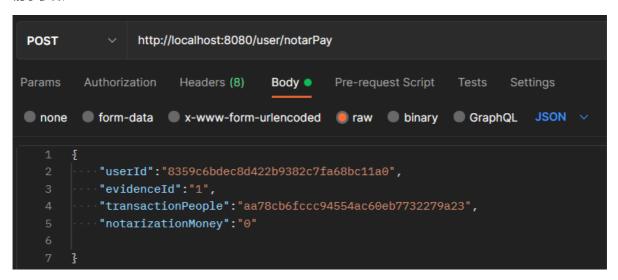

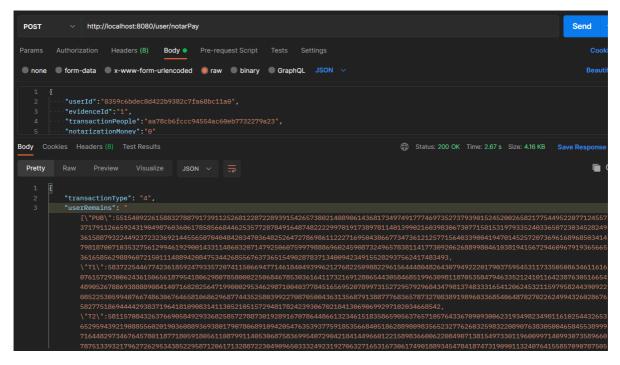


积分商店充值

接口地址: /user/charge

请求方式: POST

请求参数:

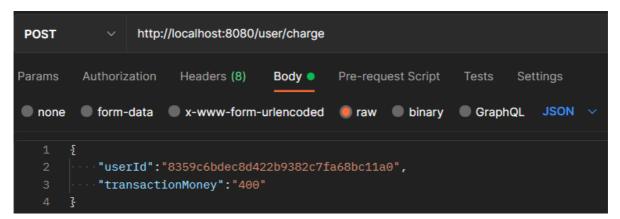

```
| Route | Pretty | Raw | Preview | Visualize | JSON | Son | Visualize | JSON | Preview | P
```


积分商店转赠

接口地址: /user/give

请求方式: POST

请求参数:

返回正确ison示例:

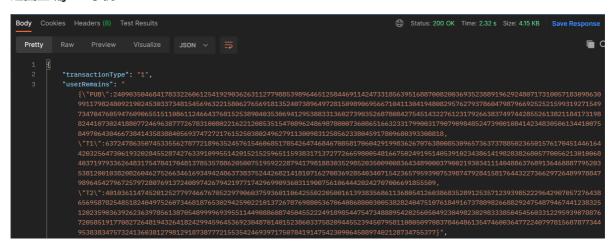


积分商店提现

接口地址: /user/withdraw

请求方式: POST

请求参数:

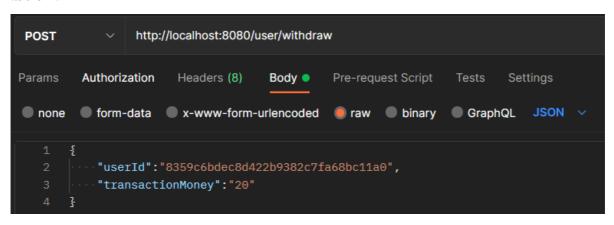

```
Pretty Raw Preview Visualize JSON ∨ □ Status: 200 OK Time: 2.21 s Size: 4.15 KB Save Response

**TransactionType*: "2",

"use1Remains*:"

{\tau^{\text{Preview}}} \text{**(601134493510523442744746947244814443293531165920433276432539189262522680476257186667830704492929380659520437644562720515865
68934047666198083945449938797154247742524444692332216608191861960252356104007425906816043054393893931842057887780310074598635477844

62856909219419933879901810683366533141350632406840195146516040680802274676903353752330947185792402756139325979292659015333557580004580577538
6430066234645711022620206397620837706408753908884246253459184938497762843180879061002677601748822728325081137960615318442084936752
3898133090522267553341220968672286396945917593295273166777844377484299831298235234064876353796,

\time**\text{\text{**11}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**2}}\text{\text{**1}}\text{\text{**1}}\text{\text{**1}}\text{\text{**2}}\text{\text{**2}}\text{\text{**2}}\text{\text{**2}}\text{\text{**2}}\text{\text{**2}}\text{\text{**2}}\text{\text{**2}}\text{\text{**2}}\text{\text{**2}}\text{\text{**2}
```

积分商店购买存储空间

接口地址: /user/memPay

请求方式: POST

请求参数:

```
POST 


http://localhost:8080/user/memPay

Params Authorization Headers (8) Body Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON 

1 {
2 | ....."userId":"8359c6bdec8d422b9382c7fa68bc11a0",
3 | ....."transactionMoney":"100",
4 | ....."storageSize":"50"
5 }
```

返回正确json示例:

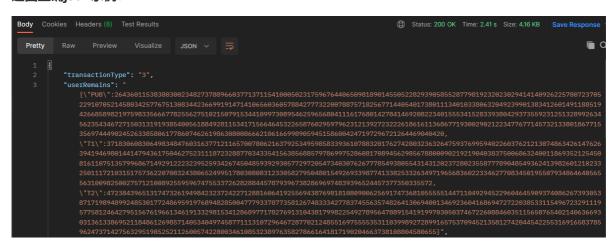

预约公证

接口地址: /notar/appoint

请求方式: POST

请求参数:

```
Post 

http://localhost:8080/notar/appoint

Params Authorization Headers (8) Body Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON 

1 {
2 | · · · · "evidenceId": "4",
3 | · · · · "notaryId": "e4ec67bace524705bf5ae1e49e0beea3"

4 |
5 }
```

返回正确json示例:



接口地址: /user/regist

请求方式: POST

请求参数:

返回正确json示例:

返回错误json示例: