

Chapter 10

Pointers and Dynamic Arrays

Learning Objectives

- Pointers
 - Pointer variables
 - Memory management
- Dynamic Arrays
 - Creating and using
 - Pointer arithmetic
- Classes, Pointers, Dynamic Arrays
 - The *this* pointer
 - Destructors, copy constructors

Pointer Introduction

- Pointer definition:
 - Memory address of a variable
- Recall: memory divided
 - Numbered memory locations
 - Addresses used as name for variable
- You've used pointers already!
 - Call-by-reference parameters
 - Address of actual argument was passed

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-3

Pointer Variables

- Pointers are "typed"
 - Can store pointer in variable
 - Not int, double, etc.
 - Instead: A POINTER to int, double, etc.!
- Example:
`double *p;`
 - p is declared a "pointer to double" variable
 - Can hold pointers to variables of type double
 - Not other types!

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-4

Declaring Pointer Variables

- Pointers declared like other types
 - Add "*" before variable name
 - Produces "pointer to" that type
- "*" must be before each variable
- `int *p1, *p2, v1, v2;`
 - p1, p2 hold pointers to int variables
 - v1, v2 are ordinary int variables

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-5

Addresses and Numbers

- Pointer is an address
- Address is an integer
- Pointer is NOT an integer!
 - Not crazy → abstraction!
- C++ forces pointers be used as addresses
 - Cannot be used as numbers
 - Even though "it is a number"

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-6

Pointing

- Terminology, view
 - Talk of "pointing", not "addresses"
 - Pointer variable "points to" ordinary variable
 - Leave "address" talk out
- Makes visualization clearer
 - "See" memory references
 - Use arrows in examples

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-7

Pointing to ...

- `int *p1, *p2, v1, v2;`
`p1 = &v1;`
 - Sets pointer variable p1 to "point to" int variable v1
- Operator, &
 - Determines "address of" variable
- Read like:
 - "p1 equals address of v1"
 - Or "p1 points to v1"

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-8

Pointing to ...

- Recall:
`int *p1, *p2, v1, v2;`
`p1 = &v1;`
- Two ways to refer to v1 now:
 - Variable v1 itself:
`cout << v1;`
 - Via pointer p1:
`cout << *p1;`
- Dereference operator, *
 - Pointer variable "dereferenced"
 - Means: "Get data that p1 points to"

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-9

"Pointing to" Example

- Consider:
`v1 = 0;`
`p1 = &v1;`
`*p1 = 42;`
`cout << v1 << endl;`
`cout << *p1 << endl;`
- Produces output:
42
42
- `p1` and `v1` refer to same variable

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-10

& Operator

- The "address of" operator
- Also used to specify call-by-reference parameter
 - Recall: call-by-reference parameters pass "address of" the actual argument
- Operator's two uses are closely related

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-11

Pointer Assignments

- Pointer variables can be "assigned":
`int *p1, *p2;`
`p2 = p1;`
 - Assigns one pointer to another
 - "Make p2 point to where p1 points"
- Do not confuse with:
`*p1 = *p2;`
 - Assigns "value pointed to" by p1, to "value pointed to" by p2

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.


10-12

Pointer Assignments Graphic: Display 10.1 Uses of the Assignment Operator with Pointer Variables


Display 10.1 Uses of the Assignment Operator with Pointer Variables

`p1 = p2;`

Before:




After:




`*p1 = *p2;`

Before:



After:



Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-13

The new Operator

- Since pointers can refer to variables...
 - No "real" need to have a standard identifier
- Can *dynamically* allocate variables
 - Operator *new* creates variables
 - No identifiers to refer to them
 - Just a pointer!
- `p1 = new int;`
 - Creates new "nameless" variable, and assigns p1 to "point to" it
 - Can access with `*p1`
 - Use just like ordinary variable

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-14

Basic Pointer Manipulations Example: **Display 10.2** Basic Pointer Manipulations (1 of 2)

Display 10.2 Basic Pointer Manipulations

```
1 //Program to demonstrate pointers and dynamic variables.
2 #include <iostream>
3 using std::cout;
4 using std::endl;

5 int main()
6 {
7     int *p1, *p2;

8     p1 = new int;
9     *p1 = 42;
10    p2 = p1;
11    cout << "*p1 == " << *p1 << endl;
12    cout << "*p2 == " << *p2 << endl;

13    *p2 = 53;
14    cout << "*p1 == " << *p1 << endl;
15    cout << "*p2 == " << *p2 << endl;
```

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-15

Basic Pointer Manipulations Example: **Display 10.2** Basic Pointer Manipulations (2 of 2)

```
16    p1 = new int;
17    *p1 = 88;
18    cout << "*p1 == " << *p1 << endl;
19    cout << "*p2 == " << *p2 << endl;

20    cout << "Hope you got the point of this example!\n";
21    return 0;
22 }
```

SAMPLE DIALOGUE

```
*p1 == 42
*p2 == 42
*p1 == 53
*p2 == 53
*p1 == 88
*p2 == 53
Hope you got the point of this example!
```

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-16


Basic Pointer Manipulations

Graphic:

Display 10.3

Explanation of Display 10.2

Display 10.3 Explanation of Display 10.2

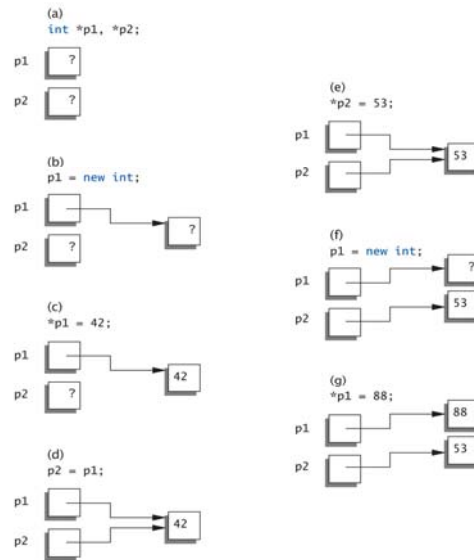

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-17

More on new Operator

- Creates new dynamic variable
- Returns pointer to the new variable
- If type is class type:
 - Constructor is called for new object
 - Can invoke different constructor with initializer arguments:


```
MyClass *mcPtr;
mcPtr = new MyClass(32.0, 17);
```
- Can still initialize non-class types:


```
int *n;
n = new int(17);    //Initializes *n to 17
```

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-18

Pointers and Functions

- Pointers are full-fledged types
 - Can be used just like other types
- Can be function parameters
- Can be returned from functions
- Example:
`int* findOtherPointer(int* p);`
 - This function declaration:
 - Has "pointer to an int" parameter
 - Returns "pointer to an int" variable

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-19

Memory Management

- Heap
 - Also called "**freestore**"
 - Reserved for dynamically-allocated variables
 - All new dynamic variables consume memory in freestore
 - If too many → could use all freestore memory
- Future "new" operations will fail if freestore is "full"

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-20

Checking new Success

- Older compilers:
 - Test if null returned by call to *new*:

```
int *p;  
p = new int;  
if (p == NULL)  
{  
    cout << "Error: Insufficient memory.\n";  
    exit(1);  
}
```
 - If new succeeded, program continues

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-21

new Success – New Compiler

- Newer compilers:
 - If new operation fails:
 - Program terminates automatically
 - Produces error message
- Still good practice to use NULL check ==> makes your program more portable.

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-22

Freestore Size

- Varies with implementations
- Typically large
 - Most programs won't use all memory
- Memory management
 - Still good practice
 - Solid software engineering principle
 - **Memory IS finite**
 - Regardless of how much there is!

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-23

delete Operator

- De-allocate dynamic memory
 - When a dynamic variable is no longer needed
 - Returns memory to freestore
 - Example:

```
int *p;  
p = new int(5);  
... //Some processing...  
delete p;
```
 - De-allocates dynamic memory "pointed to by pointer p"
 - Literally "destroys" memory

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-24

Dangling Pointers

- delete p;
 - Destroys dynamic memory
 - But p still points there!
 - Called "dangling pointer"
 - If p is then dereferenced (*p)
 - Unpredictable results!
 - Often disastrous!
- Avoid dangling pointers
 - Assign pointer to NULL after delete:
`delete p;`
`p = NULL;`

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-25

Dynamic and Automatic Variables

- Dynamic variables
 - Created with new operator
 - Created and destroyed while program runs
- Local variables
 - Declared `within function definition`
 - Not dynamic
 - Created when function is called
 - Destroyed when function call completes
 - Often called "automatic" variables
 - Properties controlled for you

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-26

Define Pointer Types

- Can "name" pointer types
- To be able to declare pointers like other variables
 - Eliminate need for "*" in pointer declaration
- `typedef int* IntPtr;`
 - Defines a "new type" alias
 - Consider these declarations:
`IntPtr p;`
`int *p;`
 - The two are equivalent

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-27

Pitfall: Call-by-value Pointers

- Behavior subtle and troublesome
 - If function changes pointer parameter itself → only change is to local copy
- Best illustrated with example...

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-28

Call-by-value Pointers Example: Display 10.4 A Call-by-Value Pointer Parameter (1 of 2)

Display 10.4 A Call-by-Value Pointer Parameter

```
1 //Program to demonstrate the way call-by-value parameters
2 //behave with pointer arguments.
3 #include <iostream>
4 using std::cout;
5 using std::cin;
6 using std::endl;

7 typedef int* IntPtr;

8 void sneaky(IntPtr temp);

9 int main( )
10 {
11     IntPtr p;

12     p = new int;
13     *p = 77;
14     cout << "Before call to function *p == "
15           << *p << endl;
```

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-29

Call-by-value Pointers Example: Display 10.4 A Call-by-Value Pointer Parameter (2 of 2)

```
16     sneaky(p);

17     cout << "After call to function *p == "
18           << *p << endl;

19     return 0;
20 }
21 void sneaky(IntPtr temp)
22 {
23     *temp = 99;
24     cout << "Inside function call *temp == "
25           << *temp << endl;
26 }
```

SAMPLE DIALOGUE


Before call to function *p == 77
Inside function call *temp == 99
After call to function *p == 99

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-30

Call-by-value Pointers Graphic: Display 10.5 The Function Call sneaky(p);

Display 10.5 The Function Call sneaky(p);

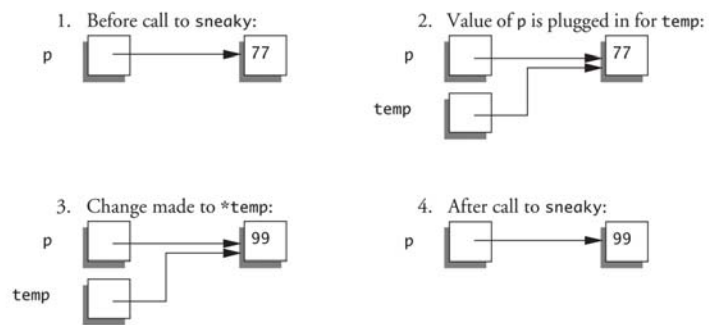

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-31

Dynamic Arrays

- Array variables
 - Really pointer variables!
- Standard array
 - Fixed size
- Dynamic array
 - Size not specified at programming time
 - Determined while program running

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-32

Array Variables

- Recall: arrays stored in memory addresses, sequentially
 - Array variable "refers to" first indexed variable
 - So array variable is a kind of pointer variable!
- Example:
`int a[10];`
`int *p;`
`p = a;`
 - a and p are both pointer variables!

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-33

Array Variables → Pointers

- Recall previous example:
`int a[10];`
`typedef int* IntPtr;`
`IntPtr p;`
- a and p are pointer variables
 - Can perform assignments:
`p = a; // Legal.`
 - p now points where a points
 - To first indexed variable of array a
 - `a = p; // ILLEGAL!`
 - Array pointer is **CONSTANT pointer!**

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-34

Array Variables → Pointers

- Array variable
`int a[10];`
- MORE than a pointer variable
 - "const int *" type
 - Array was allocated in memory already
 - Variable *a* MUST point there...always!
 - Cannot be changed!
- In contrast to ordinary pointers
 - Which can change

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-35

Dynamic Arrays

- Array limitations
 - Must specify size first
 - May not know until program runs!
- Must "estimate" maximum size needed
 - Sometimes OK, sometimes not
 - "Wastes" memory
- Dynamic arrays
 - Can grow and shrink as needed

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-36

Creating Dynamic Arrays

- Very simple!
- Use new operator
 - Dynamically allocate with pointer variable
 - Treat like standard arrays
- Example:

```
typedef double * DoublePtr;  
DoublePtr d;  
d = new double[10]; //Size in brackets
```

 - Creates dynamically allocated array variable *d*, with ten elements, base type double

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-37

Deleting Dynamic Arrays

- Allocated dynamically at run-time
 - So should be destroyed at run-time
- Simple again. Recall Example:

```
d = new double[10];  
... //Processing  
delete [] d;
```

 - De-allocates all memory for dynamic array
 - Brackets indicate "array" is there
 - Recall: *d* still points there!
 - Should set *d* = NULL;

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-38

Function that Returns an Array

- Array type NOT allowed as return-type of function
- Example:
`int [] someFunction(); // ILLEGAL!`
- Instead return pointer to array base type:
`int* someFunction(); // LEGAL!`

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-39

Pointer Arithmetic

- Can perform arithmetic on pointers
 - "Address" arithmetic
- Example:
`typedef double* DoublePtr;`
`DoublePtr d;`
`d = new double[10];`
 - d contains address of d[0]
 - d + 1 evaluates to address of d[1]
 - d + 2 evaluates to address of d[2]
 - Equates to "address" at these locations

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-40

Alternative Array Manipulation

- Use pointer arithmetic!
- "Step thru" array without indexing:
for (int i = 0; i < arraySize; i++)
 cout << *(d + i) << " " ;
- Equivalent to:
for (int i = 0; i < arraySize; i++)
 cout << d[i] << " " ;
- Only addition/subtraction on pointers
 – No multiplication, division
- Can use ++ and -- on pointers

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-41

Multidimensional Dynamic Arrays

- Yes we can!
- Recall: "arrays of arrays"
- Type definitions help "see it":
typedef int* IntArrayPtr;
IntArrayPtr *m = new IntArrayPtr[3];
 – Creates array of three pointers
 – Make each allocate array of 4 ints
- for (int i = 0; i < 3; i++)
 m[i] = new int[4];
 – Results in three-by-four dynamic array!

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-42

Back to Classes

- The `->` operator
 - Shorthand notation
- Combines dereference operator, `*`, and dot operator
- Specifies member of class "pointed to" by a given pointer
- Example:
`MyClass *p;`
`p = new MyClass;`
`p->grade = "A";` Equivalent to:
`(*p).grade = "A";`

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-43

The this Pointer

- Member function definitions might need to refer to `calling object`
 - Use predefined *this* pointer
 - Automatically points to calling object:
- ```
Class Simple
{
 public:
 void showStuff();
 private:
 int stuff;
};
```
- `void Sample::showStuff()`  
`{`  
    `cout << this->stuff;`  
`}`

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-44

## Destructor Need

- Dynamically-allocated variables
  - Do not go away until "deleted"
- If pointers are only private member data
  - They dynamically allocate "real" data (memory)
    - In constructor
  - Must have means to "deallocate" when object is destroyed
- Answer: destructor!

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-45

## Destructors

- Opposite of constructor
  - Automatically called when object is out-of-scope
- Defined like constructor, just add ~
  - `MyClass::~~MyClass()`
    - {
    - //Perform delete clean-up duties
    - }

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-46

## Summary 1

- Pointer is memory address
  - Provides indirect reference to variable
- Dynamic variables
  - Created and destroyed while program runs
- Freestore
  - Memory storage for dynamic variables
- Dynamically allocated arrays
  - Size determined as program runs

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-47

## Summary 2

- Class destructor
  - Special member function
  - Automatically destroys objects
- Copy constructor
  - Single argument member function
  - Called automatically when temp copy needed
- Assignment operator
  - Must be overloaded as member function
  - Returns reference for chaining

Copyright © 2010 Pearson Addison-Wesley. All rights reserved.

10-48