


1-8-2 Standard 3000rpm Series Motor – IM V1/B5 (Large Flange Installation)

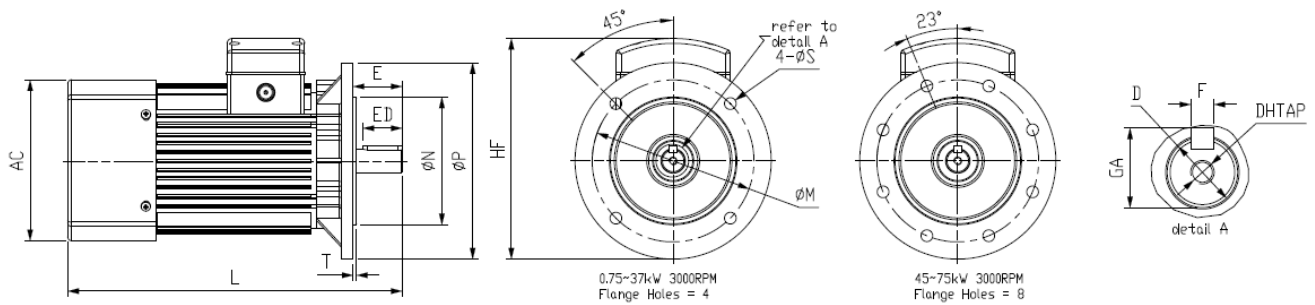

Model Name	Type	Frame	Dimensions and Tolerances / mm												
			AC	D		E		ED	F	h8	GA	M	N	j6	P
MSI75B-30CDXS2B1A MSI11C-30CDXS2B1A	Aluminum case	80 ①	156	19	+0.009 -0.004	40	±0.310	22	6	0 -0.018	21.5 0 -0.2	165	130	+0.014 -0.011	200
			Holes	S	H14	T	h12	L	HF	DHTAP	Front Bearing		Rear Bearing		
			4	12	+0.43 0	4.0	0 -0.12	331±5	222±5	M6×12L	6305 ZZ		6204 ZZ		

Model Name	Type	Frame	Dimensions and Tolerances / mm													
			AC	D		E		ED	F	h8	GA	M	N	j6	P	
MSI15C-30CDXS2B1A MSI22C-30CDXS2B1A	Aluminum case	80 ㉔	156	24	+0.009 -0.004	50	±0.310	40	8	0 -0.022	27	0 -0.2	165	130	+0.014 -0.011	200
			Holes	S	H14	T	h12	L	HF	DHTAP	Front Bearing		Rear Bearing			
			4	12	+0.43 0	4.0	0 -0.12	341±5	222±5	M8×16L	6305 ZZ		6204 ZZ			

Model Name	Type	Frame	Dimensions and Tolerances / mm													
			AC	D		E		ED	F	h8	GA	M	N	j6	P	
MSI30C-30CDXS2B1A MSI40C-30CDXS2B1A	Aluminum case	90	180	28	+0.009 -0.004	60	±0.370	50	8	0 -0.022	31	0 -0.2	215	180	+0.014 -0.011	250
			Holes	S	H14	T	h12	L	HF	DHTAP	Front Bearing		Rear Bearing			
			4	15	+0.43 0	4.0	0 -0.12	382±5	263±5	M10×20L	6306 ZZ		6205 ZZ			

Model Name	Type	Frame	Dimensions and Tolerances / mm													
			AC	D		E		ED	F	h8	GA	M	N	j6	P	
MSI55C-30CDXS2B1A MSI75C-30CDXS2B1A	Aluminum case	100 ②	194	38	+0.018 -0.002	80	±0.370	60	10	0 -0.022	41	0 -0.2	265	230	+0.016 -0.013	300
			Holes	S	H14	T	h12	L	HF	DHTAP	Front Bearing		Rear Bearing			
			4	15	+0.43 0	4.0	0 -0.12	420±10	301±5	M12×24L	6308 ZZ		6206 ZZ			

Model Name	Type	Frame	Dimensions and Tolerances / mm													
			AC	D		E		ED	F	h8		GA	M	N	j6	P
MSI11D-30CDXS2B1A MSI15D-30CDXS2B1A	Aluminum case	112	215	42	+0.018 -0.002	110	±0.435	100	12	0 -0.027	45	0 -0.2	300	250	+0.016 -0.013	350
			Holes	S	H14	T	h12	L	HF	DHTAP		Front Bearing		Rear Bearing		
			4	19	+0.52 0	5.0	0 -0.12	473±10	331±5	M16×32L		6309 ZZ		6306 ZZ		